

Ultra High Precision Bulk Metal® Z-Foil Surface Mount Power Resistor in TO-220 Configuration with TCR of ± 0.05 ppm/°C, PCR of 4 ppm/W and Load Life Stability of ± 0.005 % (50 ppm)



INTRODUCTION

The Z-Foil technology provides a significant reduction of the resistive component's sensitivity to ambient temperature variations (TCR) and applied power changes (PCR).

Model VPR221SZ is a 4 lead kelvin connected surface mount device which provides high rated power, excellent load life stability, low temperature coefficient (TCR) and low power coefficient (PCR) - all in one resistor. ± 0.05 ppm/°C absolute TCR removes error due to temperature gradients.

By taking advantage of the overall stability and reliability of Bulk Metal® Z-Foil resistors, designers can significantly reduce circuit errors and greatly improve overall circuit performances.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

TABLE 1 - TCR AND TOLERANCE		
RESISTANCE RANGE (Ω)	TIGHTEST RESISTANCE TOLERANCE	TYPICAL TCR AND MAX. SPREAD (1)
0.5 to < 1	± 0.05 %	± 0.2 ppm/°C ± 2.8 ppm/°C
1 to < 10	± 0.02 %	± 0.2 ppm/°C ± 2.3 ppm/°C
10 to 500	± 0.01 %	± 0.2 ppm/°C ± 1.8 ppm/°C

Notes

(1) MIL-range (- 55 °C to + 125 °C, + 25 °C ref.)

- Contact applications engineering for other available values

* Pb containing terminations are not RoHS compliant, exemptions may apply

FEATURES

- Temperature coefficient of resistance (TCR): ± 0.05 ppm/°C typical (0 °C to + 60 °C)
 ± 0.2 ppm/°C typical (- 55 °C to + 125 °C, + 25 °C ref.) (see table 1)
- Tolerance: to ± 0.01 %
- Power coefficient "ΔR due to self heating": 4 ppm/W typical
- Rated power: 8 W chassis mounted (MIL-PRF-39009)
- Load life stability: to ± 0.005 % at 25 °C for 2000 h, at 1.5 W
- Resistance range: 0.5 Ω to 500 Ω
- Foil resistors are not restricted to standard values; specific "as requested" values can be supplied at no extra cost or delivery (e.g. 100R2345 vs. 100R)
- Electrostatic discharge (ESD) up to 25 000 V
- Short time overload ≤ 0.001 % (10 ppm)
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise: 0.010 μ V_{RMS}/V of applied voltage (< - 40 dB)
- Thermal EMF: 0.05 μ V/°C typical
- Voltage coefficient < 0.1 ppm/V
- Non-inductive: < 0.08 μ H
- Non hot spot design
- Thermal stabilization time < 1 s (nominal value achieved within 10 ppm of steady state value)
- Terminal finish: lead (Pb)-free or tin/lead alloy
- Compliant to RoHS directive 2002/95/EC
- Prototype quantities available in just 5 working days or sooner. For more information, please contact foil@vishaypg.com
- For better performances please contact us



RoHS*
COMPLIANT

FIGURE 1 - SCHEMATICS

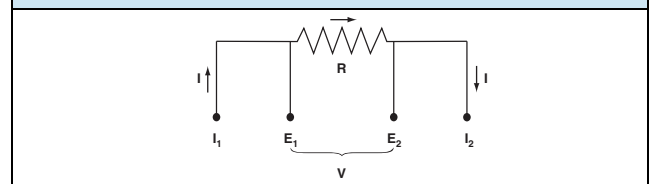


FIGURE 2 - POWER DERATING CURVE

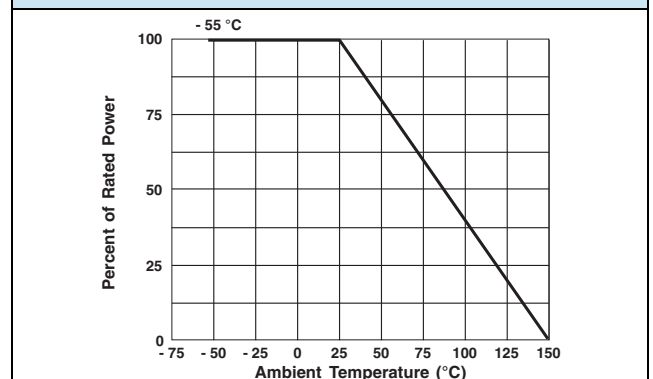


FIGURE 3 - TRIMMING TO VALUES
(conceptual illustration)

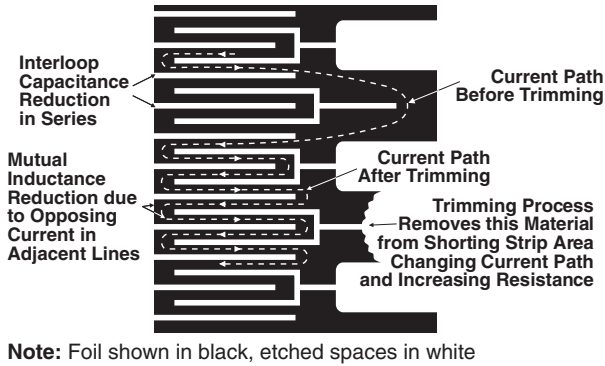


FIGURE 4 - TYPICAL RESISTANCE/TEMPERATURE CURVE
(for more details see table 1)

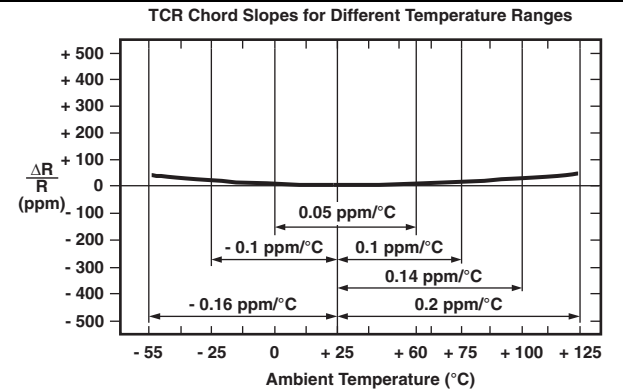


FIGURE 5 - VPR221SZ FORMING DIMENSIONS in inches (millimeters)

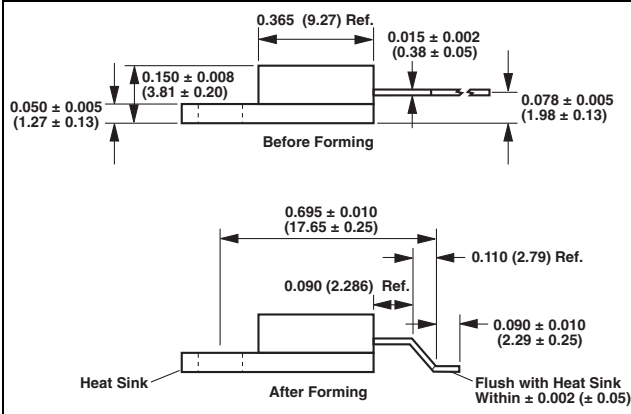


FIGURE 6 - VPR221SZ DIMENSIONS in inches (millimeters)

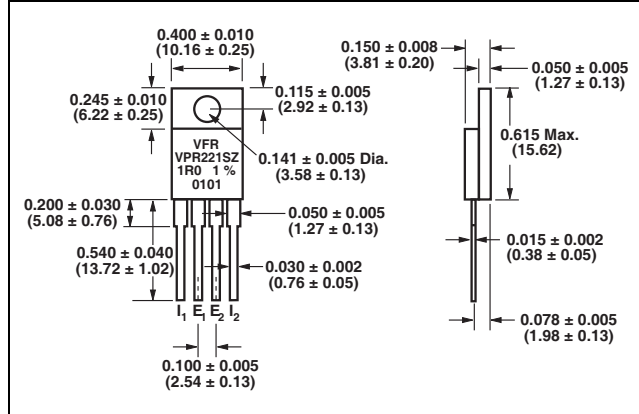


FIGURE 7 - LAND PATTERN DIMENSIONS in inches (millimeters)

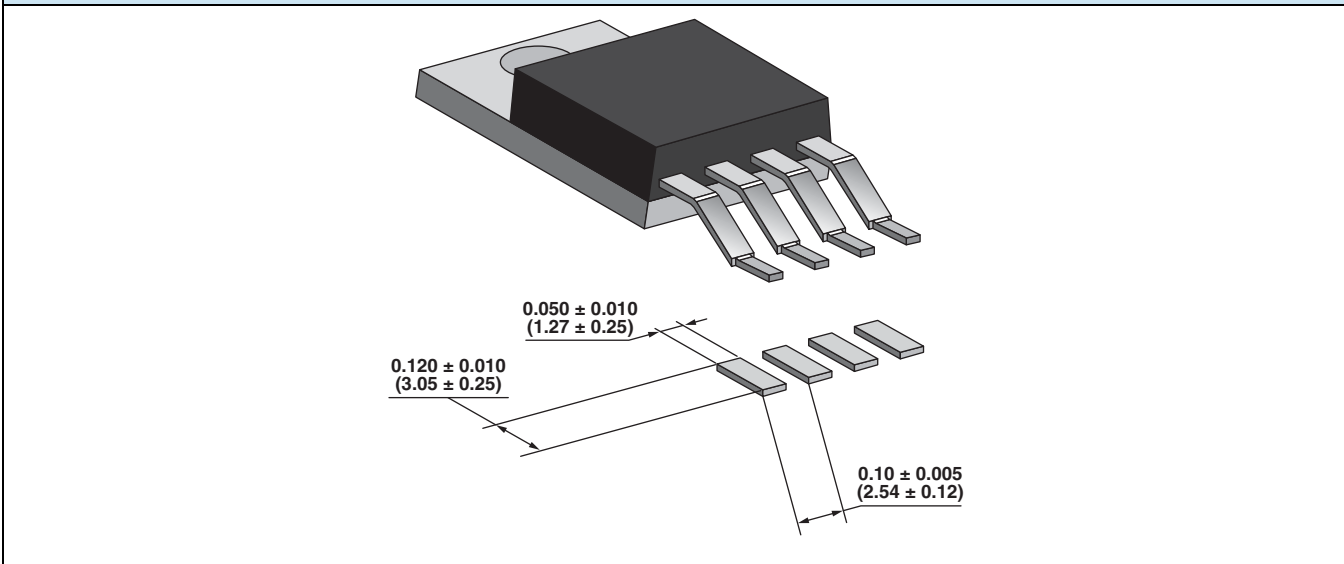


TABLE 2 - SPECIFICATIONS	
Power Rating at + 25 °C	8 W or 3 A ⁽¹⁾ on heat sink ⁽²⁾ 1.5 W in free air Further derating not necessary.
Current Noise	< 0.010 $\mu\text{V}_{\text{RMS}}/\text{V}$ of applied voltage (- 40 dB)
High Frequency Operation Rise Time Inductance (L) ⁽³⁾ Capacitance (C)	0.2 ns at 1 W 0.1 μH maximum: 0.03 μH typical 1.0 pF maximum: 0.5 pF typical
Voltage Coefficient ⁽⁴⁾	< 0.1 ppm/V
Operating Temperature Range	- 55 °C to + 150 °C
Maximum Working Voltage	300 V, not to exceed power rating
Thermal EMF ⁽⁵⁾	0.15 $\mu\text{V}/^\circ\text{C}$ maximum (lead effect)
Weight	1.2 g maximum

Notes

(1) Whichever is lower

(2) Heat sink chassis dimensions are requirements per MIL-R-39009/1B:

DIMENSIONS	inches	mm
L	6.00	152.4
W	4.00	101.6
H	2.00	50.8
T	0.04	1.0

(3) Inductance (L) mainly due to the leads

(4) The resolution limit of existing test requirement (within the measurement capability of the equipment, “essentially zero”)

(5) $\mu\text{V}/^\circ\text{C}$ relates to EMF due to lead temperature difference


TABLE 3 - PERFORMANCE SPECIFICATIONS ⁽¹⁾ MIL-PRF 39009			
TEST OR CONDITION	MIL-PRF 39009	TYPICAL ΔR	MAXIMUM ΔR
Low temperature storage 24 h at - 55 °C	$\pm 0.3\% + 0.01\ \Omega$	$\pm 0.001\%$ (10 ppm)	$\pm 0.002\%$ (20 ppm)
Dielectric withstanding voltage 300 V_{AC} at Atm	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.001\%$ (10 ppm)	$\pm 0.002\%$ (20 ppm)
Dielectric withstanding voltage 200 V_{AC} at Brm	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.001\%$ (10 ppm)	$\pm 0.002\%$ (20 ppm)
Insulation resistance	$> 10^4\ \text{M}\Omega$		$> 10^4\ \text{M}\Omega$
Low temperature operation	$\pm 0.3\% + 0.01\ \Omega$	$\pm 0.002\%$ (20 ppm)	$\pm 0.008\%$ (80 ppm)
Short time overload 5 x rated power for 5 s (in air)	$\pm 0.3\% + 0.01\ \Omega$	$\pm 0.001\%$ (10 ppm)	$\pm 0.002\%$ (20 ppm)
Moisture resistance + 65 °C to - 10 °C, 90 RH to 98 RH, 10 days	$\pm 0.5\% + 0.01\ \Omega$	$\pm 0.005\%$ (50 ppm)	$\pm 0.015\%$ (150 ppm)
Terminal strength	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.001\%$ (10 ppm)	$\pm 0.002\%$ (20 ppm)
Load life 8 W at + 25 °C, 2000 h with heat sink	$\pm 1.0\% + 0.01\ \Omega$	$\pm 0.005\%$ (50 ppm)	$\pm 0.015\%$ (150 ppm)
Load life 1.5 W at + 25 °C for 2000 h in free air	$\pm 1.0\% + 0.01\ \Omega$	$\pm 0.005\%$ (50 ppm)	$\pm 0.015\%$ (150 ppm)
High temperature exposure + 150 °C	$\pm 1.0\% + 0.05\ \Omega$	$\pm 0.005\%$ (50 ppm)	$\pm 0.01\%$ (100 ppm)

Note

(1) Measurement error $\pm 0.001\%$

TABLE 4 - GLOBAL PART NUMBER INFORMATION (1)

NEW GLOBAL PART NUMBER: Y2123420R220T9L (preferred part number format)

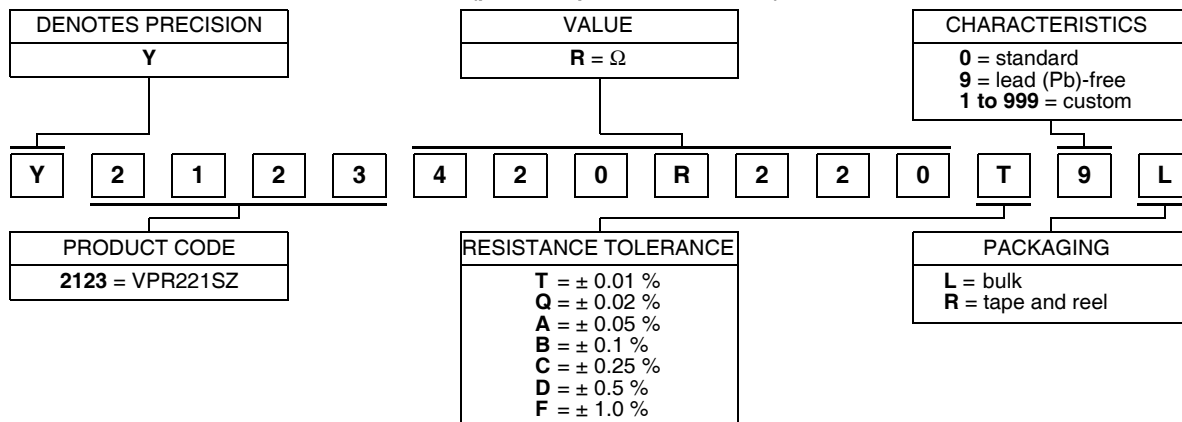

FOR EXAMPLE: ABOVE GLOBAL ORDER Y2123 420R220 T 9 L:

TYPE: VPR221SZ


VALUE: 420.22 Ω

ABSOLUTE TOLERANCE: ± 0.01 %

TERMINATION: lead (Pb)-free

PACKAGING: bulk

HISTORICAL PART NUMBER: VPR221SZ T 420R22 TCR0.2 T B (will continue to be used)

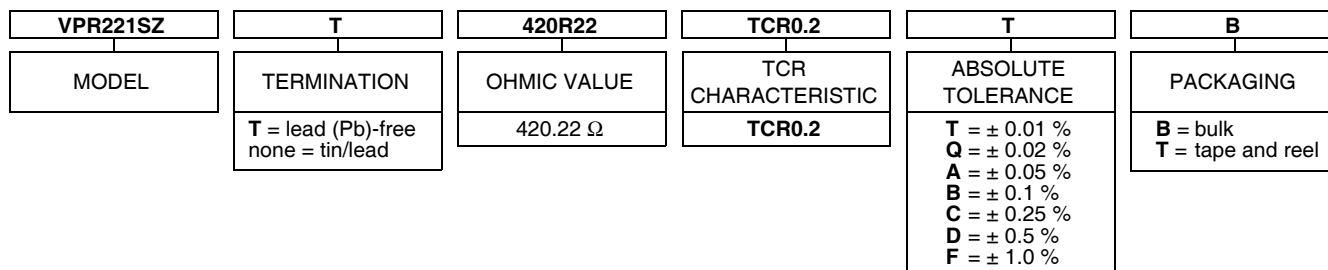

Note

(1) For non-standard requests, please contact application engineering



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.