



## WonderMASK P Peelable Solder Mask

### Product# 2211

#### Product Description

WonderMASK P is a temporary, peel-able solder mask comprised of a thixotropic, synthetic acrylic latex designed to withstand fluxing, wave soldering and cleaning operations. Unlike natural latex mask, it contains no offensive ammonia and hence is non-corrosive to copper, gold, silver or pre-soldered surfaces. In addition, stability problems are averted. When applied, the product is opaque pink, and when cured, becomes completely translucent red. Cured mask can be used for masking conformal coatings. May be used in applications such as robotic, pneumatic, hand applied or template screening (not recommended for silk screening).

Techspray's WonderMASK is the industry-leading temporary solder mask brand because of quality and versatility. Depending on the product, mask can be peeled off manually or washed off in a batch or inline system.

WonderMASK has a number of useful applications in PCB assembly:

- Thru-hole masking – Prevent soldering open holes in a wave soldering process by covering with WonderMASK. All of the masks listed below are well suited for this application.
- Conformal coating masking – In a conformal coating dipping or spraying process, WonderMASK can be used to cover connectors and other components and areas that should not be coated.
- Temporary component adhesive – WonderMASK can be used to tack down components on double-sided PCBs.

All Techspray WonderMASK products have the following advantages:


- Can be cured in pre-heat
- Withstands lead-free soldering temperatures up to 640°F (343°C) in wave soldering process
- RoHS compliant

#### Features / Benefits

- Non-ammoniated
- Nonflammable
- Easily peel-able
- Low odor
- Cure indicator - darkens as it cures
- Compatible with gold and copper leads

#### Usage Instructions

Apply a 20 to 30 mil coating for best results to desired area. The substrate should be free from flux, oil, and particulate matter. Drying times depend upon ambient humidity. Under normal conditions WonderMASK P is ready for preheating stage in 1 hour, however, cure can be accelerated to 30 minutes at 65°C/150°F or 20 minutes at 82°C/180°F. Do not over cure, as blistering of mask can occur, causing removal problems. Mask will change from an opaque pink to a translucent red when complete cure is accomplished. Mask does not have to be completely dry to withstand soldering operation; however, it should be completely translucent before removal.

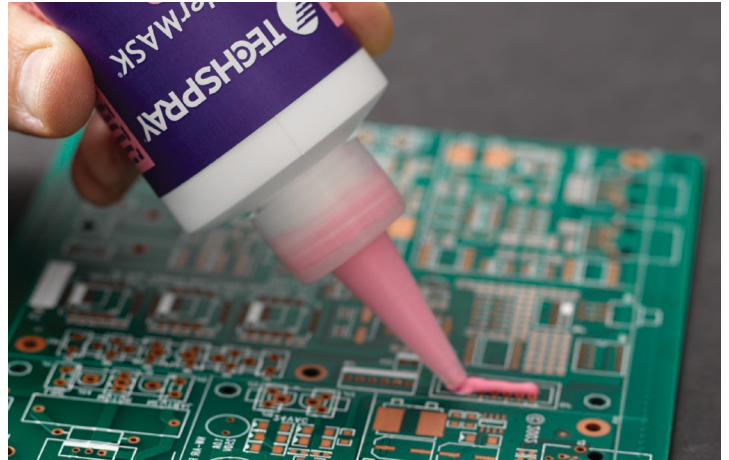

#### Typical Product Data and Physical Properties

Physical state:	Liquid
Color:	Pink/red
Relative density:	1
Shelf life:	2 years

#### Performance & Application Data

Application	Template, hand, pneumatic, robotic
Viscosity	28,000-30,000 cps
Suggested thickness	20-30 mils
Thinner	DI water
Cure time	1hr. Ambient, 30 min. @65°C, 20 min. @82°C
Removal	Peel-able

## WonderMASK P Peelable Solder Mask

### Product# 2211

#### Packaging and Availability

<b>2211-8SQ</b>	8 oz. Liquid
<b>2211-G</b>	1 Gallon Liquid
<b>2211-5G</b>	5 Gallon Liquid
<b>2211-54G</b>	54 Gallon Liquid

#### Environmental Policy

Techspray® is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

#### Resources

Techspray® products are supported by global sales, technical and customer services resources.

For additional technical information on this product or other Techspray® products in the United States, call the technical sales department at 800-858-4043, email [tsales@techspray.com](mailto:tsales@techspray.com) or visit our web site at: [www.techspray.com](http://www.techspray.com).

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray® be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.