

Diode

Silicon Carbide Schottky Diode

IDM08G120C5

5th Generation thinQ!TM 1200 V SiC Schottky Diode

Final Datasheet


Rev. 2.0 2015-07-22

Industrial Power Control

SiC Schottky Diode

Features:

- Revolutionary semiconductor material - Silicon Carbide
- No reverse recovery current / No forward recovery
- Temperature independent switching behavior
- Low forward voltage even at high operating temperature
- Tight forward voltage distribution
- Excellent thermal performance
- Extended surge current capability
- Specified dv/dt ruggedness
- Qualified according to JEDEC¹⁾ for target applications
- Pb-free lead plating; RoHS compliant

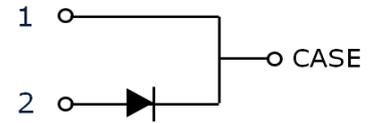

Benefits

- System efficiency improvement over Si diodes
- System cost / size savings due to reduced cooling requirements
- Enabling higher frequency / increased power density solutions
- Higher system reliability due to lower operating temperatures
- Reduced EMI
- Related Links: www.infineon.com/sic



Applications

- Solar inverters
- Uninterruptable power supplies
- Motor drives
- Power Factor Correction



Package pin definitions

- Pin 1 and backside – cathode
- Pin 2 – anode

Key Performance and Package Parameters

Type	V _{DC}	I _F	Q _C	T _{j,max}	Marking	Package
IDM08G120C5	1200V	8A	28nC	175°C	D0812C5	PG-TO252-2

1) J-STD20 and JEDEC22

Table of Contents

Description.....	2
Table of Contents.....	3
Maximum ratings.....	4
Thermal Resistances	4
Electrical Characteristics.....	5
Electrical Characteristics diagram	5
Package Drawings	9
Revision History	10
Disclaimer.....	10

Maximum ratings

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	1200	V
Continuous forward current for $R_{th(j-c,max)}$ $T_C = 157^\circ\text{C}$, $D=1$ $T_C = 135^\circ\text{C}$, $D=1$ $T_C = 25^\circ\text{C}$, $D=1$	I_F	8 13 27	A
Surge non-repetitive forward current, sine halfwave $T_C=25^\circ\text{C}$, $t_p=10\text{ms}$ $T_C=150^\circ\text{C}$, $t_p=10\text{ms}$	$I_{F,SM}$	70 60	
Non-repetitive peak forward current $T_C = 25^\circ\text{C}$, $t_p=10 \mu\text{s}$	$I_{F,max}$	530	
i^2t value $T_C = 25^\circ\text{C}$, $t_p=10 \text{ms}$ $T_C = 150^\circ\text{C}$, $t_p=10 \text{ms}$	$\int i^2 dt$	25 18	A ² s
Diode dv/dt ruggedness $V_R=0\dots960 \text{V}$	dv/dt	80	V/ns
Power dissipation $T_C = 25^\circ\text{C}$	P_{tot}	167	W
Operating temperature	T_j	-55...175	°C
Storage temperature	T_{stg}	-55...150	
Soldering temperature, Wave- and reflowsoldering allowed (reflow MSL1)	T_{sold}	260	

Thermal Resistances

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Characteristic						
Diode thermal resistance, junction – case	$R_{th(j-c)}$		-	0.7	0.9	K/W
Thermal resistance, junction – ambient	$R_{th(j-a)}$	SMD version, device on PCB, minimal footprint	-	-	62	
		SMD version, device on PCB, 6 cm ² cooling area ²⁾		35		

²⁾ Device on 40 mm*40mm*1.5 epoxy PCB FR4 with 6cm² (one layer, 70μm thick) copper for cathode connection. PCB is vertical without air stream cooling.

Electrical Characteristics
Static Characteristic, at T_j=25°C, unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
DC blocking voltage	V _{DC}	T _j = 25°C	1200	-	-	V
Diode forward voltage	V _F	I _F = 8 A, T _j = 25°C	-	1.65	1.95	V
		I _F = 8 A, T _j = 150°C	-	2.25	2.85	
Reverse current	I _R	V _R = 1200 V, T _j = 25°C		3	40	μA
		V _R = 1200 V, T _j = 150°C		14	210	

Dynamic Characteristics, at T_j=25°C, unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Total capacitive charge	Q _C	V _R = 800 V, T _j = 150°C $Q_C = \int_0^{V_R} C(V) dV$	-	28	-	nC
Total Capacitance	C	V _R = 1 V, f = 1 MHz	-	365	-	pF
		V _R = 400 V, f = 1 MHz	-	26	-	
		V _R = 800 V, f = 1 MHz	-	20	-	

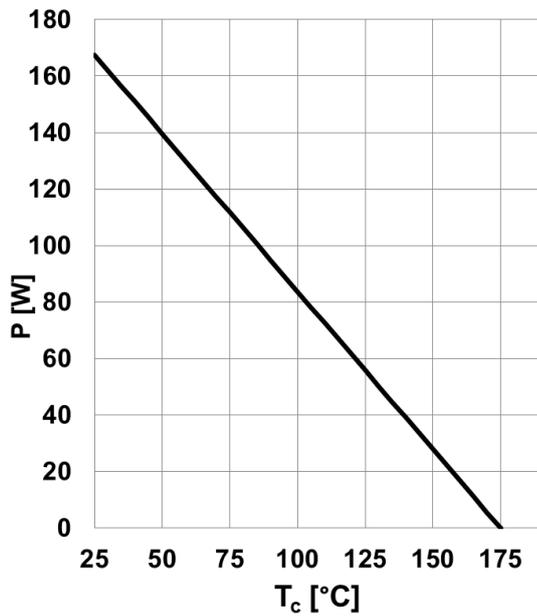


Figure 1. Power dissipation as a function of case temperature, $P_{tot}=f(T_c)$, $R_{th(j-c),max}$

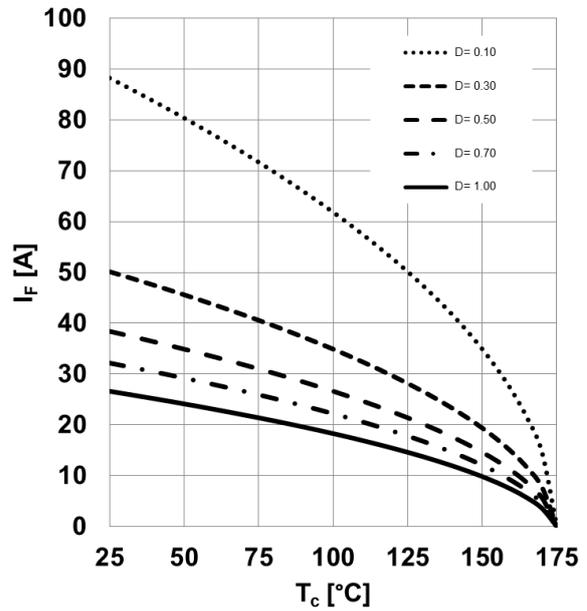


Figure 2. Diode forward current as function of temperature, $T_j \leq 175^\circ\text{C}$, $R_{th(j-c),max}$, parameter D =duty cycle, V_{th} , R_{diff} @ $T_j=175^\circ\text{C}$

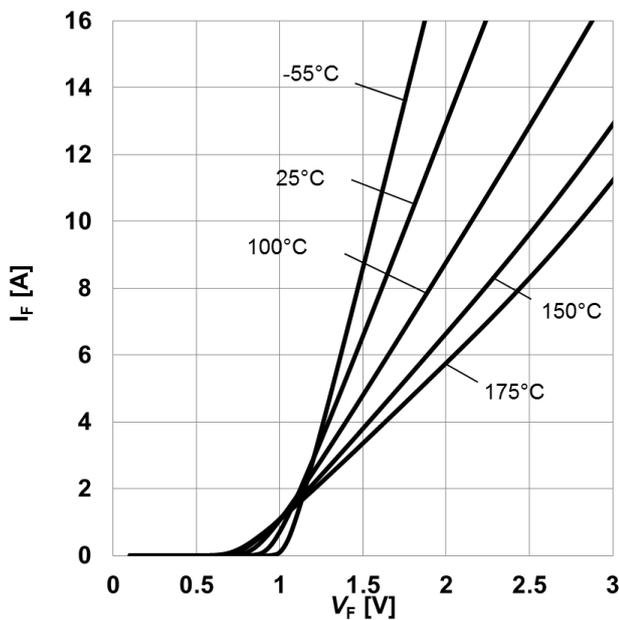


Figure 3. Typical forward characteristics, $I_F=f(V_F)$, $t_p=10 \mu\text{s}$, parameter: T_j

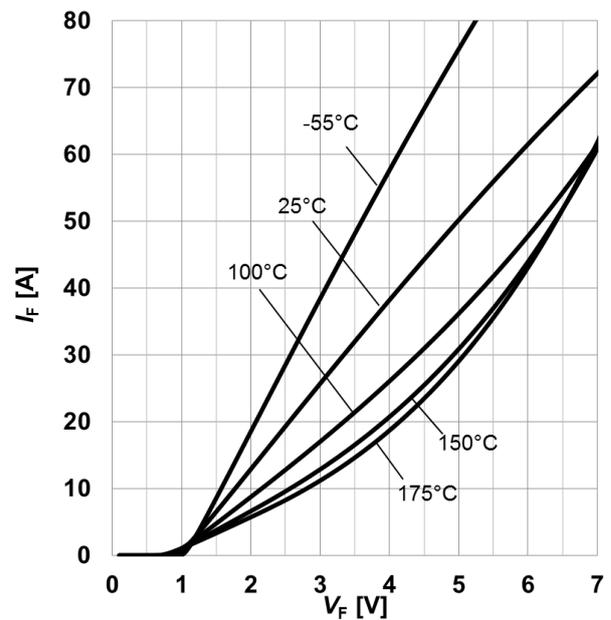


Figure 4. Typical forward characteristics in surge current, $I_F=f(V_F)$, $t_p=10 \mu\text{s}$, parameter: T_j

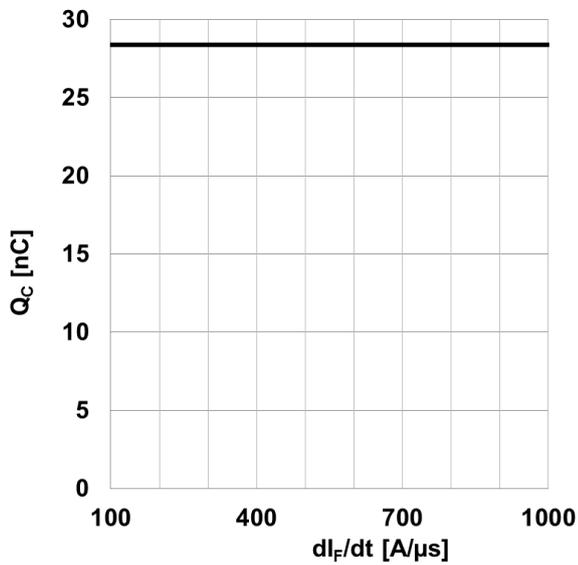


Figure 5. Typical capacitance charge as function of current slope¹, $Q_C=f(di_F/dt)$, $T_j=150^\circ\text{C}$

1) Only capacitive charge, guaranteed by design.

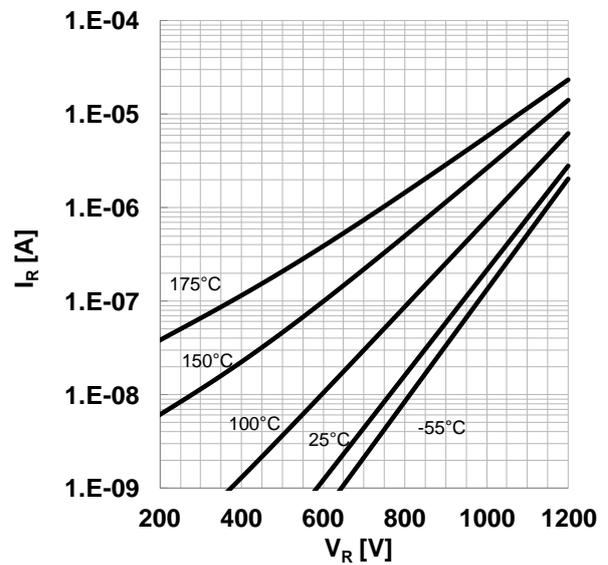


Figure 6. Typical reverse current as function of reverse voltage, $I_R=f(V_R)$, parameter: T_j

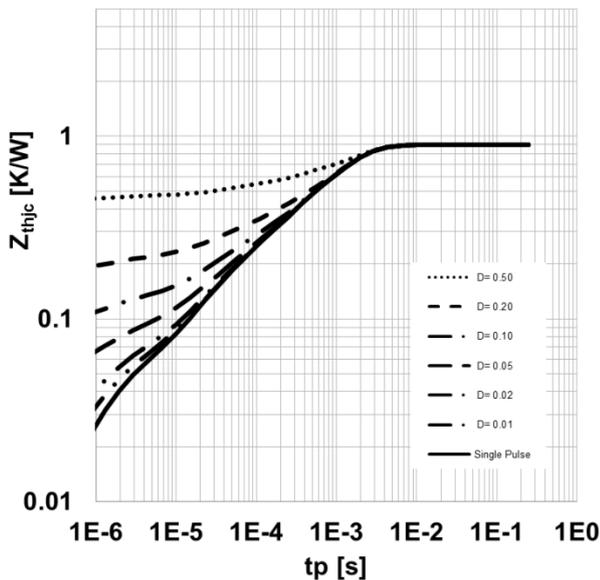


Figure 7. Max. transient thermal impedance, $Z_{thjc}=f(t_p)$, parameter: $D=t_p/T$

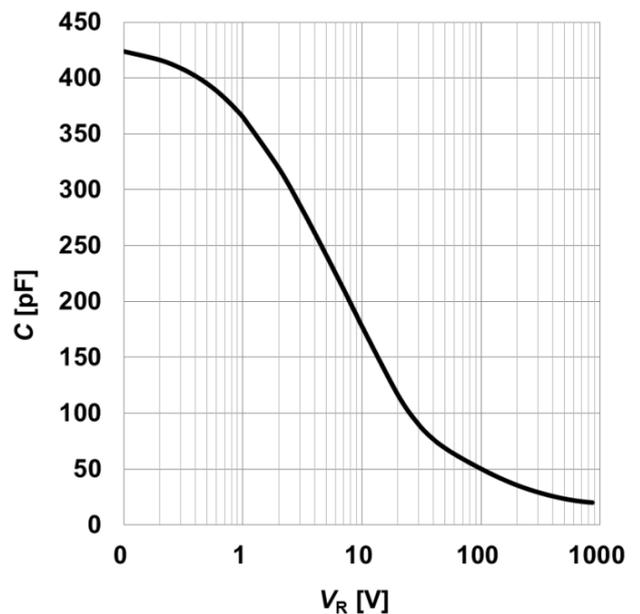


Figure 8. Typical capacitance as function of reverse voltage, $C=f(V_R)$; $T_j=25^\circ\text{C}$; $f=1\text{ MHz}$


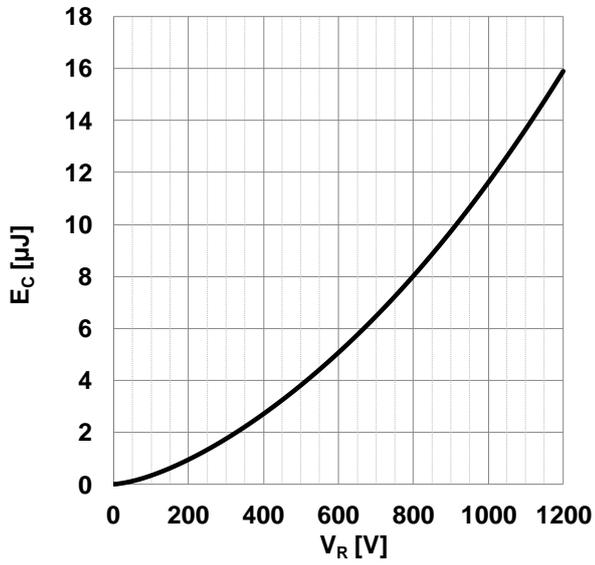


Figure 9. Typical capacitance stored energy as function of reverse voltage,

$$E_C = \int_0^{V_R} C(V) V dV$$

PG-TO252-2

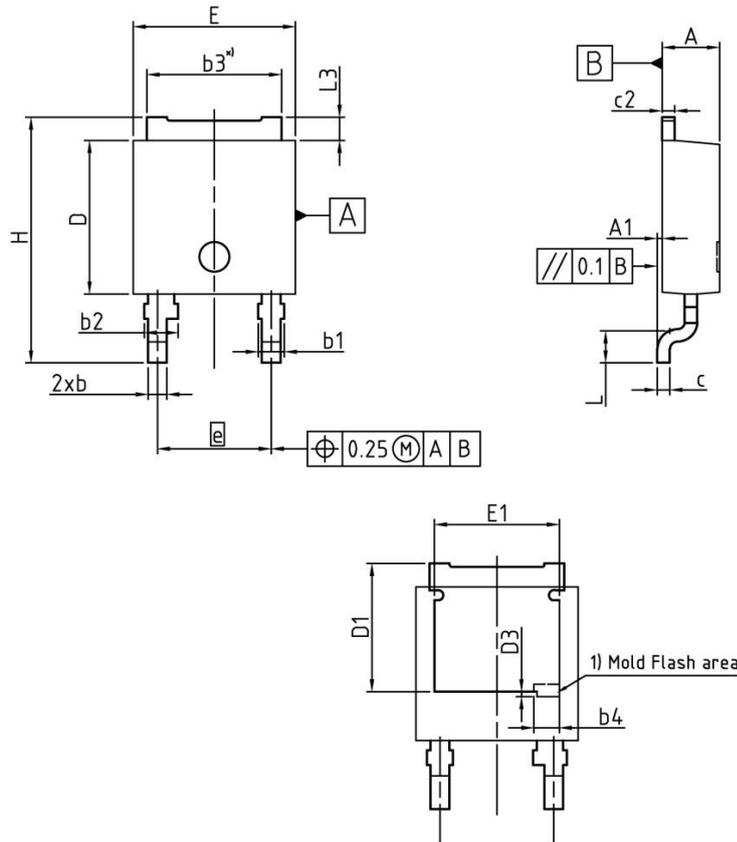

*) mold flash not included

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.20	2.35	0.087	0.093
A1	0.00	0.15	0.000	0.006
b	0.65	0.85	0.026	0.033
b1	-	1.15	-	0.045
b2	1.05	1.45	0.041	0.057
b3	5.30	5.50	0.209	0.217
b4	1.02		0.040	
c	0.46	0.58	0.018	0.023
c2	0.46	0.58	0.018	0.023
D	6.02	6.22	0.237	0.245
D1	5.04	5.44	0.198	0.214
E	6.45	6.65	0.254	0.262
E1	5.00		0.197	
e	4.57 (BSC)		0.180 (BSC)	
N	2		2	
H	9.40	10.40	0.370	0.409
L	1.19	1.39	0.047	0.055
D3	0.20		0.008	
L3	0.90	1.10	0.035	0.043

DOCUMENT NO.
Z8B00173481

SCALE

EUROPEAN PROJECTION

ISSUE DATE
29-05-2014

REVISION
01

Revision History

IDM08G120C5

Revision: **2015-07-22, Rev. 2.0**

Previous Revision:

Revision	Date	Subjects (major changes since last version)
2.0	-	Final data sheet

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to: erratum@infineon.com

Published by
Infineon Technologies AG
81726 Munich, Germany
© 2015 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.