

## Precision Surface Mount Resistors Wirewound or Metal Film Technologies



### FEATURES

- Approved according CECC 40402-801 (wirewound)
- Wide range of ohmic values (0.04 Ω to 1 MΩ)
- Low temperature coefficient (± 25 ppm/°C available)
- Good electrical insulation
- All welded construction and molded encapsulant
- High power ratings (up to 2.5 W)
- Stability class 0.5
- Pure matte tin termination
- Compliant to RoHS Directive 2002/95/EC



RoHS COMPLIANT

Specially designed for surface mounting, the MSP series uses either wirewound or metal film technology. The molded package ensures mechanical and climatic protection as well as high dielectric insulation. The MSP design is compatible with surface mounting equipment and can withstand wave and reflow soldering techniques.

DIMENSIONS in millimeters										
SERIES AND STYLES	A	B	C	D	E	F	W	X	Z	AVERAGE MASS (g)
MSP 1	6.9	3.8	3.8	2.5	6.5	1.4	2.7	2.9	6	0.2
MSP 2	11.4	5	7	5	11	2.4	5.2	4.1	9.4	0.8
MSP 3	14.8	6.6	7	5	14.4	2.4	5.2	4.1	12.7	1.5

**Note**

- General tolerance: ± 0.2 mm

TECHNICAL SPECIFICATIONS						
RESISTIVE TECHNOLOGY		WIREWOUND			METAL FILM	
Vishay Sfernice Series		MSP 1 B	MSP 2 B	MSP 3 B	MSP 1 C	MSP 2 C
CECC 40402-801		RW1	RW2	RW3	-	-
Metric Size		0704M	1107M	1607M	0704M	1107M
Rated Dissipation at + 25 °C, P <sub>25</sub>		1 W	2 W	2.5 W	0.5 W	1 W
Ohmic Range in Relation to Tolerance (with Preferred Ohmic Value Series)	± 5 % E24 Series	0.04 to 2.2K	0.04 to 4.7K	0.04 to 13K	-	-
	± 2 % E48 Series	0.04 to 2.2K	0.04 to 4.7K	0.05 to 13K	-	-
	± 1 % E96 Series	0.04 to 2.2K	0.04 to 4.7K	0.05 to 13K	10 to 332K	10 to 1M
	± 0.5 % E96 Series	0.4 to 2.2K	0.4 to 4.7K	0.3 to 13K	10 to 332K	10 to 1M
Approved Range CECC 40402-801	1 % or Class 0.5	0.5 1K	0.5 2.2K	0.1 4.12K	-	-
Limiting Element Voltage, U <sub>max.</sub> AC/DC		50 V	120 V	200 V	300 V	350 V




TECHNICAL SPECIFICATIONS (continued)					
RESISTIVE TECHNOLOGY	Wirewound			Metal Film	
Series	MSP 1 B	MSP 2 B	MSP 3 B	MSP 1 C	MSP 2 C
Critical Resistance	-	-	-	180K	122.5K
Temperature Coefficient	CECC 40402-801 - 55 °C/+ 200 °C < 1 Ω ± 100 ppm/°C 1 Ω to < 10 Ω ± 50 ppm/°C ≥ 10 Ω ± 25 ppm/°C			- 55 °C/+ 155 °C 10 kΩ to 332 kΩ K3: ± 50 ppm/°C K4: ± 25 ppm/°C > 332 kΩ K3: ± 50 ppm/°C	
Failure Rate with CECC Approval	E6 10 <sup>-6</sup> /h	E6 10 <sup>-6</sup> /h	E0 or A 10 <sup>-4</sup> /h	-	-

MECHANICAL SPECIFICATIONS		
RESISTIVE TECHNOLOGY	Wirewound	Metal Film
Encapsulant	Thermoset	
Resistive Element	CuNi or NiCr	NiCr or NiP
Ceramic Substrate	Alumina or Steatite	Alumina
Termination	Electrolytic pure matte tin	


ENVIRONMENTAL SPECIFICATIONS		
RESISTIVE TECHNOLOGY	Wirewound	Metal Film
Temperature Range	- 55 °C to 275 °C	- 55 °C to 155 °C
Climatic Category (LCT/UCT/days)	55/200/56	55/125/10

PERFORMANCE				
TESTS	CONDITIONS		REQUIREMENTS	
	Wirewound	Metal Film	Wirewound CECC 40402-801	Metal Film
Short Time Overload	IEC 60115-1 5 P <sub>r</sub> or U = 2 U <sub>max</sub> /5 s		± (0.25 % + 0.05 Ω)	± 0.25 %
Load Life	IEC 60115-1 90'/30' cycles 1000 h P <sub>r</sub> + 25 °C 8000 h P <sub>r</sub>		± (0.5 % + 0.05 Ω) ± (3 % + 0.05 Ω)	± 1 % -
Dielectric w/s Voltage	IEC 60115-1 U <sub>RMS</sub> = 500 V/60 s		No flashover or breakdown Leakage current < 10 μA	
Rapid Change of Temperature	IEC 60115-1 IEC 60068-2-14 Test Na 5 cycles (30' at LCT/30' at UCT) - 55 °C/+ 200 °C   - 55 °C/+ 125 °C		± (0.25 % + 0.05 Ω)	± 0.25 %
Climatic Sequence	IEC 60115-1 - 55 °C/+ 200 °C   - 55 °C/+ 125 °C		± (0.5 % + 0.05 Ω)	± 0.5 %
Humidity (Steady State)	IEC 60115-1 IEC 60068-2-3 Test Ca 95 % HR/40 °C 56 days   10 days		± (0.5 % + 0.05 Ω)	± 1 %
Substrate Bending Test	IEC 60115-1 IEC 60068-2-21 Test U <sub>63</sub> 2 mm/10 times		± (0.25 % + 0.05 Ω)	± 0.25 %
Shock	IEC 60115-1 IEC 60068-2-27 Test Ea 50 g's/half sine/3 times by direction (i.e. 18 shocks)		± (0.25 % + 0.05 Ω)	n/a
Vibration	IEC 60115-1 IEC 60068-2-6 Test Fc 10 Hz/2000 Hz   10 Hz/500 Hz		± (0.25 % + 0.05 Ω)	± 0.25 %
Resistance to Soldering Heat	IEC 60115-1 IEC 60068-2-58 Solder bath 260 °C/10 s		± (0.5 % + 0.05 Ω)	N/A

**POWER RATING**

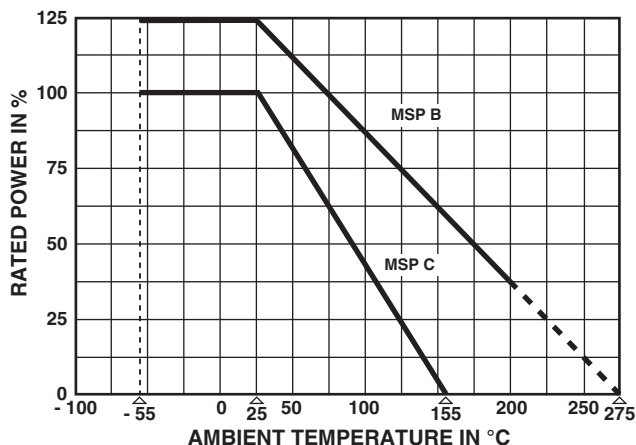

**TEMPERATURE RISE**

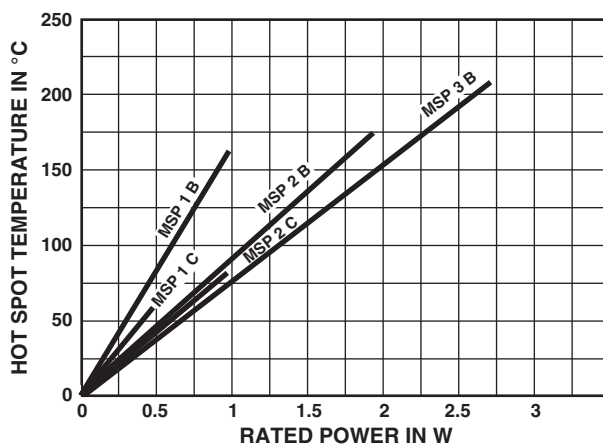

**SURFACE MOUNTING OF MSP B**

Soldering cycle: 2 min at 215 °C or 10 s at 260 °C or with an iron 40 W: 3 s at 350 °C.  
Soldering is possible by wave, reflow and vapor phase.


**NON INDUCTIVE WINDING FOR MSP B**

Non inductive (Ayrton Perry) winding available.  
Please consult Vishay Sfernice.

**PACKAGING**

In bulk (plastic bag of 100 units or multiples)  
In tube: MSP1 70 units per tube  
MSP2 50 units per tube  
MSP3 40 units per tube  
In reel of 500 units for MSP1 and MSP2

**DIMENSIONS** in millimeters - Informative Data

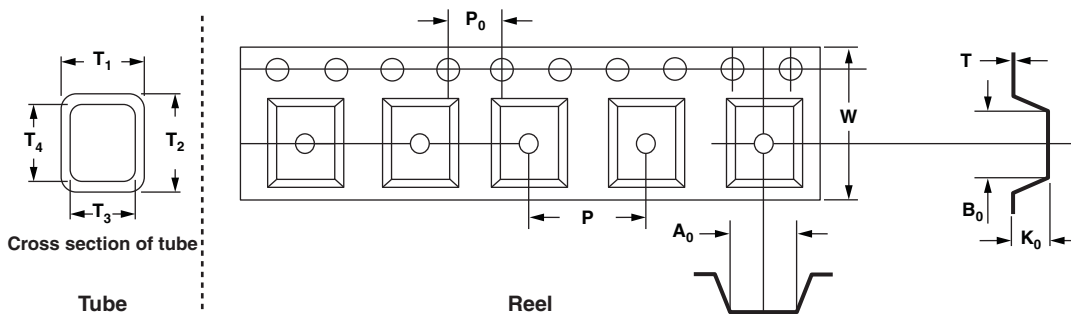

	TUBE PACKAGING					REEL PACKAGING						
	T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	T <sub>4</sub>	Length	A <sub>0</sub>	B <sub>0</sub>	K <sub>0</sub>	P <sub>0</sub>	W	T	P
MSP 1	6.6	6.8	4.6	4.8	530	3.9	7.35	4.25	4	12	0.254	8
MSP 2	9.2	8.7	8	7.5	615	7.43	11.91	5.36	4	24	0.368	12
MSP 3						N/A						

**MARKING**

Vishay Sfernice trademark, ohmic value (in Ω), tolerance (in %), series and style, technology, manufacturing date.



ORDERING INFORMATION								
MSP	1	B		48U7	± 1 %	TC	BA100	e3
SERIES	STYLE	TECHNOLOGY	NON INDUCTIVE WINDING	OHMIC VALUE	TOLERANCE	Applicable only in "C" technology	PACKAGING	LEAD (Pb)-FREE
		B: Wirewound C: Metal Film	Optional					

SAP PART NUMBERING GUIDELINES																	
M	S	P		1	B	4	8	R	7	0	F		T	2	0	E	3
GLOBAL MODEL	OPTION	SIZE	OHMIC VALUE				TOL.	TEMP. COEF.	PACKAGING	SPECIAL	RoHS						
MSP	Blank or N (Non inductive winding)	1B 2B 3B 1C 2C B = Wirewound C = Metal film	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.  48R70 = 48.7 Ω 48701 = 48 700 Ω 10002 = 100 000 Ω R0100 = 0.01 Ω R4700 = 0.47 Ω ...				B = 0.1 % F = 1 % G = 2 % J = 5 % K = 10 %	Blank or Applicable only on metal film technologies 1C and 2C: H ≥ K3 or E ≥ K4	S14 = Bag (100 pieces) R10 = Reel (500 pieces) T25 = Tube (70 pieces) T17 = Tube (40 pieces) T20 = Tube (50 pieces)	As applicable	E3 = Pure tin						



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.