

UTC-318

18.5" Ubiquitous Touch Computer UTC-318D with Intel® BayTrail J1900 UTC-318E with Intel Haswell i5-4300U



Features

- High performance with low power consumption
- Fanless design for quiet operation
- Built in Intel BayTrail J1900 (UTC-318D) and Haswell i5-4300U (UTC-318E)
- Providing Natural Viewing Experience with 16:9 18.5" Display
- Front panel complies with IP65 protection standard
- Landscape and portrait screen modes support different applications
- VESA 100 mm standard mounting holes for varied mounting demands
- Detachable frame design for panel mount applications



Introduction


UTC-318x is the multi-purpose all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. With the removable frame, the system also could fulfill industries or control system applications with panel mounting design. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Specifications

Processor System	CPU	Intel® BayTrail J1900	Intel Haswell Core i5-4300U
	Basic Frequency	2.0 GHz (Quad-Core)	1.9GHz (Duo Core)
	L2 Cache	2MB	3MB
	Memory	1 x SO-DIMM DDR3L 1333 MHz up to 8 GB	
	HDD	1 x 2.5 internal SATA HDD bay	
	Network	2 x Gigabit Ethernet ports (RJ-45)	
	I/O ports	1 x RS-232, 1 x RS-232 / 422 / 485	1 x RS-232 (optional CSAFE), 1 x RS-232/422/485
		5 x USB 2.0 / 1 x USB 3.0	2 x USB 2.0 / 4 x USB 3.0
		2 x Gigabit Ethernet (RJ-45)	2 x Gigabit Ethernet (RJ-45)
		1 x HDMI	1 x HDMI
		Audio Line-out x 1, Mic-in x 1	Audio Line-out x 1, Mic-in x 1
		RJ-11 (option)	RJ-11 (option)
	Stereo Speaker	1W x 2	
	BUS expansion	Full-size MiniPCIe/mSATA	
	Mounting	VESA 100 x 100	
OS support	Dimension(WxHxD)	475 x 295 x 43.5 mm	
	Weight	5 kg (13.4 lb)	
Environmental Specifications		Windows Embedded 8.1 Industry Pro 64bit Windows Embedded Standard 8 64bit Windows Pro Embedded 7 SP1 64bit Windows Embedded Standard 7P 32bit Windows Embedded Standard 7E 32bit Android 4.4	
	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	0.5G	
	Shock	10 G peak acceleration (11 msec. duration)	
	EMC/ Safety	CE, FCC, UL, CCC CB,BSMI	
	Front Panel Protection	IP65/ NEMA4 Compliant	
Power Supply	Input Rating	12 V/7 A (84W ITE Adapter)	12-30V/7A (84W ITE Adapter)
	Power consumption	Typical 32W Max. 70W	
LCD Display	Size	18.5" TFT LCD	
	Max Resolution	1366 x 768	
	Max Color	16.7M	
	Pixel Pitch (um)	300(H) x 300(V)	
	Brightness (cd/m²)	250 (Typical)	
	View Angle	170°/160°	
Touch Screen	Type	Analog Resistive 5-wires (Res. Flat Glass) / Projected Capacitive Touch Panel (Pcap. Flat Glass)	
	Light Transmission	Res. Touch : 80% ± 5% / P-Cap Touch : 90% ± 2%	
	Controller	COM interface / USB interface	

*UTC-318E preliminary datasheet, specification may vary in final version.

Dimensions

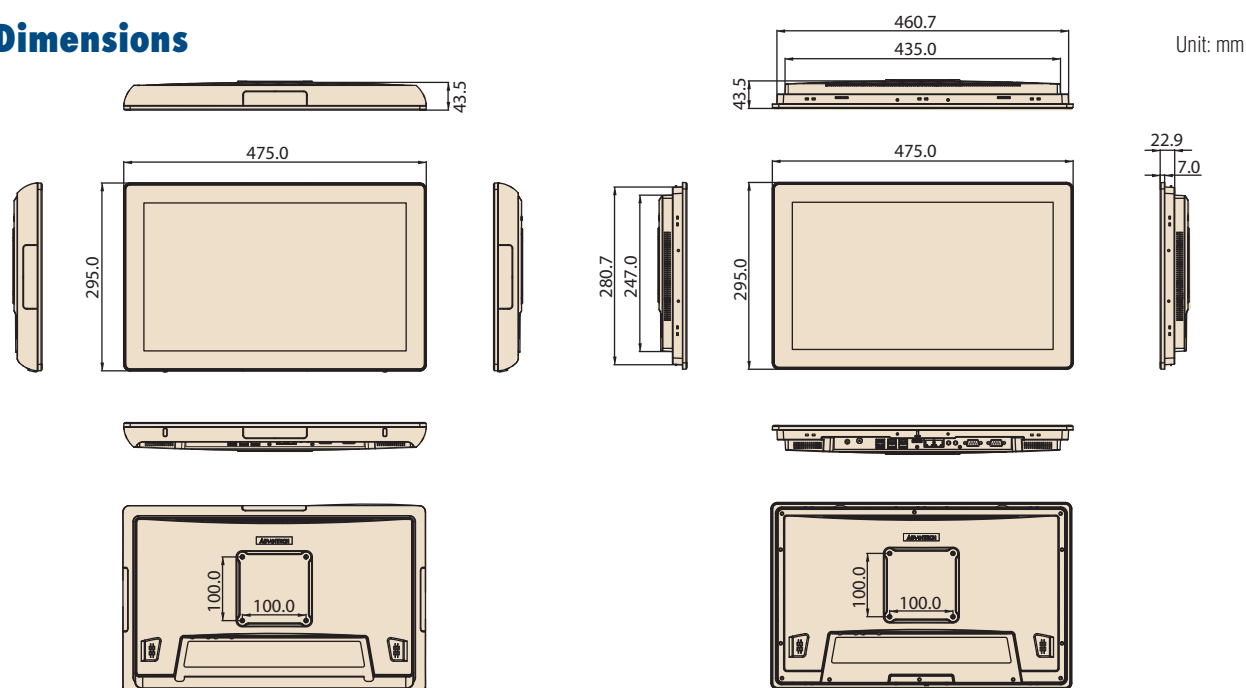

Ordering Information

Part No.	Description
UTC-318DR-AW0E	18.5" White, Intel® Celeron J1900, Res T/S, 4 GB RAM, IT Adapter
UTC-318DR-ATB0E	18.5" Black, Intel® Celeron J1900, Res T/S, 4 GB RAM, IT Adapter
UTC-318DP-AW0E	18.5" White, Intel® Celeron J1900, PCap T/S, 4 GB RAM, IT Adapter
UTC-318DP-ATB0E	18.5" Black, Intel® Celeron J1900, PCap T/S, 4 GB RAM, IT Adapter
UTC-318ER-ATW0E	18.5" White, Intel Core i5-4300U, Res T/S 4GB RAM, IT Adapter
UTC-318ER-ATB0E	18.5" White, Intel Core i5-4300U, Res T/S 4GB RAM, IT Adapter
UTC-318EP-ATW0E	18.5" White, Intel Core i5-4300U, PCap T/S 4GB RAM, IT Adapter
UTC-318EP-ATB0E	18.5" White, Intel Core i5-4300U, PCap T/S 4GB RAM, IT Adapter


UTC-318 WiFi Ordering Information

Description	Part No.	Amount
WiFi Antenna	1750006682-01	x2pcs
WiFi Module	EWM-W135F01E	x1pcs
Screws for module	1930005481	x2pcs

Installation Accessory

Part No.	Description
UTC-300P-D20E	Desk Stand, Single Color-Silver, for UTC-318
UTC-WALL-MOUNT1E	Wall Mount kit
UTC-WALL-MOUNT3E	Wall Mount Kit
UTC-T01-STANDE	Triangle shape floor stand
UTC-H01-STANDE	H-shaped floor stand
UTK-500F-A0E	Floor stand with SNBC BTP-U81 thermal printer (for China only)
UTK-500S-A0E	Floor stand without thermal printer
UTK-500G-A0E	Floor stand with thermal printer bracket

Fully- Integrated I/O

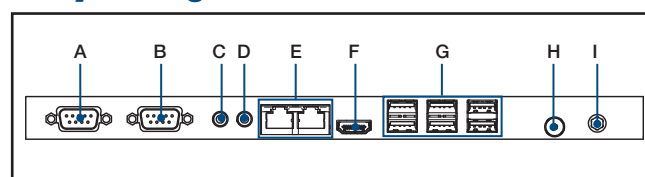

- A. COM1
- B. COM2
- C. Line-out
- D. Mic in
- E. LAN ports x 2
- F. HDMI
- G. USB 2.0 x 5 / USB 3.0 x 1 (UTC-318D)
USB 2.0 x 2 / USB 3.0 x 4 (UTC-318E)
- H. Power button
- I. DC input 12V (UTC-318D)
12-30V (UTC-318E)

Peripherals for UTC-318 series

Part No.	Description
UTC-300P-C20E	5M Camera Module, White, for UTC-318
UTC-300P-C21E	5M Camera Module, Black, for UTC-318
UTC-300P-M20E	Magnet Strip Reader, White, for UTC-318
UTC-300P-M21E	Magnet Strip Reader, Black, for UTC-318
UTC-300P-R20E	RFID Reader, White, for UTC-318
UTC-300P-R21E	RFID Reader, Black, for UTC-318
UTC-300P-S20E	Smart Card Reader, White, for UTC-318
UTC-300P-S21E	Smart Card Reader, Black, for UTC-318
UTC-300P-B20E	1D Barcode Reader, Cino, for UTC-318
UTC-300P-B21E	2D Barcode Reader, Cino, for UTC-318
UTC-300P-B40E	1D Barcode, Single Newland, for UTC-318
UTC-300P-B41E	2D Barcode, Single Newland, for UTC-318



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.