

"Compact" range without display CB12 Part number 88970840



- Version without display or key settings
- More cost effective solution
- Industrial temperature range (-20 °C → +55 °C)
- Analogue inputs 0-10 VDC or 0-20 mA/Pt100 with converters

Part numbers

| | Type | Inputs | Outputs | Supply |
|----------|------|----------------------------------|---------------------------------------|---------|
| 88970840 | CB12 | 8 digital (including 4 analogue) | 4 solid state 0.5 A (including 1 PWM) | 12 V DC |

Specifications

General environment characteristics for CB, CD, XD, XB, XR and XE product types

| | |
|--|---|
| Certifications | CE, UL, CSA, GL |
| Conformity to standards (with the low voltage directive and EMC directive) | IEC/EN 61131-2 (Open equipment) IEC/EN 61131-2 (Zone B) IEC/EN 61000-6-2, IEC/EN 61000-6-3 (*) IEC/EN 61000-6-4 (*) Except configuration (88 970 1.1 or 88 970 1.2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure) |
| Earthing | None |
| Protection rating | In accordance with IEC/EN 60529 : IP40 on front panel IP20 on terminal block |
| Overvoltage category | 3 in accordance with IEC/EN 60664-1 |
| Pollution | Degree : 2 in accordance with IEC/EN 61131-2 |
| Max operating Altitude | Operation : 2000 m Transport : 3,048 m |
| Mechanical resistance | Immunity to vibrations IEC/EN 60068-2-6, Fc test Immunity to shock IEC/EN 60068-2-27, Fa test |
| Resistance to electrostatic discharge | Immunity to ESD IEC/EN 61000-4-2, level 3 |
| Resistance to HF interference | Immunity to radiated electrostatic fields IEC/EN 61000-4-3, Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3 Immunity to shock waves IEC/EN 61000-4-5 Radio frequency in common mode IEC/EN 61000-4-6, level 3 Voltage dips and breaks (AC) IEC/EN 61000-4-11 Immunity to damped oscillatory waves IEC/EN 61000-4-12 |
| Conducted and radiated emissions | Class B (*) in accordance with EN 55022, EN 55011 (CISPR22, CISPR11) group 1 (*) Except configuration (88 970 1.1 or 88 970 1.2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in metallic cabinet) |
| Operating temperature | -20 → +55 °C (+40 °C in a non-ventilated enclosure) in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2 |
| Storage temperature | -40 → +70 °C in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2 |
| Relative humidity | 95 % max. (no condensation or dripping water) in accordance with IEC/EN 60068-2-30 |
| Mounting | On symmetrical DIN profile, 35 x 7.5 mm and 35 mm x 15 or panel (2 x 4 mm Ø) |
| Screw terminals connection capacity | Flexible wire with ferrule = 1 conductor : 0.25 to 2.5 mm ² (AWG 24...AWG 14) 2 conductors 0.25 to 0.75 mm ² (AWG 24...AWG 18) Semi-rigid wire = 1 conductor : 0.2 to 2.5 mm ² (AWG 25...AWG 14) Rigid wire = 1 conductor : 0.2 to 2.5 mm ² (AWG 25...AWG 14) 2 conductors 0.2 to 1.5 mm ² (AWG 25...AWG 16) Tightening torque = 0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm) |

| | |
|---|--|
| Processing characteristics of CB, CD, XD & XB product types | |
| LCD display | CD, XD : Display with 4 lines of 18 characters |
| Programming method | Function blocks / SCF (Grafcet) or Ladder |
| Program size | For CB, CD : 4 Ko : 64 macros max. 256 blocks max. per macro 180 typical blocks For XB, XD : |

| | |
|--|--|
| | 8 Ko : 64 macro max. 256 blocks max. per macro 350 typical blocks Or for CB, CD, XB, XD : 120 lines in Ladder |
| Program memory | Flash EEPROM |
| Removable memory | EEPROM |
| Data memory | 368 bit/200 words |
| Back-up time in the event of power failure | Program and settings in the controller : 10 years Program and settings in the plug-in memory : 10 years Data memory : 10 years |
| Cycle time | Function blocks : 6 →90 ms (typically 20 ms) Ladder : typically 20 ms |
| Response time | Input acquisition time : 1 to 2 cycle times |
| Clock data retention | 10 years (lithium battery) at 25 °C |
| Clock drift | Drift < 12 min/year (at 25 °C) 6 s/month (at 25 °C with user-definable correction of drift) |
| Timer block accuracy | 1 % ± 2 cycle times |
| Start up time on power up | < 1,2 s |

Characteristics of products with AC power supplied

| | | |
|--|---|--|
| Supply | 24 V AC (88970..4) | 100 →240 V AC (88970..3) |
| Nominal voltage | 24 V AC | 100 →240 V AC |
| Operating limits | -15 % / +20 % or 20.4 VAC→28.8 VAC | -15 % / +10 % or 85 VAC→264 VAC |
| Supply frequency range | 50/60 Hz (+4 % / -6 %) or 47→53 Hz/57 < 63 Hz | 50/60 Hz (+4 % / -6 %) or 47 →53 Hz/57 < 63 Hz |
| Immunity from micro power cuts | 10 ms (repetition 20 times) | 10 ms (repetition 20 times) |
| Max. absorbed power | CB12-CD12-XD10-XB10 : 4 VA CB20-CD20 : 6 VA XD10-XB10 with extension : 7,5 VA XD26-XB26 : 7.5 VA XD26-XB26 with extension : 10 VA | CB12-CD12-XD10-XB10 : 7 VA CB20-CD20 : 11 VA XD10-XB10 with extension : 12 VA XD26-XB26 : 12 VA XD26-XB26 with extension : 17 VA |
| Isolation voltage | 1780 V AC | 1780 V AC |
| Inputs | 24 V AC (88970..4) | 100 →240 V AC (88970..3) |
| Input voltage | 24 V AC (-15 % / +20 %) | 100 →240 V AC (-15 % / +10 %) |
| Input current | 4,4 mA @ 20,4 V AC 5,2 mA @ 24,0 V AC 6,3 mA @ 28,8 V AC | 0,24 mA @ 85 V AC 0,75 mA @ 264 V AC |
| Input impedance | 4.6 kΩ | 350 kΩ |
| Logic 1 voltage threshold | ≥ 14 V AC | ≥ 79 V AC |
| Making current at logic state 1 | >2 mA | >0.17 mA |
| Logic 0 voltage threshold | ≤ 5 V AC | ≤ 20 V AC (≤ 28 V AC : XE10, XR06, XR10, XR14) |
| Release current at logic state 0 | <0.5 mA | <0.5 mA |
| Response time with LADDER programming | 50 ms State 0 →1 (50/60 Hz) | 50 ms State 0 < 1 (50/60 Hz) |
| Response time with function blocks programming | Configurable in increments of 10 ms 50 ms min. up to 255 ms State 0 →1 (50/60 Hz) | Configurable in increments of 10 ms 50 ms min. up to 255 ms State 0 →1 (50/60 Hz) |
| Maximum counting frequency | In accordance with cycle time (Tc) and input response time (Tr) : 1 / ((2 x Tc) + Tr) | In accordance with cycle time (Tc) and input response time (Tr) : 1 / ((2 x Tc) + Tr) |
| Sensor type | Contact or 3-wire PNP | Contact or 3-wire PNP |
| Input type | Resistive | Resistive |
| Isolation between power supply and inputs | None | None |
| Isolation between inputs | None | None |
| Protection against polarity inversions | Yes | Yes |
| Status indicator | On LCD screen for CD and XD | On LCD screen for CD and XD |

Characteristics of relay outputs common to the entire range

| | |
|--|--|
| Max. breaking voltage | 5 →30 V DC 24 →250 V AC |
| Breaking current | CB-CD-XB10-XD10-XR06-XR10 : 8 A XD26-XB26 : 8 x 8 A relays, 2 x 5 A relays XE10 : 4 x 5 A relays XR14 : 4 x 8 A relays, 2 x 5 A relays |
| Electrical durability for 500 000 operating cycles | Usage category DC-12 : 24 V, 1.5 A Usage category DC-13 : 24 V (L/R = 10 ms), 0.6 A Usage category AC-12 : 230 V, 1.5 A Usage category AC-15 : 230 V, 0.9 A |
| Max. Output Common Current | 12A for O8,O9,OA |
| Minimum switching capacity | 10 mA (at minimum voltage of 12 V) |
| Minimum load | 12 V, 10 mA |
| Maximum rate | Off load : 10 Hz At operating current : 0.1 Hz |
| Mechanical life | 10,000,000 operations (cycles) |
| Voltage for withstanding shocks | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1 : 4 kV |
| Off-cycle response time | Make 10 ms Release 5 ms |
| Built-in protections | Against short-circuits : None Against overvoltages and overloads : None |
| Status indicator | On LCD screen for CD and XD |

Characteristics of product with DC power supplied

| | | |
|---|---|--|
| Supply | 12 V DC (88970..5 & 8970814 & 88970840) | 24 V DC (88970..1 et 88970..2) |
| Nominal voltage | 12 V DC | 24 V DC |
| Operating limits | -13 % / +20 % or 10.4 V DC < 14.4 V DC (including ripple) | -20 % / +25 % or 19.2 V DC < 30 V DC (including ripple) |
| Immunity from micro power cuts | ≤ 1 ms (repetition 20 times) | ≤ 1 ms (repetition 20 times) |
| Max. absorbed power | CB12 with solid state outputs : 1.5 W CD12 : 1.5 W CD20 : 2.5 W XD26-XB26 : 3 W XD26-XB26 with extension : 5 W XD26 with solid state outputs : 2.5 W | CB12-CD12-CD20 with solid state outputs - XD10-XB10 with solid state outputs : 3 W XD10-XB10 with relay outputs : 4 W XD26-XB26 with solid state outputs : 5 W CB20-CD20 with relay outputs : 6 W XD26 with relay outputs : 6 W XD10-XB10 with extension : 8 W XD26-XB26 with extension : 10 W |
| Protection against polarity inversions | Yes | Yes |
| Digital inputs (I1 to IA and IH to IY) | 12 V DC (88970..5 & 88970814 & 88970840) | 24 V DC (88970..1 and 88970..2) |
| Input voltage | 12 V DC (-13 % / +20 %) | 24 V DC (-20 % / +25 %) |
| Input current | 3,9 mA @ 10,44 V DC 4,4 mA @ 12,0 V DC 5,3 mA @ 14,4 VDC | 2,6 mA @ 19,2 V DC 3,2 mA @ 24 V DC 4,0 mA @ 30,0 VDC |
| Input impedance | 2,7 kΩ | 7,4 kΩ |
| Logic 1 voltage threshold | ≥ 7 V DC | ≥ 15 V DC |
| Making current at logic state 1 | ≥ 2 mA | ≥ 2,2 mA |
| Logic 0 voltage threshold | ≤ 3 V DC | ≤ 5 V DC |
| Release current at logic state 0 | < 0,9 mA | < 0,75 mA |
| Response time | 1 → 2 cycle times + 6 ms | 1 → 2 cycle times + 6 ms |
| Maximum counting frequency | I1 & I2 : FBD (Up to 6 k Hz) & Ladder (1 k Hz) I3 to IA & IH to IY : in accordance with cycle time (Tc) and input response time (Tr) : 1 / ((2 x Tc) + Tr) | I1 & I2 : FBD (Up to 6 k Hz) & Ladder (1 k Hz) I3 to IA & IH to IY : in accordance with cycle time (Tc) and input response time (Tr) : 1 / ((2 x Tc) + Tr) |
| Sensor type | Contact or 3-wire PNP | Contact or 3-wire PNP |
| Conforming to IEC/EN 61131-2 | Type 1 | Type 1 |
| Input type | Resistive | Resistive |
| Isolation between power supply and inputs | None | None |
| Isolation between inputs | None | None |
| Protection against polarity inversions | Yes | Yes |
| Status indicator | On LCD screen for CD and XD | On LCD screen for CD and XD |
| Analogue or digital inputs (IB to IG) | 12 V DC (88970..5 & 88970814 & 88970840) | 24 V DC (88970..1 and 88970..2) |
| CB12-CD12-XD10-XB10 | 4 inputs IB → IE | 4 inputs IB → IE |
| CB20-CD20-XB26-XD26 | 6 inputs IB → IG | 6 inputs IB → IG |
| Inputs used as analogue input only in FBD | | |
| Measurement range | (0 → 10 V) or (0 → V power supply) | (0 → 10 V) or (0 → V power supply) |
| Input impedance | 14 kΩ | 12 kΩ |
| Input voltage | 14,4 V DC max | 30 V DC max |
| Value of LSB | 14 mV | 29 mV |
| Input type | Common mode | Common mode |
| Resolution | 10 bit at maximum input voltage | 10 bit at maximum input voltage |
| Conversion time | Controller cycle time | Controller cycle time |
| Accuracy at 25 °C | ± 5 % | ± 5 % |
| Accuracy at 55 °C | ± 6,2 % | ± 6,2 % |
| Repeat accuracy at 55 °C | ± 2 % | ± 2 % |
| Isolation between analogue channel and power supply | None | None |
| Cable length | 10 m maximum, with shielded cable (sensor not isolated) | 10 m maximum, with shielded cable (sensor not isolated) |
| Protection against polarity inversions | Yes | Yes |
| Potentiometer control | 2,2 kΩ/0,5 W (recommended) 10 kΩ max. | 2,2 kΩ/0,5 W (recommended) 10 kΩ max. |
| Inputs used as digital inputs | | |
| Input voltage | 12 V DC (-13 % / +20 %) | 24 V DC (-20 % / +25 %) |
| Input current | 0,7 mA @ 10,44 VDC 0,9 mA @ 12,0 VDC 1,0 mA @ 14,4VDC | 1,6 mA @ 19,2 VDC 2,0 mA @ 24,0 V DC 2,5 mA @ 30,0 VDC |
| Input impedance | 14 kΩ | 12 kΩ |
| Logic 1 voltage threshold | ≥ 7 V DC | ≥ 15 VDC |
| Making current at logic state 1 | ≥ 0,5 mA | ≥ 1,2 mA |
| Logic 0 voltage threshold | ≤ 3 V DC | ≤ 5 V DC |
| Release current at logic state 0 | ≤ 0,2 mA | ≤ 0,5 mA |
| Response time | 1 → 2 cycle times | 1 → 2 cycle times |
| Maximum counting frequency in FBD | In accordance with cycle time (Tc) and input response time (Tr) : 1 / ((2 x Tc) + Tr) | In accordance with cycle time (Tc) and input response time (Tr) : 1 / ((2 x Tc) + Tr) |
| Sensor type | Contact or 3-wire PNP | Contact or 3-wire PNP |
| Conforming to IEC/EN 61131-2 | Type 1 | Type 1 |
| Input type | Resistive | Resistive |
| Isolation between power supply and inputs | None | None |
| Isolation between inputs | None | None |
| Protection against polarity inversions | Yes | Yes |
| Status indicator | On LCD screen for CD and XD | On LCD screen for CD and XD |
| Characteristics of relay outputs common to the entire range | | |
| Max. breaking voltage | 5 → 30 V DC 24 → 250 V AC | |
| Max. Output Common Current | 12A (10A UL) for O8,O9,OA | |

| | | |
|--|---|---|
| Breaking current | CB-CD-XD10-XB10-XR06-XR10 : 8 A XD26-XB26 : 8 x 8 A relays, 2 x 5 A relays XE10 : 4 x 5 A relays XR14 : 4 x 8 A relays, 2 x 5 A relays | |
| Electrical durability for 500 000 operating cycles | Usage category DC-12 : 24 V, 1.5 A Usage category DC-13 : 24 V (L/R = 10 ms), 0.6 A Usage category AC-12 : 230 V, 1.5 A Usage category AC-15 : 230 V, 0.9 A | |
| Minimum switching capacity | 10 mA (at minimum voltage of 12 V) | |
| Minimum load | 12 V, 10 mA | |
| Maximum rate | Off load : 10 Hz At operating current : 0.1 Hz | |
| Mechanical life | 10,000,000 operations (cycles) | |
| Voltage for withstanding shocks | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1 : 4 kV | |
| Off-cycle response time | Make 10 ms Release 5 ms | |
| Built-in protections | Against short-circuits : None Against overvoltages and overloads : None | |
| Status indicator | On LCD screen for CD and XD | |
| Digital / PWM solid state output | 12 V DC (88970814 & 88970840) | 24 V DC (88970..2) |
| PWM solid state output* | CB12 : O4 XD26 : O4 →O7 | CD12-XD10-XB10 : O4 CD20-XD26-XB26 : O4 →O7 |
| * Only available with "FBD" programming language | * Only available with "FBD" programming language | |
| Breaking voltage | 10.4 →30 VDC | 19.2 →30 VDC |
| Nominal voltage | 12-24 V DC | 24 V DC |
| Nominal current | 0.5 A | 0.5 A |
| Max. breaking current | 0,625 A | 0,625 A |
| Voltage drop | ≤ 2 V for I = 0.5 A (at state 1) | ≤ 2 V for I = 0.5 A (at state 1) |
| Response time | Make ≤ 1 ms Release ≤ 1 ms | Make ≤ 1 ms Release ≤ 1 ms |
| Operating frequency | 1 Maximum on inductive load | 1 Maximum on inductive load |
| Built-in protections | Against overloads and short-circuits : Yes Against overvoltages (*) : Yes Against inversions of power supply : Yes (*) In the absence of a volt-free contact between the output of the logic controller and the load | Against overloads and short-circuits : Yes Against overvoltages (*) : Yes Against inversions of power supply : Yes (*) In the absence of a volt-free contact between the output of the logic controller and the load |
| Min. load | 1 mA | 1 mA |
| Maximum incandescent load | 0,2 A / 12 V DC 0,1 A / 24 V DC | 0,1 A / 24 V DC |
| Galvanic isolation | No | No |
| PWM frequency | 14.11 Hz 56.45 Hz 112.90 Hz 225.80 Hz 451.59 Hz 1806.37 Hz | 14.11 Hz 56.45 Hz 112.90 Hz 225.80 Hz 451.59 Hz 1806.37 Hz |
| PWM cyclic ratio | 0 →100 % (256 steps for CD, XD and 1024 for XA) | 0 →100 % (256 steps for CD, XD and 1024 for XA) |
| PWM accuracy at 120 Hz | < 5 % (20 % →80 %) load at 10 mA | < 5 % (20 % →80 %) load at 10 mA |
| Max. Breaking current PWM | 50 mA | 50 mA |
| Max. cable length PWM | 20 m | 20 m |
| PWM accuracy at 500 Hz | < 10 % (20 % →80 %) load at 10 mA | < 10 % (20 % →80 %) load at 10 mA |
| Status indicator | On LCD screen for CD and XD | On LCD screen for CD and XD |

Accessories


| Type | Description | Code |
|---------|--|----------|
| M3 Soft | Multilingual programming software containing specific library functions (CD-ROM) | 88970111 |
| PA | EEPROM memory cartridge | 88970108 |
| PA | 3 m serial link cable : PC →Millenium 3 | 88970102 |
| PA | USB cable 3 m : PC →Millenium 3 | 88970109 |
| PA | Millenium 3 interface →Bluetooth® (class A 10 m) | 88970104 |

Comments

* to be marketed 1st quarter 2006

Dimensions (mm)

CB12

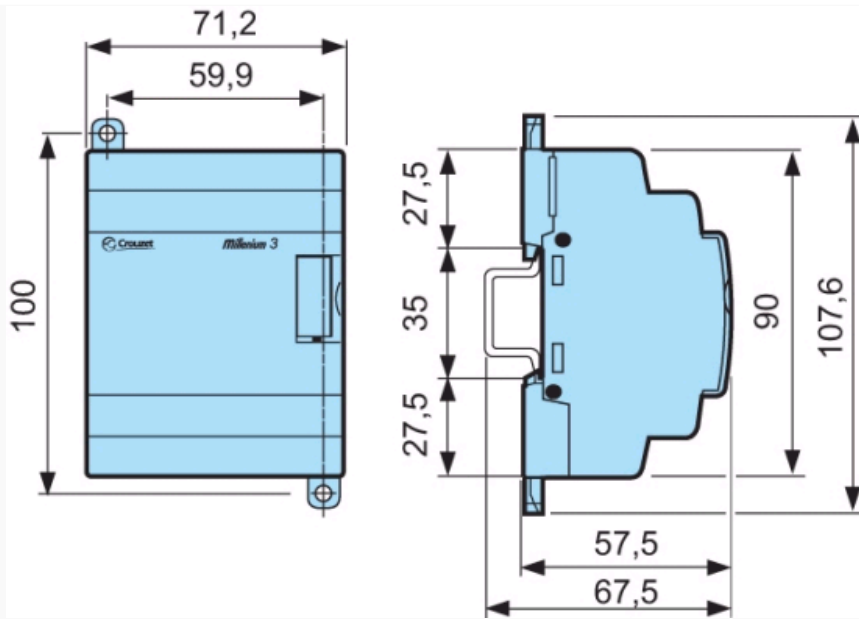



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.