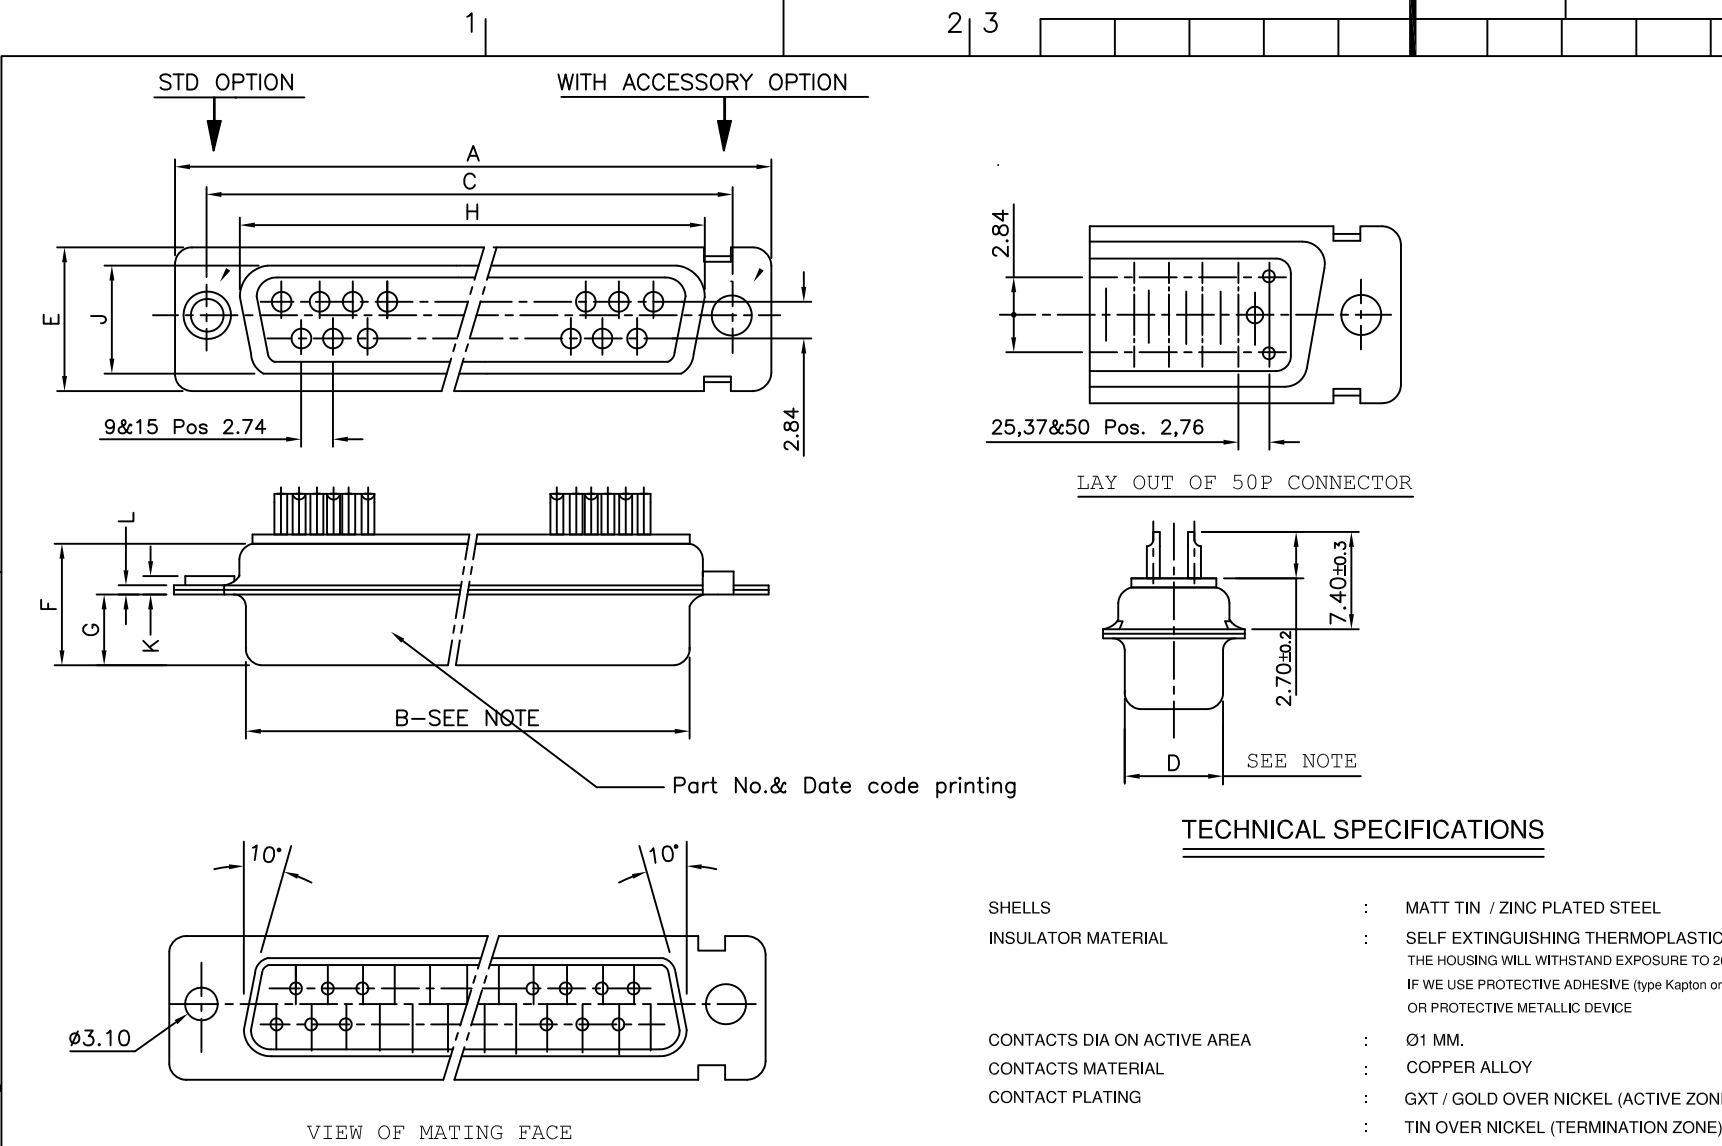






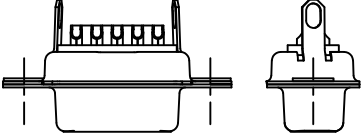



SHELLS	:	MATT TIN / ZINC PLATED STEEL
INSULATOR MATERIAL	:	SELF EXTINGUISHING THERMOPLASTIC - UL CLASS 94 V0 THE HOUSING WILL WITHSTAND EXPOSURE TO 260-265°C IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon) OR PROTECTIVE METALLIC DEVICE
CONTACTS DIA ON ACTIVE AREA	:	Ø1 MM.
CONTACTS MATERIAL	:	COPPER ALLOY
CONTACT PLATING	:	GXT / GOLD OVER NICKEL (ACTIVE ZONE) TIN OVER NICKEL (TERMINATION ZONE)
FOR LEAD FREE PLATING	:	2 µMIN. TIN TOP OVER 1.27 µ MIN.NICKEL UNDER PLATE(ON TERMINATION ZONE)
OPERATING TEMPERATURE	:	-55°C +125°C
OPERATING CURRENT	:	5 A PER CONTACT
CONTACT RESISTANCE	:	≤10m Ω
INSULATION RESISTANCE	:	≥5000M Ω
MAXIMUM VOLTAGE	:	1000 V.r.m.s
MECHANICAL ENDURANCE	:	200 MATINGS (For 64 code) 500 MATINGS (For 65 code).
DAMP HEAT	:	21 DAYS.
WIRE SIZE	:	0.6 MM ² (AWG 20) MAX.

50	P	66.65	52.68	61.11	11.08	14.99	11.09	5.85	55.07	13.31	1.50	1.0
	S	66.65	52.30	61.11	10.62	14.99	11.21	6.05	55.07	13.31	1.10	0.8
37	P	68.94	55.30	63.50	8.23	12.17	11.09	5.85	57.45	10.46	1.50	1.0
	S	68.94	54.71	63.50	7.77	12.17	11.21	6.05	57.45	10.46	1.10	0.8
25	P	52.65	38.84	47.04	8.23	12.17	11.07	5.85	41.02	10.46	1.10	0.8
	S	52.65	38.25	47.04	7.77	12.17	11.21	6.05	41.02	10.46	1.10	0.8
15	P	38.76	25.12	33.32	8.23	12.17	10.99	5.85	27.25	10.46	1.10	0.8
	S	38.76	24.54	33.32	7.77	12.17	11.21	6.05	27.25	10.46	1.10	0.8
09	P	30.43	16.79	24.99	8.23	12.17	10.99	5.85	19.02	10.46	1.10	0.8
	S	30.43	16.21	24.99	7.77	12.17	11.21	6.05	19.02	10.46	1.10	0.8
SHELL SIZE	A	+0,76 0	+0,25 0	±0,12 C	+0,25 D 0	+0,76 E 0	F MAX	+0,15 G 0	+0,51 H 0	+0,51 J 0	±0,2 K	+0,22 L 0
DIMENSIONS												

NOTE:- 1) INSIDE DIMENSIONS OF THE MALE AND OUTSIDE DIMENSIONS OF THE FEMALE CONNECTOR
2) ALL ACCESSORIES SHOWN IN ASSEMBLY OPTIONS SHOULD BE ORDERED SEPARATELY

ASSEMBLY OPTIONS

<u>FEMALE SCREW LOCK EXTENDED TYPE</u>  UNC 4-40,2B THREAD ORD CODE 8630-01-061	<u>FEMALE SCREW LOCK EXTERNAL THREAD</u>  EXTERNAL THREAD INTERNAL THREAD <table border="1"><tr><td>8630-01LF</td><td>M3</td><td>M3</td></tr><tr><td>8630-01ALF</td><td>M3</td><td>4-40 UNC 2B</td></tr><tr><td>8630-01BLF</td><td>4-40 UNC 2A</td><td>4-40 UNC 2B</td></tr><tr><td>8630-01CLF</td><td>4-40 UNC 2A</td><td>M3</td></tr><tr><td>ORD-CODE</td><td>EXTERNAL THREAD</td><td>INTERNAL THREAD</td></tr></table>	8630-01LF	M3	M3	8630-01ALF	M3	4-40 UNC 2B	8630-01BLF	4-40 UNC 2A	4-40 UNC 2B	8630-01CLF	4-40 UNC 2A	M3	ORD-CODE	EXTERNAL THREAD	INTERNAL THREAD
8630-01LF	M3	M3														
8630-01ALF	M3	4-40 UNC 2B														
8630-01BLF	4-40 UNC 2A	4-40 UNC 2B														
8630-01CLF	4-40 UNC 2A	M3														
ORD-CODE	EXTERNAL THREAD	INTERNAL THREAD														
<u>MALE LEVER LOCK</u>  ORD CODE 8630-3427(EABC) ORD CODE 8630-3428(D)	<u>CONNECTOR WITH SPECIAL RIVETTED FEMALE SCREW LOCK</u>  6.4 MAX UNC 4-40,2B THREAD PREFIX: V															
<u>WITH SHIELDING TERMINATION FINGERS</u>  OPTION: H	<u>FEMALE LEVER LOCK</u>  ORD CODE 8630-3425(EABC) ORD CODE 8630-3426(D)															

"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

Packaging as per GS-14-920

Housing will withstand exposure to 260°C peak temp for 3.5sec

ORDERING INFORMATION

SERIES	D B V 25 P 0 64 H T X B XXX LF	LEAD FREE
SHELL SIZE	E,A,B,C,D	SPECIAL CODES
OPTIONS	BLANK-STANDARD F - FLOAT MOUNTING L - CLINCH NUT (M3) O - CLINCH NUT (UNC) V - FEM. SCREW LOCK HEX. (UNC)	INSULATOR COLOUR BLANK- NATURAL B - BLACK DIMPLES X-ON MALE CONNECTORS ONLY
NO.OF CONTACTS	09,15,25,37,50	SHELL PLATING BLANK-ZINC T-STD. TIN over Cu
CONTACTS	P - PIN S - SOCKET	OPTIONS BLANK - STD H - WITH SHIELDING TERMINATION FINGERS
TERMINATION TYPE	0 - SOLDER BUCKET	CONTACT PLATING 64 - 200 Mating cycles 65 - 500 Mating cycles

mat'l. code SEE NOTE 4				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family D-SUB			
ltr	ecn no	dr	date	tolerances unless	otherwise specified		title D- SUB SOLDER BUCKET CONNECTOR (WITH ASSEMBLY OPTIONS)			
N	I11-0003	AMR	2011-01-06	angles	linear	.00±0.1				
-	-	-	-	0°±1°		.000±.00X				
H	I07-0175	MRA	2007-12-17				scale -			
J	I08-0131	MRA	2008-10-06	dr	GEORGE.V.JOSEPH	1999-03-20	FCI			
K	I09-0121	MRA	2009-07-01	enr	GEORGE.V.JOSEPH	1999-03-20				
L	I09-0140	MRA	2009-07-14	chr	ABHILASH.M.R	2009-07-01				
M	I09-0195	MRA	2009-09-18	appd	SUDHIR.VARMA	2009-07-01				
sheet index	revision sheet	N					dwg no			
		1					sheet 1 of 1			
							size			
							A3			
							type Product Customer Drawing			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.