


4.7 mm×3.5 mm SMD Light Touch Switches

Type: **EVQP2/EVQP9/EVQ3P2**

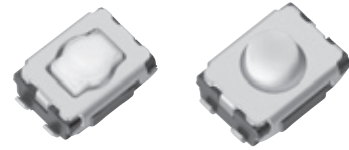


■ Features

- External dimensions : 4.7 mm×3.5 mm,
Height : Middle Push Travel 2.5 mm
Short Push Travel 2.1 mm, 2.5 mm
- High operating force and long operational life
- High mountability with J-bent (4 terminals)

■ Recommended Applications

- Operation switches for portable electronic equipment
(Mobile phones, Digital still cameras, Camcorders,
Portable audio players, etc.)
- Keyless entry systems (automotive)
- Car audio equipment

■ Explanation of Part Numbers

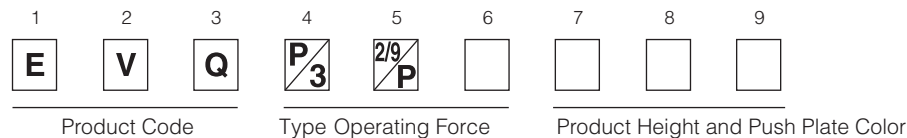

■ Specifications

| Travel Type | | Middle Push Travel | Short Push Travel |
|-------------------------------|---------------------------------|--|---|
| Type | | Snap action / Push-on V DC type SPST | |
| Electrical | Rating | 10 μA 2 V DC to 20 mA 15 V DC (Resistive load) | |
| | Contact Resistance | 100 mΩ max. | |
| | Insulation Resistance | 100 MΩ min. (at 100 V DC) | |
| | Dielectric Withstanding Voltage | 250 V AC (1 minute) | |
| | Bouncing | 10 ms max. (ON, OFF) | |
| Mechanical | Operating Force | 2.5 N, 3.5 N, 5.0 N | 1.0 N, 1.6 N, 2.4 N, 3.5 N, 4.0 N, 5.0 N |
| | Travel | 0.70 mm±0.20 mm | 0.25 mm ^{+0.05} _{-0.15} mm |
| Endurance | Operating Life | 2.5 N: 1,000,000 cycles min. 3.5 N: 500,000 cycles min. 5.0 N: 200,000 cycles min. | 1.0 N, 1.6 N: 1,000,000 cycles min. 2.4 N: 500,000 cycles min. 3.5 N: 200,000 cycles min. 4.0 N: 200,000 cycles min. 5.0 N: 200,000 cycles min. |
| Operating Temperature | | -40 °C to +85 °C | |
| Storage Temperature | | -40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping) | |
| Minimum Quantity/Packing Unit | | 4,000 pcs. Embossed Taping (Reel Pack) | |
| Quantity/Carton | | 20,000 pcs. | |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

| | |
|--|--|
| <p>No. 1</p> <p>EVQP2 EVQ3P2</p> <p>Middle push travel With J-bent terminals Without Ground Terminal</p> | <p>(General dimension tolerance±0.2)</p> |
|--|--|

| Part Numbers | Ground Terminal | Operating Force | Height | Push Plate Color | Operating Life |
|--------------|-----------------|-----------------|--------|------------------|------------------|
| EVQP2H02B | Without | 2.5 N | 2.5 mm | Blue | 1,000,000 cycles |
| EVQP2K02Q | Without | 3.5 N | 2.5 mm | Gray | 500,000 cycles |
| EVQ3P202K | Without | 5.0 N | 2.5 mm | Black | 200,000 cycles |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

| | | | | | |
|--|---|------------------------|---------------|-------------------------|-------------------------|
| <p>No. 2</p> <p>EVQP2 EVQ3P2</p> <p>Middle push travel With J-bent terminals With Ground Terminal</p>  | <p>(General dimension tolerance : ± 0.2)</p>  <p>① ② ③ ④ Circuit diagram</p> <p>Land pattern plan</p> <p>We recommend to connect the GND land shown in the switch spec. with the GND of your P.C.B for withstanding electric-static discharge.</p> | | | | |
| <p>Part Numbers</p> | <p>Ground Terminal</p> | <p>Operating Force</p> | <p>Height</p> | <p>Push Plate Color</p> | <p>Operating Life</p> |
| <p>EVQP2B02B</p> | <p>With</p> | <p>2.5 N</p> | <p>2.5 mm</p> | <p>Blue</p> | <p>1,000,000 cycles</p> |
| <p>EVQP2D02Q</p> | <p>With</p> | <p>3.5 N</p> | <p>2.5 mm</p> | <p>Gray</p> | <p>500,000 cycles</p> |
| <p>EVQP2F02K</p> | <p>With</p> | <p>5.0 N</p> | <p>2.5 mm</p> | <p>Black</p> | <p>200,000 cycles</p> |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

| No. 3 | (General dimension tolerance±0.2) | | | | |
|--|-----------------------------------|-----------------|----------|------------------|------------------|
| EVQP2 EVQP9 Short push travel With J-bent terminals Without Ground Terminal | | | | | |
| | | | | | |
| Part Numbers | Ground Terminal | Operating Force | H=Height | Push Plate Color | Operating Life |
| EVQP2002M | Without | 1.0 N | 2.1 mm | White | 1,000,000 cycles |
| EVQP2002W | Without | 1.0 N | 2.5 mm | White | 1,000,000 cycles |
| EVQP2202M | Without | 1.6 N | 2.1 mm | White | 1,000,000 cycles |
| EVQP2202W | Without | 1.6 N | 2.5 mm | White | 1,000,000 cycles |
| EVQP2402M | Without | 2.4 N | 2.1 mm | White | 500,000 cycles |
| EVQP2402W | Without | 2.4 N | 2.5 mm | White | 500,000 cycles |
| EVQP2602M | Without | 3.5 N | 2.1 mm | White | 200,000 cycles |
| EVQP2602W | Without | 3.5 N | 2.5 mm | White | 200,000 cycles |
| EVQP9W02W | Without | 4.0 N | 2.5 mm | White | 200,000 cycles |
| EVQP9P02M | Without | 5.0 N | 2.1 mm | White | 200,000 cycles |
| EVQP9P02W | Without | 5.0 N | 2.5 mm | White | 200,000 cycles |


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)


No. 4

**EVQP2
EVQP9**

Short push travel
With J-bent terminals
With
Ground Terminal



(General dimension tolerance±0.2)

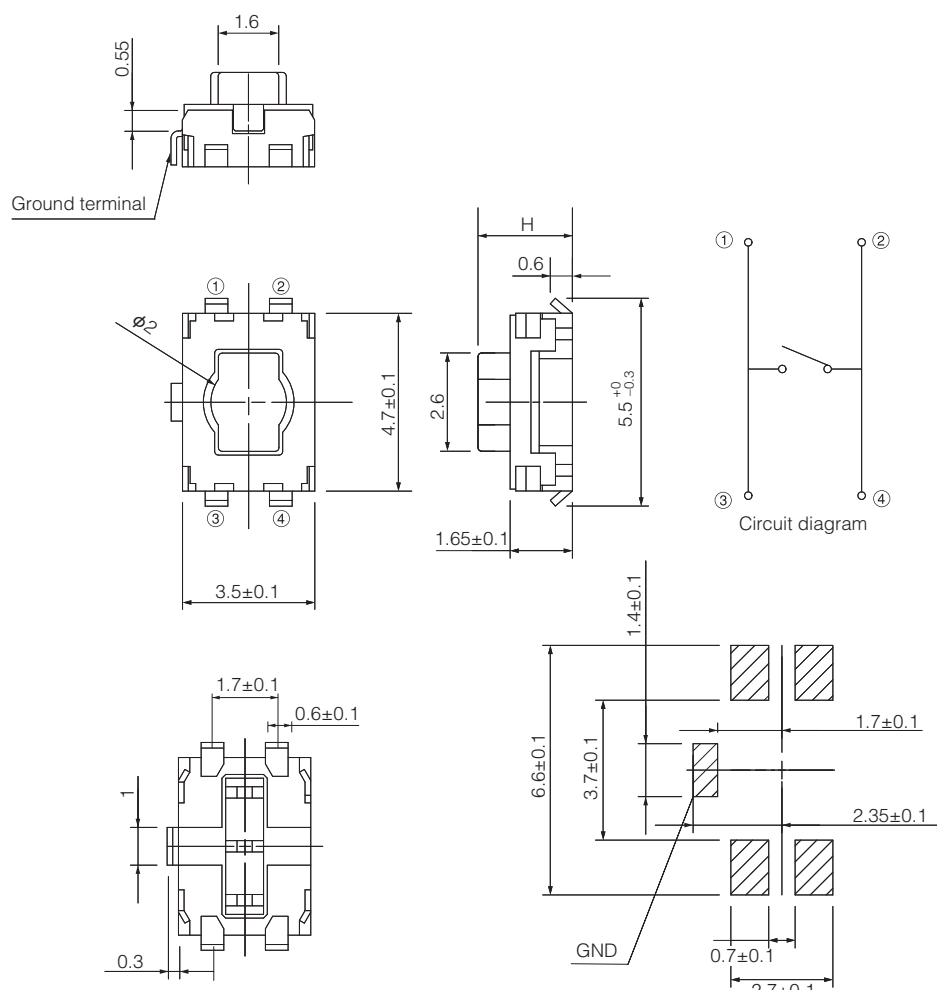

Circuit diagram

```

    graph LR
      1((1)) --- S((S))
      2((2)) --- S
      S --- 3((3))
      S --- 4((4))
    
```

Land pattern plan

We recommend to connect the GND land shown in the switch spec. with the GND of your P.C.B for withstanding electric-static discharge.


| Part Numbers | Ground Terminal | Operating Force | H=Height | Push Plate Color | Operating Life |
|--------------|-----------------|-----------------|----------|------------------|------------------|
| EVQP2P02M | With | 1.0 N | 2.1 mm | White | 1,000,000 cycles |
| EVQP2P02W | With | 1.0 N | 2.5 mm | White | 1,000,000 cycles |
| EVQP2R02M | With | 1.6 N | 2.1 mm | White | 1,000,000 cycles |
| EVQP2R02W | With | 1.6 N | 2.5 mm | White | 1,000,000 cycles |
| EVQP2T02M | With | 2.4 N | 2.1 mm | White | 500,000 cycles |
| EVQP2T02W | With | 2.4 N | 2.5 mm | White | 500,000 cycles |
| EVQP2V02M | With | 3.5 N | 2.1 mm | White | 200,000 cycles |
| EVQP2V02W | With | 3.5 N | 2.5 mm | White | 200,000 cycles |
| EVQP9H02M | With | 5.0 N | 2.1 mm | White | 200,000 cycles |
| EVQP9H02W | With | 5.0 N | 2.5 mm | White | 200,000 cycles |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Recommended Reflow Soldering Conditions



Embossed Carrier Taping

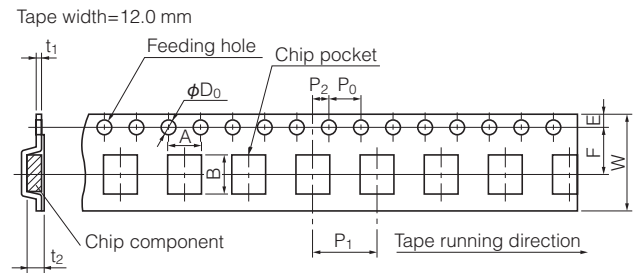


Taping condition : Lack of products in the middle of taping should be one MAX, but total quantity specified in the specifications should be secured.
 Peeling off strength of top tape : It should be within 0.2N to 1.0N at 165 degree in peeling off angle.
 Joint of carrier tape : One joint per one reel may exist.


Unit: mm

| Part No. | Height | A | B | W | F | E | P ₁ | P ₂ | P ₀ | D ₀ Dia. | t ₁ | t ₂ |
|----------|--------|---------|---------|----------|---------|-----------|----------------|----------------|----------------|----------------------------------|----------------|----------------|
| EVQP2 | 2.1 | 6.0±0.2 | 4.7±0.2 | 12.0±0.3 | 5.5±0.1 | 1.75±0.10 | 8.0±0.1 | 2.0±0.1 | 4.0±0.1 | 1.5 ^{+0.1} ₀ | 0.3±0.1 | 2.7±0.2 |
| EVQP9 | 2.5 | | | | | | | | | | | |
| EVQ3P2 | | | | | | | | | | | | |

Recommended Shape of Test Pole

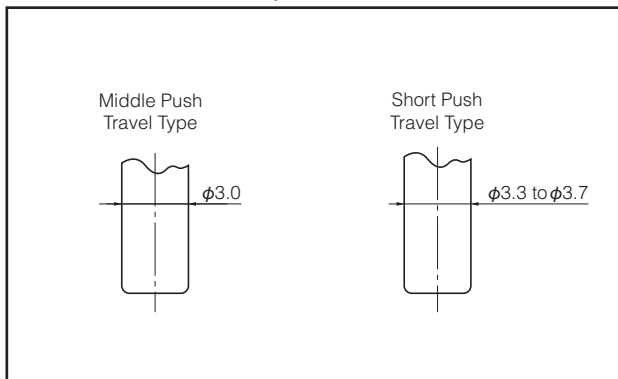

Recommended Operating Conditions

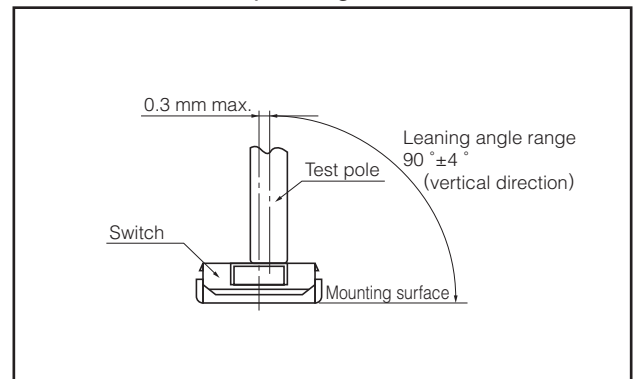

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[EVQ-P2002W](#) [EVQ-P2202W](#) [EVQ-3P2F02K](#) [EVQ-P2402M](#) [EVQ-P2T02M](#) [EVQ-P2K02Q](#) [EVQ-P2402W](#) [EVQ-P2B02B](#) [EVQ-P2202M](#) [EVQ-P2V02M](#) [EVQ-3P202K](#) [EVQ-P2002M](#) [EVQ-P2602M](#) [EVQ-P2602W](#) [EVQ-P2D02Q](#) [EVQ-P2F02K](#) [EVQ-P2H02B](#) [EVQ-P2P02M](#) [EVQ-P2P02W](#) [EVQ-P2R02M](#) [EVQ-P2R02W](#) [EVQ-P2T02W](#) [EVQ-P2V02W](#) [EVQ-P9P02M](#) [EVQ-P9H02W](#) [EVQ-P9P02W](#) [EVQ-P9H02M](#) [EVQ-P9W02W](#) [EVQ-P9102M](#) [EVQ-P9102W](#) [EVQ-P9W02M](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.