



Voidless Hermetically Sealed Unidirectional Transient Voltage Suppressors

Qualified per MIL-PRF-19500/551

Qualified Levels:
JAN, JANTX, and
JANTXV

DESCRIPTION

This series of 500 watt voidless hermetically sealed unidirectional Transient Voltage Suppressors (TVS) are military qualified to MIL-PRF-19500/551 and are ideal for high-reliability applications where a failure cannot be tolerated. Working peak “standoff” voltages are available from 5.0 to 51.6 volts. They are very robust, using a hard glass casing and internal Category 1 metallurgical bonds. These devices are also available in a surface mount MELF package configuration.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Popular JEDEC registered 1N6461 thru 1N6468 series.
- Available as 500 W peak pulse power (P_{PP}).
- Working peak “standoff” voltage (V_{WM}) from 5.0 to 51.6 V.
- High surge current and peak pulse power provides transient voltage protection for sensitive circuits.
- Triple-layer passivation.
- Internal “Category 1” metallurgical bonds.
- Voidless hermetically sealed glass package.
- JAN, JANTX, and JANTXV qualifications available per MIL-PRF-19500/551. Other screening in reference to MIL-PRF-19500 is also available.
(See [part nomenclature](#) for all available options.)
- RoHS compliant versions available (commercial grade only).

APPLICATIONS / BENEFITS

- Military and other high-reliability transient protection.
- Extremely robust construction.
- ESD and EFT protection per IEC61000-4-2 and IEC61000-4-4 respectively.
- Protection from secondary effects of lightning per select levels in IEC61000-4-5.
- Flexible axial-leaded mounting terminals.
- Nonsensitive to ESD per MIL-STD-750 method 1020.
- Inherently radiation hard as described in Microsemi “[MicroNote 050](#)”.

MAXIMUM RATINGS @ 25 °C

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-55 to +175	°C
Thermal Resistance, Junction to Lead ⁽¹⁾	$R_{\theta JL}$	60	°C/W
Forward Surge Current @ 8.3 ms half-sine	I_{FSM}	80	A
Forward Voltage @ 1 Amp	V_F	1.5	V
Peak Pulse Power @ 10/1000 μ s	P_{PP}	500	W
Reverse Power Dissipation ⁽²⁾	P_R	2.5	W
Solder Temperature @ 10 s		260	°C

- Notes:**
1. At L = 0.375 inch (9.53 mm) from body.
 2. Derate at 16.7 mW/°C (see [figure 4](#)).



“B” Package

Also available in:

“B” SQ-MELF
Package

(surface mount)



[1N6461US - 1N6468US](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland


Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetically sealed voidless hard glass with tungsten slugs.
- TERMINALS: Axial-leads are tin/lead over copper. RoHS compliant matte-tin is available for commercial grade only.
- MARKING: Body paint and part number.
- POLARITY: Cathode band.
- TAPE & REEL option: Standard per EIA-296. Contact factory for quantities.
- WEIGHT: Approximately 750 milligrams.
- See [Package Dimensions](#) on last page.

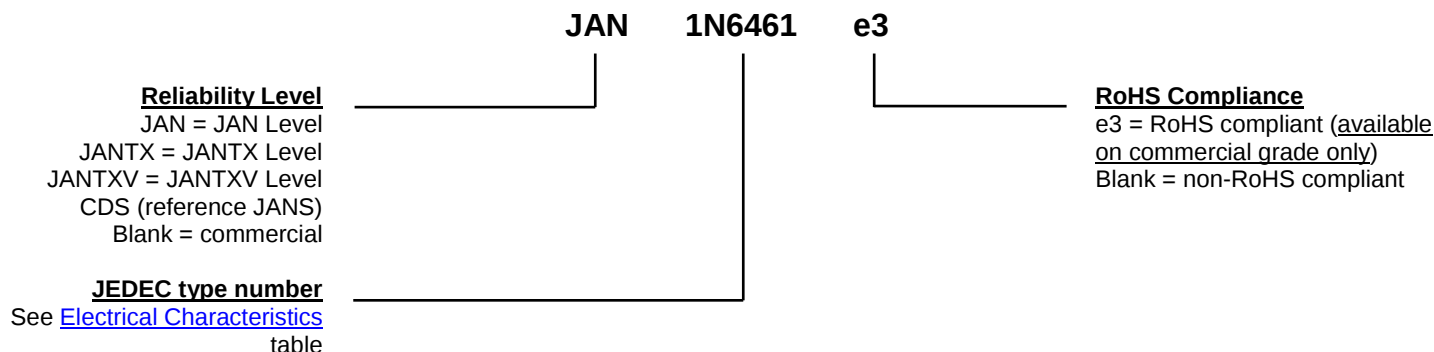PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
$\alpha_{V(BR)}$	Temperature Coefficient of Breakdown Voltage: The change in breakdown voltage divided by the change in temperature expressed in $\%/^{\circ}\text{C}$ or $\text{mV}/^{\circ}\text{C}$.
$V_{(BR)}$	Breakdown Voltage: The voltage across the device at a specified current $I_{(BR)}$ in the breakdown region.
V_{WM}	Rated working standoff voltage: The maximum-rated value of dc or repetitive peak positive cathode-to-anode voltage that may be continuously applied over the standard operating temperature.
I_D	Standby Current: The current through the device at rated stand-off voltage.
I_{PP}	Peak Impulse Current: The maximum rated random recurring peak impulse current or nonrepetitive peak impulse current that may be applied to a device. A random recurring or nonrepetitive transient current is usually due to an external cause, and it is assumed that its effect will have completely disappeared before the next transient arrives.
V_C	Clamping Voltage: The voltage across the device in a region of low differential resistance during the application of an impulse current (I_{PP}) for a specified waveform.
P_{PP}	Peak Pulse Power. The rated random recurring peak impulse power or rated nonrepetitive peak impulse power. The impulse power is the maximum-rated value of the product of I_{PP} and V_C .

ELECTRICAL CHARACTERISTICS

TYPE	MINIMUM BREAK DOWN VOLTAGE $V_{(BR)}$ @ $I_{(BR)}$	BREAKDOWN CURRENT $I_{(BR)}$	RATED WORKING STANDOFF VOLTAGE V_{WM}	MAXIMUM STANDBY CURRENT I_D @ V_{WM}	MAXIMUM CLAMPING VOLTAGE V_C @ 10/1000 μs	MAXIMUM PEAK IMPULSE CURRENT I_{PP}		MAXIMUM TEMP. COEF. OF $\alpha V_{(BR)}$
						@ 8/20 μs	@ 10/1000 μs	
	Volts	mA	V (pk)	μA	V (pk)	A (pk)	A (pk)	%/°C
1N6461	5.6	25	5	3000	9.0	315	56	-0.03, +0.045
1N6462	6.5	20	6	2500	11.0	258	46	+0.060
1N6463	13.6	5	12	500	22.6	125	22	+0.085
1N6464	16.4	5	15	500	26.5	107	19	+0.085
1N6465	27.0	2	24	50	41.4	69	12	+0.096
1N6466	33.0	1	30.5	3	47.5	63	11	+0.098
1N6467	43.7	1	40.3	2	63.5	45	8	+0.101
1N6468	54.0	1	51.6	2	78.5	35	6	+0.103

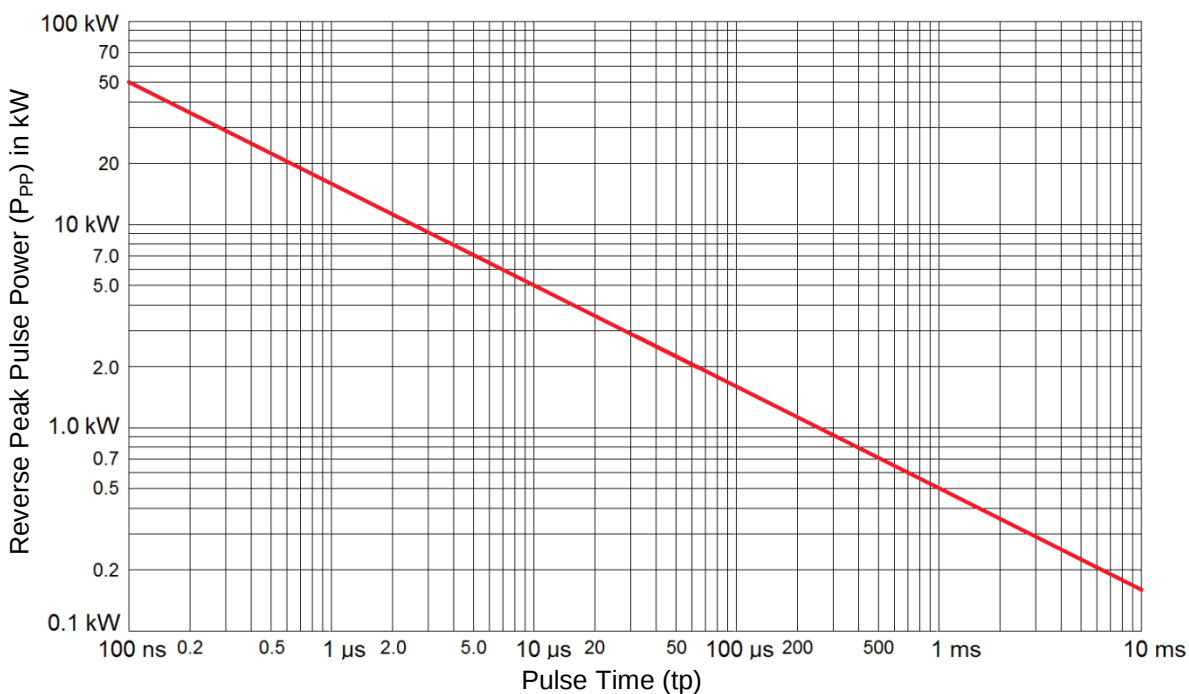
GRAPHS


FIGURE 1
Peak Pulse Power vs Pulse Time

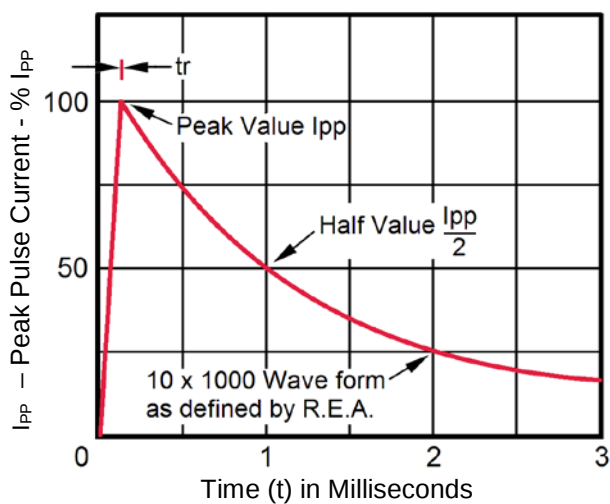


FIGURE 2
10/1000 μ s Current Impulse Waveform

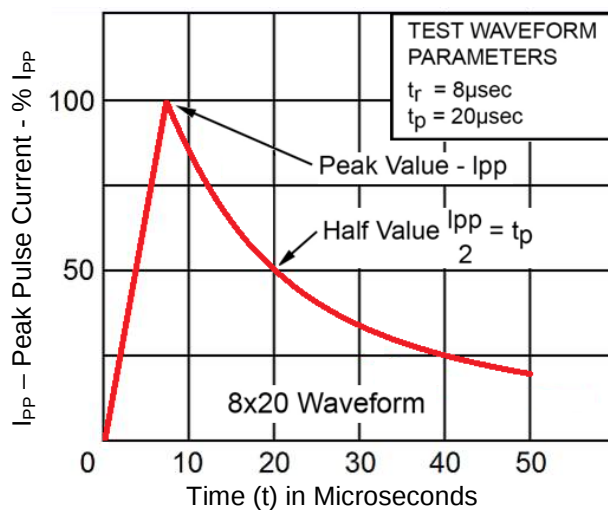
GRAPHS


FIGURE 3
8/20 μs Current Impulse Waveform

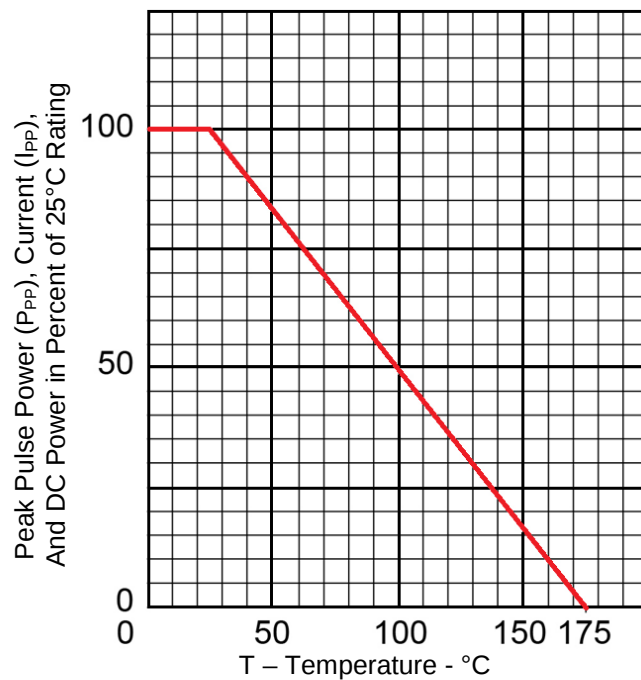
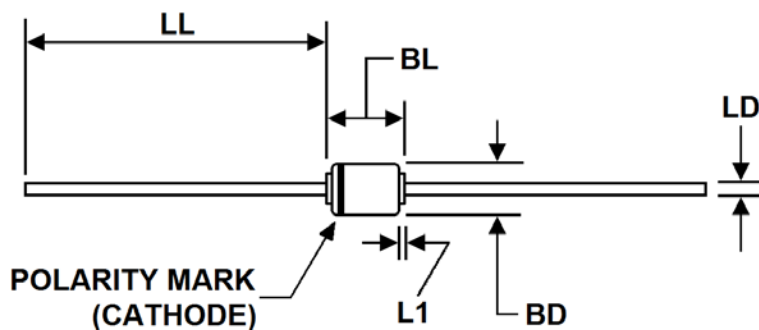


FIGURE 4
Derating Curve

PACKAGE DIMENSIONS


Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	0.115	0.145	2.92	3.68	3,4
BL	0.150	0.300	3.81	7.62	4
LD	0.037	0.042	0.94	1.07	4
LL	0.900	1.30	22.86	33.02	
L1		0.050		1.27	4

NOTES:

1. Dimensions are in inches.
2. Millimeter equivalents are given for information only.
3. Dimension BD shall be measured at the largest diameter.
4. Dimension BL includes dimension L1 region in which the diameter may vary from BD maximum to LD minimum.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.