



Product Catalog 2015-2016

# Automation Devices and Computing

## Intelligent Automation, Seamless Integration

- Automation Software
- Intelligent HMI
- Industrial Communication
- Intelligent Systems
- Embedded Automation Computers
- DIN-Rail IPCs
- Intelligent RTUs
- Power & Energy Automation
- Machine Automation
- Data Acquisition and Control
- IoT Wireless I/O Modules
- Remote I/O Modules
- WebAccess+ Solutions

**ADVANTECH***Enabling an Intelligent Planet*[www.advantech.com](http://www.advantech.com)

# Table of Contents

## Corporate Information

About Advantech	0-2
About Industrial Automation Group	0-4
Intelligent Automation, Seamless Integration	0-6
Global Certified Partner Network	0-8
Advantech Online Sales Force	0-10
Advantech iPlanet Care	0-12
One-Stop Global Services	0-13

## Star Product Highlights

Automation Software	0-14
Intelligent HMI	0-15
Industrial Communication	0-18
Intelligent Systems	0-20
Embedded Automation PCs	0-22
DIN-Rail IPCs	0-24
Intelligent RTUs	0-25
Power & Energy Automation	0-26
Machine Automation	0-27
Data Acquisition and Control	0-28
IoT Wireless I/O Modules	0-30
Remote I/O Modules	0-31
Advantech WebAccess	0-32
Rugged Tablets as Portable HMIs	0-33

## Solution Forums

Enabling an Intelligent Planet	0-34
Smart Manufacturing	0-36
Power and Energy	0-38
Oil & Gas Solution	0-39
Water Treatment	0-40
Intelligent Agriculture	0-41
Realizing IoT Business Success with WebAccess <sup>+</sup> Alliance	0-42

## Industry Solutions and Software

### CH1

#### WebAccess<sup>+</sup> Solutions

WebAccess Introduction	1-2
Advantech WebAccess	1-4
WebAccess Solution Ready Package	1-7
Advantech WebAccess Bundle Product	1-9

### CH2

#### Motion Control

Motion Control Overview	2-2
SoftMotion Introduction	2-5
Common Motion API Introduction	2-12
Centralized Motion Control Solution Selection Guide	2-13
Distributed Motion Control Solution Selection Guide	2-14
Centralized Motion Control Solutions	2-15
Distributed Motion Control Solutions	2-22
EtherCAT Solution	2-25
EtherCAT Module Selection Guide	2-28
Accessories	2-29

### CH3

#### Power & Energy Automation

Power & Energy Automation Overview	3-2
P&E Automation Computers & Controllers Selection Guide	3-4

### CH4

#### Automation Software

Advantech WebAccess	4-2
WebOP Designer / Panel Express	4-5
KW Multiprog	4-7
OPC Server	4-8
DAQNavi	4-9

## Intelligent HMI, Monitors and Panel Computers

### CH5

#### Operator Panels

Operator Panels Selection Guide	5-2
Web Operator Panels	5-4
Entry Operator Panels	5-12
Supported PLC and Controllers list	5-22

### CH6

#### Automation Panels

Control Panel Computer Selection Guide	6-2
Thin Client Computer Selection Guide	6-3
Stationary Panel and Domain-focus Computer Selection Guide	6-4
Industrial Monitor Selection Guide	6-5
Control Panel Computers	6-8
Thin Client Panel Computers	6-20
Stationary Panels and Domain-focus Computers	6-32
Robust and Wide Temperature Monitors	6-52
Robust with True-flat IP66 Upgraded	6-60
Regular Level Monitors	6-70

### CH7

#### Panel PCs

Regular Panel PC selection guide	7-2
Performance Panel PC selection guide	7-3
Regular Panel PCs	7-4
Performance Panel PCs	7-14
Installation Accessories	7-28

## Industrial Communication

### CH8

#### Industrial Wireless Solutions

Industrial Wireless Product Selection Guide	8-2
Introduction	8-4
Cellular IP Router/Gateway	8-6
Wireless Access Points	8-8
Accessories	8-13

### CH9

#### Industrial Ethernet Solutions

Industrial Ethernet Product Selection Guide	9-2
EN50155 Ethernet Switches	9-10
PoE Switch	9-12
Managed Ethernet Switch	9-18
ProView Ethernet Switch	9-27
Unmanaged Ethernet Switch	9-32
Media Converter	9-34
Accessories	9-36

## CH10

### Industrial Gateway Solutions

Selection Guide	10-2
Wireless Serial Device Servers	10-4
Dual Ethernet Serial Device Servers	10-5
Modbus Gateways	10-7

## CH11

### Serial Communication Cards

Serial Communication Card Selection Guide	11-2
PCI & Universal Communication Cards	11-4
PCI Express Communication Cards	11-8
CAN Communication Cards	11-10
PC/104 & PCI-104 Communication Modules	11-12

## Automation Controllers

### CH12

#### Embedded Automation Computers

Embedded Automation PC Selection Guide	12-2
Control DIN-RAIL PCs Selection Guide	12-3
Control Cabinet PC Selection Guide	12-4
iDoor Module Selection Guide	12-5
Embedded Automation Computers	12-6
Control DIN-Rail/ Cabinet PCs	12-17
iDoor Modules	12-29
Accessories	12-44

### CH13

#### DIN-Rail IPCs

DIN-Rail IPCs Overview	13-2
SoftLogic Control Software	13-4
PC-based Programming Software	13-6
Batch Control Solution	13-7
APAX Series Overview	13-8
APAX System Architecture	13-10
APAX Controller Selection Guide	13-11
APAX I/O Module Selection Guide	13-12
APAX Communication Module Selection Guide	13-14
APAX Controller Support Table	13-26
ADAM-5000 Controller Selection Guide	13-29
ADAM-5000 I/O Module Selection Guide	13-30
ADAM-5000 Controller Selection Guide	13-31
ADAM-5000 Controller Support Table	13-33
ADAM-5000 Remote I/O System Support Table	13-34
iRTU Overview	13-40

### CH14

#### CompactPCI Systems

Advantech CompactPCI Introduction	14-2
CompactPCI Chassis	14-4
CompactPCI Cards	14-11

## Distributed I/O Modules

### CH15

#### IoT Wireless I/O Modules: WISE-4000

IoT Wireless I/O Modules Overview	15-2
WISE-4000 Features: Wireless Ethernet Interface	15-5
WISE-4000 Features: File-based Cloud Logger and Local Data Storage	15-6
IoT Wireless I/O Modules Selection Guide	15-7
M2M I/O Modules Overview	15-12
M2M I/O Modules Selection Guide	15-16

### CH16

#### IoT Ethernet I/O Modules: ADAM-6000

ADAM-6000 Series Overview	16-2
ADAM-6000 Features: GCL	16-3
ADAM-6000 Features: Peer-to-Peer	16-4
ADAM-6000 Series Selection Guide	16-5
ADAM-6200 Series Overview	16-10
ADAM-6200 Key Features	16-11
ADAM-6200 Series Selection Guide	16-12
Real-time Ethernet I/O Modules	16-16
EtherNet/IP I/O Module Introduction	16-16
ADAM-6100 Series Selection Guide	16-17

### CH17

#### RS-485 I/O Modules: ADAM-4000

ADAM-4000 Series	17-2
Communication and Controller Module Selection Guide	17-4
I/O Module Selection Guide	17-5
Analog Input Modules	17-8
Analog Output Modules	17-11
Digital Input/Output Modules	17-12
Communication & Controller Modules	17-15
Advanced Communication & I/O Modules	17-17
Robust RS-485 I/O Module Selection Guide	17-18

## Data Acquisition and Control

### CH18

#### Data Acquisition Boards

Data Acquisition and Control Tutorial & Software	18-2
DAQnavi Introduction	18-3
DAQnavi Data Logger	18-5
Analog I/O & Multifunction Card Selection Guide	18-6
Digital I/O & Counter Card Selection Guide	18-10
PCI Express DAQ Cards	18-17
PCI Multifunction DAQ Cards	18-25
PCI Analog I/O Cards	18-29
PCI Digital I/O & Counter Cards	18-36

### CH19

#### Signal Conditioning Modules and Terminal Boards

Isolated Signal Conditioning Modules	19-3
Terminal Board Selection Guide	19-6
Isolated Digital I/O Terminal Boards	19-8

### CH20

#### Industrial USB I/O Modules

USB Hubs	20-2
USB DAQ Modules	20-3
USB GPIB Modules	20-10


# About Advantech

## Advantech: Partnering for Smart City & IoT Solutions


Founded in 1983, Advantech is a leader in providing trusted innovative embedded and automation products and solutions. Advantech offers comprehensive system integration, hardware, software, customer-centric design services, and global logistics support; all backed by industry-leading front and back office e-business solutions. Advantech has always been an innovator in the development and manufacture of high-quality, high-performance computing platforms. We cooperate closely with our partners to help provide complete solutions for a wide array of applications across a diverse range of industries. To realize our corporate vision of Enabling an Intelligent Planet, Advantech will continue collaborating and partnering for smart city and IoT solutions.

## Advantech's Good-to-Great 3-Circle Principle

The Advantech 3-Circle Principle is based on the book "Good to Great," by Jim Collins. According to the book, a company looking for long-term success should clearly address these three fundamental principles, and commit to their continuing, solid execution. Advantech is fully committed to this approach and has defined the Advantech "Good to Great 3-Circle Principle" as a means of adhering to it.

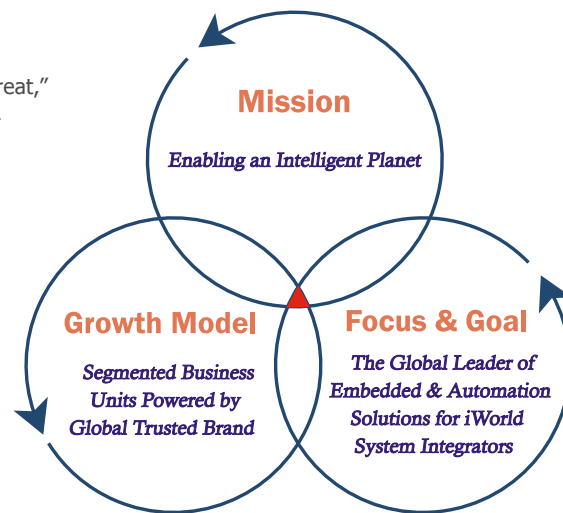

## Advantech Corporate Structure and Growth Engines

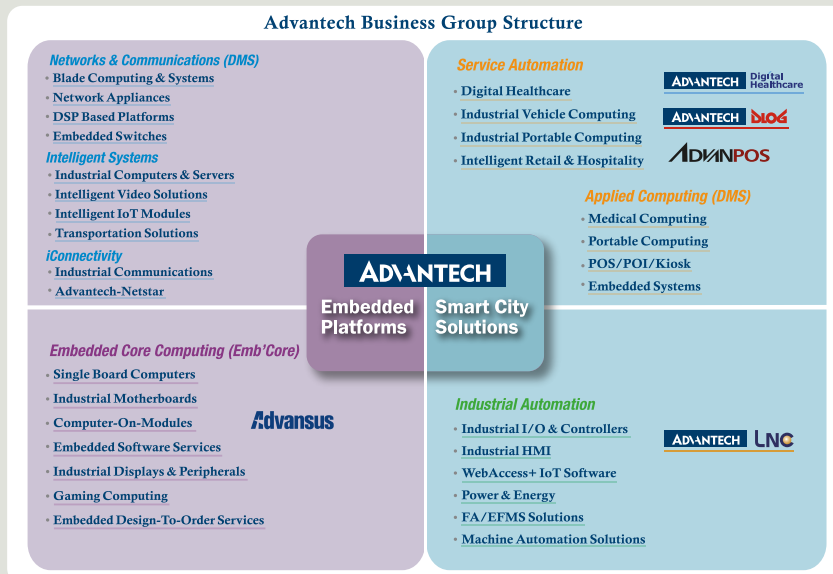

### • Embedded Core Computing Group

Embedded Core Computing Group provides a full range of embedded boards, systems peripheral modules and innovative embedded software services with leading technologies to customers. With a range of specialist design-in services backed by our internal and global resources, Advantech is committed to working closely with embedded customers to ensure design success by helping them discover new business opportunities through advanced embedded technologies and services that empower smart applications for an intelligent planet.

### • Intelligent Systems Group

With innovative technologies from cloud computing (industrial server, video server), edge computing (fanless, slim & portable devices), to high performance embedded systems (blade computing, network processor platforms, DSP processing), Advantech transforms embedded systems into intelligent systems with smart, secure, energy-saving features, built with Industrial Cloud Services and professional System Design-To-Order Services (System DTOS). Advantech's intelligent systems are designed to target vertical markets in transportation, industry (machine automation, equipment/machine building), digital signage, and video applications (video infrastructure and video surveillance).



## World-Class Recognition

Advantech is an authorized alliance partner of both Intel® and Microsoft®. Our customers find the technologies we use inside our products to be widely compatible with other products in the global marketplace. Interbrand, the world renowned brand consulting firm, recognized Advantech as one of the Top 20 Taiwanese Global Brands for many years. Advantech appreciates this recognition of our efforts to build a trusted, global brand; it also symbolizes a promise we give to our business partners, which is to keep building a trustworthy brand that is recognized everywhere and improves the lives of all.

## Quality and Environmental Compliance

As a member of the global village, Advantech understands the importance of preserving the environment. Our environmental programs focus on reducing, reusing, and recycling materials used in our manufacturing operations. Advantech's quality and environmental compliance efforts include the following:

- ISO 9001 Certification
- ISO 14001 Certification
- ISO 13485 Certification
- OHSAS 18001 Certification
- TL9000 Certification
- ISO/TS 16949 Certification
- ISO 17025 Certification
- RoHS Directive Compliance
- WEEE Directive Compliance
- Authorized Sony Green Partner
- REACH SVHC Directive Compliance
- EICC Conflict Minerals Declaration



## Timely Support at Your Convenience

Advantech has over 18 regional hotlines and offices throughout 92 cities, in 21 countries, with over 6,000 employees to provide efficient, professional services for customer care, product selection, technical support, and order handling. Through our call centers and online stores, customers worldwide enjoy the convenience of Advantech's multi-service channels to reduce business turnaround time. Together with the four customer service centers in Taiwan, China, Europe and the United States, our global service network offers an extensive spectrum of services that includes warehousing, logistics, peripheral certification, sourcing & purchasing, and RMA & value-added services, and technical support & training.

### • Networks & Communications Group

Advantech's integrated DMS "Star Fleet" Model provides OEMs and premier key accounts with customer-focused Design and Manufacturing Services (DMS), winning together through worldwide partnership and collaboration. DMS provides hardware and software integrated solutions. For the telecom and networking markets, Advantech provides mission-critical hardware to the leading equipment manufacturers. Advantech's standard and customized products are embedded in OEM equipment that the world's communications infrastructure depends upon. Through Advantech's premier DMS, our customers get reliable, open-standard solutions from the leading innovator in network platform development and manufacturing – plus dedicated resources and support to back them up.

### • iConnectivity Group

Advantech's iConnectivity Group offers a full range of industrial communication products including wired and wireless communication solutions for mission critical applications. These products include: Industrial Ethernet Switches, Industrial Wireless AP/CPE, Media Converters, Serial Device Servers, Cellular IP Gateways, and Modbus Gateways. They are also capable of securely transmitting, remotely monitoring and controlling networked devices and high communication capabilities for industrial applications. These reliable and robust industrial grade communication products from Advantech's iConnectivity group fit different applications including process manufacturing, discrete manufacturing, security, and intelligent transportation systems, and our mission is to simplify the way you connect.

### • Service Automation Group (Intelligent Services)

Following global trends in urbanization, smart cities will flourish with innovative services, and with interconnected and integrated devices, marking a significant change in the mode of operation in the industry. Service Automation Group (SAG) aims to enable smarter cities by providing products and solutions for different vertical markets such as Digital Logistics, Healthcare, and Retail. The key to the future of intelligent services is the ability to shape the industry ecosystem through fruitful collaboration with key partners. SAG is now offering a Solution Ready Package business model to targeted markets that will create higher value and help drive the industry onwards.

### • Industrial Automation Group

With the theme of "Intelligent Automation, Seamless Integration", the Industrial Automation Group (IAG) of Advantech Corporation is a pioneer in intelligent automation technology. By combining connectivity, flexibility, ruggedness and leading-edge "Internet of Things" technology, IAG offers products for intelligent HMI platforms, the industrial Ethernet, wireless communications, automation controllers, automation software, embedded automation computers, distributed I/O modules, wireless sensor network solutions, motion I/O and plug-in I/O modules for a wide array of industries. With more than 20 years of experience in providing a full range of products to different vertical markets, IAG is a leading global automation product and services provider.

### • Applied Computing Group

The Applied Computing Group devotes itself to customization services and delivers vertically-driven and application-specific solutions. We specialize in design and manufacture of high quality industrial hardware and tailored software that fulfill exact needs for sectors including gaming, healthcare, portable devices, retail, and embedded systems. We strive to apply the newest technology and debut niche products. With dedicated R&D experts, accumulated domain know-how, flexible manufacturing, and a comprehensive global service net, we offer service that gives customers a dramatic market advantage.

# About Industrial Automation Group

## Enabling Industry 4.0 & IoT with Intelligent Automation



The future of Industry 4.0 and the Internet of Things (IoT) relies on powerful IT systems that can process and store the information in a fast and efficient manner from anywhere. Combining reliable and fast network connectivity, intelligent automation platform and gateways, flexibility and ruggedness automation controllers, IoT devices and sensors, with the IoT software framework - WebAccess - and having the ability to connect to the cloud for accessibility from other smart devices. Advantech is a pioneer of intelligent industrial automation and is committed to investing in R&D in new automation technologies, collaborating in vertical market solutions with partners and connecting industry Eco-partnerships through the WebAccess+ alliance program.

## Advantech, a Pioneer of Intelligent Automation Technology

With the goal of integrating every layer of automation architecture, the Industrial Automation Group strengthens its products and solutions capabilities to provide not only a series of industrial automation products, such as IoT software framework - WebAccess software, industrial communication, IoT gateways, PC-based control platform, energy control platform, IoT Ethernet remote I/O, etc., but also solution ready packages, such as machine status monitoring, trend analysis and production information. As well as addressing the needs of different vertical markets, Advantech leverages its WebAccess + IoT solution alliance partner program. WebAccess is an integrated IoT Software Suite & Solution Platform and is the core software component of Advantech's IoT solutions.

With more than 30 years' experience in providing a full range of products to different vertical markets, the Industrial Automation Group is a leading global Automation Product and Services provider.

## Enabling Industry 4.0 & IoT with Intelligent Automation



Robotics

Machinery

Automotive

Oil & Gas

Energy


Agriculture




### Solution Ready Package



### Intelligent Automation Platform & Gateway

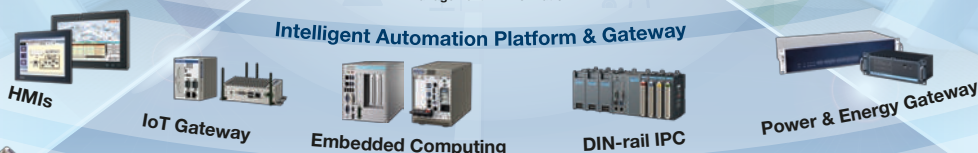

### Controller, Device & Sensor

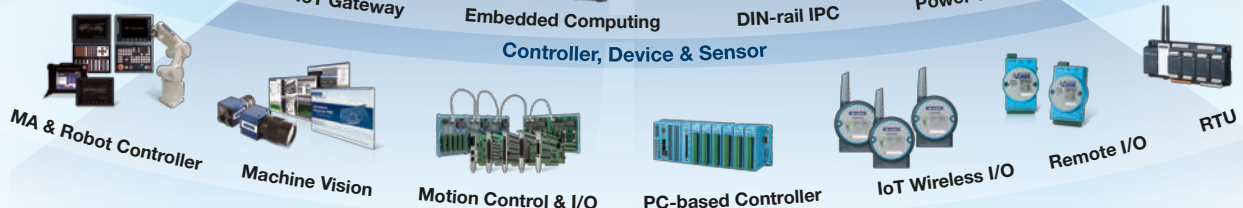

## Integrated Automation and Cloud Innovation for Industry 4.0

Industry 4.0 is becoming a buzzword in smart factories. For Advantech's Industrial Automation group, 2015 is the year of Industry 4.0. To understand Advantech's industry 4.0 solution, we've developed a three-layer architecture—intelligent machines and robots; connected iFactory solutions; and enabling the IIoT—as part of our Industry 4.0 blueprint. With these layers and the integration of information, quick response and flexible manufacturing, the overall effectiveness and efficiency of machine automation will be greatly improved.

As an equipment provider, Advantech's WebAccess+ software platform supports system integrator partners in integrating the various applications and hardware they develop. The platform combines smart HMI/SCADA software, remote device management software and intelligent video software. It also connects with industrial cloud platforms, and analyzes and manages large amounts of data, video and voice data, providing critical information anytime for management by industrial customers, effectively realizing the vision of Industry 4.0.

For intelligent machines and robotics, we offer a range of products and technologies including: motion control, machine vision, automation computing and integrated machine tools and robot controllers. With these advanced technologies, traditional industrial automation machines will become more intelligent and able to communicate, transforming the machines into cyber-physical systems that can become even more efficient.

















In an Industry 4.0 environment, all machines and equipment are networked and contain a plethora of sensors to continuously provide status details and production information to the process control system so it can perform immediate analysis and quickly take any necessary actions. By analyzing the machines used by each operator, sensors can be developed that will adjust the settings of the machine based on who's operating it. Furthermore, this information can then be integrated into manufacturing execution systems (MES) and enterprise resource planning (ERP) systems. To reach these goals, Advantech provides solutions to enable network-connected iFactories. Our WebAccess+ Integrated IoT Software Suite and Solution Platform can connect machines, robots and equipment to the factory network and integrate them with systems such as MES and ERP systems.

Another of our efforts is to enable innovative services based on big data analysis. By continuously producing status reports of plant equipment and production information, big data analysis allows system engineers to plan for future maintenance and make changes to configurations at the most appropriate time, thereby reducing the amount of downtime. The endless stream of information is an excellent method of developing new applications and creative services and can be used to increase production and reduce overheads. Industry 4.0, IIoT, cloud services and Advantech's solutions for system integrators will help lead factories into the future.


## Enabling Industry 4.0 with Integrated Automation & Cloud Innovations

# Industry 4.0

WebAccess-Enabled iFactory 4.0

<b>WebAccess Enabled iFactory 4.0</b>		<b>Semiconductor</b>  Predictive Maintenance	<b>Food &amp; Beverage</b>  Product Serialization	<b>Automotive</b>  Enterprise Resources Planning (ERP)	<b>Metal Processing</b>  Manufacturing Execution System (MES)	<b>Electronics</b>  Mass Customization				
	<b>Connected iFactory Solutions</b>		<b>WebAccess+IMM</b> <b>WebAccess+IVS</b> <b>WebAccess/SCADA</b> <b>WebAccess/NMS</b>	Production Performance Analysis 	Machine Status 	Process Optimization 	Scheduling Management 	Production Information 	Status Assessment 	Trend Analysis 
<b>Intelligent Machinery &amp; Robotics</b>	<b>Platform</b> 	<b>Motion Control</b> 	<b>Controller</b> 	<b>Machine Vision</b> 	<b>Sensor Measurement</b> 					

# Intelligent Automation, Seamless Integration

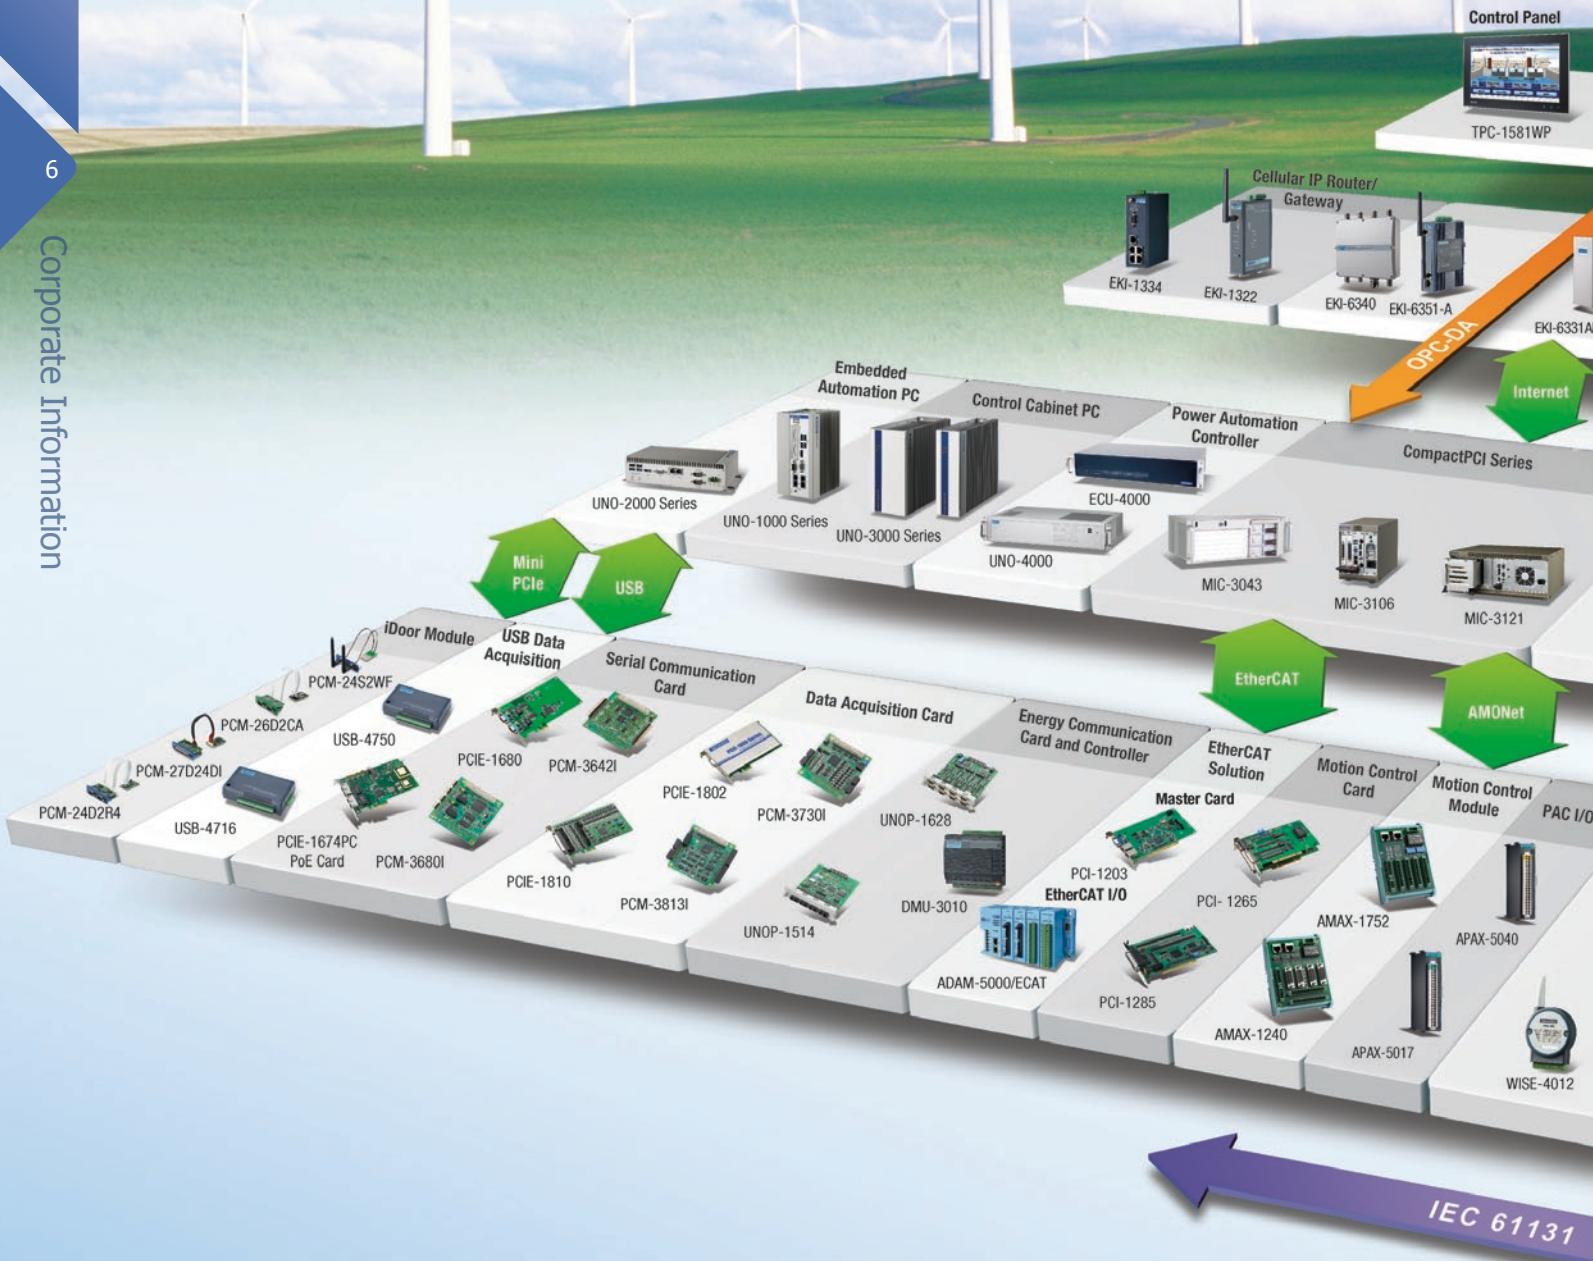

Control Panel  
TPC-1581WP

Cellular IP Router/  
Gateway  
EKI-1334 EKI-1322 EKI-6340 EKI-6351-A EKI-6331AN

OPC-DA Internet

Embedded Automation PC UNO-2000 Series UNO-1000 Series UNO-3000 Series UNO-4000  
Control Cabinet PC ECU-4000  
Power Automation Controller MIC-3043 MIC-3106 MIC-3121  
CompactPCI Series

Mini PCIe USB

EtherCAT AMONet

iDoor Module PCM-24S2WF  
USB Data Acquisition PCM-26D2CA USB-4750 PCM-27D24DI USB-4716 PCM-24D2R4  
Serial Communication Card PCIE-1680 PCM-3642I PCIE-1802 PCM-3730I UNOP-1628 PCM-3813I UNOP-1514  
Data Acquisition Card PCM-3730I UNOP-1628  
Energy Communication Card and Controller DMU-3010 ADAM-5000/ECAT  
EtherCAT Solution PCI-1203 EtherCAT I/O PCI-1265 PCI-1285 AMAX-1240  
Master Card PCI-1265  
Motion Control Card AMAX-1752  
Motion Control Module APAX-5040 APAX-5017  
PAC I/O APAX-5040  
WISE-4012

IEC 61131





WebAccess

Operator Panel

Rugged Tablet  
SCADA Server

Industrial Computer Thin-client Panel Panel PC Industrial Monitor

HMI & Mobile Device

Wi-Fi Managed Switch ProView Unmanaged Switch PoE Switch EN50155

Network

Device Server DIN-Rail IPC SCADA Controller Energy Controller Remote Terminal Unit Embedded Vision/Motion Controller

Controller

IoT Wireless I/O Wireless Router & Gateway RS-485 I/O Ethernet I/O Intelligent Ethernet I/O IoT Ethernet I/O

I/O & Sensor

# Global Certified Partner Network

Since 1983, Advantech has formed strong and lasting partnerships with many well-established channel partners and solution partners to deliver prompt and reliable local services for our customers. Currently, Advantech has over 600 partners in more than 70 countries worldwide to provide certified services and products anytime, anywhere.

## Certified Professionals Guarantee Outstanding Quality Services

Through rigorous training and validation, our partners are certified annually, guaranteeing a high standard of quality & service. With these dedicated and well-trained sales and technical support teams, Advantech customers can enjoy outstanding quality services and early access to latest industrial computing solutions.

- Value-added services: Many of our partners are distributors, value-added resellers, focused channels, system integrators, or independent software vendors specialized in specific industry segments or applications with years of experience in developing application ready platforms. Their profound knowledge in integrating Advantech's hardware platforms with peripherals and software can speed up your time-to-market.
- Quality technical support: All the partners have dedicated application engineers to provide pre-sales and post-sales technical support. Within Advantech, there's a group of hotline and field application engineers to back up our partners, ensuring the service level.
- Fast delivery with flexible global supply chain: With over 600 partners and 4 regional service centers worldwide, Advantech offers fast delivery and after-sales support to our customers.





## Strategic Focus Makes the Difference

As industrial and embedded computing applications become more diversified, customers are demanding to get solutions tailored for vertical applications and high-quality local support.

To fulfill such needs, Advantech strives to develop its global partner network with a strategic focus. We only partner with distributors, VARs, and system integrators who value quality services as we do and pride themselves with profound industry know-how and technical competency. Through our comprehensive training and certification programs, Advantech partners are expert consultants in our rich portfolio of product offerings and applications for various vertical segments.

Currently, Advantech has partners in the following categories:

### Channel Partners



Advantech iAutomation Channel Partners (CPs) are focus on industrial automation, embedded systems and general computing platform markets. With local inventory, logistic services, technical support and other add-on value services, our partners can provide professional services and prompt delivery of system components for system integrators' control and automation applications. Aligned with our regional sales offices and service centers, Advantech CPs have formed a strong service network to offer professional pre-sales and post-sales worldwide.

Advantech also identified the Channel Partners, focus on specific vertical segments, to provide local value-added services for our customers, such as application development, technical consultation, design service, integration & installation, on-site services, technical training and project management. These CPs are certified value-added resellers with expertise in application development and system integration for each segment.

### Solution Partners

Solution Partners are 3rd parties who integrate Advantech products and value-added software and peripherals to provide turn-key solutions. Advantech's Solution Partners offer our customers a full range of field proven integrated solutions in Medical, Telecom, Transportation, Gaming, Power & Energy, Building & Home Automation, Factory & Machine Automation, Environmental Monitoring & Facility Management, Retail, Hospitality & Self-service, and many more. Their solutions are validated with Advantech products for compatibility, quality, and service.



### Business Alliance Partners

Advantech is the global premier partner of Intel Embedded Alliance and gold partner of Microsoft Windows Embedded. All the business alliance partners have been carefully selected and closely cooperated to improve the service Advantech provide to customers, helping them add value whilst meeting stringent requirements in a wide array of industries. These partnerships aim to enable an intelligent planet by offering hardware or software that empower the connected eWorld.

# Advantech Online Sales Force

## Enabling an Intelligent Planet

To provide fast and convenient services to our customers and users, Advantech provides several easily-accessible web portals, including: the Advantech.com website, Buy.Advantech.com and an Online Support Portal to serve different requirements. To supplement our electronic contacts, we've also built up regional call centers to take care of customers who prefer human contact. These methods allow us to deliver our services by live chat, phone line and email anytime and anywhere.

## 33 Teams in 26 Cities Serve Global Inquiries

The image features a world map with 33 orange location markers. The cities marked are: Milpitas, Cincinnati, Mexico, Sao Paulo, Buenos Aires, Reading, Edinborough, Paris, Warsaw, Dusseldorf, Munich, Milano, Beijing, Shanghai, Bangkok, Shenzhen, Bangalore, Singapore, Penang, Serangoon North, Jakarta, Taipei, Doha, and Victoria. To the right of the map is a 'Call Center' box with the heading 'Ask an Expert' and icons for 'Chat Online Now', 'Request Call Back', 'Sales & Quotation', and 'More Contacts'. Below this is a photo of a woman and the text 'Toll Free 1-888-876-8668'. Below the map are three screenshots of web portals: 'Buy.Advantech.com' (top left), 'Online Support' (bottom left), and 'Advantech.com' (bottom right).



Milpitas



Cincinnati



Dusseldorf



Beijing



Taipei



Tokyo



Melbourne

## Advantech.com Website

Through [www.advantech.com](http://www.advantech.com), we not only offer comprehensive products, but also real-time updated information to our customers. In addition to product information, you also can find case studies of proven applications from diverse sectors. Furthermore, registered MyAdvantech members, can access the RMA service center, updated price lists, and various promotion programs.



## Online Store

### Buy.Advantech.com

To extend Advantech's services, we launched the Buy.Advantech online store which offers one-stop shopping for Human Machine Interfaces, Industrial Ethernet networking, Controller & I/O products, plus computing platforms. This eStore offers comprehensive product information to build systems easily, with live expert support to solve problems, online configurations providing easy system customization options, instant quotations, an extensive library of FAQs and all the latest up-to-date downloads and firmware.



## Online Support

Providing superior self-support mechanisms is one of the most essential parts of being a top-tier automation company, and we take pride in the outstanding level of service that we offer. To best support our customers, we've created a suite of useful interactive online tools, including:

- Technical Documents: Manuals, datasheets, updated drivers and utilities all available for download through the Support Portal
- 3D Product Models: Simulated products in 3D format to provide detailed outlook for customer evaluation
- Online Training: Self-training documents and videos to provide trainees with integrated information
- Online Catalog: Comprehensive online catalogs to provide customers with extensive product information



## 24/7 Online Service



To effectively respond to customers' questions, our regional call centers support inquiries about: purchasing, shipping, technical, and RMA issues among lots of general accounts. Contact your regional call center to get the support you need today.


### Global Hotlines

Mexico	52-55-4170-8318	China	800-810-0345/8389	Japan	0800-500-1055
Colombia	57-1381-2858	India	800-425-5070/5071	Australia	1300-308-531
Indonesia	62-21-7511939	US	888-576-9668	Malaysia	1800-88-1809
Singapore	888-576-9668	Brazil	0800-770-5355	Russia	8800-555-0150/8120
Thailand	66-2248-3140	Taiwan	0800-777-111	Europe	00800-2426-8081
Korea	080-363-9494/9495				

# Advantech iPlanet Care

## Manufacturing

Our dual, world-class manufacturing centers in Taiwan and China maintain precise quality control, and offer a full range of production in a timely and cost-effective manner. To maximize the efficiency of operational procedures, we have implemented a cluster manufacturing system within our segmented manufacturing service units. This unique approach enables a direct, simplified, and highly streamlined design-to-manufacturing process.

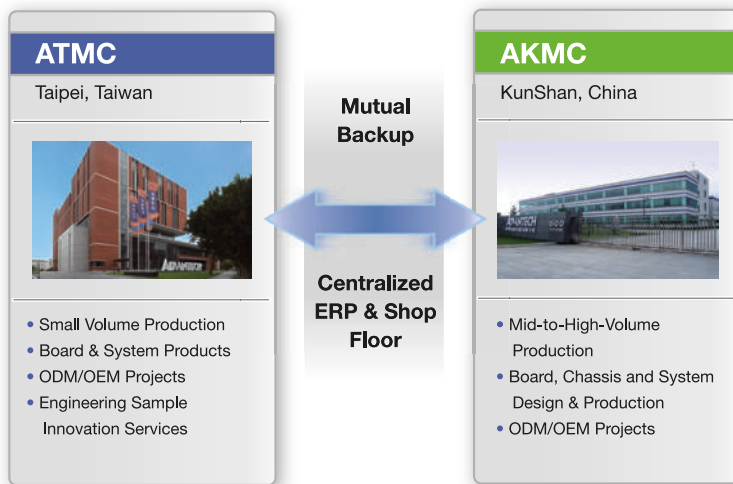

- In-house board, chassis, and system production
- Dual world-class manufacturing centers minimize business risks
- Advanced production capabilities and customizable processes
- Rigid quality assurance system
- Most complete ISO standard coverage

## Configure To Order Services

Advantech's Configure To Order Services (CTOS) makes industrial computing solutions more accessible by offering web-based configuration tools, comprehensive, complex assembly services with high-mix, low-volume box build and customized assembly, modification, system integration and functional testing services.

- Online intelligent configuration
- Comprehensive approach to complex configuration solutions
- Local customized configuration services
- 2 year global warranty covering system & peripherals integrated



## Certified Quality Assurance System

Advantech has been designing and manufacturing industrial PCs according to our 3C Quality Statement:

- Always strive for overall customer satisfaction
- Continuous improvement
- Apply closed-loop mechanisms to resolve problems

At Advantech, quality is our main priority. A complete line of safety, EMC and reliability measures such as ESD, vibration, drop testing, temperature, humidity and HALT chambers are available to ensure our products meet the strictest standards. All facilities are at least ISO 9001 and 14001 certified while others hold additional certifications such as ISO 13485, 17025, TL9000 and OHSAS18001. An environmental program that focuses on reducing, reusing and recycling of materials throughout the manufacturing process is also applied at Advantech. All our products are 100% RoHS compliant and Environmental Management Systems such as QC080000 are applied to meet worldwide environmental requests. Advantech's efforts towards environmental protection have been recognized by Sony since 2004 (Sony Green Partner).

- Complete ISO coverage
- Green policies
- Constant quality and reliability monitoring
- Ease of access to quality contacts



# One-Stop Global Services

Advantech iPlanet Care combines exceptional business expertise, powerful design capacities, and a thorough global service network to provide one-stop global services and total solutions. Our broad range of global support packages adds maximum flexibility and efficiency to your projects.



## Global Logistics Services

With strong integrated ERP and SAP supply chain solutions, our worldwide logistics network offers a wide range of options for different delivery models including local and global solutions that meet your unique needs and budget requirements.

Advantech's Logistics Service gives you the flexibility to simplify your logistical networks, bring your products to market on time, and enjoy a timely return on your investment.

- Optimized and flexible shipping solutions
- Integrated ERP and SAP supply chain solution with global distribution network
- Centralized plants with local delivery

## Global Peripheral Procurement Services



Advantech global peripheral procurement network consists of local teams that leverage strong, worldwide supplier relationships and strict vendor and product management to offer quality-guaranteed, compatible peripherals with short lead times and competitive prices.

- Localized procurement with worldwide network support
- Global standardization management; 100% compatible peripherals
- Trusted quality with revision control
- Short lead time and competitive price

## Global Customer Support Services

Our global presence provides localized reliable customer support services. We can create an optimized maintenance and support plan, leveraging the full power of our service portfolio to help reduce costs and proactively mitigate business risks to best meet your needs. In addition to our complete technical and repair support, we provide a variety of customizable after-sales services, including extended warranty, advance replacement, upgrade, fast repair, etc. With our knowledgeable local support groups, we enable a consistent support experience around the world and help keep your investment at peak performance and within your budget.

- 24/7 technical support: hotline AE & online chat support
- Global deployment with local full-line repair capability
- Easy-to-use web-based repair and tracking system (eRMA)
- Various value-added, after-sales service packages

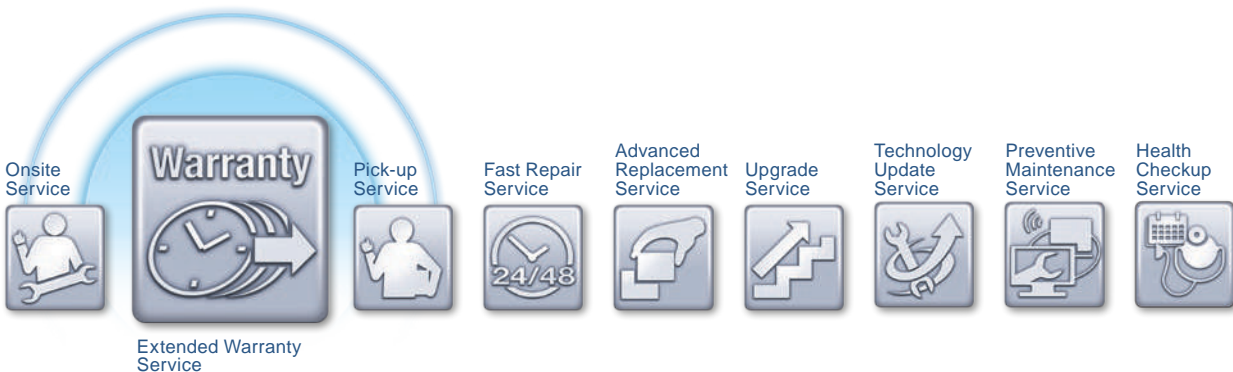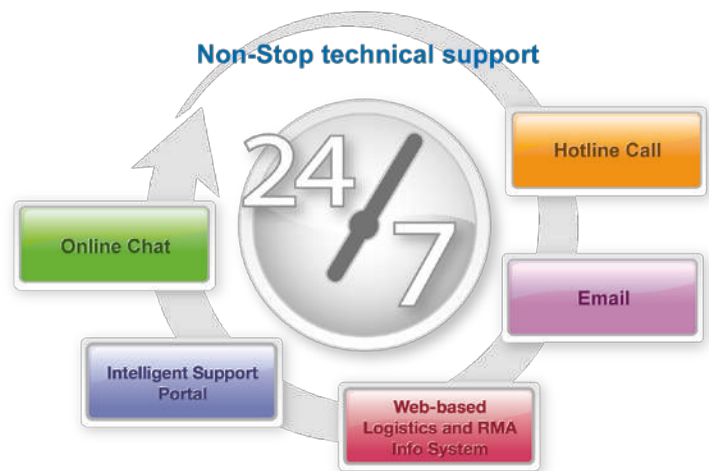

# Automation Software

## Minimize Programming Time while Optimizing Performance

Advantech's automation software lineup includes SCADA software, network management, remote device management, HMI runtime development software, SoftLogic programming tools, OPC Server, and other user-friendly programming tools and utilities. Advantech WebAccess web-based HMI/SCADA software is a shining example. It helps customers view, control and configure systems remotely through the Internet from any smart device. Advantech's software and hardware solutions empower automation professionals to develop integrated automation systems efficiently.



## Automation Software



### Advantech WebAccess

#### Web-based HMI/SCADA Software

- Cross-browser, cross-platform business intelligent dashboard for remote data analytic service
- Distributed SCADA architecture with central database server and multi-layer inter-operable SCADA nodes
- Google Maps and GPS location tracking integration
- Supports open interfaces - web services, widget interfaces and WebAccess APIs



### WebAccess/NMS

#### Advantech WebAccess/NMS

#### Visualize Device Connectivity

- Easy device location with Google map support
- Ethernet, WLAN, Cellular integration network topology
- Remote configuration, monitoring and F/W upgrading
- Supports Advantech Ethernet-based platforms and modules
- 100% browser-based software system
- Supports a variety of mobile devices and browsers



### SUSIAccess

#### Remote Device Management Software

- Device monitoring and automatic alerts by email/SMS
- Quick access to remote control for device diagnostics and repair
- Complete protection from cyber threats (powered by McAfee application control technology)
- Simple backup and recovery (powered by Acronis backup and recovery technology)



### WebOP Designer/Panel Express

#### HMI Runtime Development Software

- Provides user friendly easy configuration
- Application software function objects
- Supports project protection, upload/download operations
- Collects data from many devices using various methods
- Supports over 400 industrial communication protocols



### CODESYS

#### IEC-61131-3 SoftLogic Control Software

- Cross-compiling: 5 standard languages can be cross-compiled to each other
- Real-time performance
- Provides free IDE tool
- Powerful debugging tools and simulation support
- Fulfill integration with Advantech control platform



### DAQNav


#### Software Development Package for Advantech DAQ Products

- Rapid Application Design (RAD) helps developers to build a program in the shortest time
- Thread-safety design to ensure high reliability under multi-thread environment
- Intuitive utility Navigator integrates configuration tools, testing panel, manual, tutorial, and example codes

### Advantech Data Logger

#### Data Logging Application Software

- Online and offline monitoring of acquired signal
- Exports recorded data to .txt and .xls (Excel) for post analysis
- Flexible display with customized plot, title, cursor and axis



### OPC Server

#### OPC Server for ADAM & Modbus Devices

- Supports Microsoft Windows XP/ 2000/ 7/ 8/ 8.1
- Supports Advantech ASCII, Modbus RTU, and Modbus/TCP protocol
- Compliant with the latest OPC Data Access 1.0, 2.04 and 3.0 standards
- Compliant with the latest OPC Alarm and Events 1.0 and 1.2 standards





# Intelligent HMI

## Leading the Evolution of Intelligent Operator and Panel PCs

As we stand on the edge of the new era of Industry 4.0, Advantech as a leading enabler of intelligent factories, will continue to innovate the next generation of HMI products and solutions for different industries.

We provide an integrated and comprehensive range of HMI products including Control Panel Computers and Thin-client Panel Computers (TPC and SPC), Industrial Monitors (FPM), Web Operator Panels (WebOP), Industrial Panel PCs (IPPC) and Panel PCs (PPC) for intelligent factories, automation markets, and domain focused markets such as food and beverage, oil and gas and railway transportation.



### Control Panel Computers



**NEW** ikey IDor

#### TPC-1881WP

18.5" WXGA TFT LED LCD Intel® Core™ i7/ i3 with PCT Multi-Touch Panel Computer

- Intel® Core™ i7-4650U/ i3-4010U with 4GB DDR3L SDRAM
- 7H Hardness Glass Surface Widescreen with PCT Multi-touch, IP66 Front Protection and True-flat Touch Design
- Expandable System I/O, Isolated Digital I/O, Fieldbus and Communication by iDoor Technology
- Built-in ikey and Home-key for an intuitive UI
- Supports two USB 3.0 and HDMI for independent display



**NEW** ikey IDor

#### TPC-1581WP

15.6" HD TFT LED LCD Intel® Core™ i3 with PCT Multi-Touch Panel Computer

- Intel® Core™ i3-4010U 1.7GHz with 4GB DDR3L SDRAM
- 7H Hardness Glass Surface Widescreen with PCT Multi-touch, IP66 Front Protection and True-flat Touch Design
- Expandable System IO, Isolated Digital IO, Fieldbus and Communication by iDoor Technology
- Built-in ikey and Home-key for an intuitive UI
- Supports USB 3.0 and HDMI for independent display




**NEW** IDor

#### TPC-1582T/ 1282T

15"/ 12" XGA TFT LED LCD Intel® Core™ i3 Touch Panel Computer

- Intel® Core™ i3-4010U 1.7GHz with 4GB DDR3L SDRAM
- More Durable 5-wire Resistive Touch Screen with IP66 Front Protection
- PCIe and mini PCIe expansion support
- Expandable System I/O, Isolated Digital I/O, Fieldbus and Communication by iDoor Technology

### Thin Client Panel Computers



IDor

#### TPC-1751T/ 1551T/ 1251T/ 651T

17"/ 15"/ 12.1"/ 5.7" XGA TFT LED LCD Intel® Atom™ Dual-core Thin Client Panel Computer

- Intel® Atom™ Dual-core E3827 1.75 GHz processor with 4GB DDR3L SDRAM
- -20°C ~ 60°C Wide Operating Temperature
- IP66 Front Protection and More Durable 5-wire Resistive Touch Screen with True-flat Touch Design
- Supports iDoor Technology (TPC-1251T-EHKE required)



ikey IDor

#### TPC-1551WP

15.6" WXGA TFT LED LCD Intel® Atom™ Dual-core Thin Client Panel Computer

- Intel® Atom™ Dual-core E3827 1.75 GHz processor with 4GB DDR3L SDRAM
- 7H Hardness Glass Surface 16:9 Widescreen with PCT Multi-touch, IP66 Front Protection and True-flat Touch Design
- Supports iDoor Technology (TPC-1251T-EHKE required)



ikey IDor

#### TPC-1051WP

10.1" WXGA TFT LED LCD Intel® Atom™ Dual-core Thin Client Panel Computer

- Intel® Atom™ Dual-core E3827 1.75 GHz processor with 4GB DDR3L SDRAM
- 7H Hardness Glass Surface Widescreen with PCT Multi-touch, IP66 Front Protection and True-flat Touch Design
- Supports iDoor Technology (TPC-1251T-EHKE required)

### True-flat Monitors



TAIWAN EXCELLENCE 2015



#### FPM-7211W/ 7181W/ 7151W

21.5"/ 18.5"/ 15.6" Industrial Monitor with PCT, Direct VGA+DVI ports

- 16:9 FHD/ WXGA LED backlight LCD with True-flat Seamless Design
- 7H Hardness Glass Surface with PCT Multi-touch and IP66 Front Protection
- Supports 10 points multi-touch via USB interface in Windows 7/8
- Robust design with SECC chassis and Magnesium alloy front panel



ikey IDor

#### FPM-6211W

21.5" Semi-industrial Monitor with PCT for long-distance / iLink Technology

- 16:9 FHD LED backlight LCD with True-flat Seamless Design
- 7H Hardness Glass Surface with PCT Multi-touch and IP65 Front Protection
- Supports 5 points multi-touch via USB interface in Windows 7/8
- ikey for OSD control and remote/local source switch
- Robust design with SECC chassis and Magnesium alloy front panel



IDor

#### FPM-7151T/ 7121T

15"/ 12.1" XGA TFT LED LCD

- 15"/ 12.1" XGA 50K Lifetime LED Backlight LCD with Anti-glare Screen and Tempered Glass
- IP66 Certified Front Panel Protection with True-flat Seamless Design
- -20°C ~ 60°C Wide Operating Temperature
- Robust Design with SECC Chassis and Aluminum Front Panel
- DP/VGA video input
- Combination RS-232 & USB Interface for Touchscreen Function

## Web Operator Panels



### WebOP-3120T

12" XGA Cortex™-A8 Operator Panel with Wide Operating Temperature

- Microsoft® Windows CE 6.0
- Backup memory FRAM in 128KB (64 words) without battery
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C Wide Operating Temperature
- Front panel flat-sealed with IP66 compliance



### WebOP-3100T

10.1" WSVGA Cortex™-A8 Operator Panel with Wide Operating Temperatures

- Microsoft® Windows CE 6.0
- Backup memory FRAM in 128KB (64 words) without battery
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C Wide Operating Temperature
- Front panel flat-sealed with IP66 compliance



### WebOP-3070T

7" WVGA Cortex™-A8 Operator Panel with Wide Operating Temperatures

- Microsoft® Windows CE 6.0
- Backup memory FRAM in 128KB (64 words) without battery
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C Wide Operating Temperature
- Front panel flat-sealed with IP66 compliance

## Entry Level Operator Panels



### WebOP-2100T

10.1" WSVGA Cortex™-A8 Operator Panel

- 65,536 colors TFT LCD, ARM9-based CPUs
- Front panel flat-sealed with IP66 compliance
- 10W low power consumption
- Supports over 400 PLC communication protocols
- Communicates with up to four types of devices
- Flexible runtime download and maintenance



### WebOP-2070T

7" WVGA Cortex™-A8 Operator Panel

- 65,536 colors TFT LCD, ARM9-based CPUs
- Front panel flat-sealed with IP66 compliance
- 10W low power consumption
- Supports over 400 PLC communication protocols
- Communicates with up to four types of devices
- Flexible runtime download and maintenance



### WebOP-2040T

4.3" WQVGA Cortex™-A8 Operator Panel

- 65,536 colors TFT LCD, ARM9-based CPUs
- Front panel flat-sealed with IP66 compliance
- 10W low power consumption
- Supports over 400 PLC communication protocols
- Communicates with up to four types of devices
- Flexible runtime download and maintenance

## Stationary Panels



### SPC-1581WP

All around IP65 15.6" WXGA Stationary Panel with Intel® i5 Processor

- Intel® Core™ i5-4300U 1.9GHz with 4GB DDR3L SDRAM
- All around IP65 protection with waterproof M12 connector
- Built-in ikey and home-key for an intuitive UI
- 7H Hardness Glass Surface with PCT Multi-touch
- 1 x RS-232/ 1 x USB/ 2 x LAN/ 24V<sub>DC</sub>-in with Waterproof M12 connector



### SPC-1840WP

All around IP65 18.5" Stationary Panel with AMD® Dual-core Processor

- All around IP65 18.5" Stationary Panels with AMD® Dual-core Processor
- 7H Hardness Glass Surface Widescreen with PCT Multi-touch, True-flat Touch Design
- Built-in ikey and Home-key for an Intuitive UI
- Robust design with All Around IP65 design, VESA support
- 1 x RS-232/ 1 x USB/ 2 x LAN/ 24V<sub>DC</sub>-in with Waterproof M12 connector



### SPC-2140WP

All around IP65 21.5" Stationary Panel with AMD® Dual-core Processor

- All around IP65 21.5" Stationary Panels with AMD® Dual-core Processor
- 7H Hardness Glass Surface Widescreen with PCT Multi-touch, True-flat Touch Design
- Built-in ikey and Home-key for an Intuitive UI
- Robust design with All Around IP65 design, VESA support
- 1 x RS-232/ 1 x USB/ 2 x LAN/ 24V<sub>DC</sub>-in with Waterproof M12 connector

## Domain-focused Computers



### IPPC-8070WV

7" Multifunctional HMI for transportation applications

- Intel® Atom™ 1.6GHz processor
- IP65 front BZL protection with resistive touch screen
- GPS/ GSM/ Wifi/ Radio optional communication module expansions
- 2 x USB, 2 x LAN, 2 x COM Ports
- Supports iManager, SUSIAccess and Embedded Software APIs



### IPPC-5211WS

All Around IP69K 21.5" TFT LED LCD with PCT Touch Panel and Corrosion-proof 316L Stainless Steel

- Intel® Celeron® Quad-core J1900 2 GHz
- All-round IP69K protection with corrosion-proof 316L stainless steel
- Sealed and rugged design with high reliable Components
- Options for Cfast/ HDD



### FPM-8151H

15" XGA TFT LED LCD Industrial Monitor with Corrosion-proof 316L Stainless Steel Front Panel for Hazardous location

- Corrosion-proof 316L Stainless Steel Front Panel
- IP65 Certified Front Panel Protection
- -20 °C ~ 60 °C Wide Operating Temperature
- More Durable 5-wire Resistive Touch Screen with Anti-glare and Tempered Glass

## Entry Level Monitors



### FPM-2170G

17" SXGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

- 17" SXGA TFT LCD with 50K hours LED backlight life time
- Robust design with IP65 aluminum front panel
- Anti-glare screen
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combination RS-232 & USB interface for touchscreen function



### FPM-2150G

15" XGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

- 15" XGA TFT LCD with 50K hours LED backlight life time
- Robust design with IP65 aluminum front panel
- Anti-glare screen
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combination RS-232 & USB interface for touchscreen function



### FPM-2120G

12" SVGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

- 12" SVGA TFT LCD with 50K hours LED backlight life time
- Robust design with IP65 aluminum front panel
- Anti-glare screen
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combination RS-232 & USB interface for touchscreen function

## Ruggedized and Wide-temperature Monitors



### FPM-3191G

19" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports

- Robust design with stainless steel chassis and IP65 aluminum front panel protection
- OSD control pad on front panel
- Supports industrial 24V<sub>DC</sub> and 12V<sub>DC</sub> power input
- Supports panel, wall, desktop, rack or VESA arm mounting



### FPM-3171G

17" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports

- Robust design with stainless steel chassis and IP65 aluminum front panel protection
- -20°C ~ 60°C Wide Operating Temperature
- OSD control pad on front panel
- Supports industrial 24V<sub>DC</sub> and 12V<sub>DC</sub> power input
- Supports panel, wall, desktop, rack or VESA arm mounting



### FPM-3151G

15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports

- Robust design with stainless steel chassis and IP65 aluminum front panel protection
- -20°C ~ 60°C Wide Operating Temperature
- OSD control pad on front panel
- Supports industrial 24V<sub>DC</sub> and 12V<sub>DC</sub> power input
- Supports panel, wall, desktop, rack or VESA arm mounting

## Fanless Panel PCs



### PPC-3120/ 3100

12.1" XGA/ 10.4" SVGA Intel® Atom™ Dual-core Fanless Panel PC

- Intel® Atom™ Dual-core D2550 1.86GHz Processor with Max 4GB DDR3 SDRAM
- Fanless Design and Low Power Consumption
- 5-wire Resistive Touch Screen
- Optional PCI x1/ PCIe x1 Expansion Kit
- Automatic data flow control over RS-485



### PPC-3170/ 3150

17" SXGA/ 15" XGA Intel® Atom™ Quad-core Fanless Panel PC

- Intel® Atom™ Quad-core E3845 1.91GHz Processor with Max 8GB DDR3L SDRAM
- -20°C ~ 60°C Wide Operating Temperature
- 5-wire Resistive Touch Screen
- Built-in PCI x1/ PCIe x1 Expansion Slot
- Built-in Isolated RS-422/485 with Autoflow
- Optional CF and Cfast module



### PPC-4211W/ 4151W

21.5" FHD/15.6" WXGA Intel® Core™ i5/ Celeron® with PCT Multi-Touch Wide Screen Fanless Panel PC

- Intel® Core™ i5-4300U 2.9GHz/ Celeron® 2980U 1.6GHz Processor with Max 8GB DDR3L SDRAM
- Entirely flat panel with PCT touch screen
- Supports one PCIe x4/ PCI x1 Bus Expansion
- Built-in isolated RS-422/485 with Autoflow

## Multi-functional Panel PCs



Core™ i  
+  
Compact

### PPC-6120

12.1" XGA Intel® Core™ i5/ i3/ Celeron® Panel PC

- Intel® 4th Generation Core™ i7/ i5/ i3/ Celeron® Processor with 2x 204-pin SODIMM DDR3/DDR3L SDRAM (Max 16G)
- Built-in Isolated RS-422/485 with Autoflow, Dual Intel® GbE
- Optional PCI x1/ PCIe x1 Expansion Kit
- 5-wire Resistive Touch Screen



Core™ i  
+  
Advanced

### PPC-6170/ 6150

17" SXGA/15" XGA Intel® Core™ i5/ i3/ Celeron® Panel PC

- Intel® Core™ i5-3610ME/ i3-3120ME/ Celeron® 1020E with Max 8GB DDR3/ DDR3L SDRAM
- Dual HDD support Intel RAID 0/1, and Optional second HDD or ODD
- Multiple Bus Expansion Slots, one PCIe x4, one PCI + Optional one PCIe x1, two PCI, Optional two PCIe x1
- Built-in Isolated RS-422/485 with Autoflow, Dual Intel® GbE



Core™ i  
+  
Economic

### PPC-8170/ 8150

17" SXGA/15" XGA Intel® Core™ i5/ i3/ Celeron® Panel PC

- Intel® Core™ i5-3550S/ i3-3220 with 2x 204-pin DDR3 SDRAM (Max 8GB)
- One PCIe x4 or PCI slot
- Supports 6 x USB, 6 x COMs, 8 bit GPIO
- Supports iManager, SUSIAccess and Embedded Software APIs

# Industrial Communication

## Simplify the Way You Connect

Advantech's Industrial Communication products draw on over 20 years of experience to provide reliable wired and wireless communication (3G, GPRS, and WLAN) for mission critical applications. These products include: Industrial Ethernet Switches, Industrial Wireless AP/Client, Media Converters, Serial Device Servers, Cellular IP Gateways, and Modbus Gateways. They are also capable of securely transmitting critical and sensitive information, remotely monitoring and controlling networked devices and emphasizing high communication capabilities for industrial applications.



### Industrial Wireless AP/ CPE



**NEW**

#### EKI-1334

Industrial UMTS/HSPA+ Cellular Router

- Universal five-band UMTS/HSPA+ 850/900/1800/1900/2100 MHz
- Dual WAN (Ethernet WAN and Cellular WAN) for redundancy
- Routing and firewall security protocols
- Advanced VPN (IPSec/SSL/GRE/L2TP/PPTP)



**NEW**

#### EKI-1331

1-port Serial/Ethernet to HSPA+ IP Gateway

- Universal five-band UMTS/HSPA+ 850/900/1800/1900/2100 MHz
- Protocols converting between serial and Ethernet: Modbus RTU & TCP
- Provides NAT and VPN
- EMC Level III for industrial standards



#### EKI-1321/ 1322

1/ 2-port RS-232/ 422/ 485 to GPRS IP Gateways

- Universal quad-band GSM/GPRS 850/ 900/ 1800/ 1900 MHz
- Dual SIM slots for connection redundancy
- Extra SD slot for data buffering and auto recovery
- Provides NAT and VPN

### Industrial Wireless Access Point

#### EKI-6340 Series

IEEE 802.11 a/ b/ g/ n Outdoor Single to Triple Radio Wi-Fi AP/ Client

- EMC Level 4
- C1D2 certified
- -40~75°C operating temperature range
- EN50155 compliant



#### EKI-6351-A

IEEE 802.11 a/ b/ g/ n Wi-Fi AP/ Client

- EMC Level 4
- C1D2 certified
- -40~75°C operating temperature range
- EN50155 compliant



### Industrial Wireless Access Point



**NEW**

#### EKI-6310GN

IEEE 802.11 b/ g/ n Wireless Access Point/ Client

- With N-type connector for antenna connector
- High output power 27dBm
- Standard 802.3af PoE PD
- WEP/ WPA/ WPA2/ IEEE 802.1x authentication support



#### EKI-6331AN

IEEE 802.11 a/ n Wireless Access Point/ Client

- MIMO 2 x 2 11n
- Embedded 16dBi dual-polarity directional antenna with external R-SMA connector for optional antenna
- High output power 24 dBm
- IGMP snooping protocol support

### Wireless Serial Device Servers



#### EKI-1361/ 1362

1/ 2-port RS232/ 422/ 485 to 802.11b/ g/ n WLAN Serial Device Servers

- Links any serial device to an IEEE 802.11b/ g/ n network
- Provides 1/2 x RS-232/ 422/ 485 port
- Secures data access with WEP, WPA, and WPA2
- Supports WLAN Ad-Hoc and Infrastructure modes

## Industrial Ethernet Managed Switches



NEW

### EKI-9778

1U Rackmount Switch with Combo Port  
Flexibility 24GbE + 4 10GbE Managed Switch

- 24 x GbE ports and 4 x 10GbE (4x SFP+) ports
- 16 x gigabit combo ports (1000BASE-T/TX or GbE SFP)
- Dual redundant power 110 ~ 220 V<sub>AC</sub> input
- Fanless design
- IEEE1588 PTPv2 with 1-step precision clock



NEW

### EKI-9316/ 9312

16/12 Port Full Gigabit Managed DIN  
Rail Switch

- All Gigabit connections support dual-ring protection and non-blocking traffic forwarding
- Redundancy: X-Ring+ (recovery time < 20ms)
- STP, RSTP, MSTP for better redundancy
- Dual power input, dual image for system reliability
- Operating temperature: -40 ~ 75 °C



### EKI-7659C

8+2G Combo Port Gigabit Managed  
Redundant Ethernet Switch

- 8 x Fast Ethernet ports, plus 2 x Gigabit combo ports
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: X-Ring Pro (recovery time < 20ms)
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- IPv6 support

## Proview Series Ethernet Switch



NEW

### EKI-5728/ 5725/ 5528/ 5525

8-port/ 5-port Fast and Gigabit ProView  
Series Ethernet Switch

- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS via SNMP
- Port-based QoS for deterministic data transmission
- eMark certified (EKI-5728)
- Loop detection

## Industrial Ethernet Unmanaged Switches



### EKI-3728/ 3725/ 3528/ 3525

8-port/ 5-port Fast and Gigabit Unmanaged  
Ethernet Switch

- Supports IEEE 802.3az, Energy Efficient Ethernet
- Super compact IP40 protection
- Supports IEEE 802.1p QoS- VIP port
- Supports redundant 12 ~ 48 V<sub>DC</sub> dual power input and P-Fail relay
- Loop detection

## Media Converters



### EKI-3541M/ 3541S/ST

10/100T (X) to Multi/ Single-Mode SC/ST  
Type Fiber Optic Media Converter

- Supports Link Fault Pass-through (LFP) function
- Supports full/half duplex flow control
- Supports MDI/MDI-X auto crossover
- Supports redundant 12-48 V<sub>DC</sub> dual power input
- ST Connector Provided

## Industrial PoE Switches



NEW

### EKI-9316P/ 9312P

16/12 Port Managed DIN Rail Switch with  
PoE/PoE+

- All Gigabit connections support dual ring protection
- Redundancy: X-Ring+ (recovery time < 20ms)
- IEEE 802.3af PoE+ to supply 30W power
- IEEE 802.3af/802.3at per port with system PoE power management
- Dual power input, dual image for system reliability
- Operating temperature: -40 ~ 75 °C



### EKI-7659CPI

8+2G Port Gigabit Managed PoE Switch  
w/ Wide Temperature

- 8 x Fast Ethernet ports with PoE injector function, plus 2 x Gigabit Copper/ SFP combo ports
- IEEE802.3af compliant, provides 15.4Watts per port.
- Redundancy: X-Ring Pro (recovery time < 20ms)
- IPv6 support

## EN50155 Compliant Switches



### EKI-6500/ EKI-9500 Series

EN50155 M12 Managed/ Unmanaged  
Ethernet Switch

- EN50155 compliant
- Redundancy: X-Ring Pro (recovery time < 20ms) (Managed models)
- M12 connectors
- Waterproof fiber optic connectors
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output

## Serial Device Server



### EKI-1526/T/ 1528/T

16/8-port RS-232/422/485 Serial  
Device Server

- 2 x 10/100 Mbps Ethernet ports for LAN redundancy
- Supports up to 921.6 kbps, and any baud rate setting
- Provides COM port redirection (Virtual COM), TCP and UDP operation modes
- Built-in 15 KV ESD protection for all serial signals
- Standard 1U rackmount size



### EKI-1524/CI/I 1522/CI/I/ 1521/CI/I

4/2/1-port RS-232/ 422/ 485  
Serial Device Server

- 2 x 10/ 100 Mbps Ethernet ports for LAN redundancy
- -40~70 °C operating temperature range
- 2KV Isolation for RS-422/485 signals
- EMC Level 4
- IPv6/IPv4 Dual Stack
- Port Buffering Support

## Modbus Gateways



### EKI-1224CI/I/ 1222CI/I/ 1221CI/I

4/2/1-port Modbus Gateway

- 2 x 10/ 100 Mbps Ethernet ports for LAN redundancy
- Supports up to 921.6 kbps, and any baud rate setting
- Automatic RS-485 data flow control
- -40 ~ 75 °C operating temperature range
- 2KV Isolation for RS-422/485 signals
- EMC Level 4

# Intelligent Systems

## Accelerating Cloud Computing, iConnectivity and Intelligent Video Solutions

With innovative technologies for cloud computing applications and services (industrial and video servers), edge computing applications (fanless, slim & portable devices), to high performance embedded systems (blade computing, network processor platforms, and DSP processing), Advantech is devoted to transforming our embedded systems into intelligent systems with smart, secured, energy-saving features. Designed by our Industrial Cloud Built-in Services and professional System Design-To-Order Services (System DTOS) teams, Advantech's intelligent systems are designed to target multiple vertical markets in transportation, industrial automation (machine automation, equipment/machine builders), digital signage, and also video applications (video infrastructure and video surveillance).



### Industrial Computers



#### ACP-4D00

4U Dial-node 350mm Chassis for Machine Automation Application

- Easy maintenance dual-node design
- Supports half-sized slot SBC and 6-slot backplane
- Maximum 3 available slots for 260mm length add-on cards
- Standard 4U height, ultra short depth of 350mm
- Self-diagnostics functions of system fan and temperature alarm



#### ACP-4020

Compact 4U Rackmount Chassis for Half-size SBC or ATX/ MicroATX Motherboard

- Compact 4U rackmount chassis, with shallow 350mm depth
- Supports ATX/ MicroATX motherboards or backplanes up to 15 slots for half-size SBC
- 1 x Internal 2.5" and two external 3.5" drive bays support up to five 2.5" HDD/ SSDs (via optional kit IDT-3120E)
- Supports 80 plus single power supply up to 700W
- Smart fan speed control for system fans



#### HPC-7442

4U Rackmount Chassis for EATX/ ATX Motherboard with Up to 8 SAS/ SATA HDD Trays

- Shock-resistant disk drive bay holds four hot-swap 3.5" and 2.5" SAS/ SATA disk trays, one slim optical disk drive, and one 3.5" internal drive
- With installation of optional storage upgrade kit, eight hot-swap HDD trays provide high storage capacity
- Supports 80 Plus certified single and redundant power supplies
- Front-accessible system fan
- LED indicators and audible alarm notification for system fault detection

### Server-grade IPCs



#### ASMB-823

Intel® Xeon® E5 ATX Server Board

- LGA2011 ATX Server Board with dual Xeon® E5-2600(v3) processors
- DDR4 2133 MHz RDIMM up to 192 GB
- 4 x PCIe x16 slots (Gen3), two PCIe x8 (Gen3) and one PCIe x4 (Gen2) slots
- 9 x SATA3 ports and six USB 3.0 port



#### ASMB-923

Intel® Xeon® E3 EATX Server Board

- LGA 2011 EATX Server Board with dual Xeon® E5-2600(v3) processor
- DDR4 2133 MHz RDIMM up to 256 GB
- Four PCIe x16 slots (Gen3), two PCIe x8 slots (Gen3.0) and one PCIe x4 (Gen2.0)
- 10 SATA3 ports and 4 x USB 3.0 ports

### GPU Server



#### AGS-920

2U GPU Server with Dual Intel® Xeon® E5 Processors

- Supports NVIDIA Tesla, Grid, Quadro, AMD FirePro, and Advantech designed DSP cards
- 8 x DDR3 Non-ECC/ECC/REG 1600 DIMM up to 128GB
- Supports 4 x FH/FL double-depth PCIe x16 expansion cards + 1 FH/HL single-depth PCIe x8 expansion card
- 8 x Hot-swap SATA/SAS HDD bays
- Quad GbE LAN (IPM 2.0) port

## Machine Vision Systems



### AIIS-1240 / 1440

PoE / USB 3.0 Machine Vision System, Intel® Core™ i CPU, Dedicated to 4-CH PoE / USB 3.0 Camera

- Intel® 3rd/ 2nd Core™ i7/ i5/ i3 CPU (LGA1155)
- AIIS-1240: 4-CH GbE PoE (Power over Ethernet), IEEE 802.3af compliant
- AIIS-1440: 4-CH USB 3.0 with dedicated controller
- Volume less than 3 Liters
- Easier fan filter maintenance
- Internal USB Type-A with lock design

## Fanless Compact Systems



### ARK-5261

Intel® Celeron™ Processor J1900 Fanless Compact Equipment System with PCIe & PCI Expansion Slots

- Intel® Celeron™ processor J1900
- Supports one PCIe1 & 2x PCI slots
- Supports four RS-232/422/485 (COM 1/2 with 5V/ 12V power); ARK-5261 sku has isolation feature
- Supports 2 Giga LAN/ 1 USB 3.0+ 5 USB 2.0/ Dual 2.5" HDD/ GPIO& printer port
- Supports wide power range of 9~ 30V DC input



### ARK-5420

3<sup>rd</sup> Gen Intel® Core™ i Processor Fanless Compact Equipment System with PCIe & PCI Expansion Slots

- Supports 3<sup>rd</sup> Gen Intel® Core™ i5/ Celeron BGA type CPU with Intel® HM76 PCH
- Supports 1x PCIe4 & PCI slots and 1x Mini-PCIe (Full size)
- Supports VGA& HDMI/USB 3.0/ serial ports
- Supports wide temperature -25~ 60°C
- Supports 9~ 36V wide range DC input

## Transportation Systems



### ITA-1711

Intel® Celeron™ Processor J1900 Fanless AFC System with Dual GbE and Display

- Supports 9 ~ 36 V wide range DC input
- Supports up to two GbE, six USB 2.0X ten COM ports
- Supports RS-232/ 422/ 485 with serial ports automatic flow control
- Onboard DDR3 memory up to 4GB and optional NVRAM
- Supports one 2.5" HDD



### ITA-2210

EN50121-4 Full Compliance 2U Fanless Systems for Wayside Control with Intel® Atom™ D525 Processor

- Supports Intel® Atom™ D525 Processor at 1.8GHz
- Supports three ITAM modules, one PC 104+ and one Mini-PCIe cards
- Supports two VGA/ eight USB 2.0/ two COM ports
- Supports wide temperature -25~ 60°C
- Supports single/ dual power module



### ITA-5730

EN 50155 Certified Compact Fanless System with 3<sup>rd</sup> Gen Intel® Core™ i Processor

- Satisfies temp. standard: EN 50155 TX (-40 ~ 70°C) and IEC 61373 body mount class B
- Compliant with EN 50121-3-2 EMC test standard
- Ruggedized connectors (M12) used for communication and power ports
- Optional PCI/ miniPCIe slots for expansion
- Supports easy-swap HDD/ SSD/ CF modules

## Multimedia Processing Cards



### DSP-8682

Full-length PCI Express Card with 8 TI 8-core DSPs

- On-board 8 x TI TMS320C6678 DSPs with PCIe Gen three 8 interfaces
- 8 x TMS320C66x DSP Core Subsystems @ 1.0/ 1.25 GHz per DSP
- 2 GB DDR-1333 memory per DSP



### DSP-8662H

4-ch HDMI PCIe Video Decoder Card with 4-ch 3G-SDI inputs and SDK

- Powered by quad TI TMS320DM8168 SoC
- 4-channel HDMI video/ audio outputs up to 1920 x 1080 at 60 fps
- Supports H.264/ MJPEG/ RAW HW decoding
- 4-channel SDI video + audio inputs up to Full HD 60 fps per channel

## High Performance Server



### CGS-6000

2U Server for Carrier Grade and Optimized I/O Deployment

- Supports dual Intel® Xeon® E5v2 series processors
- Up to 512GB DDR3 with 16 Registered ECC DIMMs
- 4 x full-height, full-length PCIe x8 slots
- 2 x full-height, half-length PCIe x4 slots
- 4 x 2.5" hot-swappable SAS/ SATA HDD/ SSD drives

## CompactPCI® Platforms



### MIC-3328

3U CompactPCI PlusIO Intel® 3<sup>rd</sup> Generation Core™ Processor Blade

- Supports 3<sup>rd</sup> generation Intel® Core™ processor and QM77 PCH
- 4 GB DDR3 1600 soldered SDRAM with ECC (max 8GB)
- 1 x 2.5" SATA-II SSD, CFast, XMC, SATA NAND Flash on board (optional)
- Triple independent display support



### MIC-3396

6U CompactPCI 4<sup>th</sup> Generation Intel® Core™ i3/ i5/ i7 Processor Blade

- Supports 4<sup>th</sup> Generation Intel® Core™ i3/ i5/ i7 processors and QM87 PCH with embedded graphic display
- 2 x SATA ports, 1 x USB 3.0, 4 x USB 2.0, 2 x DVI ports, 2 x RS-232 ports, 1 x PS/2 connector and PCIe x 8 interface to RTM
- Optimized single-slot SBC with 2.5" SATA-III HDD/ CFast socket/ on-board flash (optional)



### CPCI-8220

6U CompactPCI Freescale QorIQ P2040 Ruggedized Processor Blade

- Supports Freescale QorIQ™ P2040 at 1.2 GHz
- Up to 4GB DDR3 with ECC support
- Supports extended operating temperature range -40°C ~ 85°C (optional)
- Supports WR VxWorks 6.9 or WR Linux 4.3

# Embedded Automation PCs

## Open and Robust Computing Power for Automation Applications

Advantech offers a complete range of Embedded Automation PCs with each series coming in three sizes: palm, small and regular. All of them are dedicated to providing fanless, industrial-proven and application ready control platforms. With a robust design, they include multiple expansion solutions and versatile mounting methods to fulfill the needs of different applications. The UNO-1000/3000 series is ideal for din-rail, enclosure and book mounting in control cabinets and the UNO-2000 series is a versatile model for stand-mount environments. In addition, all new UNO products support Advantech iDoor Technology which utilizes the mPCIe format and gives customers the flexibility to configure the various I/O requirements based on different applications. Modules for iDoor Technology include: Fieldbus protocol; digital and analog I/O; smart sensor, communication and memory.



### Control Cabinet PCs



**NEW**

#### UNO-1252G

Intel® Quark Palm-Size DIN-Rail Controller

- Intel® Quark 400Mhz processor with 256MB memory
- 2 x LAN, 2 x mPCIe, 2 x COM, 8 x GPIO, 2 x USB, 1 x microSD, 1 x SIM, 1 x power terminal
- Compact with fanless design
- Chassis grounding protection



**NEW**

#### UNO-1372G

Intel® Atom Quad-Core Small-Size DIN-Rail Controller

- Intel® Atom E3845 1.91GHz processor with 4GB DDR3L memory
- 3 x GbE, 3 x USB, 2 x COM, 1 x VGA, 1 x HDMI, audio, 1 x mSATA, 2 x mPCIe, 1 x SATA, 8 x DI/O, 1 x power terminal
- Exchangeable RTC battery with easily access at top side



**NEW**

#### UNO-1483G

Intel® 4th Gen Core™ i3 Regular-Size DIN-Rail Controller

- Intel® 4th Gen Core™ i3 processor up to 1.7GHz with 8GB DDR3L memory
- 4 x GbE, 3 x mPCIe, 1 x PCIe, 4 x USB 2.0/3.0, 1 x RS-232, 2 x RS-422/485, 1 x VGA, 1 x DP, 8 x DI/O and audio ports
- Dual power input and remote power button for reducing power down time



**NEW**



#### UNO-3382G/3384G

Intel® Core™ i7 Book Mount Automation Computer

- Intel® 4th Generation Core™ i7/Celeron processors with 4GB/8GB DDR3L memory
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232/422/485, 2 x display ports, 2 x PCI/PCIe, 2 x mPCIe, 1 x mSATA slot
- Dual hot-swappable HDD/SSD slots with thumb screws for easy maintenance
- Supports DIN-rail, stand, wall and book mounting



**NEW**



#### UNO-3483G

Intel® Core™ i7 Enclosure Mount Automation Computer

- Intel® 3rd Gen Quad Core processor, up to 2.1 GHz with 8GB DDR3L memory
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232, 1 x RS-422/485, 1 x VGA, 1 x HDMI, 1 x PCIe x4, 3 x mPCIe, 1 x mSATA slot
- Dual hot-swappable HDD/SSD slots with thumb screws for easy maintenance



**NEW**



#### UNO-2483P

Intel® Core™ i7/Celeron Regular-Size Automation Computer

- Intel® 4th generation Core™ i7/Celeron processors up to 1.9GHz with 4GB/8GB DDR3L memory
- 4 x PoE, 4 x GbE, 4 x USB 2.0/3.0, 2 x RS-232, 2 x RS-422/485, 1 x VGA, 1 x HDMI, audio
- Rubber stopper design with captive screw

### Embedded Automation Computers



**NEW**

#### UNO-2272G

Intel® Atom™ Palm-Size Automation Computer

- Latest Intel® Atom™ processors up to 1.86 GHz with 2GB DDR3 memory
- 1 x GbE, 3 x USB 2.0, 1 x RS-232, 1 x VGA, 2 x mPCIe, audio
- Compact fanless design



**NEW**



#### UNO-2362G

AMD® Dual Core T40E Small-Size Automation Computer

- AMD® Dual Core T40E 1.0GHz processor with 2GB DDR3 SO-DIMM memory
- 1 x GbE, 4 x USB 2.0, 1 x RS-232, 1 x RS-485, 1 x mPCIe, 1 x DP, 1 x HDMI
- Daisy-chain for Ethernet with auto-bypass protection enabled



**NEW**

#### UNO-2483G/2473G

Intel® 4th Gen Core™ i7/ i3/ Celeron/ Atom™ Regular-Size Automation Computer

- Intel® 4th Gen Core™ i7/i3/Celeron/ Atom™ processors up to 1.9GHz with 4GB/8GB DDR3L memory
- 4 x GbE, 4 x USB 2.0/3.0, 2 x RS-232, 2 x RS-422/485, 3 x mPCIe, 1 x VGA, 1 x HDMI, audio
- Chassis grounding protection



## Advantech iDoor Modules



- PCM-2300MR**  
MR4A16B, MRAM, 2MByte
- 2MB MRAM Storage
  - Speed 6 MB/Sec



- PCM-23C1CF**  
CFast, Ejection Type I, CFast x 1
- 1 port CFast I/O card
  - CFast 3.0, Type I/II



- PCM-23U1DG**  
Internal Locked USB Slot for USB Dongle, USB x 1
- 1 port USB I/O card
  - USB A type w/ lock



- PCM-24R1TP**  
Intel 82574L, GbE, IEEE 1588 PTP, RJ45 x 1
- 1 port GbE LAN
  - IEEE 1588 precision time protocol ready



- PCM-24R2GL**  
Intel i350 mPCIe, GbE, IEEE 802.3ab, RJ45 x 2
- 2 port GbE LAN
  - Intel i350



- PCM-24R2PE**  
Intel i350, GbE, PoE IEEE 802.3af, PD, RJ45 x 2
- 2 port PoE (Power Over Ethernet)
  - Single port 15.4W of DC power



- PCM-24U2U3**  
USB 3.0 mPCIe card, USB-A type x 2
- 2 port USB 3.0
  - USB A type



- PCM-24S2WF**  
Atheros AR9462, 802.11 a/b/g/n 2T2R w/ BT4.0, SMA x 2
- Atheros AR9462
  - 802.11 a/b/g/n 2T2R w/ Bluetooth 4.0



- PCM-24S23G**  
6-band HSPA Cellular Module, GPS, SIM Holder, SMA x 2
- 3.75G HSPA+GPS
  - Dual-SIM card holder with switch for redundancy



- PCM-24D2R2/ PCM-24D2R4**  
OXPCIe952 UART, Isolated RS-232, RS-422/485, DB9 x 2
- 2000 V<sub>oc</sub> isolation protection
  - RTS/CTS/Xon/Xo flow control



- PCM-24D4R2/ PCM-24D4R4**  
OXPCIe954 UART, Non-isolated RS-232, RS-422/485, DB37 x 1
- Non isolation 4 COM ports
  - 50 bps ~ 921.6 kbps serial speed (RS-422/485)



- PCM-27D24DI**  
Digital I/O, Isolated 16DI/8DO, DB37 x 1
- 16DI, 8DO
  - 2500 V<sub>oc</sub> isolation protection



- PCM-26R2EC**  
Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45 x 2
- Real-time fieldbus EtherCAT protocol
  - Supports Master/Slave



- PCM-26R2EI**  
Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45 x 2
- Real-time fieldbus EtherNet/IP protocol
  - Supports Master/Slave




- PCM-26R2PN**  
Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45 x 2
- Real-time fieldbus PROFINET protocol
  - Supports Master/Slave



- PCM-26D2CA**  
SJA1000 CANBus, CANOpen, DB9 x 2
- CAN 2.0 A/B
  - 1Mbps, 16MHz



- PCM-26D1DB**  
Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9 x 1
- Fieldbus PROFIBUS protocol
  - Supports Master/Slave



- PCM-26R2PL**  
Hilscher netX100 FieldBus mPCIe, POWERLINK, RJ45 x 2
- Real-time fieldbus POWERLINK protocol
  - Supports Slave

# DIN-Rail IPCs

## The Next Generation of Scalable Automation Controllers

Advantech's APAX products are PC-based controllers which leverage embedded computing technology to achieve the same level of ruggedness as PLCs. With an open architecture and scalable I/O Modules, the APAX series is more flexible in order to implement various modern control strategies. It also inherits an excellent communication capability to collaborate with other industrial devices. Not only does it have super reliability, but the APAX bus provides backup and redundancy functionality to enhance the total availability.



### APAX-5580 Controller and Modules



NEW

#### APAX-5580

APAX High Performance Controller

- Intel® 4th gen. Core i7/i3/Celeron CPU inside
- 2 x mPCIe interfaces for wireless communication
- One key operating system recovery
- Dual power input and UPS support



NEW



#### APAX-5435

APAX iDoor interface Module

- Supports Fieldbus iDoor module
- Supports mPCIe interface



NEW

#### UPS Module

APAX UPS Module

- Provides emergency power when the main power fails
- Supports fast boot from standby mode

### APAX-5580 PCIe Modules



NEW

#### APAX-5490

RS-232/422/485 Module

- Support RS-232/422/485
- Auto flow control in 485 mode



NEW

#### APAX-5430

APAX SATA HDD Module

- SATA I/II/III 2.5" HDD/SDD
- Support RAID 0/1
- Support Hot swap



#### APAX-5070/5071/5072

Fieldbus Communication Coupler

- Revised to support 1ms Modbus response time
- Flexible Modbus mapping table
- Supports UDP Data Streaming function and Event Alarms

### I/O Modules



NEW

#### APAX-5090

Communication Module with APAX Local Bus

- 4 x RS-232/422/485 ports
- Acts as a Modbus gateway with APAX-5070
- Supports distributed topology with APAX bus



#### APAX-5017H

12-ch High Speed Analog Input Module

- Voltage and current inputs including  $\pm 10$  V and 4 ~ 20 mA
- Each channel can be configured with different input types and ranges
- 1000 samples/second per channel



#### APAX-5080

4/8-ch High Speed Counter Module

- 5 counter: Up, Up/Down, Pulse/Direction, A/B phase, Frequency
- 4 x DI channels for counter gate inputs
- 4 x DO channels for alarm outputs

# Intelligent RTUs

## Smart IoT Devices with Dual Wireless Network Capability and Flexible I/O Options

The ADAM-3600 is an intelligent iRTU, mainly used in the oil, gas and water industries. Intelligent network nodes in the IoT, can control the downstream field devices to complete delivery tasks, transfer data to upstream devices wired or wirelessly. It is key to connecting devices to the Internet of Things architecture. The ADAM-3600 has a high performance and low power processor, adopts 20 local I/O points and wired and wireless communication modes, users can collect, process and distribute the local information. It has a built-in real-time operating system and a real-time database, providing customers with an open interface and supports diverse programming languages.



### Open Standard Intelligent RTU



**NEW**

#### ADAM-3600-C2G

##### 8 AI / 8 DI / 4 DO / 4-Slot Expansion and Dual Wireless

- TI Cortex A8 600MHz CPU with DDR3L 256MB RAM
- RT-Linux OS with TagLINK realtime database
- Onboard IO- 8AI / 8DI / 4DO with 4-Slot I/O expansion flexibility
- Internal 2 x Mini-PCIe Interface for Dual Wireless Networking
- Certified Wireless Solution Zigbee/ Wi-Fi/ 3G/ 4G/ GPRS
- IEC61131-3 & C programming language SDK support
- Modbus/TCP, Modbus/RTU & DNP3 protocol support
- Wide operation temperature -40~70°C
- Support iCDManager for remote connectivity diagnosis
- iRTU Studio for off-line configuration and remote deployment



### Intelligent Ethernet I/O Module



**NEW**

#### ADAM-3600-A1F

##### 16 DI / 8 Relay with 4-Slot Expansion

- 16-ch Digital Input, 8-ch Relay Output on board I/O
- Flexible I/O deployment by 4-slot expansion module
- Datalog by internal memory, SD card, USB
- Support the Access Control function
- Auto firmware update by USB and SD card
- Remote monitor, control and configure through a Web browser
- Supports built-in web server and RESTful Web service



### I/O Expansion Modules



**NEW**

#### ADAM-3600 Series I/O Expansion Modules

- ADAM-3651 8-ch Digital Input Module
- ADAM-3656 8-ch Digital Output (Sink type) Module
- ADAM-3624 2-ch Analog Output Module
- ADAM-3660 4-ch Relay Output Module
- ADAM-3618 3-ch Thermocouple Module
- ADAM-3617 4-ch Analog and Input Module

# Power & Energy Automation

## Ensure Reliable P&E Automation with IEC 61850-3 and IEEE 1613 Compliant Products

Advantech provides Power and Energy computers, controllers, and data acquisition module with rugged, cableless designs for harsh environments in Smart Substation and Green Energy applications. The UNO-4600 series and ECU-4000 series are compliant with the hardware requirements of IEC-61850-3, which defines the international standards of network and system communications in smart substation. Advantech also provides power and energy controllers (ECU-1000) for transformer and GIS switches, IED (Intelligent Electronic Devices) applications.



### Power & Energy Automation Computers



**NEW**

#### ECU-4674

Intel® Atom™ N2600 Substation Computers for Power Automation Applications

- Intel® Atom™ N2600 1.6GHz CPU
- Supports 2 x RS-232 isolated ports, 16 x RS-232/485 isolated ports
- Supports 2 x 10/100/1000 Base-T, and 6 x 10/100 Base-T
- iCDManager : intelligent Connectivity Diagnose Manager



**NEW**

#### ECU-4784

Intel® Haswell Core i7 Power & Energy Automation Computer with 8 x LAN, 10 x COM and 2 x Expansion Slots

- Intel® Haswell Core i7 4650U 1.7GHz processor
- Supports 1 x 10/100/1000 Base T RJ-45 (Support AMT, Teaming Function, PXE, 1588)
- Supports 7 x 10/100/1000 Base T RJ-45 (Supports Teaming Function, PXE, 1588)
- iCDManager : intelligent Connectivity Diagnose Manager



#### UNO-4673A/4683

Intel® Atom™ D510/ Core™ i7 Substation Computers for Power Automation Applications

- Intel® Atom™ D510 1.66 GHz CPU (UNO-4673A)/Intel® Core™ i7 2.0 GHz CPU (UNO-4683)
- Supports fiber optic, IRIG-B, 6 x LAN, and 2 x COM
- Supports PCI, Mini PCI, Mini PCIe, and PCI-104 expansions

### Power & Energy Automation Controllers



#### ECU-1871

Intel® Atom™ D510 Modular Power & Energy Controller

- Intel® Atom™ D510 CPU
- 1 x RS-232 port/ 2 x RS-485 isolated ports
- 2 x 10/100Base-T RJ-45 connectors
- Windows® CE 6.0, WES 2009, and Linux ready solution
- Supports 2 x PCI-104 extension slots



#### ECU-1911

Xscale @ PXA-270 520MHz All-in-one Open RTU

- Xscale @ PXA-270 520 MHz CPU
- 1 x RS-232 port, 3 x RS-485 isolated ports, 1 x VGA
- 2 x 10/100Base-T RJ-45 connectors
- 8-ch 16-bit differential Analog Input
- 32-ch isolated Digital Input/Output



#### ECU-1710A

Intel® Atom™ D510 Automation Controller Combined with Embedded Computer and DAQ Cards

- Intel® Atom™ D510 CPU
- 2 x RS-232 ports
- 2 x 10/100Base-T RJ-45 ports
- 16-ch AI/4-ch AO/16-ch DIO/1-ch Counter
- Integrated PCI-1710UL & PCI-1720U DAQ cards

### Power & Energy Automation Extension Cards



#### ECU-P1706/ P1300

Simultaneous AI Card Combined with Vibration Signal Modulate Card for ECU-1871

- Simultaneous 8-ch AI with PCI-104
- 250KS/S, 16-bit, 8K Samples On-board FIFO
- 2-ch, 32-bit Timer/Counter
- 0.1Hz-25Hz adjustable low pass filter (ECU-P1300)



#### UNOP-1618D/ 1628D

8-port Isolated RS-232/422/485 with/without Port-to-port Isolation for UNO-4673A/4683

- 8 x COM ports
- Selectable RS-232/422/485 port
- Isolation 2500V<sub>DC</sub> (UNOP-1628D)
- Automation RS-485 data flow control



#### UNOP-1514C/ RE/ PE

4-port Fiber Optic LAN Card for UNO-4673A/ 4683

- LAN 100 Base-FX
- Distance: Up to 2 km
- IEEE 802.3, 802.3u, 802.3x
- Wavelength : 1310nm
- 4 x SC type Multi-mode fiber ports

# Machine Automation

## Integrated Soft Computing to Enable Intelligent Machines

Supporting Advantech's PCI-1245/1265/1285/1245E/1285E/1245L series, SoftMotion is an important core technology in the machine automation field. Advantech independently developed its own SoftMotion control technology and uses the FPGA (Field Programmable Gate Array) and DSP (Digital Signal Processing) as the core-computing hardware platform. Meanwhile, based on the three motion control architectures - centralized, distributed, embedded. Advantech's comprehensive product offering helps our customers to continuously progress their technologies and optimize customer's devices control to minimize their programming needs.



### Motion Control PCI Cards



#### PCI-1245E/ 1285E

Economic SoftMotion 4/ 8-axis Stepping and Servo Motor Control PCI Card

- Softmotion on DSP
- T&S-curve speed profile, Prog. Acc and Dec
- Jog Move, P to P move, Home Move
- 2-axis Linear interpolation, E-Gear
- Single axis Position/ Speed override



#### PCI-1245/ 1265/ 1285

Standard SoftMotion 4/6/8-axis Stepping and Servo Motor Control PCI Card

- Functions supported by Economic version
- 2 axis circular move, Helical Move
- Path table, Tangential move, Look Ahead
- Superimposed Move, E-CAM, Tigger/ Latch
- Group position/ Speed override
- 8DI/ 8DO/ 2AI (PCI-1265)



#### PCI-1245L

Basic SoftMotion 4-axis Stepping and Servo Motor Control PCI Card

- SoftMotion on FPGA
- Single end pulse output for stepping motor
- T&S-curve speed profile, Prog. Acc and Dec
- Jog Move, P to P move, Home Move
- 2-axis Linear interpolation
- Single axis position/ Speed override


### AMONet Master Cards & Slave Modules



#### PCI-1202U

2-port AMONet RS-485 PCI Master Card

- Up to 64 slave AMAX modules per ring
- Transmission (baud rate) can be up to 20Mbps
- Communication distance is up to 100 M @ 10Mbps
- Programmable digital input to notify events
- Easy installation with RJ45 phone jack and LED diagnostic



#### AMAX-1220/ 1240

High-performed 2/4-axis AMONet Motion Slave Module

- Maximum transmission (baud rate) can be up to 20Mbps with master card
- Maximum pulse train output up to 6.5 MHz & equipped with encoder input
- 2-axis point-to-point, linear & circular interpolation
- Position compare and triggering function (AMAX-1240 only)



#### AMAX-1752/ 1754/ 1756

Compact 32-ch Isolated Digital Input/ Output Slave Module

- Maximum transmission (baud rate) can be up to 20 Mbps with master card
- On-board terminal for direct wiring & LED indicators
- 2,500 V<sub>RMS</sub> isolation voltage
- Compact design for horizontal placement

### EtherCAT Solutions



NEW

#### PCI-1203

EtherCAT Master PCI Card

- EtherCAT master card for Advantech and other EtherCAT IO / motion slave device connection
- Windows utility for slave device information display and parameter setting
- Integrate Advantech Common Motion SDK for user programming
- Support multi-axes and group motion function
- Support high density DI/O and AI/O application



NEW

#### ADAM-5000/ECAT

4-slot Distributed High Speed I/O System for EtherCAT

- 4 slots with various digital and analog I/O modules is just a single EtherCAT node on the network.
- Supports EtherCAT Distributed Clock (DC) mode and SyncManager mode
- Supports the Modular Device Profile (MDP) when all modules are a pure I/O function
- Compatible with Advantech Common Motion SDK or other EtherCAT master through ENI file generation

### Embedded Motion Controller



#### PEC-3240

Intel® Celeron® M 1.0 GHz 4-axis Embedded Motion Controller with 32-ch Digital I/O

- Onboard Intel® Celeron® M 1.0 GHz CPU
- 16-ch isolated DI and 16-ch isolated DO
- Independent 4-axis motion control

# Data Acquisition and Control

## A Broad Selection of Form Factors to Satisfy All Your DAQ Needs

Advantech offers a wide range of industrial data acquisition and control devices with various interfaces and functions. Based on PC technology, from ISA to PCI Express, and signal conditioning to graphical software tools, Advantech's industrial I/O products are reliable, accurate, affordable, and suitable for many industrial automation applications, such as testing & measurement, laboratory applications, machine automation, and production testing. Moreover, its brand new I/O driver, DAQnavi, supports Windows 7 and 8, helping customers seamlessly integrate Advantech's data acquisition cards to the latest platforms, improve performance, and reduce development time.



### PCI Express DAQ Cards



#### PCI-1730

32-ch TTL and 32-ch Isolated DI/O PCI Express Card

- 16-ch TTL DI and 16-ch TTL DO with 5 V compatibility
- 16-ch isolated DI and 16-ch isolated DO with 24 V compatibility
- High-voltage isolation on all isolated DI/ O channels (2,500 V<sub>DC</sub>)



#### PCI-1752/ 1754/ 1756

64-ch Isolated Digital I/O PCI Express Card

- PCI-1752: 64-ch DO
- PCI-1754: 64-ch DI
- PCI-1756: 32-ch DI, 32-ch DO
- High-voltage isolation on all channels (2,500 V<sub>DC</sub>)
- Keep the output setting and value after system hot reset
- Interrupt handling capacity



#### PCI-1760

8-ch Relay and 8-ch Isolated DI PCI Express Card

- 8-ch isolated DI with programmable digital filter
- High-voltage isolation on input channels (2,500 V<sub>DC</sub>)
- 2-ch Form C and 6-ch Form A relay output
- 2-ch counter input and PWM output available



#### PCI-1810/1816/1816H

12-bit/ 16-bit 16-ch AI Multifunction PCI Express Card

- PCI-1810 & PCI-1816: 500 KS/s
- PCI-1816H: 1 MS/s
- Analog Trigger and Digital Trigger
- Waveform Generator for AO
- 24 programmable digital I/O lines
- Two 32-bit programmable counter/ timers



#### PCI-1802

8-ch, 24-Bit, 216 kS/s Dynamic Signal Acquisition PCI Express Card

- 8 simultaneously sampled analog inputs up to 216 KS/s
- 24-bit resolution ADCs with 115 dB dynamic range
- Wide input ranges from  $\pm 0.2$  V to  $\pm 10$  V
- Built-in anti-aliasing filter
- Software configurable 4 or 10 mA integrated electronic Piezoelectric (IEPE)



#### PCI-1840

125MS/s, 16-bit, 4-ch Digitizer PCI Express Card

- 4 analog inputs, up to 125MHz, 16-bit resolution
- 500 MHz Time Interleaved Sampling
- Non-stop data streaming capable
- 2 GB on-board memory
- On-Board tunable anti-aliasing filter AC/ DC Coupling

### PCI DAQ Cards



#### PCI-1714U/1714UL

Simultaneous Analog Input PCI Card

- Each channel has dedicated A/D converter
- PCI-1714U: 12-bit, 30 MS/s, 4-ch single-ended AI
- PCI-1714UL: 12-bit, 10 MS/s, 4-ch single-ended AI
- 30 V<sub>DC</sub> over-voltage protection



#### PCI-1716/ L

250KS/s, 16-bit, 16-ch Multifunction PCI Card

- 16 single-ended or 8 differential or a combination of analog inputs
- 16-bit A/ D converter, with up to 250 kHz sampling rate
- Auto-calibration
- 16-ch digital input and 16-ch digital output
- 2 analog output channels (PCI-1716 only)



#### PCI-1730U/ 1756

32-ch/ 64-ch Isolated Digital I/O Universal PCI Card

- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink current for isolated output channels (90 mA max./ Channel)
- Current protection for each port

## USB DAQ Modules



### USB-4711/ 4716

150 kS/s, 12-bit / 200 kS/s, 16-bit  
16-ch Multifunction USB Module

- 2 analog output channels
- 5V/TTL compatible DIO (8 inputs, 8 outputs)
- 1 counter for event counting, frequency measurement and PWM output
- Lockable USB cable for secure connection



### USB-4750

32-ch Isolated Digital I/O USB Module

- 16 isolated DI and 16 isolated DO channels
- 2 isolated counters for event counting and frequency measurement
- Keeps the last output value after system hot reset
- 2,500 V<sub>DC</sub> isolation protection



### USB-4761

8-ch Relay and 8-ch Isolated Digital Input  
USB Module

- 8 Form C (SPDT) relay channels
- Relay contact rating: 0.25 A @ 250 V<sub>AC</sub>, 2 A @ 30 V<sub>DC</sub>
- LED indicators to show activated relay
- 2,500 V<sub>DC</sub> isolation protection

## PCI/PCIE Communication Cards



### PCI-1620/ 1622

8-port PCI Express Serial Communication  
Card with Surge Protection

- PCI-1610: RS-232
- PCI-1612: RS-232/ 422/ 485
- Optional surge protection
- DMA mastering to reduce CPU loading
- 128-byte FIFOs with advanced management



NEW

### PCIE-1620/ 1622

8-port PCI Express Serial Communication  
Card with Surge Protection

- PCIE-1620: RS-232
- PCIE-1622: RS-232/ 422/ 485
- Optional surge protection
- DMA mastering to reduce CPU loading
- 128-byte FIFOs with advanced management



### PCIE-1672PC/ 1674PC

4/ 8-port PCI Express Power-over-Ethernet  
Communication Card

- Onboard DSP to reduce CPU loading
- 2,250 V<sub>DC</sub> isolation protection
- Supports Jumbo frames (9,500 byte) and link aggregation
- Supports IEEE-1588 and IEEE-802.1 AS timing and synchronization



NEW

### PCIE-1602/ PCIE-1604

2-port RS-232/422/485 PCI-express PCI  
Comm. Card w/Isolation

- PCIE-1602: 2x RS-232/422/485 ports
- PCIE-1604: 2x RS-232 ports
- Optional surge protection
- Optional isolation protection for RS-232/422/485
- DMA mastering to reduce CPU loading



NEW

### PCIE-1610/ PCIE-1612

4-port RS-232/422/485 PCI-express PCI  
Comm. Card w/Isolation

- PCIE-1610: 4x RS-232 ports
- PCIE-1612: 4x RS-232/422/485 ports
- Optional surge protection
- Optional isolation protection for RS-232/422/485
- DMA mastering to reduce CPU loading



NEW

### PCIE-1680

2-port CAN-bus Universal PCI  
Communication Card with  
CANopen Support

- Operates two separate CAN networks at the same time
- High speed transmission up to 1 Mbps
- 16 MHz CAN controller frequency
- Isolation protection of 2,500 V<sub>DC</sub>
- I/O address automatically assigned by PCI PnP

## CompactPCI Systems

### MIC-3106/ 3111/ 3121

4U CompactPCI With 2/7  
Peripheral Slots

- 2G operational anti-vibration protection.
- 2G shipping anti-vibration protection
- Air-tight seal connector design for corrosive environments
- Modular design and front hot-swap enabled
- Easily exchange peripheral cards to reduce maintenance costs



NEW



MIC-3106

NEW



MIC-3111

NEW



MIC-3121

# IoT Wireless I/O Modules

## Providing IoT Wireless Smart Devices from I/O to Sensor

As wireless applications became a more common and preferred solution, Advantech introduced a variety of wireless remote I/O devices to the market as an important enabler of the IoT. With the Wi-Fi based WISE-4000 series and popular Zigbee protocol ADAM-2000 series, our clients are free from worrying about a wired layout and extra associated costs, for a more flexible deployment. Furthermore, the WISE-4000 series brings an authentic IoT experience to the market. By realizing an "anytime and anywhere" solution, not only can users retrieve data via mobile devices, the modules can now be configured and troubleshot from mobile devices to save time.



## Wireless IoT Ethernet I/O Modules

### WISE-4050

4-ch Digital Input and 4-ch Digital Output  
IoT Wireless I/O Module

- 2.4 GHz IEEE 802.11b/g/n WLAN
- Protocols: Modbus/TCP, TCP/IP, UDP, DHCP, HTTP
- Supports RESTful web API in JSON format for IoT integration
- Supports both wireless client and server modes that can be accessed directly without AP or router
- Supports file-based cloud storage and local logging
- Supports mobile device web configuration with HTML5
- Supports 10~30V<sub>DC</sub> power with reverse protection



### WISE-4060

4-ch Digital Input and 4-ch Relay Output  
IoT Wireless I/O Module

- 2.4 GHz IEEE 802.11b/g/n WLAN
- Protocols: Modbus/TCP, TCP/IP, UDP, DHCP, HTTP
- Supports RESTful web API in JSON format for IoT integration
- Supports both wireless client and server modes that can be accessed directly without AP or router
- Supports file-based cloud storage and local logging
- Supports mobile device web configuration with HTML5
- Supports 10~30V<sub>DC</sub> power with reverse protection



### WISE-4012

4-ch Universal Input and 2-ch Relay Output  
IoT Wireless I/O Module

- 2.4 GHz IEEE 802.11b/g/n WLAN
- 4-ch UI: 0~10V, 0~20mA, 4~20mA, digital input
- Supports RESTful web API in JSON format for IoT integration
- Web Services: REST, HTML5, JavaScript, JSON
- Supports both wireless client and server modes that can be accessed directly without AP or router
- Supports file-based cloud storage and local logging
- Supports mobile device web configuration with HTML5



### WISE-4012E - IoT Developer Kit

6-ch Universal Input/Output IoT Developer  
IoT Module for IoT Developer

- 2.4 GHz IEEE 802.11b/g/n WLAN
- 2-ch 0~10V Input, 2-ch DI, and 2-ch Relay Output
- Includes WebAccess with demo project for developer
- Includes extension board for simulating sensor status
- Includes micro USB cable for power input
- Supports both wireless client and server modes that can be accessed directly without AP or router
- Supports mobile device web configuration



WebAccess/SCADA

## M2M (Machine to Machine) I/O Modules

### ADAM-2520Z/ 2510Z

Wireless Modbus RTU Gateway

- 2.4 GHz IEEE 802.15.4 compliant RF
- Outdoor range up to 1,000 m
- Supports battery input with 2 x AA alkaline batteries
- Supports Modbus RTU protocol
- Network capacity with 32 nodes (routers & end devices)
- Supports Star/ Tree/ Mesh Network Topologies



### ADAM-2031Z

Wireless Temperature & Humidity  
Sensor Node

- 2.4 GHz IEEE 802.15.4 compliant RF
- Low duty cycle and low power consumption
- Outdoor range up to 110 m
- Supports battery input with 2 x AA alkaline batteries
- Built-in temperature/ humidity sensor input



### ADAM-2051Z/ 2051PZ

Wireless 8-ch Digital Input Node with  
Power Amplifier

- 2.4 GHz IEEE 802.15.4 compliant RF
- Outdoor range up to 1,000 m
- Supports battery input with 2 x AA alkaline batteries
- 10K  $\Omega$  input resistance



### ADAM-2107PZ

Wireless 6-ch Analog Input Node with  
Power Amplifier

- 2.4 GHz IEEE 802.15.4 compliant RF
- 6-ch differential input:  $\pm 150\text{mV}$ ,  $\pm 500\text{mV}$ ,  $\pm 1\text{V}$ ,  $\pm 5\text{V}$ ,  $\pm 10\text{V}$ ,  $\pm 20\text{mA}$ , 0~20mA, 4~20 mA





# Remote I/O Modules

## Providing Remote I/O Connectivity with RS-485 and Ethernet, with More Options

When "Internet of things" is no longer just a slogan, Advantech's versatile products boost clients' production performance by meeting different application needs. With a typical automation network using RS-485 to transmit serial signals the ADAM-4000 & robust ADAM-4100 series, and the designed for harsh environment Robust RS-485 based ADAM-4100 series, Ethernet based ADAM-6000 series and Daisy-chain Ethernet based ADAM-6200 series, managing field devices becomes easier and the field site status can be identified, tracked and altered remotely. There are over 1 million ADAMs in the world, in various industries such as industrial automation, environmental and facility management, intelligent transportation system, and so on and their record of being highly efficient devices is well proven.



### Daisy-chain Ethernet I/O Modules



#### ADAM-6217/ 6224

Isolated Analog I/O Modbus TCP Module

- ADAM-6217: 8-ch AI; ADAM-6224: 8-ch AO & 4-ch DI
- Daisy chain connection with auto-bypass protection
- Auto-calibration without providing any input
- Web language support: HTML 5, Java Script, XML
- Supports GCL and Peer-to-Peer
- Group configuration capability for setting up multiple modules



#### ADAM-6250/ 6251/ 6256

Isolated Digital I/O Modbus TCP Module

- ADAM-6250: 8-ch DI & 7-ch DO
- ADAM-6251: 16-ch DI; ADAM-6256: 16-ch DO
- Daisy chain connection with auto-bypass protection
- DI/O LED Indication; DO fail safe value
- Web language support: HTML 5, Java Script, XML
- Supports GCL and Peer-to-Peer
- Group configuration capability for setting up multiple modules



#### ADAM-6260/ 6266

Relay Output Modbus TCP Module (with DI)

- ADAM-6260: 6-ch RL; ADAM-6266: 4-ch RL & 4-ch DI
- Daisy chain connection with auto-bypass protection
- DI/O LED Indication; Relay fail safe value
- Web language support: HTML 5, Java Script, XML
- Supports GCL and Peer-to-Peer
- Group configuration capability for setting up multiple modules

### Smart Ethernet I/O Modules



#### ADAM-6017

8-ch Isolated Analog Input Real-time Ethernet Module

- 2-ch DO for AI trigger applications
- Modbus RTU, TCP/ IP, UDP and HTTP protocol
- Embedded web server
- Supports data stream and event trigger
- Supports GCL and Peer-to-Peer



#### ADAM-6050

18-ch Isolated Digital I/O Modbus TCP Module

- Modbus RTU, TCP/ IP, UDP DHCP and HTTP protocol
- 12-ch digital input and 6-ch digital output
- Embedded web server
- Supports data stream and event trigger
- Supports GCL and Peer-to-Peer



#### ADAM-6060/ 6066

6-ch Digital Input and 6-ch Relay Modbus TCP Module/ 6-ch Digital Input and 6-ch Power Relay Modbus TCP Module

- Modbus RTU, TCP/ IP, UDP DHCP and HTTP protocol
- Embedded web server
- Supports data stream and event trigger
- Supports GCL and Peer-to-Peer

### Robust RS-485 I/O Modules



#### ADAM-4117/ 4118

Robust 8-ch Analog Input Module  
Robust 8-ch Thermocouple Input Module

- Modbus RTU protocol
- Wide operating temperature -40 ~ 85°C (-40 ~ 185°F)
- 8 differential and independent configuration channels
- High common mode voltage 200 V<sub>DC</sub>
- 1 kV surge, 3 kV EFT and 8 kV ESD protection



#### ADAM-4017+/ 4018+

8-ch Analog Input Module  
8-ch Thermocouple Input Module

- Modbus RTU protocol
- 8-ch AI/ 8-ch Thermocouple Input
- Over Voltage Protection: ±35 V<sub>DC</sub>
- Built-in TVS/ESD protection
- Isolation Voltage: 3,000 V<sub>DC</sub>



#### ADAM-4051/ 4055/ 4056

16-ch Isolated Digital Input Module  
16-ch Isolated Digital I/O Module  
12-ch Isolated Digital Output Module

- Modbus RTU protocol
- ADAM-4055: 8-ch DI & 8-ch DO
- Dry/ wet contact digital input level
- Isolation Voltage: 2,500 V<sub>DC</sub>
- Over Voltage Protection: 70 V<sub>DC</sub>

# Advantech WebAccess

## The IoT Software Framework

Advantech WebAccess is a 100% web-based HMI/SCADA software. With more and more investment and development on integrating IoT applications and cloud architecture, it has become not only a HMI/SCADA software but also an IoT software framework in the IoT era. Advantech WebAccess supports powerful remote monitoring and control functions through standard web browsers, so that users can easily monitor and control automation equipment with full featured SCADA functions by their Client or Thin Client device. Starting from Version 8, Advantech WebAccess provides a HTML5 based Dashboard as the next generation WebAccess HMI. It helps system integrators to create their own dashboard and view their dashboard remotely via any device. Advantech WebAccess also provides open interfaces for system integrators to develop their IoT applications and widgets which can meet the needs of various applications.



## Advantech WebAccess HMI/SCADA Software



### Advantech WebAccess

#### 100% Web-based HMI/SCADA Software

- Distributed SCADA architecture with central database server and multi-layer inter-operable SCADA nodes
- Supports ample drivers, including Advantech I/O, controllers and major PLCs
- Web-enabled video, audio and animation
- Excel self-defined reports
- Google Maps and GPS location tracking integration
- High availability redundant SCADA, ports and devices
- Supports open interfaces as an IoT platform

#### HTML5 Business Intelligence Dashboard

- Cross-browser, cross-platform WebAccess HMI based on HTML5
- Supports dynamic thin clients access for a seamless viewing experience across PC, Mac, tablet and smartphone
- Built-in widgets to customize information page by analysis charts and diagrams
- Create customized widget with graphic functionalities, like basic shape, animation, picture import, and macro command via cross-browser

## WebAccess Bundled Products

### WA-TPC1771

17" Touch Panel Computer with 600/5,000 Tags WebAccess

- Built-in Windows 7 Embedded with Advantech WebAccess 600/5,000 Tags
- Intel® Atom™ D525 1.8 GHz CPU
- 8 DI/O and backup SRAM support



### WA-UNO2178A

Compact SCADA Server with 600/5,000 Tags WebAccess

- Built-in Windows 7 Embedded with Advantech WebAccess 600/ 5,000 Tags
- Intel® Atom™ D510 1.67 GHz CPU
- 2 x GbE, 8 x COM, 6 x USB 3.0 and 2 x MiniPCIe



## Semiconductor Data Gateway

### WA+SECS

WebAccess SECS Server with Intel® Core™ i7 Automation Computer

- SECS protocol embedded –SEMI standard compliant interface for data collection
- Provides SECS functions for polling, trace and event notification by configuration
- Bundled with Advantech WebAccess, browser based HMI/SCADA software



## Energy Data Gateways

### BEMG-4221/ 4222

Energy Data Concentrator with 6 x USB, 4x COM / 8x COM, 128 Devices

- Built-in Windows CE with Advantech WinCE WebAccess
- Web-server functions support customers with remote configuration, remote operation, remote maintenance
- Combines Advantech BEMS and power meter for energy saving solution



# Rugged Tablets as Portable HMIs

## Enabling Intelligent Real-Time Inspections and Onsite Management

Advantech's portable HMI products are designed to assist mobile workers with conducting and managing onsite inspections. Equipped with the latest Intel® chipset and RF technology (WLAN, WWAN, and GPS), Advantech's rugged tablets enable data to be transmitted and processed seamlessly, ensuring workers have constant access to relevant information. Integrated I/O (dual camera, RFID, NFC RFID, and RS-232) and extensive user-friendly accessories (including a vehicle docking station, desk docking station, universal cover, and customizable extension modules) support rapid data collection and mobile operation for substantially increased productivity. The rugged product designs (MIL-STD-810G and IP65 certification with a drop tolerance of up to 4 ft.), sunlight-readable displays, and long battery life are designed to facilitate the completion of complex tasks in harsh field environments.



### Fully Rugged Tablet

#### PWS-870

10" 16:9 Fully Rugged Tablet with Fourth Generation Intel® Core™ i Processor

- MIL-STD-810G and IP65 certified, and can withstand drops of up to 4 ft.
- 10.1" HD high-brightness, multi-touch, Gorilla Glass panel with digitizer
- Fourth generation Intel® Core™ i processor supports Windows 8
- Built-in 4G LTE, WLAN (802.11 a/b/g/n/ac), BT4.0, and GPS modules with Beidou/GLONASS support
- Hot-swappable battery offers up to 11 hours operation
- Built-in dual cameras, a 1D/2D barcode scanner, and NFC RFID
- Wide array of peripherals including a vehicle docking station, desk docking station, and customizable extension modules



#### Wall Docking Station

- Anti-theft locking mechanism
- Rapid device docking and removal (1 second)
- Equipped with 1 x DC-in, expansion I/O, 2 x USB 3.0, 1 x LAN, and 1 x GNSS port



#### Desk Docking Station

- Equipped with 1 x DC-in, 2 x USB 3.0, 1 x LAN, 1 x RS-232, and 1 x VGA port
- Secondary battery charger



#### Universal Cover

- Made from black plastic and PVC
- Measures Approx. 305 x 254.2 x 88.4 mm
- Designed for easy carrying



#### Extension Module

- MSR and smart card reader extension
- I/O extension
- UHF RFID extension

### Rugged Tablet

#### PWS-770

10" 4:3 Rugged Tablet with Intel® Atom™ N2600 Processor

- 10.4" XGA LED, high brightness (300 cd/m2), WAV transfective-LCD panel
- Hot swappable, high-capacity li-ion battery provides 8 hours of operation
- Wide variety of I/O ports support various applications
- IP54 certified with a drop tolerance of up to 4 ft.
- Equipped with Wi-Fi, Bluetooth, GPS, and WWAN (3.75G) technology
- Supports optional data capture modules (1D/2D barcode scanner, MSR, and RFID)
- Lightweight design (1.2 kg)



#### Wall Docking Station

- Anti-theft locking mechanism
- Rapid device docking and removal (1 second)
- Equipped with 1 x DC-in, expansion I/O, 2 x USB 2.0, 1 x LAN, and 1 x SMA (for GPS) port



#### Desk Docking Station

- Equipped with 1 x DC-in, 2 x USB 2.0, 1 x LAN, and 1 x RS-232 port
- Secondary battery charger



#### Carry Bag

- Made from black PVC



#### Hand Strap

- Made from black PVC

# Enabling an Intelligent Planet

Advancements in technology have paved the way for modern civilization; allowing us to interconnect human lives in a way never before thought possible. Advantech, a global industrial computing and automation manufacturer, continues to explore what technology can bring into our lives. With over three decades of proven experience, we combine information, automation and communication technology with efficiency, energy conservation, minimized risk, cost-effectiveness, and environmental protection to create solutions to enable an intelligent planet.



Production Information  
Integration

WebAccess+



iAgriculture



Oil & Gas



Power & Energy

Internet of Things

Industry 4.0

# Smart Manufacturing

The Internet of Things (IoT), which gives users the ability to control their devices from wherever they are, is moving into industrial automation. Industry 4.0 takes advantage of the IoT to become Industrial IoT (IIoT) and now gives industrial automation environments the same abilities. However, Industry 4.0 encompasses more than just IIoT and includes four core technologies: digital design & production technique; cyber-physical systems; intelligent facilities & products and unified standard communication protocols. Through these key elements, we can realize on-demand production, mixed model manufacturing and advanced applications like: machine predictive maintenance. Terabytes of data are generated in Industry 4.0 and form the basis of big data which is processed by an MES or ERP system to become valuable production information.

Flexible  
Production

36

Solution Forum

## Production Information Integration

Cyber-physical systems are formed through linking the production information of isolated production stations to enable all the stations to instantly respond to changes in production variables, significantly shortening the development of the optimal production yield and building a complete production record. Using this technology, the production process can simultaneously adapt the product design and form a dynamic manufacturing execution environment.



## Product Solutions

### Production Information Integration

### Instant Information

#### Software



**Advantech WebAccess**  
Web-based HMI/SCADA Software

#### HMI



**TPC-1782H**  
Touch Panel Computer with iDoor technology

#### Communication



**EKI-9300 series**  
Full Gigabit Managed DIN Rail Ethernet Switch

#### Controller



**UNO-2483G**  
Embedded Automation Computer with iDoor Technology

#### Remote I/O



**WISE-4000 series**  
IoT Wireless I/O Modules



**ADAM-6200 series**  
Daisy-chain Ethernet I/O Modules

#### Software



**WebAccess/NMS**  
Network Management Software

**Mass Customization**  
**On-demand Production**


### Instant Production Information Dispatch and Display

Intelligent factories mean optimizing factory information distribution with the visualization of information, and connecting it with the shop floor and MES management system. Users from field operators to plant managers and management executives can utilize these productivity indicators and trends to organize a more accurate real-time decision making and business strategies.



### Equipment Networking and Monitoring

Through advanced test and measurement technology and highly integrated network functionality, machines collect data during production before turning it into valuable information. Network functionality also realizes M2M communication to upgrade the flexibility and efficiency of any production line. With comprehensive DAQ product functions and a mature networking structure, Advantech has its first foray into the era of Industry 4.0.



### Dispatch & Display

### Equipment Networking and Monitoring

#### Display



**FPM-6211W**  
21.5" Full HD Semi-industrial Monitor

#### Computer



**UNO-3483G**  
Control Cabinet PC with flexible expansion

#### HMI



**TPC-1551T**  
Thin Client Panel Computer with iDoor technology

#### Communication



**EKI-5000 series**  
Gigabit/Fast Ethernet ProView Switch

#### Controller



**MIC-3100 series**  
4U Highly Robust Industrial PC



**UNO-1483G**  
DIN-Rail PC with built-in digital I/O

#### I/O



**PCIE-1802**  
24 bit Ultra-high Resolution Instrument Cards



**PCIE-1816**  
High Performance PCIE Multifunction Cards

# Power and Energy

## Building Reliable Power Automation Solutions with Trusted System Components

Power supply and demand is becoming more and more critical. Substation automation, T&D grid automation, renewable energy, power generation & transmissions, energy management systems and maintenance-free power backup systems with IEC 61850-3 compliance are the big trends in today's applications. Power Automation improves energy efficiency and intelligence while also implementing important environment protection and green powered features. Advantech is proud to develop reliable HMIs, Embedded Automation Computers, Industrial Managed Switches and DIN-rail PCs to serve this market.



### Power Generation

- Redundant automation controller architecture
- Simultaneous high-speed data acquisition modules
- Multi-port managed Ethernet switches



### Smart Substations

- IEC 61850-3/ IEEE 1613 compliant computing platforms, I/O modules and Ethernet switches
- Reliable redundant X-Ring networking communications



### Renewable Energy

- Reliable energy automation Controllers with an open system
- Fiber optic managed switches for redundant X-ring networking topology
- Powerful SCADA software support



### Wind Power Management

- Robust vibration diagnosis server
- Powerful SCADA software support
- Reliable industrial gateway

## Product Solutions

### HMI



**FPM-7151T**  
15.6" Industrial Monitor with Projected Capacitive Touchscreen



**APAX-5522PE**  
IEC 61850-3 Compliant PAC with Marvel XScale® CPU

### Controllers



**ECU-1871**  
Intel® Atom™ D510 Modular Power & Energy Controller



**ECU-4784**  
Intel® Haswell Core i7 Power & Energy Automation Computer

### Communication



**EKI-9228G**  
L2 Managed IEC 61850-3 Industrial Ethernet Rack-Mount Switches



**EKI-9312/ EKI-9316**  
Full Gigabit Managed DIN Rail Switch



**APAX-5017PE**  
IEC 61850-3 Compliant 12-ch Analog Input Module



# Oil and Gas

## Building Digital Oilfields via the IoT

Take advantage of science and technology innovation to promote industrialization and informatization integration in the oil and gas industry.

Currently in the intense competition of the international and domestic energy markets, methods of improving the management level and improving the production and economic efficiency to decrease costs is essential. To achieve this, improving the application level will strengthen management information and aid further integration.



### Oil Well Monitoring

- Intelligent RTU
- Web-based HMI/SCADA software
- Industrial automation computer
- LED backlit LCD display screen




### Pipeline Monitoring

- Intelligent pipeline RTU
- Powerful KW softlogic software
- Remote I/O monitoring
- GPRS telecommunication
- Excellent pipeline leakage detection



### Storage Tank Monitoring

- IEC 61850 certified power automation control platform
- EN50155 certified industrial switch
- Web-based HMI/SCADA software

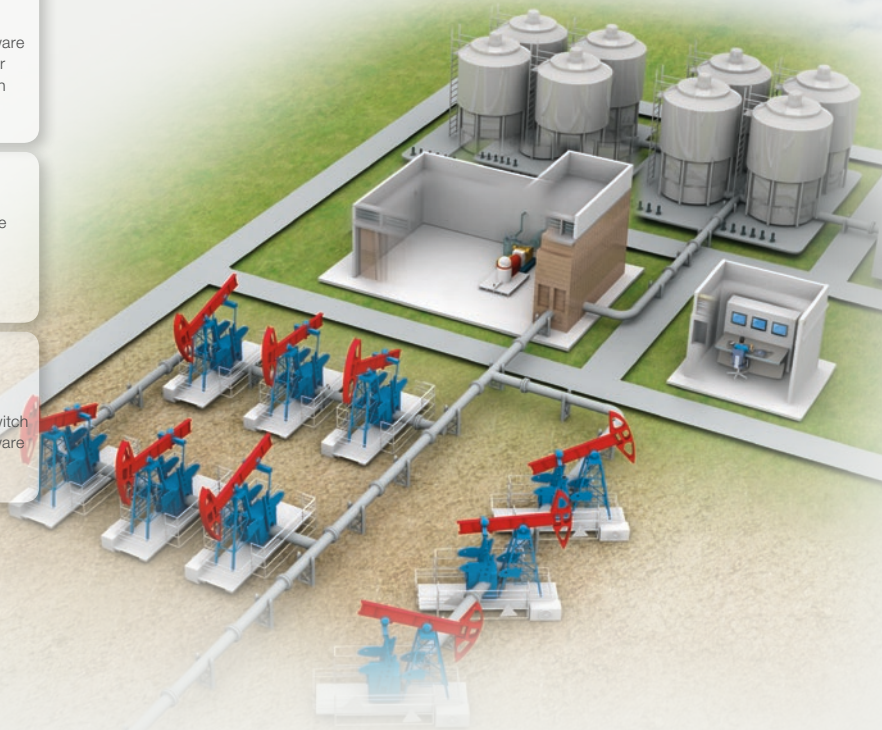

## Product Solutions

### Software



**Advantech WebAccess**  
Web-based HMI/SCADA Software

### Communication



**EKI-1331**  
RS-232/485 to HSPA+ IP Gateway



**EKI-5000**  
Gigabyte/Fast Ethernet ProView Switch

### Controller



**APAX-5620**  
PAC with Marvel XScale® CPU and CAN

### Computer Platform



**TPC-1551T**  
15" XGA Thin Client Multi-Touch Panel Computer

### RTU



**ADAM-3600**  
8AI/ 8DI/ 4DO/ 4-Slot Expansion Wireless Intelligent RTU

### I/O




**ADAM-4000/6000**  
Remote I/O Modules

# Water Treatment

## Water Conservation and Water Treatment Solutions

Equipment that integrates the monitoring and control, data analysis, real-time video, mass data records, data base exchange mechanism and cloud technology based system, allows water conservation experts to easily construct various modes of control and management analysis.

From the water source, to sewage treatment, reclaimed water and drinking water, Advantech provides system devices, intelligent terminals, redundancy controllers, various communication devices and cloud monitoring software, and adopts an open framework to maximize the benefits and efficiency of water resource monitoring and management experts.

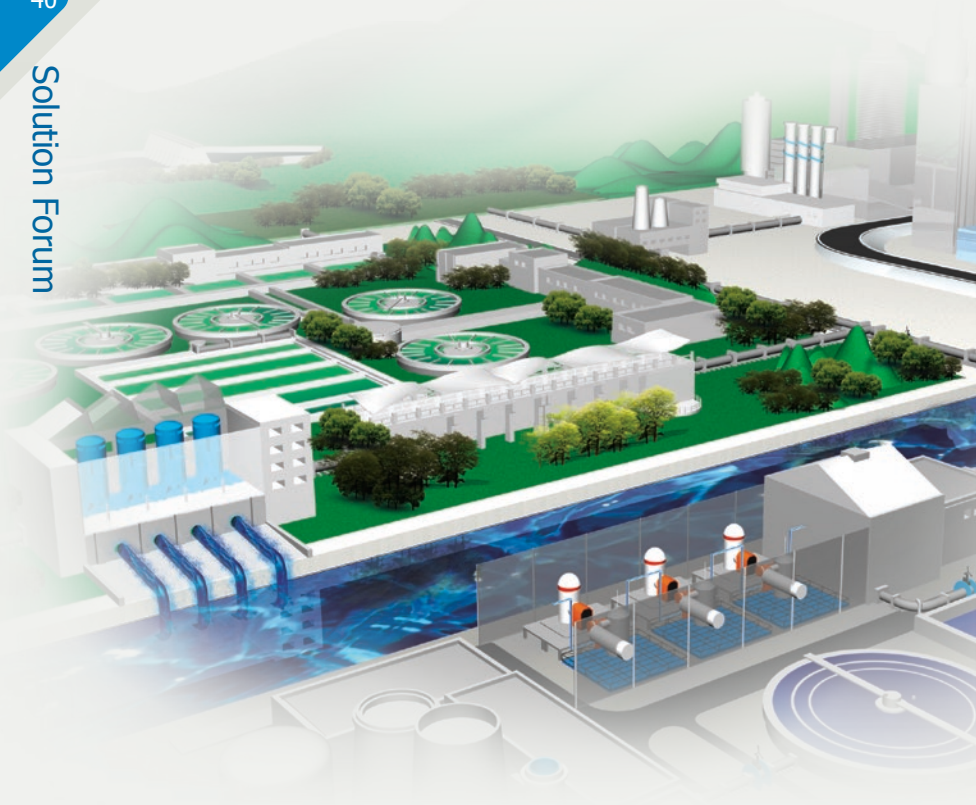

### Pump Station Management

- Intelligent RTU controllers
- Flow/Pressure PID control
- Fiber optic switches
- Professional WebAccess HMI/SCADA software



### Water Treatment Plant System

- User friendly touch panel computers
- IP-based video surveillance
- Redundant network architecture



### Sewage Treatment

- Redundant automation controller architecture
- Redundant network architecture
- Professional WebAccess HMI/SCADA software



### Pipeline Monitoring

- Intelligent pipeline RTU
- Remote I/O monitoring
- GPRS telecommunication
- Excellent pipeline leak detection

## Product Solutions

### Software



**Advantech WebAccess**  
Web-based HMI/SCADA Software

### HMI



**FPM-3151G**  
15" XGA Industrial Monitor

### Controllers



**APAX-5620**  
PAC with Marvel XScale® CPU and CAN

### Intelligent RTU



**ADAM-3600**  
8AI/ 8DI/ 4DO/ 4-Slot Expansion Wireless Intelligent RTU

### Communication



**EKI-7659C**  
8+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch



**EKI-1322**  
2-port RS-232/422/485 to GPRS IP Gateway

### I/O



**APAX-5017**  
12-ch Analog Input Module

# Intelligent Agriculture

## Providing Reliable Control and Remote Monitoring Solutions

As an enabler of IoT, Advantech aims to provide our customer a complete yet reliable system to enable our customers' business step into the next success. With cloud management and the connected system, computerized plants and managerial information can be fulfilled. The versatile product offerings can satisfy the need of the fields from fertilization and irrigation, plant tissue culture labs, plant factories, green houses and safe transportation process monitoring and control. With Advantech's control and monitoring systems, including compact embedded PC, trusted communication modules, remote data acquisition modules and web-based HMI/SCADA software – WebAccess; farm owners can get real-time information as quality data and thus takes less time to determine the next action.



### Plant Cultivated Clod Process Control

- Reliable precision control systems
- Computerized management system
- Web-based HMI/SCADA software easily integrated into ERP systems



### Plant Factory Environment Control & Monitoring

- Distributed control system for LED lighting, temperature, humidity, PH value and nutrient control
- Web-based tracking & management systems




### Intelligent Greenhouse Facility Control & Monitoring

- Scalable distributed control system for chiller, boiler, clean room, sterilization, hygrometer, fertilization, irrigation, water pump and shade net control



### Remote Management with Web-enabled SCADA Software

- Goods ID tracking recording & management system
- Powerful Remote Diagnose Maintenance Functionality

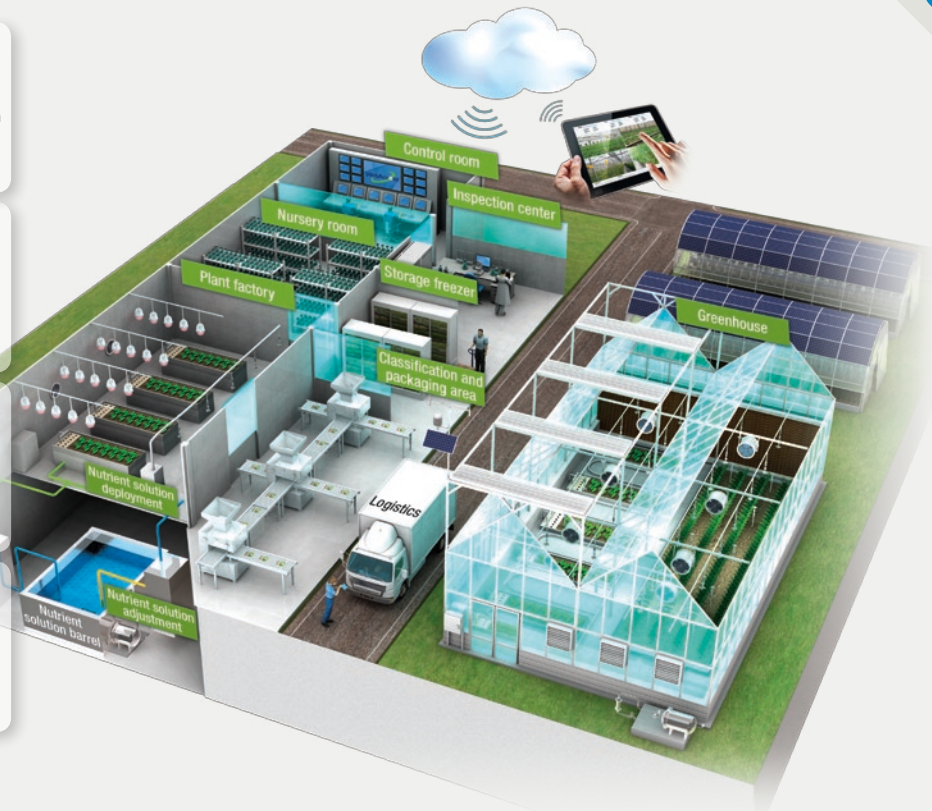

## Product Solutions

### Software



**Advantech WebAccess**  
Web-based HMI/SCADA Software

### HMI



**TPC-1581WP**  
15.6" Multi-Touch Panel Computer

### Communications



**EKI-57281**  
8-port Gigabit Ethernet ProView Switch

### Controllers and I/O



**ADAM-5560KW/ADAM-5017P**  
7-slot DIN-Rail IPC/ 8-ch Analog Input Module



**APAX-5620KW/APAX-5046**  
DIN-Rail IPC/ 24-ch Digital Output Module

### I/O



**WISE-4000**  
IoT Wireless I/O Modules



**ADAM-4000/ADAM-6000**  
Remote I/O Modules

# Realizing IoT Business Success with WebAccess+ Alliance

Advantech's WebAccess+ IoT Solution Alliance is a market-oriented cooperation model using WebAccess, the IoT Software framework as its core – to link solutions, partners' strengths and strategic co-marketing to get into focused vertical markets, such as Intelligent factory, water, oil & gas, renewable energy, intelligent agriculture and intelligent buildings. It aims to offer complete IoT solutions for a wide array of markets and applications, also achieving win-win partnerships in the blooming IoT industries.



## WebAccess+ Training & Certificate

Advantech provides a full range of WebAccess training courses and professional certificates to help partners to build up WebAccess software technology capability. Also, Advantech sets up regional WebAccess Solution Center (WSC) to assist local partners to increase partners' technical capabilities.



## Marketing Collaboration

Advantech WebAccess+ partners can get full co-marketing supports such as co-exhibition, co-conference, seminar, roadshows, WebAccess+ website, video and co-marketing campaigns to increase company branding and awareness.



# WebAccess+ Solutions

<b>WebAccess Introduction</b>		<b>1-2</b>
<b>Advantech WebAccess</b>	Browser-based HMI/SCADA Software	<b>1-4</b>
<b>WebAccess Solution Ready Package WA+SECS</b>	WebAccess SECS Server with Intel® Core™ i7 Automation Computer	<b>1-7</b>
<b>Advantech WebAccess Bundle Product WA-TPC1771</b>	17" Touch Panel Computer with 600/5,000 Tags WebAccess	<b>1-9</b>
<b>Advantech WebAccess Bundle Product WA-UNO2178</b>	Intel® Atom™ D510 Compact SCADA Server with 600/5,000 Tags WebAccess	<b>1-10</b>

To view all of Advantech's WebAccess+ Solutions, please visit <http://webaccess.advantech.com/>.



# WebAccess Introduction

## Introduction

Advantech WebAccess is a 100% web-based HMI/SCADA software. With more and more investment and development on integrating IoT applications and cloud architecture, it has not only become HMI/SCADA software but also an IoT software framework in the IoT era. Advantech WebAccess supports powerful remote monitoring and control functions through a standard web browser, so that users can easily monitor and control automation equipment with full featured SCADA functions by their Client or Thin Client devices.

Starting from Version 8, Advantech WebAccess provides a HTML5 based Dashboard as the next generation WebAccess HMI. It helps system integrators create their own dashboard and view it remotely from any device. Advantech WebAccess also provides open interfaces for system integrators to develop their IoT applications and widgets which can meet the needs of various applications.

## WebAccess Components

Advantech WebAccess is a HMI/SCADA software with excellent networking capabilities. Through the WebAccess web structure, users can develop a central database from project node to SCADA node via Internet or Intranet. It also supports powerful remote monitoring and control functions. Through a standard web browser, users can easily monitor and control automation equipment with full-featured SCADA functions by their Client or Thin Client device.

### Project Node

A development platform for WebAccess and a web server for all clients to connect to the development project or to monitor and control the system remotely.

- System integration
- Project development
- Web server, provides connection between SCADA and client
- Database server, records the data

### SCADA Node

It communicates in real-time with automation equipment and controls the equipment via serial ports, Ethernet or proprietary communication through multiple built-in drivers.

- Connect end devices
- Data acquisition and transmission
- Supports more than 200+ device drivers
- Real-time and historical data log
- Action log

### Client

Connecting to Project Nodes and gets the address of the SCADA Node, then communicates directly with the SCADA Node using proprietary communications over TCP/IP connection.

- Remote monitoring and control
- Real-time and historical trend
- Alarm records

### Thin Client

The Thin Client interface is intended for use with iOS, Android and Windows mobile devices. With thin clients, users can browse real-time graphics, data-log trends, and tag information. Set values to tag or acknowledge alarms to be supported via an intuitive interface.

- Mobility monitor and control
- Real-time data

## WebAccess Architecture




## WebAccess Focused Solutions

### Building Energy Management Solution




- Single buildings : Commercial, Hospitals, Restaurants, Office buildings
- Building complex
  - Franchised restaurants, shopping malls, furniture stores, shoe stores, supermarkets, book stores, and convenience stores
  - Financial groups, shopping centers, campuses, and telecommunication stations

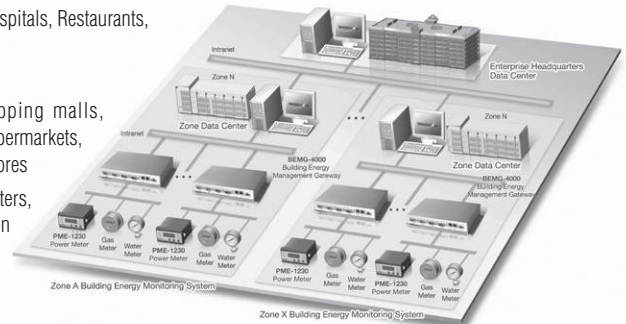

### Oil & Gas Solution




- WebAccess is utilized to collect and manage data transferred from RTU, to create an analysis tool, and to monitor the operating status of oil wells
- For pipeline monitoring, the gateway software, WebAccess is running in each of the gateway devices converting each system to a standard protocol and sending them to control center
- Communicating with intelligent devices, WebAccess acts as remote control software for monitoring and controlling devices in the field

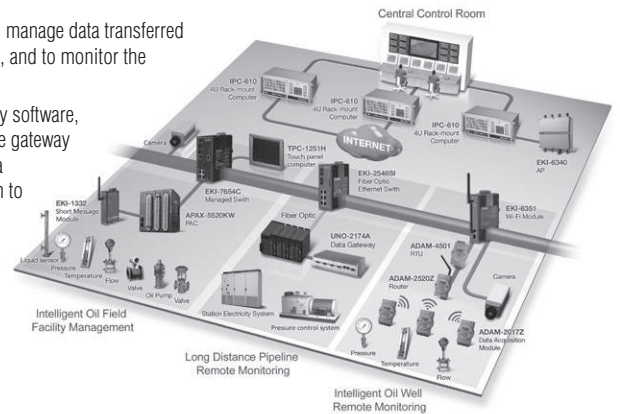

### Factory Automation Solution




- Water system: raw water supply, ultra pure water supply, waste water treatment, and reclamation
- Electric system: 220/110 KV high voltage power monitoring, emergent power generator, dynamic/static uninterruptible power supply, electric bus, high voltage switch gear, and low voltage power meter
- Gas system: toxic gases detection, gas cabinet operation, valve box operation, and general gases
- HVAC system: clean room operation, acid exhaust, process cooling water, and general air-conditioning

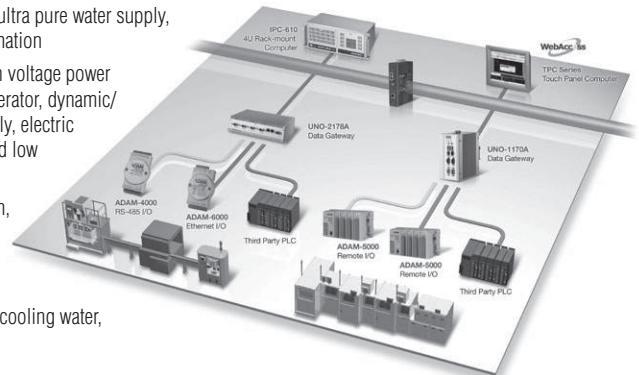

### Water Treatment Solution



- Water resource distribution system
- Raw water distribution system
- Large scale water supply pumping system
- SCADA system for tap water
- Booster pump station monitoring and control system
- Urban tap water pipeline monitoring control system
- City pipeline distribution optimization system
- Remote management system for city sewage pipelines
- Monitoring and control system for sewer pump stations.
- SCADA system for large sewage plant
- Performance management for large sewage plan

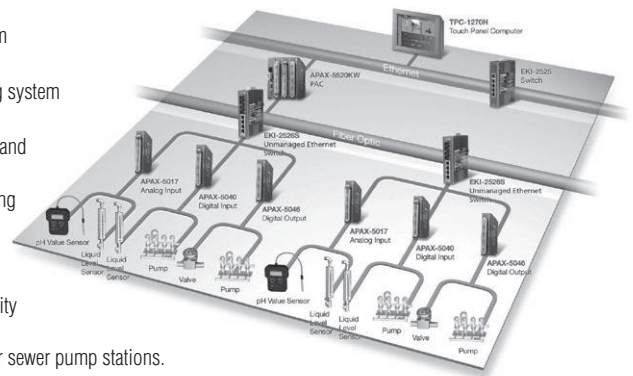

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# Advantech WebAccess

Browser-based  
HMI/SCADA Software



## Features

- Remote engineering and support with WebAccess Cloud Architecture
- Business Intelligence Dashboard - cross-browser, cross-platform WebAccess HMI based on HTML5
- Open Interfaces - Web Services, Widget Interfaces and WebAccess APIs
- Excel Report integration for report format customization
- Multitouch gesture support
- Google Maps and GPS location tracking integration
- WebAccess Express - The auto-configuration tool for various devices
- Distributed SCADA architecture with central database server and Multi-layer inter-operable SCADA nodes
- Supports ample drivers, including Advantech I/O, controllers and major PLCs
- Redundant SCADA, ports and devices - High availability
- Web-enabled video, audio and animation in WebAccess View
- Open data connectivity by providing industrial protocol and ODBC integration
- Advanced SCADA Function - Alarm, Schedule and Real-time database

## Introduction

Advantech WebAccess is a web browser-based software package for human-machine interfaces (HMI) and supervisory control and data acquisition (SCADA). All the features found in conventional HMI and SCADA software including Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. The basic components are:

1. SCADA Node: it communicates in real-time with automation equipment and controls the equipment via serial, ethernet or proprietary communication via multiple built-in device drivers. Not only does it run local controls and monitoring, but also provides real-time data to all remote clients.
2. Project Node: it is the development platform for WebAccess and is a web server for all clients to connect to the development project or remotely monitor and control the system. All system configuration, project database files and graphics are stored here.
3. Client node: through the ActiveX control inside Microsoft Internet Explorer, it monitors and controls the SCADA Node. The client connects to the Project Node and get the address of the SCADA Node, then communicates directly with the SCADA Node using proprietary communications over a TCP/IP connection. Data is displayed in real-time with dynamically animated graphics along with real-time, historical trending and alarm information. Users can acknowledge alarms and change set-points, status and other data.
4. Thin Client: the Thin Client interface is intended for use with smart mobile devices, such as iOS, Android and Windows. In Thin client users can browse graphics, data-log trends, and tag information in real-time. Setting the value to tag or acknowledge alarms can also be supported via an intuitive interface.

WebAccess 8.0 is a new generation of WebAccess HMI. Business Intelligence Dashboard, provides users with cross-platform, cross-browser data analysis and user interface based on HTML5 technology. WebAccess 8.0 can also act as an IoT Platform by providing open interfaces for partners to develop IoT applications for different vertical markets.

## Feature Details

### WebAccess Cloud Architecture

WebAccess is a 100% web based HMI and SCADA software with private cloud software architecture. WebAccess can provide large equipment vendors, SIs, and Enterprises to access and manipulate centralized data and to configure, change/update, or monitor their equipment, projects, and systems all over the world using a standard web browser. Also, all the engineering works, such as database configuration, graphics drawing and system management and the troubleshooting can be operated remotely. This can significantly increase the efficiency of maintenance operations and reduce maintenance costs.

### HTML5 Business Intelligence Dashboard

WebAccess 8.0 provides an HTML5 based Dashboard as the next generation of WebAccess HMI. System integrators can use Dashboard Editor to create the customized information page by using analysis charts and diagrams which are called widgets. Ample widgets have been included in the built-in widget library, such as trends, bars, alarm summary, maps...etc. After the dashboard screens have been created, end user can view the data by Dashboard Viewer in different platforms, like Internet Explorer, Safari, Chrome, and Firefox for a seamless viewing experience across PCs, Macs, tablets and smartphones.

### Open Interfaces

WebAccess opens three kinds of interfaces for different use. First, WebAccess provides a Web Service interface for partners to integrate WebAccess data into APPs or application system. Second, a pluggable widget interface has been opened for programmer to develop their widget and run on WebAccess Dashboard. Last, WebAccess API, a DLL interface for programmer to access WebAccess platform and develop Windows applications. With these interfaces, WebAccess can act as an IoT platform for partners to develop IoT applications in various vertical markets.

### Excel Report

WebAccess provides Excel Report integration for fulfilling the requirements of self-defined report functionality. Users can build self-defined Excel templates and generate daily/ weekly/ monthly/yearly or on demand reports automatically in Microsoft Excel format. The Excel Report function is also web-based. It can be generated and viewed in a Web browser from wherever is needed.


### Multitouch Gesture Support

WebAccess supports multitouch functionality with various pre-set gestures, such as flick to change pages, zooming in and out of the display and 2-handed operation maximizing operating safety, increasing usability and decreasing training time due to the more intuitive handling. In addition, multi-touch also supports multi-finger tap, multi-finger grab, and multi-finger spread gestures to operate pre-defined actions.

### Google Maps and GPS Tracking Integration

WebAccess integrates real-time data on each geographical site with Google Maps and GPS location tracking. For remote monitoring, users can intuitively view the current energy consumption on each building, production rate on each field or traffic flow on the highway together with alarm status. By right-clicking on Google Maps or entering the coordinate of the target, users can create a marker for the target and associate the real-time data of three sites with a display label. Furthermore, this function also integrates with GPS modules to track the location of the marker in Google Maps and allows it to be used in vehicle systems.



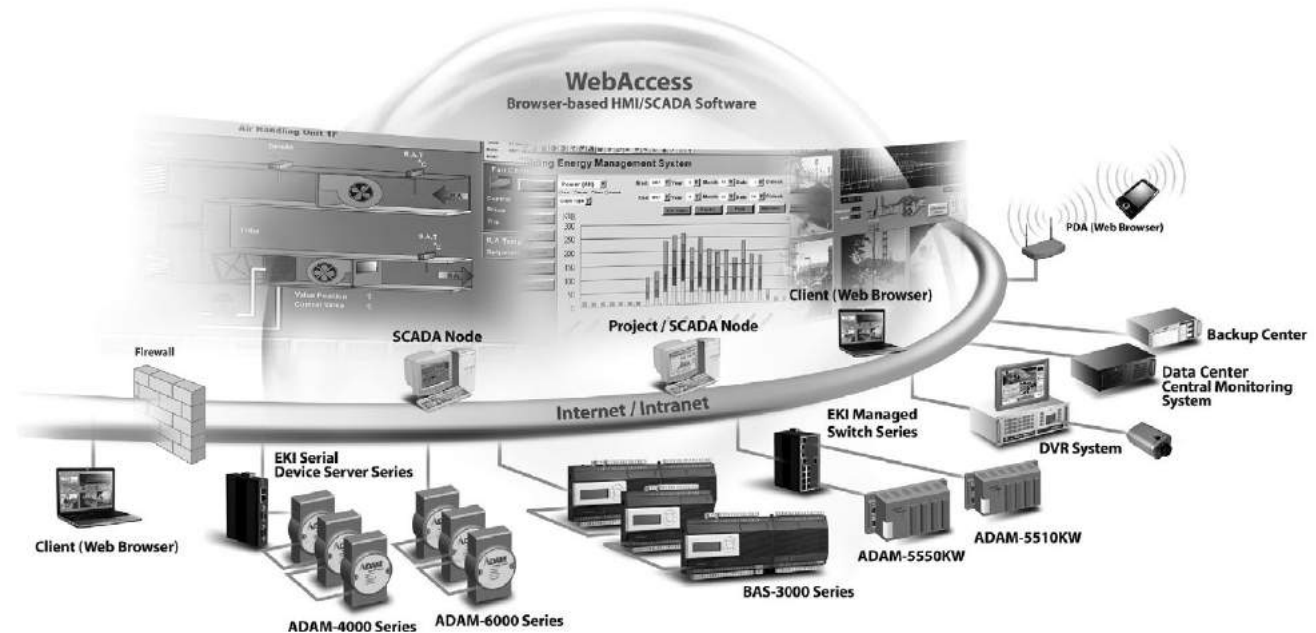

## Auto-Configuration - WebAccess Express

Advantech WebAccess Express is an automated graphical remote control application program with 1-click to bring device information online. It automatically discovers the ADAM and EKI modules on the network and serial ports, generates a database and brings real-time data online with prebuilt monitoring graphics. Express also provides remote monitoring functions and allows users to communicate and exchange data with SNMP, DiagAnywhere Server or SUSI 4.0 APIs and then check the health of the CPU, memory, temperature, and voltage of the target machine as device monitoring platform. With SNMP, DiagAnywhere, or SUSI API Driver integration, users can configure the alarm function if any abnormal or suspicious data is detected in WebAccess.

## Distributed SCADA Architecture with Central Database Server

SCADA nodes run independent of any other node. Each SCADA node communicates to automation equipment using communication drivers supplied with Advantech WebAccess. The Project Node is a centralized database server of configuration data. A copy of the database and graphics of all SCADA nodes is kept on the Project Node. The historical data is also stored in the database in project node.

## Ample Driver Support

WebAccess supports hundreds of devices. In addition to Advantech I/Os and controllers, WebAccess also supports all major PLCs, controllers and I/Os, like Allen Bradley, Siemens, LonWorks, Mitsubishi, Beckhoff, Yokogawa etc. WebAccess can easily integrate all devices in one SCADA. All of these device drivers are integrated into WebAccess and free of charge. For a complete list of WebAccess drivers, refer to [webaccess.advantech.com](http://webaccess.advantech.com).

## Redundant SCADA, COM Ports and Devices

Advantech WebAccess assures continuous, reliable communication to automation equipment. WebAccess Backup node activates when the Primary node is down. WebAccess device drivers communicate with backup ports or devices if the primary connection is lost and automatically restores to the primary item when it becomes available.

## Alarm Management System

WebAccess advanced Alarm Management System (AMS) delivers alarm messages via SMS, email and audio announcement to multiple receivers by predefined alarm group, user groups, time schedule and priority setting.

## Web-enabled Video, Audio, Animation

WebAccess allows operators and users to monitor equipment and facilities directly using web-enabled full-motion video cameras, audio, and web cams. It also supports the use of live video cameras that are IP-enabled via ActiveX control, Windows Media Player, JPEG and other formats supported by Microsoft Internet Explorer 8.0 (or later). The video image appears in the same display area as graphics, animation, alarms and trends displays. With vector-based graphics, WebAccess graphics can be built at any resolution and displayed at any resolution. It also has the options to allow users to define the aspect ratio, 16:9, 16:10 or 4:3, to view their graphics to avoid distortion when displaying in certain aspect ratio display.

## Open Data Connectivity

Advantech WebAccess exchanges online data with 3rd party software in real-time by supporting OPC UA/DA, DDE, Modbus and BACnet Server/Client. It supports SQL, Oracle, MySQL, and MS Access for offline data sharing.

## Real-Time Database

WebAccess Real-Time Database (RTDB) is designed to meet industrial high speed and large quantity data access requirements. With the fully integrated design, users do not need to learn how to operate this database. Just by enabling the usage of RTDB in WebAccess configuration page, WebAccess SCADA node can serve data processing (collection and retrieval at the same time) at a rate of millions of records per second. Also, the RTDB maintenance feature can automatically archive and delete obsolete data.

## Gateway with WebAccess Installed

With open real-time data connectivity and hundreds of device drivers, WebAccess can integrate all devices and a selected hardware platform with pre-installed WebAccess becomes the perfect protocol gateway or data concentrator. With intuitive setup, WebAccess converts field device data to Modbus, OPC DA, OPC UA or BACnet protocol, so other software, such as ERP and MES can gain access without knowing the field device protocol. WebAccess+ Solution Products, a bundle of WebAccess Professional 8.0 and Windows 7 Embedded built in to Advantech's robust hardware platform, can be used as a high performance, low cost data gateway solution.

## WebAccess Scheduler

WebAccess Scheduler provides on/off control and setpoint changes based on the time of day, day of the week and the calendar. Users can control lights, temperature and equipment for saving energy during work days. WebAccess Scheduler allows the definition of up to 16 periods per day and preserved functions for setpoints.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail I/PCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

### Software Specifications

#### Advantech WebAccess Professional

- I/O Tag Number 75/150/300/600/1500/5000/20K/64K
- Internal Tag Number 75/150/300/600/1500/5000/20K/64K
- Web Client 1024
- Alarm Logs 5000
- Action Logs 5000

#### Graphics

- Number of Graphic Pages Unlimited (limited by H/D size)
- Variables per Graphic Pages 4000
- Tag Source Global
- Multitouch Gestures Yes

#### Dashboard

- Cross Browser and Platform Yes
- Number of Built-in Widgets 37
- Open Widget Interface Yes

#### Group Trend Log

- Number of Data Logging Number of I/O tags license x 2
- Alarm Groups per SCADA 9999

#### Receipt

- Recipes per Project Unlimited (limited by H/D size)
- Unit per Recipe 999
- Item per Unit 999

#### Scheduler

- Holiday Configuration Group 9999
- Time Zone Group 9999
- Device Loop Group 9999
- Equipment Group 9999
- Scheduler Reservation Group 9999

#### Web-enabled Integration

- Video Yes
- Google Maps and GPS Location Tracking Yes

#### Open Connectivity

- Modbus Server Yes
- BACnet Server Yes
- ODBC and SQL Query Yes
- OPC DA/UA Server Yes
- DDE Server Yes

#### Others

- Centralized logs on project Yes, node via ODBC
- SCADA Redundancy Yes
- Script language TclScript / VBScript / Jscript
- Data Transfer Yes
- Report / Excel Report Yes
- Device Redundancy Yes
- Supports IPv6 Yes
- WebAccess Express Yes

### Minimum Requirements

#### Project Node / SCADA Node

- Operating System Windows XP (SCADA Node only), Windows 7 SP1 Professional, Windows 8 Professional, Windows Server 2008 R2 or later  
Net Framework 4.5 or later version
- Hardware Intel Atom or Celeron. Dual Core processors or higher recommended  
2GB RAM minimum, more recommended  
30GB or more free disk space
- Display Resolution 1024 x 768 or higher (recommended)  
Lower resolutions also supported
- USB Port USB port for License Hardkey on SCADA node

### Ordering Information

#### Professional Versions

- **WA-P80-U075E** WebAccess V8.0 Professional Software with 75 tags
- **WA-P80-U150E** WebAccess V8.0 Professional Software with 150 tags
- **WA-P80-U300E** WebAccess V8.0 Professional Software with 300 tags
- **WA-P80-U600E** WebAccess V8.0 Professional Software with 600 tags
- **WA-P80-U15HE** WebAccess V8.0 Professional Software with 1,500 tags
- **WA-P80-U50HE** WebAccess V8.0 Professional Software with 5,000 tags
- **WA-P80-U20KE** WebAccess V8.0 Professional Software with 20,000 tags
- **WA-P80-U64KE** WebAccess V8.0 Professional Software with Unlimited tags

#### Version Upgrade\*

- **WA-X80-U000E** WebAccess Upgrade to Version 8.0
- \* Upgrade the WebAccess Version from V.7.X to V8.0.

#### Upgrade\*

- **WA-X80-U075E** WebAccess software license, 75 tags upgrade
- **WA-X80-U300E** WebAccess software license, 300 tags upgrade
- **WA-X80-U600E** WebAccess software license, 600 tags upgrade
- **WA-X80-U15HE** WebAccess software license, 1,500 tags upgrade
- **WA-X80-U50HE** WebAccess software license, 5,000 tags upgrade

\* Original serial number from WebAccess Professional version is required to purchase WebAccess upgrade. The serial number can be found on the USB dongle.

#### WebAccess+ Bundled Products

- **WA-TPC1771-T600E** 17" Touch Panel Computer, 600 tags WebAccess with Traditional Chinese
- **WA-TPC1771-T50HE** 17" Touch Panel Computer, 5,000 tags WebAccess with Traditional Chinese
- **WA-TPC1771-C600E** 17" Touch Panel Computer, 600 tags WebAccess with Simplified Chinese
- **WA-TPC1771-C50HE** 17" Touch Panel Computer, 5,000 tags WebAccess with Simplified Chinese
- **WA-TPC1771-E600E** 17" Touch Panel Computer, 600 tags WebAccess with English
- **WA-TPC1771-E50HE** 17" Touch Panel Computer, 5,000 tags WebAccess with English
- **WA-UNO2178-T600E** Automation Computer, 600 tags WebAccess with Traditional Chinese
- **WA-UNO2178-T50HE** Automation Computer, 5,000 tags WebAccess with Traditional Chinese
- **WA-UNO2178-C600E** Automation Computer, 600 tags WebAccess with Simplified Chinese
- **WA-UNO2178-C50HE** Automation Computer, 5,000 tags WebAccess with Simplified Chinese
- **WA-UNO2178-E600E** Automation Computer, 600 tags WebAccess with English
- **WA-UNO2178-E50HE** Automation Computer, 5,000 tags WebAccess with English

#### Dashboard Viewer

- **Hardware** PC: Intel Core I3 or higher, 4GB RAM or higher  
iPhone: iPhone 5 or later version  
Android: 1.5GHz Quad Core or higher, 2GB RAM or higher  
Windows Phone: 1.5GHz Quad Core or higher; 2GB RAM or higher
- **Browser** Internet Explorer: Version 9 or later version  
Chrome: Version 37 or later version  
Firefox: Version 31 or later version  
Safari: Version 7 or later version

# WA+SECS

## WebAccess SECS Server with Intel® Core™ i7 Automation Computer

**NEW**



### Features

- Bundled with Advantech WebAccess, browser-based HMI/SCADA software
- SECS protocol embedded - SEMI standard compliant interface for data collection
- An integrated platform from PLC, PAC and Remote I/O devices
- Provide SECS functions for polling, trace and event notification by configuration
- Second SECS port is optional
- Built-in Windows® 7 Embedded
- 2 x RS-232 and 2 x RS-232/422/485 ports with automatic flow control
- 4 x 10/100/1000 Base-T Ethernet
- DVI-I, DP, HDMI support 2 independent displays
- Audio with Mic in, Line in, Line out
- Supports 2 x PCI-104 plug-in cards with daughterboard expansion

### Introduction

Advantech WA+SECS is a plug and play compact SCADA server, and accommodate variety PLC in the market with SECS connection capability. It is built on Advantech's solid UNO platform with pre-installed WebAccess SCADA software, SECS Protocol, pre-configured Windows 7 Embedded and IIS environment. Just plug in the power and network cable, the web enabled browser-based server is ready for users to start configuring their SCADA system from their computer. This compact server enables users to view real-time graphics, alarms, trends and logs, and control the field devices via a web browser remotely on their desktop or notebook computer. This compact SCADA server is powered by an Intel Core i7-2655LE 2.2GHz processor. It equipped with 4 x 10/100/1000Base-T RJ-45 LAN ports, 6 USB 2.0 ports and 2 mini PCIe slots for WLAN cards and 1 SIM card slot. The fanless design, spindle-free storage, wide operating temperature environment and IP40 ingress protection make this SCADA server a durable and reliable platform.

### WebAccess Professional Version

- **I/O Tag Number** 100
- **Internal Tag Number** 100
- **Web Clients** 1024
- **Alarm Logs** 5000
- **Action Logs** 5000
- **SECS Protocol** Enable SEMI standard compliant interface
- **Graphics** Unlimited number of graphic pages, global tag source
- **Web-enabled Integration** Video  
Google Maps and GPS location tracking
- **Number of data logging** 2 x number of I/O tags license
- **Others** SCADA redundancy  
TclScript / VBScript / Jscript Language  
Data transfer and reporting  
ODBC and SQL Query  
Device redundancy

### System Hardware

- **CPU** Intel Core i7-2655LE 2.2GHz
- **Memory** 4 GB/8 GB DDR3 SDRAM built-in
- **Indicators** LEDs for power, battery, LAN (Active, Status) and serial (Tx, Rx)
- **Keyboard/Mouse** 1 x PS/2
- **Storage** 2.5" SATA, 320G 5400RPM
- **Display** 1 x DVI-I, 1 x HDMI, 1 x DP (2 x independent displays)
- **Mini PCIe Expansion** 2 x mini PCIe slots with 1 x SIM card

### I/O Interface

- **Serial Ports** 2 x RS-232, 2 x RS-232/422/485 with DB9 connectors; automatic RS-485 data flow control
- **Serial Port Speed** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 115.2 kbps (Max.)
- **LAN** 4 x 10/100/1000 Base-T RJ-45 ports
- **USB Ports** 6 x USB

### Ordering Information

- **WA+SECS-T100E** Automation Computer, 100 tags WebAccess with Traditional Chinese
- **WA+SECS-C100E** Automation Computer, 100 tags WebAccess with Simplified Chinese

### Specifications

#### General


- **Operating System** Windows 7 Embedded
- **Certification** CE, UL, CCC, FCC, C-Tick, BSMI
- **Dimensions (W x D x H)** 55 x 152 x 69 mm (10" x 6.0" x 2.7")
- **Enclosure** Aluminum
- **Mounting** DIN-rail, Wallmount, VESA
- **Power Consumption** UNO-2174G/GL: 30 W/ 20 W (Typical)
- **Power Requirements** 9 ~ 36 V<sub>DC</sub> (e.g +24V @ 3A) (Min. 72W), AT/ATX  
Weight 3.0 kg
- **System Design** Fanless with no internal cabling (except COM3/COM4)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

## WebAccess SECS Gateway

Solution Ready Package (SRP) is a ready-for-use solution which can concentrate the benefits and advantages from WebAccess+ IoT Solution Alliance partner, who provides vertical application and HMI design based on Advantech WebAccess and devices, and also Advantech, who always devotes to providing hardware and WebAccess software for building up a SRP. WebAccess SECS Gateway is a SRP solution based on WebAccess and Advantech devices to accommodate variety PLC in the market with Semiconductor Equipment Communication Standard protocol for data connection capability in Semiconductor application. WebAccess SECS Gateway is composed of SECS Interface, that help application developer to build and test programs which are necessary to communicate with SECS protocol enabled device or application efficiently. Collecting effective date and the use of monitoring and diagnostic solutions can not only prevent equipment failure for enhancing the capacity and stability, but also greatly save maintenance costs by data analysis.

## WebAccess SCES Gateway Architecture Features Details

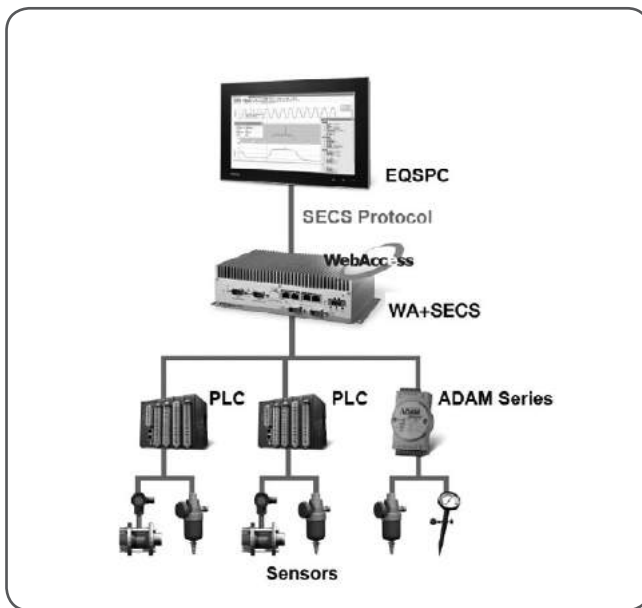

### Supports SEMI E5-0702 (SECS II) and SEMI E37-0702 (HSMS) compliant

SECS is the semiconductor's equipment interface protocol for equipment-to-host data communications. In an automated fab, the interface can start and stop equipment processing, collect measurement data, change variables and select recipes for products. WA+SECS support SECS/GEM standard interface to do all this in a defined way.

### An integrated platform from PLC, PAC and Remote I/O devices

WA+SECS is an integrated platform with WebAccess and SECS interface, and accommodate variety PLC in the market with Semiconductor Equipment Communication Standard protocol for data connection capability in Semiconductor application

### Plug & Play from sensors to SECS

Plug and play compact Semiconductor application server. Just plug in the power and network cable, the web enabled browser-based server is ready for users to start configuring their Application system from their computer.

# WA-TPC1771

17" Touch Panel Computer with 600/5,000 Tags WebAccess

**NEW**



**WebAccess**



## Features

- Bundled with Advantech WebAccess, browser-based HMI/SCADA software
- Intel® Atom™ D525 1.8 GHz processor
- 17" SXGA TFT LED LCD
- Compact design with die-cast Al front bezel
- Fanless cooling system
- IP65 compliant front panel
- PCIe and Mini PCIe expansion support
- 8 x DI/O and backup SRAM support
- Supports DDR3 SDRAM
- Serial port isolation protection
- Automatic data flow control RS-485
- Gigabit Ethernet supported
- Built-in Windows® 7 embedded
- Supports external antenna for wireless communication

## Introduction

Advantechs WA-TPC1771 is a plug and play HMI/SCADA server. It is built on Advantech solid Touch Panel Computer platform with pre-installed WebAccess SCADA software and pre-configured Windows 7 embedded and IIS environment. Just plug-in the power and network cable, the web enabled browser-based server is ready for user to start configuring his SCADA system from his computer. This HMI/SCADA server enables users to view real-time graphics, alarms, trending and logs, and control the field devices locally with the high quality 17" TFT LCD screen or via a web browser remotely on its desktop or notebook computer. The 1.8 GHz Intel® Atom™ D525 processor is the powerhouse of the server. It provides excellent computing power and balanced with it low power consumption. The fanless design and spindle-free storage make this SCADA server a durable and reliable platform.

## WebAccess Professional version

- **I/O Tag Number** 600/5000
- **Internal Tag Number** 600/5000
- **Web Client** 1024
- **Alarm Logs** 5000
- **Action Logs** 5000
- **Graphics** Unlimited Number of Graphic Pages, Global Tag Source
- **Number of Data Logging** 2 x number of I/O tags license
- **Web-Enabled Integration** Video and Google Maps
- **Others** SCADA Redundancy  
TclScript / VBScript / Jscript Language  
Data Transfer and Reporting  
ODBC and SQL Query  
Device Redundancy

## Specifications

### General

- **Operating System** Windows 7 Embedded
- **BIOS** AMI 8Mbit
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless Design
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- **Mounting** Desktop, Wall or Panel Mount
- **Power Consumption** 24 W (typical)
- **Power Input** 10~29 V<sub>DC</sub>
- **Watchdog Timer** 1 ~ 255 sec (system)

### System Hardware

- **CPU** Intel® Atom™ D525 1.8 GHz with 1MB cache
- **Chipset** ICH8M
- **Memory** 4GB SO-DIMM DDR3 SDRAM
- **LAN** 10/100/1000Base-T x 2
- **Expansion Slots** Half-size PCI-E or full-size Mini PCI-E
- **Storage** 2.5" SATA, 1TB 5400RPM
- **I/O** RS-232 x 2 (COM1, 2) with isolation  
RS-422/485 x 1 (COM3) with isolation and auto data flow control  
USB 2.0 x 2 (Host)  
PS/2 x 1
- **DI/DO & Backup SRAM** 8 x DI/DO with isolation and backup 1MB SRAM

### LCD Display

- **Display Type** SXGA TFT LED LCD
- **Display Size** 17"
- **Max. Resolution** 1280 x 1024

## Ordering Information

- **WA-TPC1771-T600E** 17" Touch Panel Computer, 600 tags WebAccess with Traditional Chinese
- **WA-TPC1771-T50HE** 17" Touch Panel Computer, 5,000 tags WebAccess with Traditional Chinese
- **WA-TPC1771-C600E** 17" Touch Panel Computer, 600 tags WebAccess with Simplified Chinese
- **WA-TPC1771-C50HE** 17" Touch Panel Computer, 5,000 tags WebAccess with Simplified Chinese
- **WA-TPC1771-E600E** 17" Touch Panel Computer, 600 tags WebAccess with English
- **WA-TPC1771-E50HE** 17" Touch Panel Computer, 5,000 tags WebAccess with English

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WA-UN02178

## Intel® Atom™ D510 Compact SCADA Server with 600/5,000 Tags WebAccess

NEW



### Features

- Bundled with Advantech WebAccess, browser-based HMI/SCADA software
- Onboard Intel Atom D510 processors
- 2 x 10/100/1000 Base-T RJ-45 ports, 6 x USB 2.0 ports
- Built-in Windows® 7 Embedded
- Onboard system status LED indicators
- Front-accessible CF slot
- Supports Boot from LAN function
- 2 x Mini PCIe slots with 1 x SIM slot support
- Fanless design with no internal cabling
- Isolation between chassis and power ground
- Supports wide operating temperatures from -10 ~ 70°C
- IP40 ingress protection
- Supports plug-in cards (1 x PCI-104 and 1 x PC/104+) with additional daughterboard expansion
- Supports 8 x COM ports
- Supports arbitrary baud rates

### Introduction

Advantech's WA-UN02178 is a plug and play compact SCADA server. It is built on Advantech solid UNO platform with pre-installed WebAccess SCADA software and pre-configured Windows 7 Embedded and IIS environment. Just plug in the power and network cable, the web enabled browser-based server is ready for user to start configuring his SCADA system from his computer. This compact server enables users to view real-time graphics, alarms, trending and logs, and control the field devices via a web browser remotely on his desktop or notebook computer. This compact SCADA server is powered by 1.66 GHz Intel® Atom™ D510 processor. It provides excellent computing power and balanced with Energy Star certified low power consumption. It's also equipped with dual Gigabit LAN ports, 6 USB 2.0 ports and 2 mini PCIe slots for WLAN cards and 1 SIM card slot. The fanless design, spindle-free storage, wide operating temperature environment and IP40 ingress protection make this SCADA server a durable and reliable platform.

### WebAccess Professional Version

- **I/O Tag Number** 600/5000
- **Internal Tag Number** 600/5000
- **Web Client** 1024
- **Alarm Logs** 5000
- **Action Logs** 5000
- **Graphics** Unlimited Number of Graphic Pages, Global Tag Source
- **Number of data logging** 2 x number of I/O tags license
- **Integration**
- **Others** SCADA Redundancy  
TelScript / VBScript / Jscript Language  
Data Transfer and Reporting  
ODBC and SQL Query  
Device Redundancy

### Specifications

#### General

- **Operating System** Windows 7 Embedded
- **Certification** Energy Star, CE, FCC Class A, UL, CCC, C-Tick Class A, BSMI
- **Dimensions (W x D x H)** 255 x 152 x 59 mm (10" x 6.0" x 2.3")
- **Enclosure** Aluminum +SECC
- **Mounting** DIN-rail, Wallmount, VESA
- **Industrial Grounding** Isolation between chassis and power ground
- **Power Consumption** 16 W (Typical)
- **Power Requirements** 9 ~ 36 V<sub>DC</sub> (e.g. +24 V @ 1.5 A) (Min. 36 W), ATX
- **System Design** Fanless design with no internal cabling

#### System Hardware

- **CPU** Intel Atom D510 Dual Core 1.66 GHz
- **Memory** 2 GB DDR2 SDRAM built-in
- **Indicators** LEDs for Power, CF, LAN (Active, Status), Serial (Tx, Rx)
- **Keyboard/Mouse** 1 x PS/2
- **Storage** 2.5" SATA, 1TB 5400RPM
- **Display** DB15 VGA connector up to 2048 x 1536
- **Watchdog Timer** 1~255 sec (System)

#### I/O Interface

- **Serial Ports** 2 x RS-232/485 (COM1-2), 2 x RS-232/422/485 w/ 128kB FIFO (COM A-B), 4 x RS-232/485 from DB25 print port (COM3-6)
- **LAN** 2 x 10/100/1000Base-T RJ-45 ports (Built-in boot ROM in flash BIOS)
- **USB Ports** 6 x USB 2.0


### Ordering Information

- **WA-UN02178-T600E** Automation Computer, 600 tags WebAccess with Traditional Chinese
- **WA-UN02178-T50HE** Automation Computer, 5,000 tags WebAccess with Traditional Chinese
- **WA-UN02178-C600E** Automation Computer, 600 tags WebAccess with Simplified Chinese
- **WA-UN02178-C50HE** Automation Computer, 5,000 tags WebAccess with Simplified Chinese
- **WA-UN02178-E600E** Automation Computer, 600 tags WebAccess with English
- **WA-UN02178-E50HE** Automation Computer, 5,000 tags WebAccess with English

# Motion Control

<b>Motion Control Overview</b>		<i>2-2</i>
<b>SoftMotion Introduction</b>		<i>2-5</i>
<b>Common Motion API Introduction</b>		<i>2-12</i>
<b>Centralized Motion Control Solution Selection Guide</b>		<i>2-13</i>
<b>Distributed Motion Control Solution Selection Guide</b>		<i>2-14</i>
<b>Centralized Motion Control Solutions</b>		
<b>MIC-3106</b>	CompactPCI Machine Automation Solution	<i>2-15</i>
<b>PCI-1245</b> <b>PCI-1265</b> <b>PCI-1285</b>	DSP-based 4/6/8-axis Stepping and Servo Motor Control Universal PCI Card	<i>2-16</i>
<b>PCI-1245S</b>	DSP-based 4-axis SCARA Robot Motor Control Universal PCI Card	<i>2-17</i>
<b>PCI-1245E</b> <b>PCI-1285E</b>	Economic DSP-based 4/8-axis Stepping and Servo Motor Control Universal PCI Card	<i>2-18</i>
<b>PCI-1245L</b>	4-axis Stepping and Servo Motor Control Universal PCI Card	<i>2-19</i>
<b>PCI-1220U</b> <b>PCI-1240U</b>	2-axis Stepping and Servo Motor Control Universal PCI Card 4-axis Stepping and Servo Motor Control Universal PCI Card	<i>2-20</i>
<b>PCI-1243U</b>	4-axis Stepping Motor Control Universal PCI Card	<i>2-21</i>
<b>Distributed Motion Control Solutions</b>		
<b>PCI-1202U</b> <b>PCM-3202P</b>	2-port AMONet RS-485 PCI Master Card 2-port AMONet RS-485 PC/104+ Master Card	<i>2-22</i>
<b>AMAX-1220</b> <b>AMAX-1240</b>	Open Frame Type 2/ 4-axis AMONet Motion Slave Modules	<i>2-23</i>
<b>AMAX-1752</b> <b>AMAX-1754</b> <b>AMAX-1756</b>	Open Frame Type 32-ch Isolated Digital Input/Output Slave Modules	<i>2-24</i>
<b>EtherCAT Solution</b>		
<b>EtherCAT Solution Introduction</b>		<i>2-25</i>
<b>PCI-1203</b>	2-port EtherCAT Universal PCI Master Card	<i>2-26</i>
<b>ADAM-5000/ECAT</b>	4-slot Distributed High Speed I/O System for EtherCAT	<i>2-27</i>
<b>EtherCAT Module Selection Guide</b>		<i>2-28</i>
<b>ADAM-E5000 I/O Module Selection Guide</b>		<i>2-28</i>
<b>Accessories</b>		
<b>Selection Guide</b>	Centralized/Distributed Selection Guide	<i>2-29</i>
<b>Accessories</b>	DIN-rail Terminal Boards	<i>2-31</i>
<b>Cable Accessory</b>		<i>2-32</i>

To view all of Advantech's Motion Control Solutions, please visit [www.advantech.com/products](http://www.advantech.com/products).

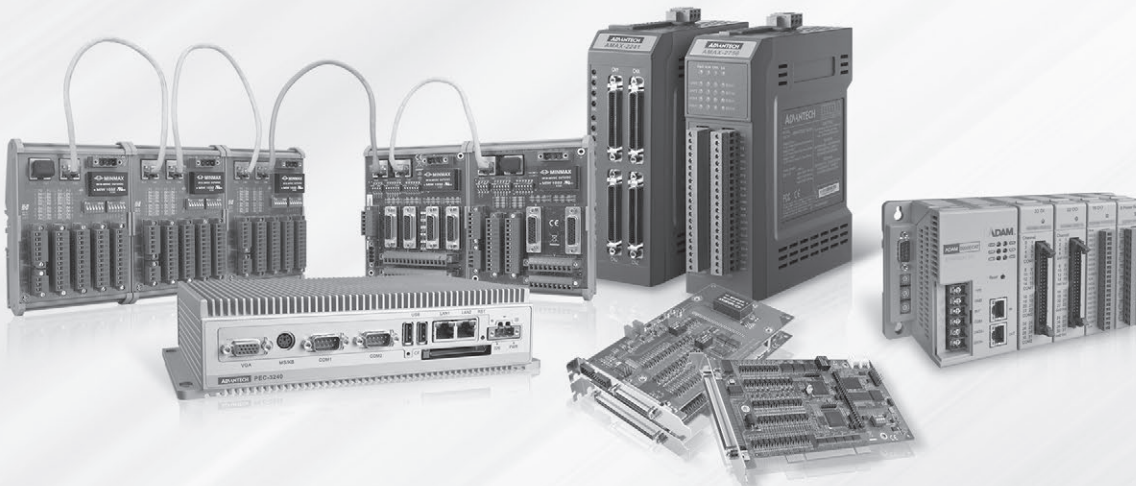


# Motion Control Overview

## Application-Oriented Motion Control Platforms to Fulfill a Variety of Control Requirements

Looking back over decades of PC-based motion control, ASIC-based & distributed control topologies through proprietary bus are quite common. However, the new emerging market for machine control comes with multiple-axis dependency, synchronization, and improved response times. These factors drive the paradigm shift from ASIC-based to SoftMotion-based and have more flexibility in design through suitable trajectories aligned with machines to meet the faster throughput, high performance and precision, and real-time Ethernet to give system integrators and machine builders help find the suitable solutions and reduce costs. Combining SoftMotion-based & Ethernet, this paradigm shift helps improve flexible trajectories, wiring-saving, and faster response times compared with past centralized topologies and reduce system implementation complexity.

Moreover, each quadrant of technology in the following diagram could be integrated into PC-based barebones to provide application-ready motion control platforms with off-the-shelf utilities and bountiful libraries for vertical market applications. For example, Advantech's PEC-3240 is a dispensing-oriented controller for the electronic industries.

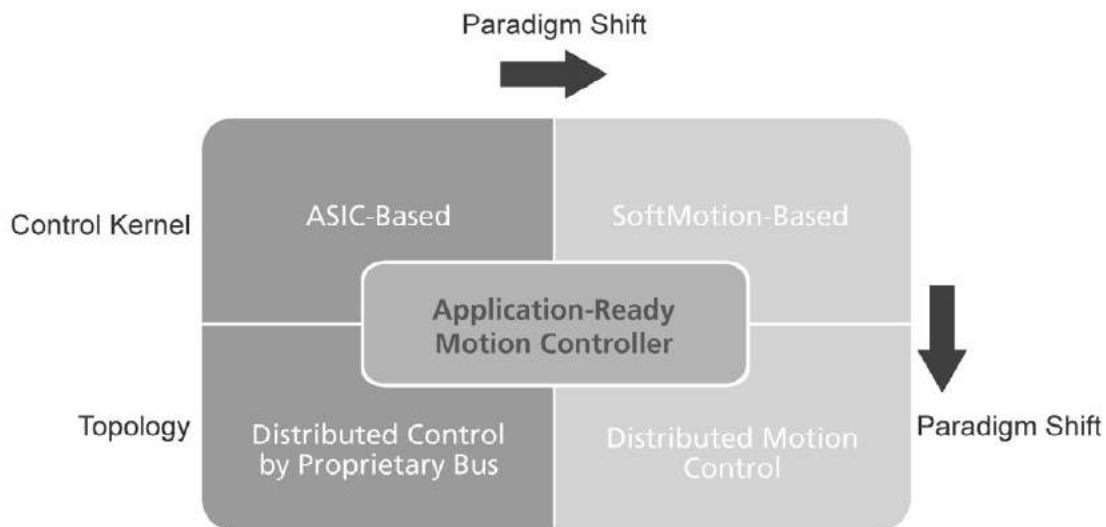

**Application-ready Motion Control Platform Related Technology Chart**

### ASIC-based Motion Control

Since the 1990's, Advantech has been developing several motion control boards with ASIC-based technology. Based on the ASIC kernel, the boards are digital signal type and connected with servo drives and motors to build a system. The pulse train speed and resolution will determine the control precision and response. Advantech's motion control team implemented application-ready libraries to fulfill the different machines in industry. The ASIC-based series boards are for GMC (General Motion Control) purposes to provide faster time-to-market with robust and cost-effective market adopters.

### Distributed Motion Control

As industrial Ethernet technology moves forward to increase response times and accurate time-deterministic precision, using real-time Ethernet is the future trend and benefits many machine builders with open standards. Distributed motion control can significantly reduce wiring efforts and cost in significant ways. In the past, fieldbus control was proprietary and had lower response times. Machine builders only have limited options in the market. However, open standard real-time Ethernet is the next generation. This technology will be also applied to a variety of Advantech platforms to offer application-ready motion control platforms with real-time Ethernet technology.

### SoftMotion-based Motion Control

In order to meet increasingly demands for complexity of trajectories, such as Gantry control & synchronization, and voltage signals for speed/torque control, Advantech's motion control team developed SoftMotion-based motion controllers and provides application-oriented & customization services. The SoftMotion technology is a control kernel executed by software which can run in DSP-based, RISC-based and X86-based CPUs with real-time extension. This technology gives flexibility in system implementation and the possibility to integrate third party real-time I/O control boards.

### Features and Benefits of Common Motion APIs

Most machine builders and system integrators face library integration headaches from different vendors and different boards. Moreover, re-programming applications are necessary when the motion control boards are changed or upgraded. Advantech's motion control team delivered the common motion API concept and developed the common motion library to reduce time-consuming on this task and give faster time-to-market if any upgrading request exists. The common motion API concept is applied to all of Advantech's motion controllers.

### Application-Ready Motion Control Platform


In any vertical specific application, machine builders and system integrators are looking for application-ready control platforms. The main reasons for this consideration are system integrity and system stability. Compared with plug-in motion controllers plus industrial PCs, the application-ready motion control platform provides a well-designed system with validation to guarantee stability. Furthermore, this concept can bring higher add-on value to system integrators and machine builders.



## Complete Application-Ready Platforms for General Motion Control Tasks

Advantech offers application-ready platforms that range from industrial workstations and industrial-grade CPUs, to motion control, encoder input and isolated I/O cards for general motion control (GMC) applications such as SMT/PCB, semiconductor and LCD manufacturing machinery. Advantech provides a full-range of industrial computing platforms that include high-brightness LCD displays, keypads, up to 20-slot backplanes and redundant power supplies for machine builders.

Nowadays general motion applications are divided into two functions - centralized and distributed motion control solutions. For centralized motion control, ASIC-based motion controllers are entry level that allow customers to easily build their own motion machines. As complicated and high performance applications are increasing, Advantech has recently developed SoftMotion control modules which are DSP-based to help customers do more tasks that ASIC-based motion modules can't do, such as gantry control, trajectory planning, electrical-CAM and so on. Furthermore, in order to enhance performance and stability, customized firmware in SoftMotion will be possible and can add secure protection for authorization. Advantech provides 2,4,6 and 8 axis motion modules to fulfill the different motion applications.

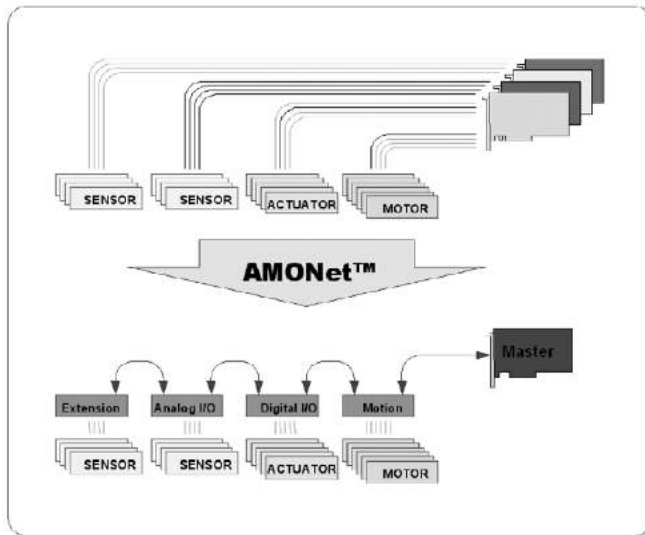

Wire-Saving/Long-Distance

## AMONet - Advantech Distributed Motion Control Solutions

Motion control is growing in complexity as the number of axis in newly developed machines with motion control increases each year. Distance is also becoming an issue, as motors are located further and further away from the host computer. AMONet (Advantech Motion Network) was engineered to tackle the problems of increasing spending on wiring and maintenance of these complex motion control systems, and it also gets rid of distance limitations.


The first series of distributed motion control products from Advantech are called the AMONet RS-485 Series. AMONet RS-485 products are categorized as Master cards or Slave modules. While the Master card is kept in the host PC, the slave modules can be distributed so that they are next to motor drivers on the factory floor. The communication speed between the AMONet RS-485 slave modules can be up to 20 Mbps. This makes it possible to scan 2048 I/O points within 1.04 ms (or 1024 I/O points in 0.56 ms). Furthermore, an AMONet RS-485 master will update the I/O status automatically, and map data into local memory. Software running on the host PC can then read the status by simply reading the onboard memory, so no polling of slave modules is necessary.

Each port of a master card can control up to 2048 I/O connections or 256 motion axes, so future extensions are easily implemented. The distance between a master card and its slave modules can be up to 100 meters, and this distance is covered with a cost-effective Cat 5 network cable. In addition to saving wiring costs, debugging and maintenance are also simplified.

Another advantage of AMONet RS-485 is its compatibility with motor drivers from different vendors. Advantech provides specially designed wiring boards for popular motion drivers from vendors such as Panasonic, Mitsubishi, Yaskawa and Delta. This makes configuration easier, as pin-to-pin cables can be used. Having a selection of motor vendors can also be an advantage when sourcing of a certain motor is difficult.

Motion control and I/O functions with AMONet RS-485 use the same library. This unique feature saves time, as programmers do not need to study both a motion library and an I/O library. You can also connect to a manual pulse generator directly to adjust and calibrate the system without having to write programs first.

AMONet makes machine building with motion control easier. The savings made on wiring and programming effort, as well as the compatibility with a wide range of popular motors have already led to many requests for AMONet products.

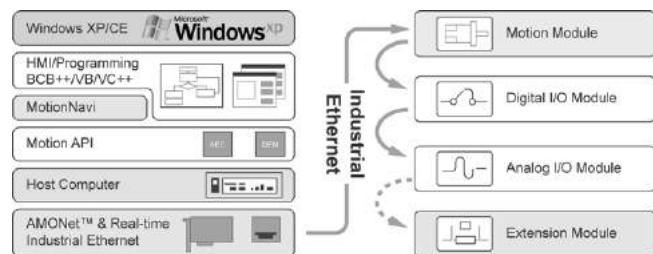

System Architecture

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Motion Control Overview

## A Broad Array of Products for Motion Control

Advantech's full product offering accommodate all your motion control needs. You can choose centralized, pulse type, position control motion cards with different axis numbers equipped with different functions. And you can decide the cards based on different machine configurations, features and costs. Advantech provides a common motion API that is the same for all motion control cards and our SDK also includes DOTNET components, G-codes and complete sample codes for major development environment. Advantech also provides distributed motion and IO control solution. For AMONet distributed solution, we provide master card, 2-axis/4-axis motion modules and multiple DIO modules. AMONet solution can help reduce overall wiring costs with the simple wiring design and offer the flexibility to easily adding new modules to fulfill the requirements of changing axis/IO configuration or long distance installation between modules. Advantech also provide the motion and IO control solution of EtherCAT. The master card can directly connect to EtherCAT Servo drivers and Advantech ADAM-5000/ECAT IO system with multiple DIO and AIO slave modules. The solution can perform multi-axis synchronous move and high speed IO capability coming with EtherCAT protocol.


## The Differences Between Centralized & Distributed Motion Control

Machine control system architectures generally fall into two categories - centralized or distributed. In a centralized system, all control loops including logic, trajectory generation, and PID control, are executed on a single processor. In a distributed system, the trajectory generation and logic control executes in the central processor, but the PID control loop is executed in the intelligent slave module. A distributed approach gives more processing power, while it reduces overall wiring cost and system complexity.


The Distributed Motion Control Products are categorized in two groups - Master Cards and Slave Modules. Communication between master and slave is based on AMONet or EtherCAT, which saves wires, transmits over long distances at high speeds, and has time-deterministic features.

The communication interface between master and host PC is based on memory mapping. Various functions can be chosen on the slave modules, and the industrial DIN-rail mountable design makes it easy to distribute them in the field. The master card collects information from slave modules and publishes the data to its host PC, and vice versa.

### Centralized Motion Control

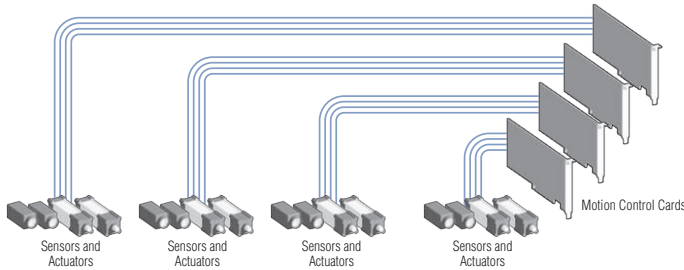


### Distributed Motion Control

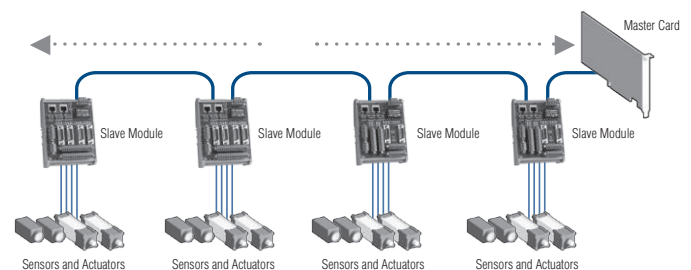

## SoftMotion-based Motion Control

Advantech develops DSP-based SoftMotion control cards which enable the simplified utilization of complex motion manipulation involving JOG, PTP, linear and circular interpolation, multiple axes synchronized motion, and etc. For highly flexible programming features, it has the possibility to offer motion kernel customization. For high performance FPGA, high execution rate DSP, and Dual-Port RAM (DPM) technology, SoftMotion control cards can support faster encoding speeds, higher speed position comparison, and trigger pulse outputs over cards which use ASIC motion IC. SoftMotion controllers can provide programmable acceleration and deceleration to eliminate jerk and smooth velocity profile. For each axis, individual unlimited point tables can realize seamless continuous movements. These tables are also able to combine linear and arc segments. Based on the Common motion API—DSP & FPGA architectures, Advantech provides customers much easier programming environment and robust motion control.

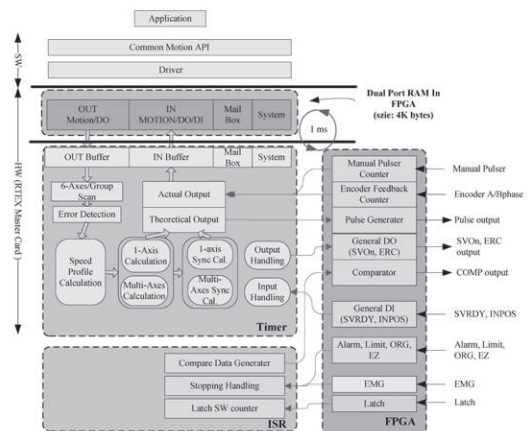

## Application-Ready Motion Control Platforms - MIC Series

The new MIC-3100 series of modular industrial computers are the best choice as automation platforms for all types of critical applications. They are built upon proven technologies to offer most rugged flexibility, but at a reasonable cost. In brief, they provide three times the value of using traditional PCs, whilst only costing a little more, which means you get to enjoy better performance with greater affordability and value.

There are three features below comparing to traditional Box PC:

- Reliability** : Hard Metric Connector provides unmatched robustness for avoiding vibration problem. The anti-vibration spec is 2G for operating condition. 3G is for machine shipping.
- Availability**: Front access & hot swap design minimize maintenance effort, user can reduce the maintain cost.
- Flexibility**: Patented design can work with standard half size PCI cards. User can integrate solution with reasonable price easy.

MIC-3100 series are front accessible and the highly reliable nature of CompactPCI makes it the perfect choice for industrial applications.



# SoftMotion Introduction

## Advantech's SoftMotion Introduction


SoftMotion is Advantech's important core technology in the equipment automation field. Compared to ASIC motion control solutions, Advantech's Machine Automation Team independently developed its own SoftMotion control technology and uses the FPGA (Field Programmable Gate Array) and DSP (Digital Signal Processing) as the core-computing hardware platform. Because of SoftMotion, which is developed into the software architecture, excludes the inherent limitations of ASIC specifications Advantech is able to offer the expertise of professional motion control for our customers and provides custom firmware to optimize customer's devices control as well as to minimize their needs for programming. Through SoftMotion technology enhancements, Advantech offers critical technologies in EMA (Electronic Machine Automation) and TMA (Traditional Machine Automation) fields. Meanwhile, based on the three motion control architectures (centralized, distributed and embedded), Advantech's comprehensive product offering helps our customers to continuously progress their technologies, so as to create a win-win opportunity.

Supporting Advantech's PCI-1245/1245E/1245L/1265/1285/1285E series, SoftMotion's features are described below:




### JOG Move

Manually control the axis to directly move within a fixed (predefined) amount of position or continuously in the +/- direction along all axes via external signals; with this feature, users can manually control the movement while reducing CPU loading without consuming system resource.

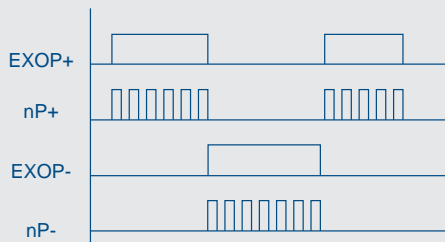


### Handwheel Move

Use a handwheel to control a motor to rotate positively or negatively; also, users can define parameters for or use external handwheels to control axial movement.

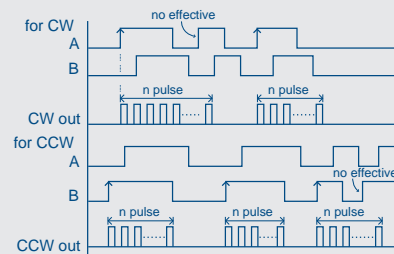


### Trapezoidal & S-Curve Profile

Users can issue commands to configure movement profiles (initial speed, acceleration, deceleration, maximum speed and acceleration onset rate (or called jerk which is for S—speed-curve movement)) and control a motor to move based on predefined speed curves such as the trapezoidal curve or S-curve (second degree curve).

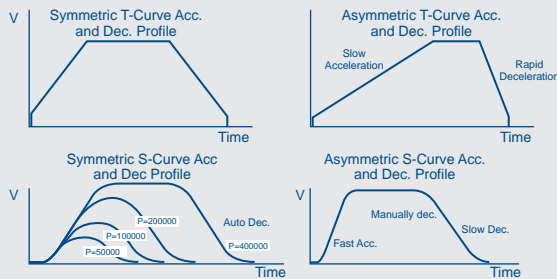

### Programmable Acceleration and Deceleration

Programmable to define the rate of acceleration and deceleration and configure acceleration curve profile (the initial speed, maximum speed, acceleration, deceleration, Jerk) that best meets user needs. Acceleration and deceleration rates can be set independently to ensure the movement better & smooth!

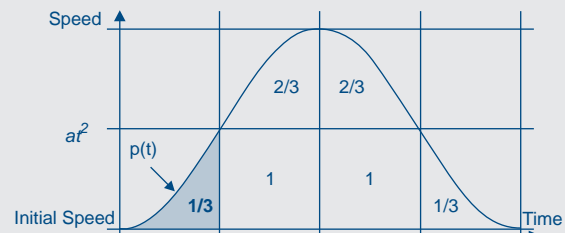




### Homing

SoftMotion supports more than 10 homing modes to fit into the mechanical design.

**MODE1\_Abs:** Limited to using ORG only, movement (direction) → ORG trigger → stop  
**Example:** Positive direction; ORG logic: trigger on a high voltage level

**MODE2\_Lmt:** Limited to using EL only, movement (direction) → EL trigger → stop  
**Example:** Positive direction; EL logic: trigger on high voltage level


**MODE3\_Ref:** Limited to using EZ only, movement (direction) → EZ trigger → stop  
**Example:** Positive direction; EZ logic: trigger on high voltage level

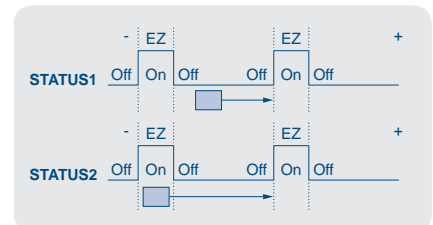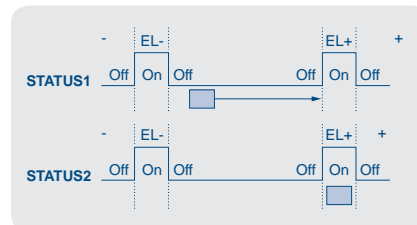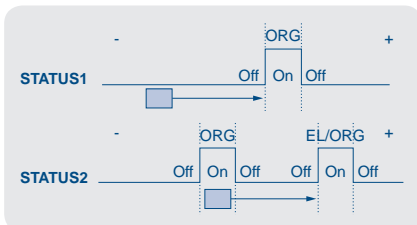


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# SoftMotion Introduction


**MODE4\_Abs\_Ref:** ORG + EZ, movement (direction) → ORG trigger → stop → movement (direction) → EZ trigger → stop  
**Example:** Positive direction; ORG logic: trigger on high voltage level; EZ logic: trigger on high voltage level

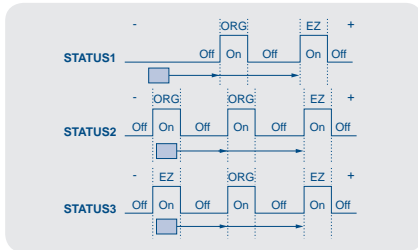


**MODE5\_Abs\_NegRef:** ORG + negative EZ, movement (direction) → ORG trigger → stop → movement (negative direction) → EZ trigger → stop  
**Example:** Positive direction; ORG logic: trigger on high voltage level; EZ logic: trigger on high voltage level

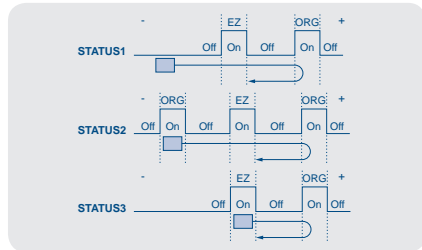


**MODE6\_Lmt\_Ref:** EL + negative EZ, movement (direction) → EL trigger → stop → movement (negative direction) → EZ trigger → stop  
**Example:** Positive direction; EL logic: trigger on high voltage level; EZ logic: trigger on high voltage level

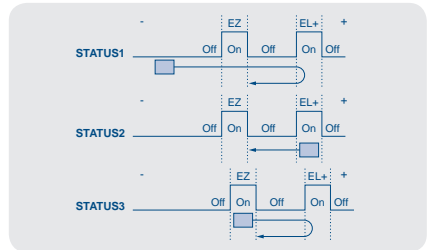


**MODE7\_AbsSearch:** limited to searching ORG only, movement (direction) → ORG → stop  
**Example:** Positive direction; EL logic: trigger on high voltage level; EL logic: trigger on high voltage level

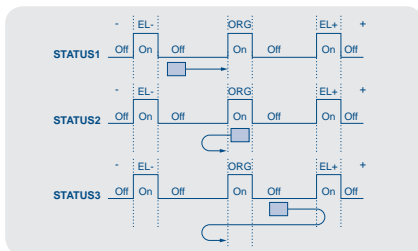


**MODE8\_LmtSearch:** Limited to searching EL only, movement (direction) → EZ search → stop  
**Example:** Positive direction; EL logic: trigger on high voltage level

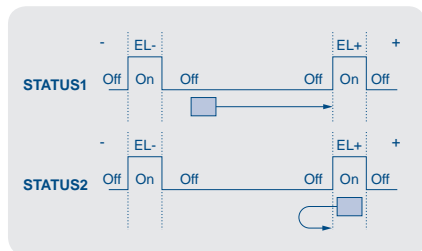


**MODE9\_AbsSearch\_Ref:** Search ORG+EZ only, movement (direction) → ORG search → stop → movement (direction) → EZ trigger → stop  
**Example:** Positive direction; ORG logic: trigger on high voltage level; EL logic: trigger on high voltage level

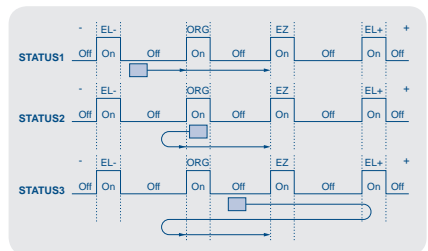


**MODE10\_AbsSearch\_NegRef:** Search ORG+ negative EZ, movement (direction) → ORG search → stop → movement (direction) → EZ trigger → stop  
**Example:** Positive direction; ORG logic: trigger on high voltage level; EL logic: trigger on high voltage level; EZ logic: trigger on high voltage level

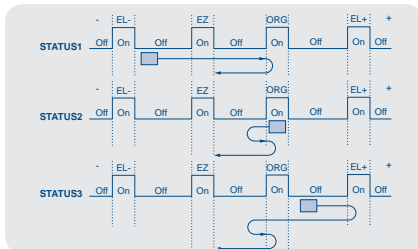


**MODE11\_LmtSearch\_Ref:** Search EL+ negative EZ, movement (direction) → EL search → stop → movement (negative direction) → EZ trigger → stop  
**Example:** Positive direction; EL logic: trigger on high voltage level; EZ logic: trigger on high voltage level

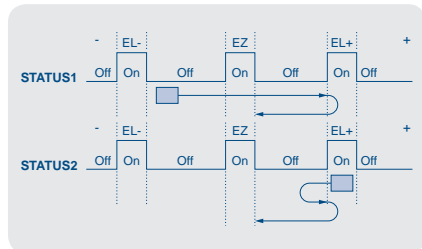


**MODE12\_AbsSearchRefind:** Search ORG + Refind ORG, movement (direction) → ORG Search → stop → movement (negative direction) → Leave ORG(FL) → stop → movement (negative direction) → Refind ORG(FL) → stop  
**Example:** Positive direction; ORG logic: trigger on high voltage level; limit logic: trigger on high voltage level

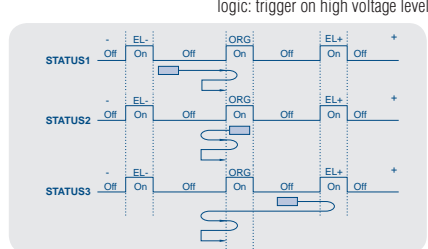


**MODE13\_LmtSearchRefind:** Search EL + Refind EL, movement (direction) → EL Search → stop → movement (negative direction) → Leave EL(FL) → stop → movement (negative direction) → Refind EL(FL) → stop  
**Example:** Positive direction; limit logic: trigger on high voltage level

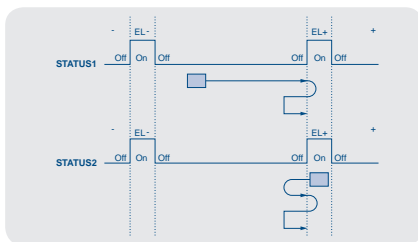

**MODE14\_AbsSearchRefind\_Ref:** Search ORG + Refind ORG + EZ, movement (direction) → ORG Search → stop → movement (negative direction) → Leave ORG(FL) → stop → movement (negative direction) → Refind ORG(FL) → stop → movement (direction) → EZ trigger → stop  
**Example:** Positive direction; limit logic: trigger on high voltage level; ORG logic: trigger on high voltage level

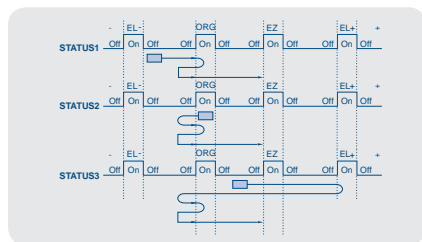

**MODE15\_AbsSearchRefind\_NegRef:** Search ORG + Refind ORG + NegEZ, movement (direction) → ORG Search → stop → movement (negative direction) → Leave ORG(FL) → stop → movement (negative direction) → Refind ORG(FL) → stop → movement (Negative direction) → EZ trigger → stop  
**Example:** Positive direction; limit logic: trigger on high voltage level; ORG logic: trigger on high voltage level

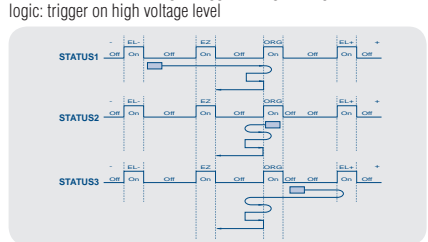




## MODE16\_LmtSearchRefind\_Ref:

Search EL + Refind EL, movement (direction) → EL Search → stop → movement (negative direction) → Leave EL(FL) → stop → movement (negative direction) → Refind EL(FL) → stop → movement (negative direction) → EZ trigger → stop

**Example:** Positive direction; limit logic: trigger on high voltage level



## 3-axis Arc Interpolation

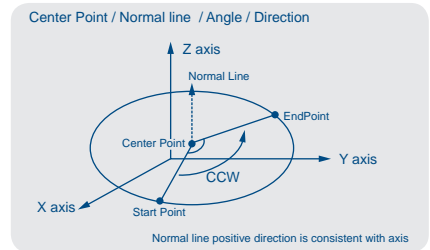
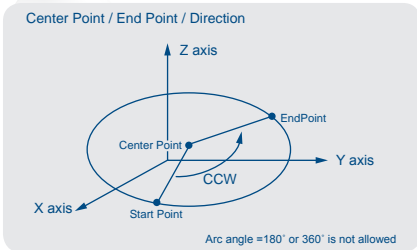
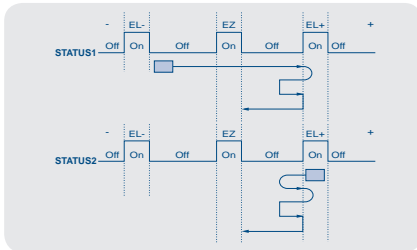


## Helical / Spiral Interpolation

Helical / spiral movement by interpolation defined by

- (1) center position
- (2) terminal point on the circular route or points along the circular route
- (3) terminal point on the circular route and Z axis movement.



To perform interpolation up to 2+1 axes for helical / spiral movement.

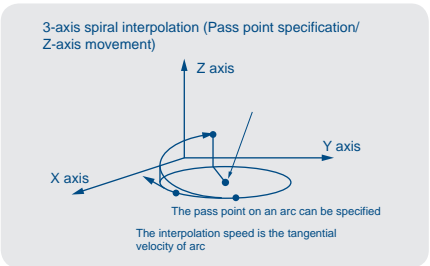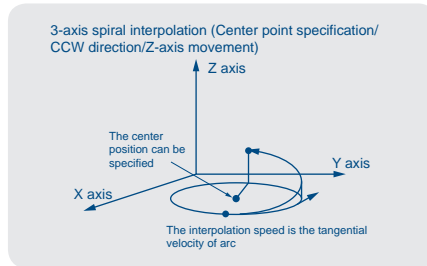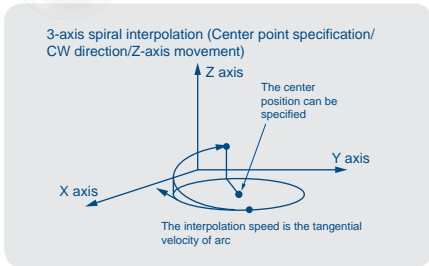



## Multi-axis (Group) Motion

- Group settings: up to 3 group settings
- Linear interpolation: up to 8 axes
- Speed override is available

## 3-axis Linear Interpolation

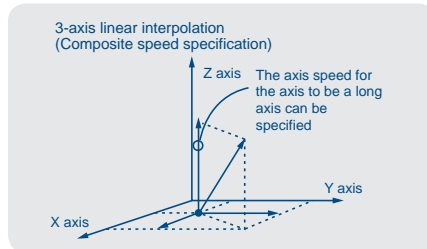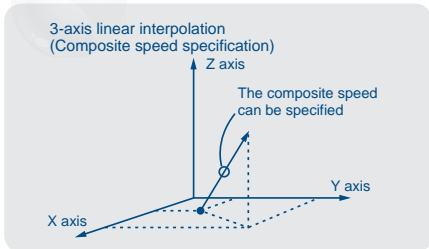

## 2-axis Linear Interpolation

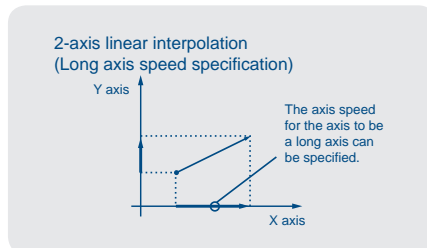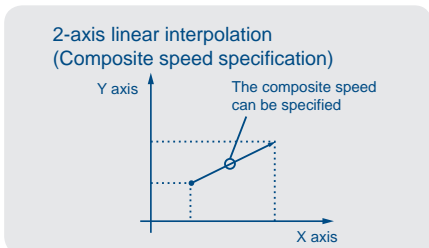


1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards


# SoftMotion Introduction

## 2-axis Circular Interpolation


2-axis circular interpolation  
(Center point specification/CW direction)

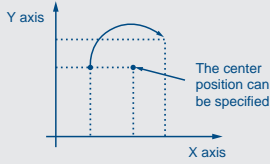

2-axis circular interpolation  
(Center point specification/CCW direction)

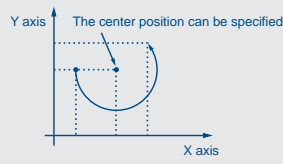


2-axis circular interpolation  
(Pass point point specification)

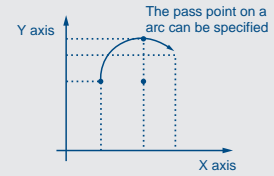


### Backlash Compensation

In order to enhance ball screw repeatability precision, special algorithms and commands can be adopted to eliminate these errors and offset their inherited weakness in mechanism design.

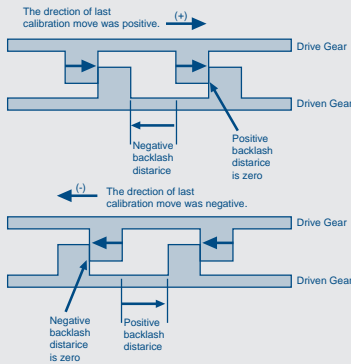


### Superimposed Move

Change the current state of motion by superimposing new commands onto existing movement. E.g. the expected position and speed are 5,000 and 300. The state of motion is changed by superimposing position 1,000 and speed 100.

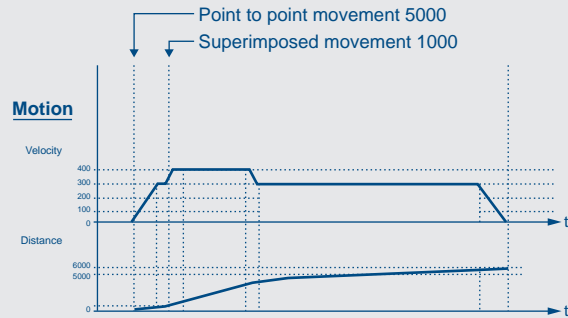


### Tangential Following

The knife control of cutting machine is typical application. For Z axis movement, a motor follows the X-Y movement and curve. As shown below, the tangential direction of the circular movement for the Z axis on this X-Y dimension will be adjusted instantly to ensure that the radius between its movement and the circular trace stays at 90 degrees.

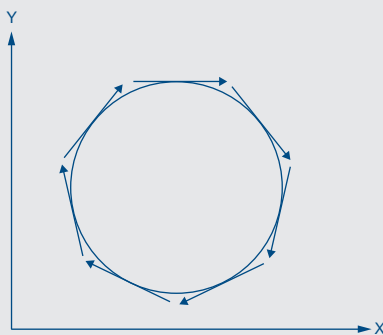

### Position Window Output

The digital output voltage level within a certain position window can be controlled by using commands.

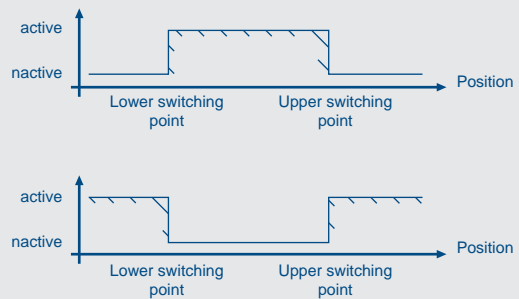




## Position / Velocity Override


Under certain conditions, users can use commands to set up and change the position of a terminal point and movement speed to fulfill certain purposes. The terminal points and movement speed can still be changed on the fly.

### Position / Velocity Override

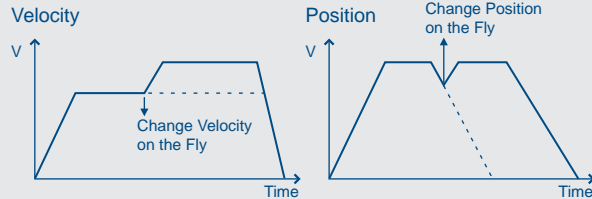

## Simultaneously Start/Stop


Simultaneously start/stop can be achieved by issuing commands to configure settings to trigger multiple axes and multiple cards from external signal sources. Software control via commands is also supported.

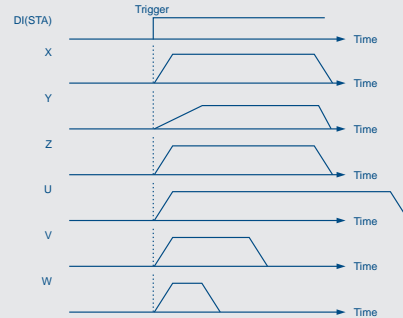


## Trigger Function

- Single compare & trigger: trigger on a single position.
- Table compare & trigger: multi position triggers during fixed intervals or variable intervals can be achieved via commands.
- Linear compare & trigger: triggers on any position within 2D or 3D space can be achieved via commands.
- Compare and toggle trigger: as shown in the bottom right figure, we can set to invert DO after triggers of a certain position – ex. high voltage level at the first point after triggers for DO, low voltage level at the second point after triggers for DO, and high voltage level again at the third position and ends with a low voltage level at the fourth point.


### Single Compare & Trigger

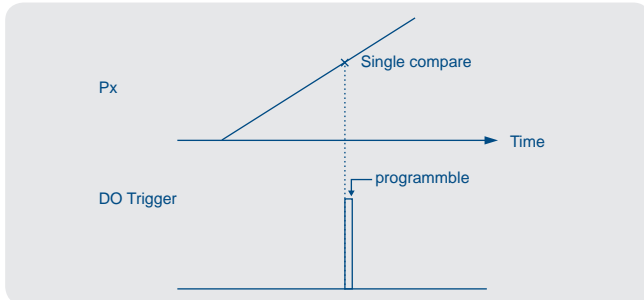


### Table Compare & Trigger

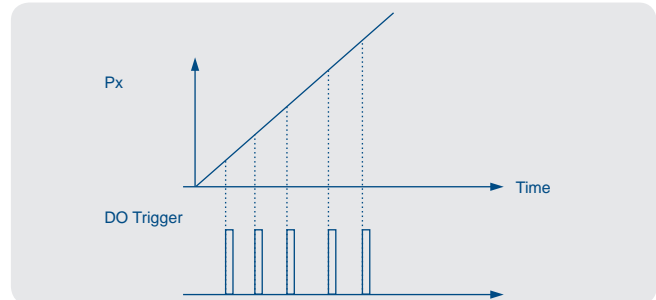

### Linear Compare & Trigger

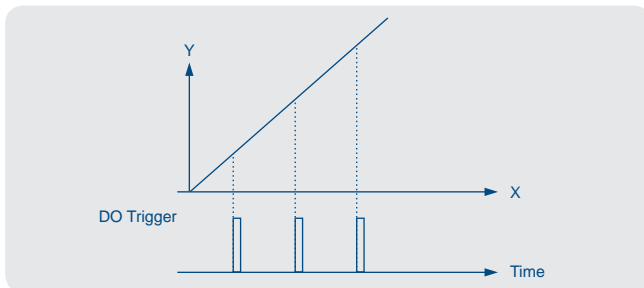


### Compare and Toggle Trigger

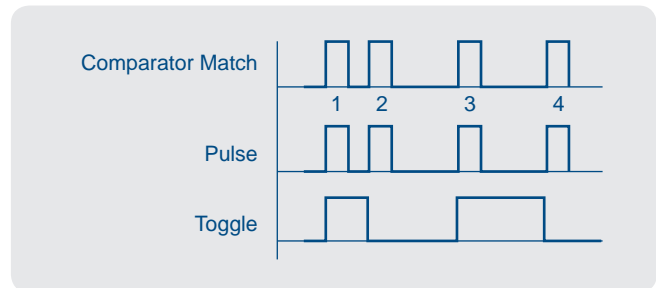

## E-Gear

Multi-axial and absolutely synchronized controls can be achieved through SoftMotion algorithms and parameter configurations. With E-Gear, users can enforce configurations and controls over master and slave gears through their relationship. This not only simplifies the mechanism designs, but also saves mechanism space and enforces absolute and synchronized controls.

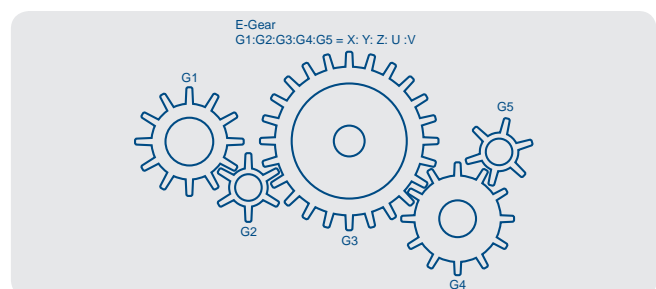



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# SoftMotion Introduction




## Velocity Motion

Via commands, users can control motors to operate continuously under a defined speed.

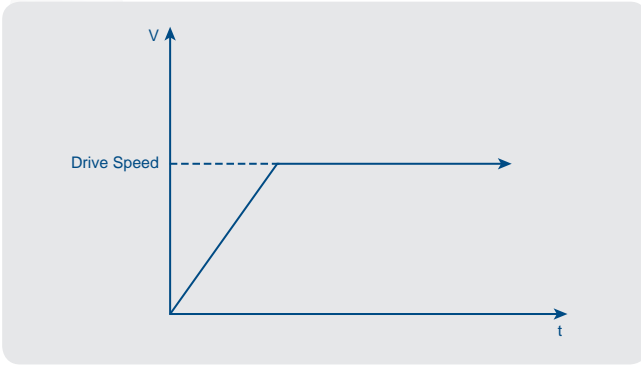



## Multi-Axis Point to Point Motion

Entering terminal points of axis with relative and absolute positions, users can configure the motor to arrive at the final position configured. With this feature, users can activate multi-axial control and simultaneous start/stop on the same or different cards.

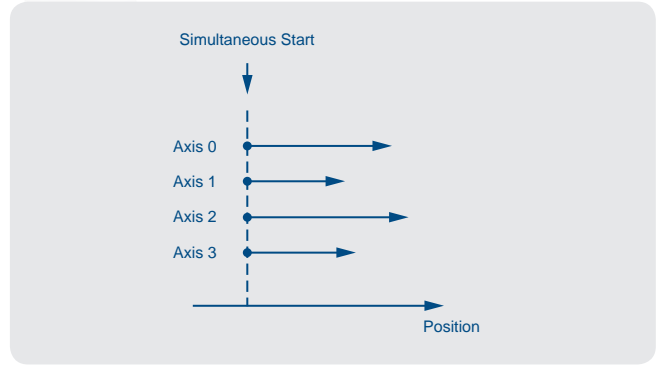


## E-Cam

The relationship of relative movement between master (shaft axis) and slave (follower axis) axes can be established from following tables and it can simulate moves of the cam and provide multiple movement models based on the relationship.

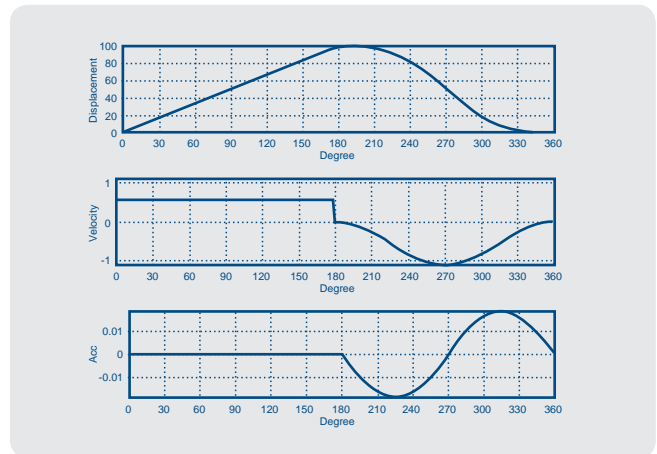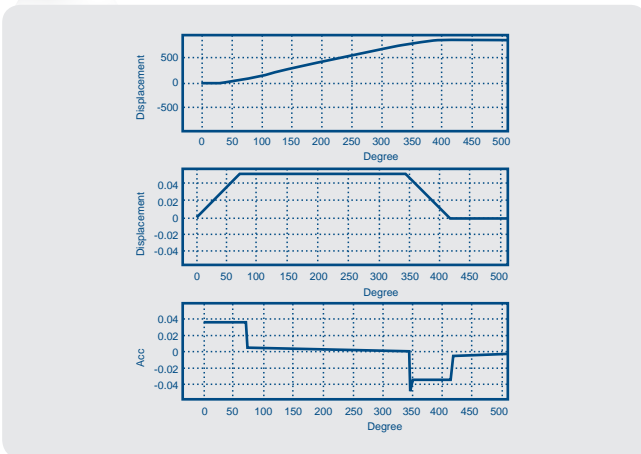

## Path Table Motion

- Supports up to 3 describing path tables and each table can be up to 10,000 points
- Supports linear and circular interpolation commands
- Supports start/stop motion list as descriptive commands for movement control
- Supports Pause/ Resume commands
- Supports Auto Blending
- Supports Z axis following movement

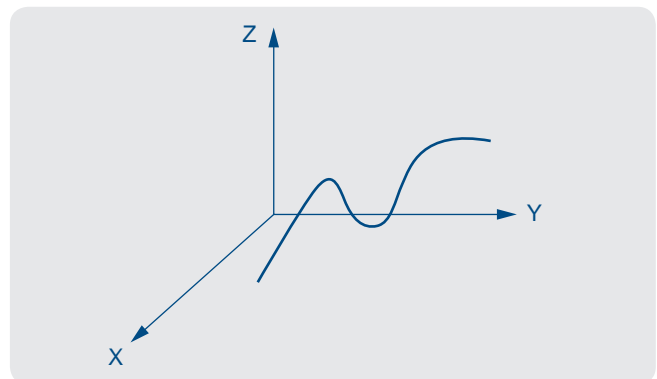




# SoftMotion Introduction




## Look Ahead

By configuring customized parameter profiles (e.g. feed speed and acceleration) users can use the forward looking preprocessing module to enforce movement control and continuous small segmented linear-wise trajectories processing procedures.

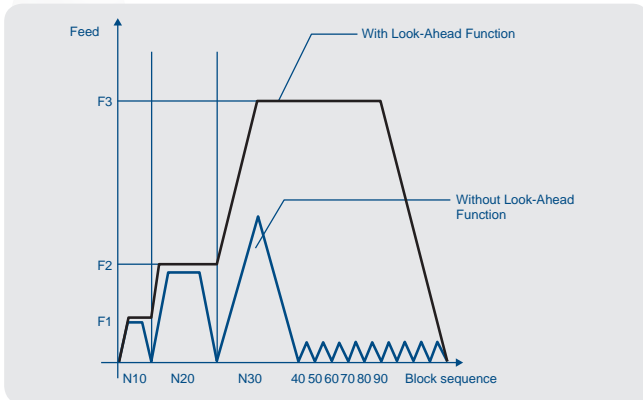


## Up to 3 Groups of Vectors Moving

With SoftMotion algorithms designed to enhance DSP and FPGA interaction, users can use the system to perform interpolated movement: to simplify the design of machines for mechanism designers.

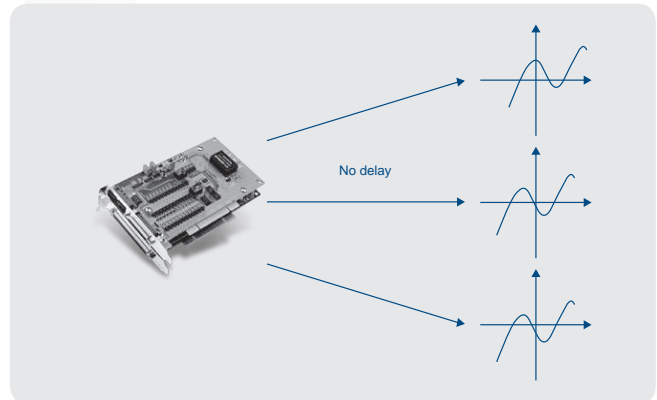


## Event Interrupt

Instantly notify users with event interruption alerts when specified event occur. So, users can activate contingency procedures based on event condition.

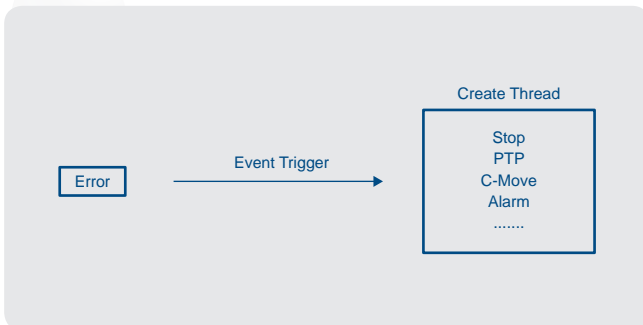


## Position Latch

Record down the theoretical and actual motor positions when corresponding sensors are triggered.

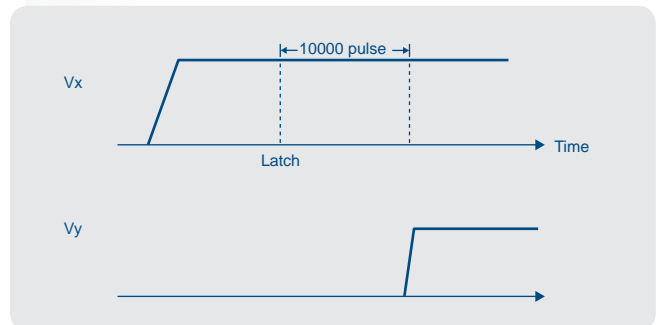

## Gantry Control

Ensure that the error deviation of absolute mutual parallel axes positions during active sessions remain within the predefined range via special algorithms to achieve gantry controls.

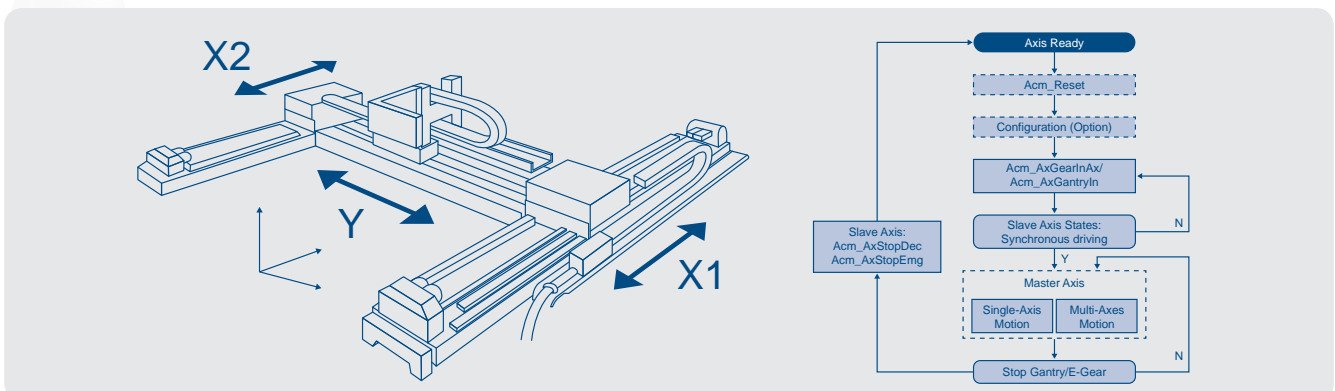


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Common Motion API Introduction

## Architecture and Features of Common Motion API

### Advantech's New Generation Motion Control Software

System integrators often encounter difficulties when an engineer may not be familiar with the different syntaxes during the integration of various motion control cards. And what both of them the most is that when the system has to be upgraded, the problems often occur with rewriting the program as well as increasing the development time. To reduce these difficulties, Advantech has introduced a unified interface - Common Motion API- which provides a single syntax and interface, regardless of the types of motion control card the integrator chooses to use. The design can proceed under a single syntax interface to save development time and speed up the time to market. The ACM (Advantech Common Motion) architecture defines a single interface which consists of three types of operation objects, including Device, Axis and Group and each object has its own Property, Method and State.

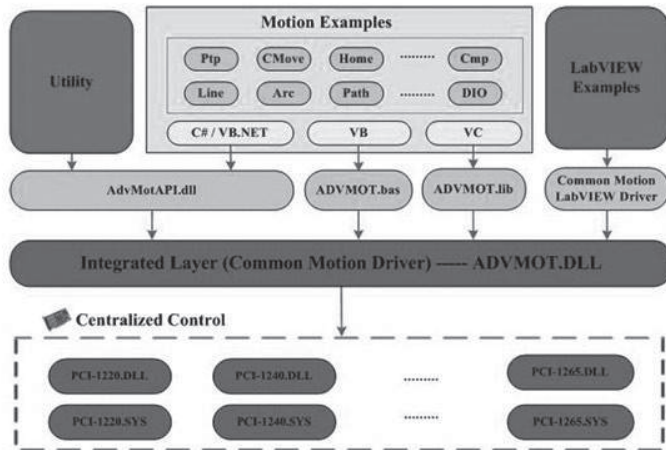

### Features of Common Motion API

- Provides complete debugging tool utility
  - Hardware wiring testing
  - Software functional testing
  - Condition & status monitoring
- Provides the dedicated APIs for different applications
- Simplifies API calls process
- Improves the integration
- Supports scalable hardware
  - Supports the existing hardware and future hardware development, such as PCI-1245/45E/45L/65/85/85E series

Through the above advantages and the lower learning threshold, integrators can significantly reduce development time and follow-up maintenance work!

## 5 Compositions in Common Motion API

### 1. Easy-understanding Naming Rule

#### Property

- FT\_XXX: Feature Property
- CFG\_XXX: Configuration Property
- PAR\_XXX: Parameter Property

#### Method

- Acm\_DevXXX(): Use 'Device' as a control unit
- Acm\_AxXXX(): Use 'Axis' as a control unit
- Acm\_GpXXX(): Use 'Group' as a control unit

#### Event

- EVT\_DevXXX
- EVT\_AxXXX
- EVT\_GpXXX

### 2. Object-oriented Interface

#### 3 Categories of Property

- Feature Property
- Configuration Property
- Parameter Property

#### 3 Categories of Method

- Use 'Device' as a control unit
- Use 'Axis' as a control unit
- Use 'Group' as a control unit

#### 3 Categories of Event

- EVT\_DevXXX
- EVT\_AxXXX
- EVT\_GpXXX

### 3. Clear Motion Control Unit

- Single-axis: Axis Object
- Multi-axis: Group Object
- DI/O, AI/O: Device Object

### 4. Simple Integer Type


- U/I/F stands for different types of integers and the following numbers stand for bits.

New Type	Windows Data Type	Description
U8	UCHAR	8-bit unsigned integer
U16	USHORT	16-bit unsigned integer
U32	ULONG	32-bit unsigned integer
U64	ULONGLONG	64-bit unsigned integer
I8	CHAR	8-bit signed integer
I16	SHORT	16-bit signed integer
I32	INT	32-bit signed integer
I64	LONGLONG	64-bit signed integer
F32	FLAOT	32-bit Floating point variable
F64	DOUBLE	64-bit Floating point variable

- Example: U32 Acm\_AxMoveRel (U32 AxisHandle, PF64 Distance)

### 5. Detailed Error Classification

No	Error Code	Classification	Description
1	0	Success	Set up successfully
2	0x01000001 ~0x010000ff	Warning	The parameter is incorrect but do not affect performance
3	0x8000xxx	Function Error	Cannot execute because the parameter is incorrect
4	0x80001xxx	Communication Error	Cannot execute because of communication errors
5	0x80002xxx	Motion Error	Cannot execute because of motion errors
6	0x80003xxx	DAQ Error	Cannot execute because of data acquisition errors

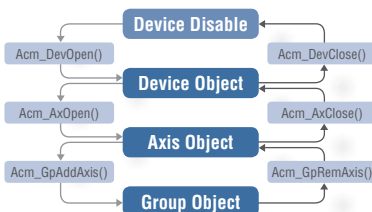

# Centralized Motion Control Solution Selection Guide

## Centralized Motion Control Solutions



Category		Motion Control						Encoder		
Bus		PCI						ISA	PCI	ISA
Model		PCI-1220U	PCI-1240U	PCI-1243U	PCI-1245L	PCI-1245E PCI-1285E	PCI-1245 PCI-1265 PCI-1285	PCL-839+	PCI-1784U	PCL-833
Axis	Number of Axis	2	4	4	4	4/8	4/6/8	3	-	-
	Linear Interpolation	✓	✓	-	✓	✓	✓	-	-	-
	2-axis Circle Interpolation	✓	✓	-	-	-/✓	✓	-	-	-
Advanced Functions	Encoder Channels	2	4	-	4	4/8	4/6/8	-	4	3
	Limit Switch Input Channels	4	8	8	8	8/16	8/12/16	6	-	-
	Home Input Channels	2	4	4	4	4/8	4/6/8	3	-	-
	Emergency Stop Input Channels	1	1	1	1	1	1	-	-	-
	Slow Down Limit Switches	4	8	-	8	8/16	8/12/16	6	-	-
	General Purpose DI Channels	6	12	8	16	16/32	16/32/32	16	4	2
	Servo On Output Channels	2	4	-	4	4/8	4/6/8	-	-	-
	General Purpose DO Channels	8	16	8	16	16/32	16/32/32	16	4	-
	Analog Input Channels	-	-	-	-	-	2 (PCI-1265 only)	-	-	-
	BoardID Switch	✓	✓	✓	✓	✓	✓	-	✓	-
	Position Compare Event	✓	✓	-	-	-	✓	-	-	-
	Position Latch	-	-	-	-	-	✓	-	-	-
	Dimensions (mm)		175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	185 x 100	185 x 100
Connector		50-pin SCSI	100-pin SCSI	DB62	100-pin/ 200-pin SCSI	100-pin SCSI 2x100-pin SCSI	100-pin SCSI 2x100-pin SCSI	1 x DB37 2 x 20-pin	DB37	1 x DB25
Wiring Boards		ADAM-3952 ADAM-3955 ADAM-3956	ADAM-3952 ADAM-3955 ADAM-3956	ADAM-3962	ADAM-3952 ADAM-3955 ADAM-3956	ADAM-3952 ADAM-3955 ADAM-3956	ADAM-3952 ADAM-3955 ADAM-3956	ADAM-3937 ADAM-3920	ADAM-3937	ADAM-3925
Page		2-21	2-21	2-22	2-20	2-19	2-16/ 2-17/2-18	online	online	online

## CompactPCI Machine Automation Solution



Model Name		MIC-3106 MA ARP Solution
Chassis	Power Type	ATX
	Input Voltage	100 ~ 240 V <sub>AC</sub>
	Wattage	180W
Hardware	CPU	Intel Atom D525, 1.8GHz / Intel 3rd Gen. Core i3-3217UE, 1.6GHz
	Memory	2GB / 4GB On board
	Storage	1 x CompactFlash Type II / 1 x CFast 1 x 2.5" SATA HDD
	Graphic	1 x DB15 port
Communication	Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
	USB	3 x Type A / 2 x USB 3.0 Type A
	Serial	2 x RS-232, DB9 connector
Physical	Dimensions (W x H x D mm)	134 x 177 x 238
	Weight (kg)	7 Kg
Page		2-15

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Distributed Motion Control Solution Selection Guide

## AMONet Motion Master Cards



Model		PCI-1202U	PCM-3202P
Bus		PCI	PC/104+
Advanced Functions	General Purpose DI Channels	8	-
	General Purpose DO Channels	4	-
	Remote Motion	✓	✓
	Remote I/O	✓	✓
Dimensions (L x H)		175 x 100 mm	96 x 90 mm
Connectors		2 x RJ45	4 x 10-pin box header
Digital I/O Slave Modules		AMAX-1752, AMAX-1754, AMAX-1756, AMAX-2752SY, AMAX-2754SY, AMAX-2756SY	
Motion Slave Modules		AMAX-1220, AMAX-1240, AMAX-2241/PMA, AMAX-2242/J2S, AMAX-2243/YS2	
Page		2-20	2-20

## AMONet Motion Slave Modules



Model		AMAX-1220	AMAX-1240	AMAX-2241/PMA
Axis	Number of Axis	2	4	4
	Linear Interpolation	✓	✓	✓
	2-axis Circle Interpolation	✓	✓	✓
Advanced Functions	Encoder Channels	2	4	4
	Limit Switch Input Channels	4	8	8
	Home Input Channels	2	4	4
	Emergency Stop Input Channels	1	1	1
	Slow Down Limit Switches	4	8	8
	Servo On Output Channels	2	4	4
	BoardID Switch	✓	✓	✓
	Position Compare Event	-	✓	✓
	Position Latch	-	✓	✓
	Simultaneously Start/Stop among Modules	✓	✓	-
Power Consumption		2 W @ 24 V typical		5 W @ 24 V typical
Dimensions (L x W x H)		141 x 108 x 60 mm		125 x 47.6 x 151 mm
Page		2-21	2-21	2-23

## Isolated Digital I/O Slave Modules



Model	AMAX-1752	AMAX-1754	AMAX-1756	AMAX-2752SY	AMAX-2754SY	AMAX-2756SY
Isolated Digital Input Channels	32	-	16	32	-	16
Isolated Digital Output Channels	-	32	16	-	32	16
Typical Power Consumption	600 mW			1.2 W		
Maximum Power Consumption	2 W			5 W		
Dimensions (L x W x H)	141 x 95 x 60 mm			125 x 47.6 x 151 mm		
Page	2-22	2-22	2-22	2-24	2-24	2-24

# MIC-3106

## CompactPCI Machine Automation Solution



### Features

- Highly robust design for machine automation in harsh environments.
- 2G operational anti-vibration protection. 3G shipping anti-vibration protection
- Air-tight seal connector design for corrosive environments
- Modular design and front hot-swap enabled
- Easily exchange peripheral cards to reduce maintenance costs
- Pulse output up to 5 Mpps; Encoder input is 10 MHz for 4xAB mode
- Independent 4/8-axis motion control
- Up to 8-axis linear, 2-axis circular interpolation function
- 64-ch isolated Digital I/O (32-ch inputs and 32-ch outputs)

### Introduction

The MIC-3106 is a whole new generation of industrial computers using a sophisticated CPCI interface which enables great anti-vibration and ventilation capabilities. The MIC-3106 also supports front hot-swap ability which makes switching cards and maintenance a lot easier. Advantech is proud to present a great value highly robust motion control solution. This model can be equipped with high accuracy 4/8-axis motion control cards (MIC-3245/3285) and a high density 64-ch isolated I/O card (MIC-3756) which provides you with a compact ready to use solution at no extra cost compared to traditional PCI solutions and speed up your system development with this application ready controller.

### Specifications

#### General

- **Input Voltage** 100 ~ 240 V<sub>AC</sub>, ATX
- **Power Consumption** 100 ~ 240 V<sub>AC</sub>
- **Slot** System slot x 1; Peripheral slot x 2
- **ON/OFF Switch** Lockable Toggle Switch
- **Dimension** 134 x 177 x 238
- **Weight** 7kg

#### System Hardware

- **CPU** Intel Atom D525, 1.8GHz / 3rd Gen. Core i3, 1.6GHz
- **Memory** 2GB / 4GB On board
- **Storage** CompactFlash Type II x 1; 2.5" SATA HDD x 1
- **Graphic** DB15 port x 1

#### I/O Interface

- **LAN** 10/100/1000 Mbps, RJ45 connector x 2
- **USB** Type A x 3
- **Serial** RS-232, DB9 connector x 2
- **PS/2** PS/2 x 1

#### Pulse Type Motion Control

- **Number of Axis** 4/8
- **Interpolation** 2~8-axis linear, 2-axis circular
- **Max. Output Speed** 5 Mpps
- **Step Count Range** ±2, 147, 483, 646
- **Pulse Output Type** Pulse/direction (1-pulse, 1-direction type) or CW/CCW (2-pulse type)
- **Position Counters** Range of command and actual position
- **Velocity Profiles** T-Curve, S-Curve
- **Local I/O** Machine Interfaces: LMT+, LMT-, ORG  
Servo Driver Interfaces: ALM, INP  
Position Compare I/O: CMP  
General Digital I/O: MIC-3245:16-ch DI, 16-ch DO ; MIC-3285: 32-ch DI, 32-ch DO  
(RDY/LTC pin can be switchable to general-purpose input and CAM-DO/CMP/SVON/ ERC pin to general-purpose output)

#### Encoder Interface

- **Input Type** Quadrature (A/B phase) or up/down
- **Counts per Enc.** Cycle x1, x2, x4 (A/B phase only)
- **Input Range** 5 ~ 15 V
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Max. Input Frequency** 10 MHz under 4xAB mode

#### Isolated Digital Input

- **Channels** 32

- **Input Voltage Logic** 0: 2 V max.Logic 1: 10 V min. (50 V max.)
- **Interrupt Capable** Ch. 2 (DI00, DI16)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Input Resistance** 5.7 kΩ

#### Isolated Digital Output

- **Channels** 32
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** 100 mA max./channel
- **Opto-Isolator Response** OFF delay (±20%) 5 μs ON delay (±20%) 120 μs

#### Environment

- **Temperature** Operating: 0 ~ 50°C  
Non-Operating: -20 ~ 60°C
- **Humidity (non-condensing)** Operating: 10 ~ 85% @ 40°C  
Non-Operating: 10 ~ 95% @ 40°C
- **Vibration(5 ~ 500 Hz)** Operating: 2Grms (without HDD)  
Non-Operating: 2G
- **Shock (11ms)** Operating: 10G  
Non-Operating: 30G

### Ordering Information

- **MIC3106L2A1401E-T** MIC-3106 chassis w/ MIC-3325D & MIC-3285
- **MIC3106L2A1402E-T** MIC-3106 chassis w/ MIC-3325D & MIC-3245
- **MIC3106H1A1501E-T** MIC-3106 chassis w/ MIC-3328 & MIC-3245
- **MIC3106H1A1502E-T** MIC-3106 chassis w/ MIC-3328 & MIC-3285

#### Accessories

- **PCL-10153PA5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- **PCL-10153PA5LS-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- **PCL-10153YS5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- **PCL-10153MJ3-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- **PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m

#### Packing List


PCL-101100SB-1E	Mini-SCSI-100 Shielded Cable, 1m	w/ 3285: x2 w/ 3245: x1
ADAM-3956-AE	4-Axis 100-pin SCSI DIN-rail motion wiring board	
MIC-3756/3-A	3U cPCI 64-ch Isolated DI/O Card	x 1
PCL-10178-1E	DB-78 Shielded Cable, 1m	x 1
ADAM-3978-AE	DB-78 Wiring Terminal, DIN-rail Mount	x 1

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1245 PCI-1265 PCI-1285

## DSP-based 4/6/8-axis Stepping and Servo Motor Control Universal PCI Card

**NEW**

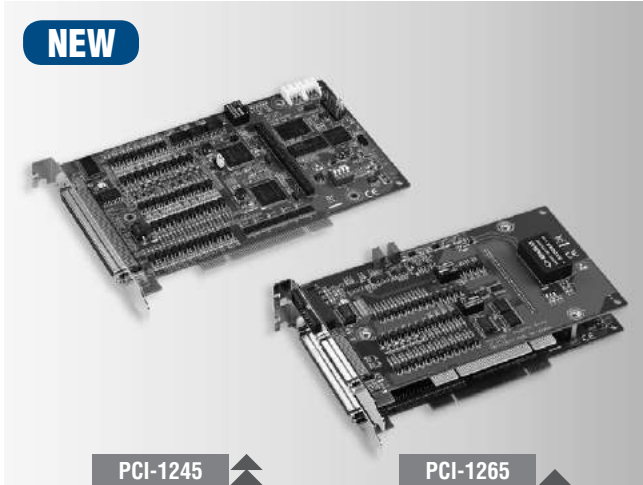

PCI-1245

PCI-1265



### Features

- Encoder input is 10 MHz for 4xAB mode, 2.5 MHz for CW/CCW mode
- Pulse output up to 5 Mpps
- Memory buffer (10K points) for trajectory planning which is designed in DSP
- Supports E-Gear, and helical interpolation
- Supports E-CAM providing 256 points to describe the CAM profiles which buffers located in DSP
- Hardware emergency input
- Watchdog timer
- Position latch
- Position compare triggering up to 100 KHz, and memory buffer is up to 100 K points in DSP
- Programmable interrupt
- Supports gantry mode by semi-closed loop pulse train control
- RDY/LTC-dedicated input channels & SVON/CMP/CAM-DO/ERC-dedicated output channels are switchable for general input and output purposes

### Introduction

PCI-1245/65/85 is a 4/6/8-axis universal PCI (supporting both 3.3 V and 5 V signal slot) stepping/pulse-type servo motor control card designed for applications which need to control interpolation, synchronization among multiple axes, continuous contouring and high speed triggering to integrated machine vision solution. PCI-1245/65/85 utilizes the high-performance DSP and FPGA to calculate the motion trajectories, synchronization timing control for multiple axes and input/output handling to offer functionality, such as up to 4/6-axis linear interpolation, 2-axis circular interpolation, helical interpolation, T/S-curve acceleration/deceleration rate and so on. In addition, Advantech supplies a Common Motion API library, graphical utility and user-friendly examples to decrease programming load, helping users complete configuration and diagnosis easily.

### Specifications

#### Pulse Type Motion Control

- Motor Driver Support** Pulse-type servo/stepping
- Number of Axes** PCI-1245: 4  
PCI-1265: 6  
PCI-1285: 8
- Interpolation** PCI-1245: 2 to 4-axis linear, 2-axis circular, X-Y plane with Z thread helical interpolation  
PCI-1265: 2 to 6-axis linear, 2-axis circular, X-Y plane with Z thread helical interpolation  
PCI-1285: 2 to 8-axis linear, 2-axis circular, X-Y plane with Z thread helical interpolation
- Max. Output Speed** 5 Mpps
- Step Count Range** ±2, 147, 483, 646
- Pulse Output Type** Pulse/direction (1-pulse, 1-direction type) or CW/CCW (2-pulse type)
- Position Counters** Range of command and actual position
- Velocity Profiles** T-Curve, S-Curve
- Local I/O** Machine Interfaces: LMT+, LMT-, ORG  
Servo Driver Interfaces: ALM, INP  
Position Compare I/O: CMP  
General Digital I/O: PCI-1245: 16-ch DI, 16-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)  
PCI-1265: 32-ch DI, 32-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)  
PCI-1285: 32-ch DI, 32-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)
- Analog Input** PCI - 1265: 2

#### Encoder Interface

- Input Type** Quadrature (A/B phase) or up/down
- Counts per Enc. Cycle** x1, x2, x4 (A/B phase only)
- Input Range** 5 ~ 15 V
- Isolation Protection** 2,500 V<sub>DC</sub>
- Max. Input Frequency** 10 MHz under 4xAB mode

#### General

- Bus Type** Universal PCI V2.2
- Connectors** PCI-1245: 1 x 100-pin SCSI female connector  
PCI-1265: 1 x 100-pin SCSI female connector & 1 x 50-pin SCSI female connector  
PCI-1285: 2 x 100-pin mini-SCSI female connector (175 x 100 mm (6.9" x 3.9"))
- Dimensions (L x H)** PCI-1245/1265: Typical: 5 V @ 850 mA  
Max.: 5 V @ 1 A  
PCI-1285: Typical: 5 V @ 300 mA  
3.3 V @ 1.2 A  
Max.: 5 V @ 400 mA  
3.3 V @ 1.5 A
- Power Consumption**
- Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- PCI-1245-AE** 4-axis Stepping/Servo Control Universal PCI Card
- PCI-1265-AE** 6-axis Stepping/Servo Control Universal PCI Card
- PCI-1285-AE** 8-axis Stepping/Servo Control Universal PCI Card


#### Accessories

- ADAM-3956-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board
- ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board
- ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board
- ADAM-39100-AE** 100-pin DIN-rail SCSI Wiring Board
- PCL-101100M-1E/2E/3E** 100-pin SCSI Cable, 1m/2m/3m (for PCI-1245/65)
- PCL-10251-1E/3E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m/3m (for PCI-1245/65 only)
- PCL-101100SB-1E/2E/3E** Mini-SCSI-100 Shielded Cable, 1m/2m/3m (for PCI-1285)
- PCL-10153PA5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- PCL-10153PA5LS-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- PCL-10153YS5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- PCL-10153MJ3-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m

# PCI-1245S

## DSP-based 4-axis SCARA Robot Motor Control Universal PCI Card

NEW

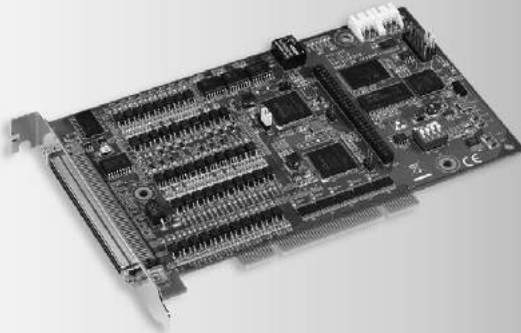

RoHS  
compliant  
CE FCC

### Features

- Pulse output is up to 5Mpps
- Encoder input is 10MHz for 4xAB mode, 2.5MHz for CW/CCW mode
- Fast processing speed provides smooth interpolation
- Support T & S-Curve for joint-space trajectory planning
- Line, Arc, Angle and PTP motion are also supported
- Support both Jog/MPG in Joint/World system
- Support RZ direct coupling structure for various applications
- Adding teaching points through JOG/MPG by Common Motion Utility for Path planning
- Easy integration for robot-vision application
- Position latch
- Position compare triggering up to 100 KHz, and memory buffer is up to 100 K points in DSP

### Introduction

PCI-1245S is 4-axis Robot PCI bus controller board which is created as the SCARA Robot solution for factories looking for maximum value without performance trade off. PCI-interface structure is a great benefit for user to embed into various platforms for flexibility and performance requirement. In addition, ease of integration with bus-level vision solutions and robot motion control for vision guide application.

All Advantech motion controllers are applied to "Common Motion API" architecture which is a unified user programming interface. This architecture can save the effort of application maintenance and upgrade. Both Joint and World coordinate system are supported. T&S-curve speed profile optimization make PCI-1245S has outstanding acceleration / deceleration characteristics. Robot path function and look ahead feature make robot trajectory can be planned in advance and move smoothly in arbitrary path. Lots of fully integrated options such as Virtual Device, .Net support, 3D emulator and much more enable powerful programming, reduced project-developed cycle times and very cost-saving robot solution.

### Specifications

#### Pulse Type Motion Control

- **Motor Driver Support** Pulse-type servo/stepping
- **Number of Axes** 4
- **Interpolation** Line motion, Arc Motion
- **Max. Output Speed** 5 Mpps
- **Step Count Range**  $\pm 2, 147, 483, 646$
- **Pulse Output Type** Pulse/direction (1-pulse, 1-direction type) or CW/CCW (2-pulse type)
- **Position Counters** Range of command and actual position
- **Velocity Profiles** T-Curve, S-Curve
- **Local I/O**
  - Machine Interfaces: LMT+, LMT-, ORG
  - Servo Driver Interfaces: ALM, INP
  - Position Compare I/O: CMP
  - General Digital I/O: 16-ch DI, 16-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)

#### ABS Encoder Interface

- **Input Type** Quadrature (A/B phase) or up/down
- **Counts per Enc. Cycle** x1, x2, x4 (A/B phase only)
- **Input Range** 5 ~ 15 V
- **Isolation Protection** 2,500 V<sub>oc</sub>
- **Max. Input Frequency** 10 MHz under 4xAB mode

#### General

- **Bus Type** Universal PCI V2.2
- **Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1 A
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCI-1245S-AE** 4-axis Stepping/Servo Control Universal PCI Card

#### Accessories


- **ADAM-3956-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board
- **ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board
- **ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board
- **ADAM-39100-AE** 100-pin DIN-rail SCSI Wiring Board
- **PCL-101100M-1E/2E/3E** 100-pin SCSI Cable, 1m/2m/3m
- **PCL-10251-1E/3E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m/3m
- **PCL-10153PA5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- **PCL-10153PA5LS-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- **PCL-10153YS5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- **PCL-10153MJ3-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- **PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1245E PCI-1285E

## Economic DSP-based 4/8-axis Stepping and Servo Motor Control Universal PCI Card

**NEW**

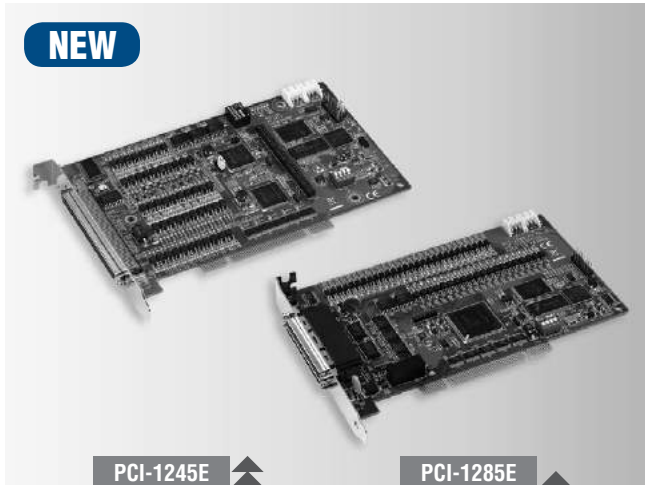

PCI-1245E

PCI-1285E



### Features

- Encoder input is 10 MHz for 4xAB mode, 2.5 MHz for CW/CCW mode
- Pulse output up to 5 Mpps
- Memory buffer for trajectory planning (circular trajectory and auto blending are not supported)
- Supports E-Gear
- Hardware emergency input
- Watchdog timer
- Programmable interrupt
- RDY/LTC-dedicated input channels & SVON/CMP/CAM-DO/ERC-dedicated output channels are switchable for general input and output purposes

### Introduction

PCI-1245E/1285E is a 4/8-axis economic universal PCI (supporting both 3.3 V and 5 V signal slot) stepping/pulse-type servo motor control card designed for entry-level applications which need to control linear interpolation, electronic gear, continuous contouring (circular trajectories and auto blending are excluded). PCI-1245E/1285E utilizes the high-performance DSP and FPGA to calculate the motion trajectories, synchronization timing control for multiple axes and input/output handling to offer functionality, such as 2–8-axis linear interpolation, E-Gear (only for PCI-1245E), T/S-curve acceleration/deceleration rate, speed override, 16 home modes and so on. In addition, Advantech supplies a Common Motion API library, graphical utility and user-friendly examples to decrease programming load, helping users complete configuration and diagnosis easily.

### Specifications

#### Pulse Type Motion Control

- Motor Driver Support** Pulse-type servo/stepping
- Number of Axis** PCI-1245E: 4  
PCI-1285E: 8
- Interpolation** PCI-1245E: 2-axis linear  
PCI-1285E: 2-axis linear
- Max. Output Speed** 5 Mpps
- Step Count Range** ±2, 147, 483, 646
- Pulse Output Type** Pulse/direction (1-pulse, 1-direction type) or CW/CCW (2-pulse type)
- Position Counters** Range of command and actual position
- Velocity Profiles** T-Curve, S-Curve
- Local I/O**
  - Machine Interfaces: LMT+, LMT-, ORG
  - Servo Driver Interfaces: ALM, INP
  - General Digital I/O: PCI-1245E: 16-ch DI, 16-ch DO  
PCI-1285E: 32-ch DI, 32-ch DO

#### Encoder Interface

- Input Type** Quadrature (A/B phase) or up/down
- Counts per Enc. Cycle** x1, x2, x4 (A/B phase only)
- Input Range** PCI-1245E 5~15V  
PCI-1285E 5~10V
- Isolation Protection** 2,500 V<sub>bc</sub>
- Max. Input Frequency** 10 MHz under 4xAB mode

#### General

- Bus Type** Universal PCI V2.2
- Connectors** PCI-1245E: 1 x 100-pin SCSI female connector  
PCI-1285E: 2 x 100-pin mini-SCSI female connector
- Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- Power Consumption** PCI-1245E: Typical: 5 V @ 850 mA  
Max.: 5 V @ 1 A  
PCI-1285E: Typical: 5 V @ 530 mA  
3.3 V @ 160 mA  
Max.: 5 V @ 500 mA  
3.3 V @ 1 A

- Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- PCI-1245E-AE** Economic 4-axis Stepping/Servo Control Universal PCI Card
- PCI-1285E-AE** Economic 8-axis Stepping/Servo Control Universal PCI Card

#### Accessories


- ADAM-3956-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board
- ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board
- ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board
- ADAM-39100-AE** 100-pin DIN-rail SCSI Wiring Board
- PCL-101100M-1E/2E/3E** 100-pin SCSI Cable, 1m/2m/3m (for PCI-1245E)
- PCL-10251-1E/3E** 100-pin SCSI to Two 50-pin SCSI Cable, 1m/3m
- PCL-101100SB-1E/2E/3E** Mini-SCSI-100 Shielded Cable, 1m/2m/3m (for PCI-1285E)
- PCL-10153PA5-2E** DB-26 pin to SCSI-50 pin 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- PCL-10153PA5LS-2E** DB-26 pin to SCSI-50 pin 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- PCL-10153YS5-2E** DB-26 pin to SCSI-50 pin 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- PCL-10153MJ3-2E** DB-26 pin to SCSI-50 pin 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- PCL-10153DA2-2E** DB-26 pin to SCSI-50 pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m



# PCI-1245L

## 4-axis Stepping and Servo Motor Control Universal PCI Card

NEW

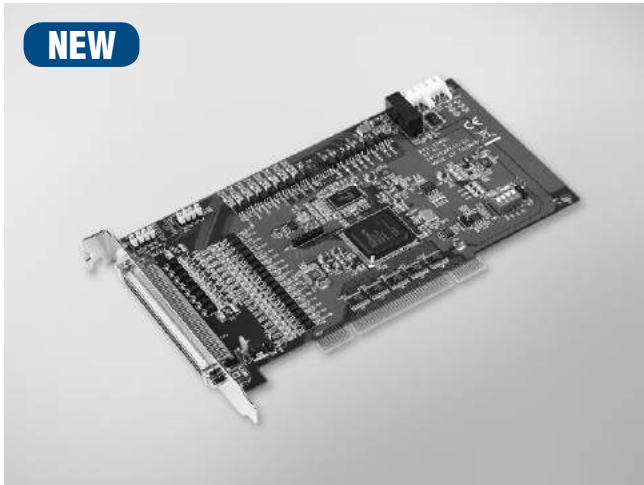

### Features

- Encoder input is 10 MHz for 4xAB mode, 2.5 MHz for CW/CCW mode
- Pulse output up to 1 Mpps and the output type can be switched to differential or single-end by jumper setting
- Supports 2 axis linear interpolation
- Supports T/S-curve
- Supports speed override
- Hardware emergency input
- Watchdog timer
- Supports programmable acceleration/deceleration rate
- Programmable interrupt
- RDY dedicated input channels & SVON/ERC dedicated output channels are switchable for general input and output purposes

### Introduction

The PCI-1245L is a 4-axis universal PCI card (supporting both 3.3 V and 5 V signal slots) stepping/pulse-type servo motor control card designed for entry-level applications which need to control interpolation, synchronization among multiple axes, with SoftMotion algorithm inside to perform the motion trajectory and precise movement. The PCI-1245L utilizes the high-performance FPGA to calculate the motion trajectories, synchronization timing control for multiple axes and input/output handling to offer functionality, such as 2 axis linear interpolation, T/S-curve, speed override, programmable acceleration/deceleration rate, 16 home modes and so on.

In addition, all Advantech motion controllers use the "Common Motion API" architecture which is a unified user programming interface and graphical utility. This architecture saves application maintenance and upgrades. Programmers can benefit from integrating any Advantech SoftMotion controller without changing large amounts of the application code. User-friendly examples decrease programming load, helping users complete configuration and diagnosis easily.

### Specifications

#### Pulse Type Motion Control

- Motor Driver Support** Pulse-type servo/stepping
- Number of Axes** 4
- Interpolation** 2-axis linear interpolation
- Max. Output Speed** 1 Mpps
- Step Count Range**  $\pm 2, 147, 483, 646$
- Pulse Output Type** Pulse/direction (1-pulse, 1-direction type), CW/CCW (2-pulse type) or single-ended +5V output
- Position Counters** Range of command and actual position
- Velocity Profiles** T-Curve, S-Curve
- Local I/O**
  - Machine Interfaces: LMT+, LMT-, ORG
  - Servo Driver Interfaces: ALM, INP
  - General Digital I/O: 16-ch DI, 16-ch DO (RDY pin can be switchable to general-purpose input and SVON/ERC pin to general-purpose output)

#### Encoder Interface

- Input Type** Quadrature (A/B phase) or up/down
- Counts per Enc. Cycle** x1, x2, x4 (A/B phase only)
- Input Range** 5~10 V
- Isolation Protection** 2,500 V<sub>DC</sub>
- Max. Input Frequency** 4 MHz under 4xAB mode

#### General

- Bus Type** Universal PCI V2.2
- Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 0.6 A  
Max.: 5 V @ 1 A

- Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- PCI-1245L-AE** 4-axis Stepping/Pulse-type Servo Motor Control Universal PCI Card

#### Accessories


- ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board
- ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board
- ADAM-39100-AE** 100-pin DIN-rail SCSI Wiring Board
- PCL-101100M-3E** 100-pin SCSI Cable, 3 m
- PCL-10152-1E** 50-pin SCSI Male-male Shielded Cable, 1m
- PCL-10152-3E** 50-pin SCSI Male-male Shielded Cable, 3m
- PCL-10251-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- PCL-10251-2E** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- PCL-10251-3E** 100-pin SCSI to Two 50-pin SCSI Cable, 3 m
- PCL-10153PA5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- PCL-10153PA5LS-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- PCL-10153YS5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- PCL-10153MJ3-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards


# PCI-1220U PCI-1240U

2-axis Stepping and Servo Motor Control  
Universal PCI Card

4-axis Stepping and Servo Motor Control  
Universal PCI Card

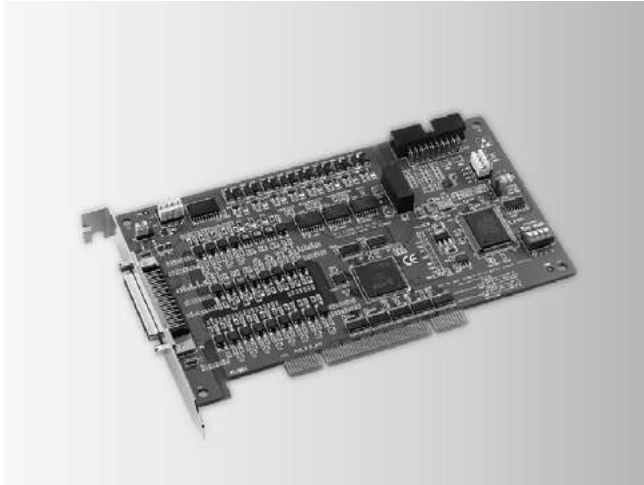

PCI-1220U

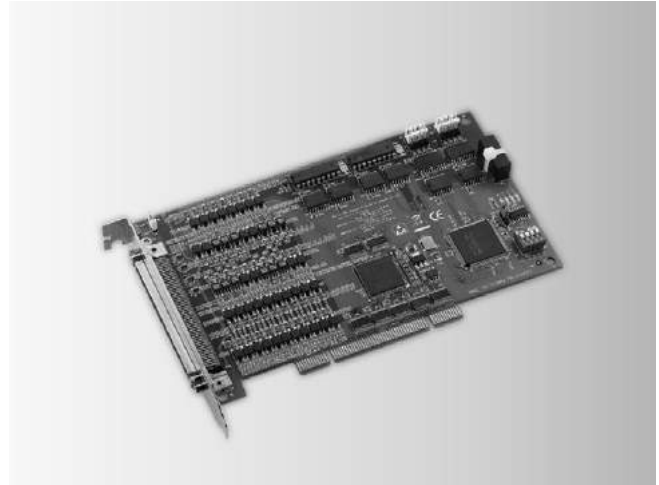

PCI-1240U



## Specifications

### Pulse Type Motion Control

- **Motor Driver Support** Pulse-type servo/stepping
- **Number of Axis** 4
- **Interpolation** 2-axis linear, 3-axis linear, 2-axis circular (PCI-1240U)  
2-axis linear, 2-axis circular (PCI-1220U)
- **Max. Output Speed** 4 Mpps
- **Step Count Range** ±2, 147, 483, 646 (32-bit)
- **Pulse Output Type** Pulse/direction (1-pulse, 1-direction type), or CW/  
CCW (2-pulse type)
- **Position Counters** Range of command and actual position
- **Velocity Profiles** T-Curve, S-Curve
- **Local I/O** Machine Interfaces: LMT+, LMT-, ORG  
Servo Driver Interfaces: ALM, RDY, SVON, INP  
Position Compare I/O: CMP  
General Digital I/O: 12-ch DI, 16-ch DO

### Encoder Interface

- **Input Type** Quadrature (A/B phase or up/down)
- **Counts /Enc. Cycle** x1, x2, x4 (A/B phase only)
- **Input Range** 5 ~ 25 V
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Max. Input Freq.** 1 MHz

### General

- **Bus Type** PC/104
- **Certification** CE, FCC Class A
- **Connectors** 2 x IDC 50-pin male connector
- **Dimensions (L x H)** 96 x 90 mm (3.8" x 3.5")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1 A
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temp.** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temp.** -20 ~ 85°C (-4 ~ 185°F)

## Ordering Information


- **PCI-1220U-AE** 2-axis Stepping and Servo Motor Control Universal PCI Card
- **PCI-1240U-B2E** 4-axis Stepping and Servo Motor Control Universal PCI Card

### Accessories

- **ADAM-3956-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board (PCI-1240U only)
- **ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board (PCI-1220U/1240U)
- **ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board (PCI-1220U/1240U)
- **ADAM-3950-AE** 50-pin DIN-rail Flat Cable Wiring Board (PCM-3240 only)
- **ADAM-39100-AE** 100-pin DIN-rail SCSI Wiring Board (PCI-1240U only)
- **PCL-101100M-1E/2E/3E** 100-pin SCSI Cable, 1m/2m/3m (PCI-1240U only)
- **PCL-10150-1.2E** IDC-50 Flat Cable, 1.2m (PCM-3240 only)
- **PCL-10152-1E/3E** 50-pin SCSI M-M Shielded Cable, 1m/3m (PCI-1220U only)
- **PCL-10251-1E/3E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m/3m (PCI-1240U only)
- **PCL-10153PA5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- **PCL-10153PA5LS-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- **PCL-10153YS5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- **PCL-10153MJ3-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- **PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m

# PCI-1243U

## 4-axis Stepping Motor Control Universal PCI Card

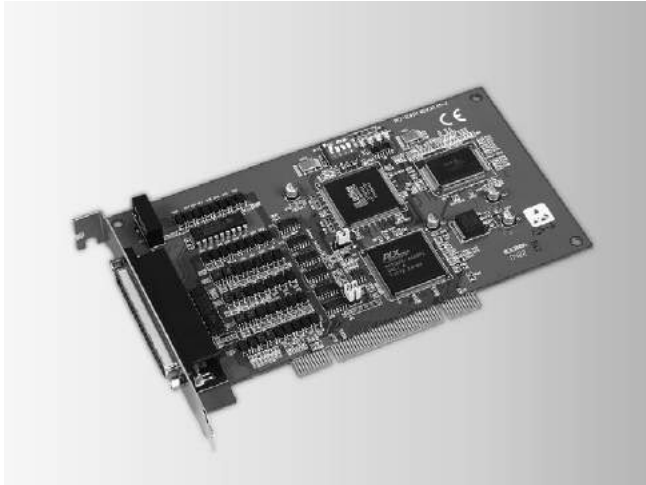

RoHS  
compliant  
CE FCC

### Features

- 4 axis stepping motor control
- PCI universal bus
- Up to 400 k pulse output rate
- T-Curve acceleration/deceleration
- Pulse/Dir and CW/CCW pulse output mode
- Up 24-bit step count
- Opto-Isolated Digital input and output
- Up to 1,500 V<sub>RMS</sub> system isolation
- BoardID switch

### Introduction

PCI-1243U is a 4-axis stepping motor control card with universal PCI interface. Each axis can be controlled directly through the card's I/O registers. This board is economic solution for stepping motor which provides 4 channels pulse train, T/S speed profile, on-the-fly velocity change and so on. The board is supplied with DLL library for Windows programmer to write the program. With the DLL driver, you can easily link to VC++®, Visual Basic® or BCB.

### Specifications

#### Pulse Type Motion Control

- **Motor Driver Support** Stepping
- **Number of Axis** 4
- **Max. Output Speed** 400 kpps
- **Step Count Range** 0 ~ 16, 777, 215
- **Pulse Output Type** Pulse/Direction, CW/CCW
- **Position Counters** ±16, 777, 215
- **Home Modes** 4
- **Velocity Profiles** T-Curve or S-Curve acceleration/deceleration
- **Local I/O Interfaces** PEL x 4, NEL x 4, RG x 4, SLD x 4, EMG x 1
- **General Input Channels** 8
- **General Output Channels** 8

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 1 V  
Logic 1: 12 V (24 V max.)
- **Isolation Protection** 3,750 V<sub>RMS</sub>
- **Opto-Isolator Response** 25 μs
- **Input Resistance** 4.7 kW

#### Isolated Digital Output

- **Channels** 8
- **Output Type** Sink (NPN)
- **Isolation Protection** 3,750 V<sub>RMS</sub>
- **Output Voltage** 5 ~ 30 V<sub>DC</sub>
- **Sink Current** 200 mA max./channel; 1.1 A max. total
- **Opto-Isolator Response** 25 μs

#### General

- **Bus Type** PCI V2.2
- **Certification** CE, FCC Class A
- **Connectors** 1 x DB-62 female
- **Dimensions** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 340 mA  
Max.: 5 V @ 500 mA
- **Storing Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storing Temperature** -20 ~ 80°C (-4 ~ 170°F)

### Ordering Information

- **PCI-1243U-AE** 4-axis Stepping Motor Control Card

#### Accessories

- **PCL-10162-1E** DB-62 Cable Assembly, 1m
- **PCL-10162-3E** DB-62 Cable Assembly, 3m
- **ADAM-3962-AE** DB-62 Wiring Board with DIN-rail Mounting

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules

16  
IoT Ethernet I/O  
Modules

17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# PCI-1202U PCM-3202P

## 2-port AMONet RS-485 PCI Master Card 2-port AMONet RS-485 PC/104+ Master Card



PCI-1202U

RoHS  
Compliant  
2002/95/EC

CE FCC

### Specifications

#### AMONet RS-485 Motion Control

- **AMONet RS-485** 2 rings
- **Interface** Half duplex RS-485
- **Cable Type** CAT5 UTP/STP Ethernet cable and above
- **Surge Protection** 10 kV
- **Transmission Speeds** 2.5, 5, 10, and 20 Mbps
- **Data Flow Control** Automatic
- **Communication Distance (Max.)** 100 m @ 20 Mbps w/32 slave modules  
100 m @ 10 Mbps w/64 slave modules
- **Slave Module** Digital I/O, Motion Control, Analog I/O

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Dry contact (need external voltage source)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Input Resistance** 2.4 kW @ 0.5 W

#### Isolated Digital Output


- **Channels** 4
- **Output Type** Open collector
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 10 ~ 30 V<sub>DC</sub>
- **Sink Current** 1 ch: Max. 0.5 A  
4 ch: Max. 1.1 A (total)

#### General

- **Bus Type** Universal PCI V2.2
- **certification** CE, FCC Class A
- **Connectors** 2 x RJ45
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** 5 V<sub>DC</sub> @ 0.5 A typical
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temp.** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temp.** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCI-1202U-AE** 2-port AMONet RS-485 PCI Master Card

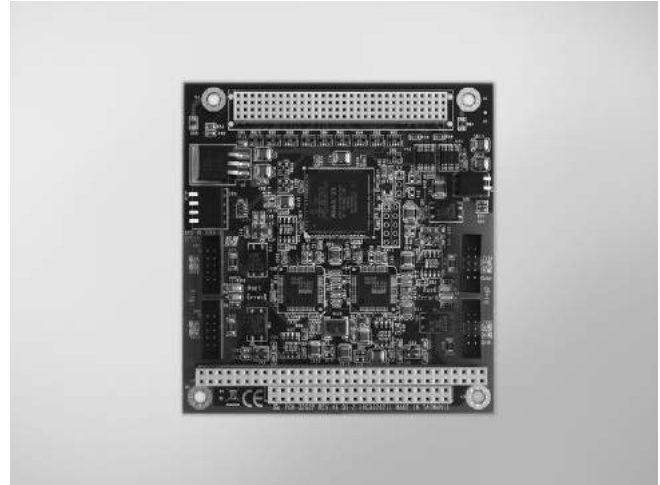

PCM-3202P

RoHS  
Compliant  
2002/95/EC

CE FCC

### Specifications

#### AMONet RS-485 Motion Control

- **AMONet RS-485** 2 rings
- **Interface** Half duplex RS-485
- **Cable Type** CAT5 UTP/STP Ethernet cable
- **Surge Protection** 10 kV
- **Transmission Speeds** 2.5, 5, 10, and 20 Mbps
- **Data Flow Control** Automatic
- **Communication Distance (Max.)** 100 m @ 20 Mbps w/32 slave modules
- **Slave Module** Digital I/O, Motion Control, Analog I/O

#### General

- **Bus Type** PC/104+
- **Certification** CE, FCC Class A
- **Connectors** 4 x 10-pin box header
- **Dimensions (L x H)** 96 x 90 mm (3.8" x 3.5")
- **Power Consumption** 5 V<sub>DC</sub> @ 0.5 A typical
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temp.** 0 ~ 60°C (32 ~ 140°F)
- **Storing Temp.** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCM-3202P-AE** 2-port PC/104+ AMONet RS-485 Master Card

# AMAX-1220 AMAX-1240

## Open Frame Type 2/ 4-axis AMONet Motion Slave Modules

**NEW**



AMAX-1220

AMAX-1240



### Features

- End limit logic is switchable (high or low active)
- BoardID is switchable
- Easily visible LED indicators on board to do diagnosis
- Direct wire to servo drive to save terminal board space while installation
- Max. 6.5 MHz, 4-axis pulse output
- 28 bits counter for incremental encoder
- Horizontal installation for for servo or stepping motor driver
- Suitable for DIN-rail mounting

### Introduction

AMAX-1220 and AMAX-1240 have compact open frame designs for horizontal placement and an interface connector mounted on the board. With a transfer cable to servo drive, both models can conveniently connect to Mitsubishi J3, Yaskawa Sigma V and Panasonic A4/A5.

The AMAX-1220 is an economic 2-axis AMONet slave module which supports motion functionality in point-to-point (PTP), linear & circular interpolation, simultaneously start/stop among multiple slave modules, and brake signal to servo for emergence consideration. The AMAX-1240 is an advanced 4-axis AMONet slave module which not only supports AMAX-1220 motion functionality, but also supports advanced features in position compare and triggering function. Both linear interval and table setups are supported.

### Specifications

#### Pulse Type Motion Control

- **Motor Driver Support** Pulse-type servo
- **Number of Axes** AMAX-1220: 2  
AMAX-1240: 4
- **Interpolation** Linear and circular
- **Max. Output Speed** 6.5 Mpps
- **Step Count Range** ±134, 217, 728
- **Pulse Output Type** OUT/DIR, CW/CCW, A/B phase
- **Position Counter** ±134, 217, 728
- **Home Modes** 13
- **Velocity Profiles** T-Curve, S-Curve
- **Local I/O**
  - Machine Interfaces: EL+/-, ORG and SD (Slow Down) for Each Axis
  - Servo Driver Interfaces: ALM, RDY, SVON, INP, Break for Each Axis
  - Position Compare I/O: LTC, CMP for Each Axis(Only available for AMAX-1240-AE)
- Simultaneous Move Within Multiple Modules: CSTA/CSTP (Simultaneously Start/Stop) for each model
- General Purpose I/O: AMAX-1220 supports 8xDI and 8xDO

#### Encoder Interface

- **Input Type** A/B phase, CW/CCW
- **Counts per Enc. Cycle** x1, x2, x4 (AB phase only)
- **Input Range** Low: 0 ~ 0.5V  
High: 3.5 ~ 7V
- **Isolation Protection** 2,500 V<sub>RMS</sub>
- **Max. Input Frequency** 2 MHz @ 5 V

#### General

- **Bus Type** AMONet RS-485
- **Certification** CE, FCC Class A
- **Connectors** RJ-45 x 2 are for communication port  
DB-26 connector by transfer cable to servo drives. Other are screw terminal type connectors
- **Dimensions (L x W x H)** 141 x 108 x 60 mm (5.6" x 4.3" x 2.4")
- **System Power Consumption** 2 W @ 24 V typical
  - Output Channel Power Consumption 120W typical, 240W max.
  - Input Channel Power Consumption
- **System Power Input** AMAX-1220: 8 W @ 24 V external power (max.)  
AMAX-1240: 10 W @ 24 V external power (max.)
- **Humidity** 24 V<sub>DC</sub> within 200 mV ripple  
5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)

### Ordering Information

- **AMAX-1220-AE** Economic 2-axis AMONet Motion Control Module
- **AMAX-1240-AE** Advanced 4-axis AMONet Motion Control Module

#### Accessories


- **PCL-10153PA5-2E** 50-pin Cable to Panasonic A4 and A5 Servo, 2 m
- **PCL-10153PA5LS-2E** 50-pin Cable to Panasonic MINAS A Servo, 2 m
- **PCL-10153YS5-2E** 50-pin Cable to Yaskawa Sigma V Servo, 2 m
- **PCL-10153MJ3-2E** 50-pin Cable to Mitsubishi J3 Servo, 2 m
- **PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# AMAX-1752 AMAX-1754 AMAX-1756

## Open Frame Type 32-ch Isolated Digital Input/Output Slave Modules

NEW

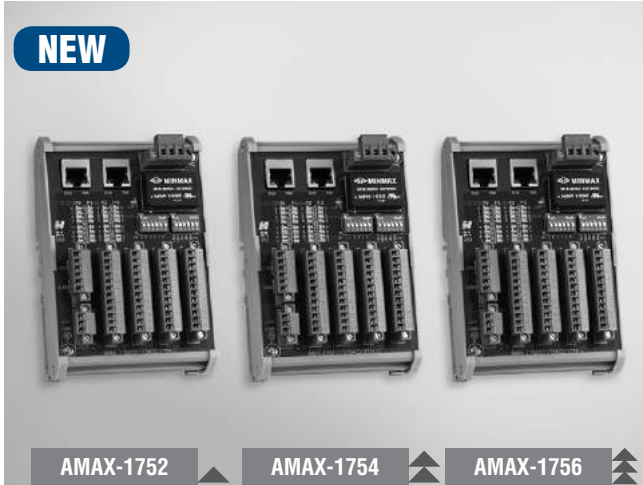

AMAX-1752

AMAX-1754

AMAX-1756



### Features

- Communication baud rate, 2.5Mbps, 5Mbps, 10Mbps and 20Mbps are supported and switchable
- Onboard screw terminal for direct wiring
- 2,500 VRMS Isolation voltage
- Suitable for DIN-rail mounting
- BoardID is switchable
- Easily visible LED indicators on board to do diagnosis

### Introduction

The AMAX-1752, AMAX-1754 and AMAX-1756 are compact open frame designs for horizontal placement, on-board screw terminal for direct wiring and on-board easily-visible LED indicators are for system diagnosis. All the digital I/O slave modules could be connected and distributed by standard LAN cables thereby saving wiring costs and maintenance. Three models are introduced: 32-ch digital input (AMAX-1752), 32-ch digital output (AMAX-1754) and 16-ch digital input/output (AMAX-1756). According to maximum communication baud rate, 2048 I/O points can be scanned and updated within 1.04 ms.

### Specifications

#### Isolated Digital Input

- **Channels** AMAX-1752: 32  
AMAX-1756: 16
- **Input Type** Dry contact
- **Isolation Protection** 2,500 V<sub>RMS</sub>
- **Opto-Isolator Response** 100 μs (max.)
- **Input Resistance** 3.2kΩ

#### Isolated Digital Output

- **Channels** AMAX-1754: 32  
AMAX-1756: 16
- **Output Type** Sink (NPN) (open collector Darlington transistors)
- **Isolation Protection** 2,500 V<sub>RMS</sub>
- **Output Voltage** 10 ~ 30 V<sub>DC</sub>
- **Sink Current** 1 ch: 500 mA (1 port)

#### General

- **Bus Type** AMONet RS-485
- **Certification** CE, FCC Class A
- **Connectors** (1) RJ-45 x 2 are for communication port  
(2) I/O points use screw terminal type connector
- **Dimensions** 141 x 95 x 60 mm (5.6" x 3.7" x 2.4")
- **Power Consumption** 600mW typical, 2 W max.
- **Power Input** 24 V<sub>DC</sub> within 200 mA ripple
- **Power Supply for DIO** 10 ~ 30 V<sub>DC</sub> (2A max)
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)

### Ordering Information

- **AMAX-1752-AE** Open Frame Type 32-ch Isolated Digital Input AMONet Module
- **AMAX-1754-AE** Open Frame Type 32-ch Isolated Digital Output AMONet Module
- **AMAX-1756-AE** Open Frame Type 16/16-ch Isolated Digital I/O AMONet Module

# EtherCAT Solution Introduction


## Introduction

EtherCAT (Ethernet Control Automation Technology) is a high-performance, Ethernet-based fieldbus industrial network system. The protocol is standardized in IEC 61158 and applies to automation applications that need faster and more efficient communications. Short data update times with precise synchronization make EtherCAT suitable for real-time requirements in automation technology.

## EtherCAT Features

### Functional Principle

In EtherCAT network, the Master sends Ethernet frames through all of the slave nodes. The Standard Ethernet packet or frame is no longer received, interpreted, and copied as process data at every node. Instead, slave devices read the data addressed to them and input data are also inserted in the same time while the telegram passes through the device, processing data "on the fly". Typically the entire network can be addressed with just one frame.

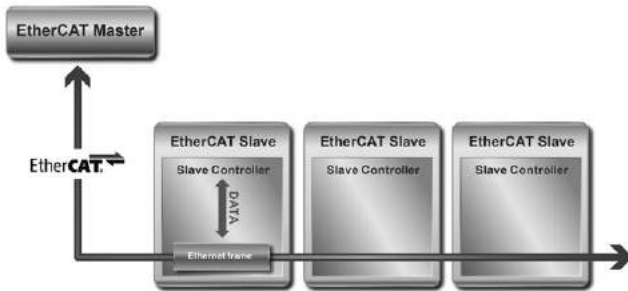

### Protocol


Data exchanges are cyclically updated between EtherCAT Masters and Slaves. Data in EtherCAT frames is transported directly within the IEEE 802.3 Ethernet frame using Ethertype 0x88a4 and are processed by the EtherCAT Slave Controller on the fly. Each EtherCAT datagram is a command that consists of a header, data and a working counter. The datagram header indicates what type of access the master device would like to execute:

- Read, write, read-write
- Access to a specified slave device through direct addressing
- Access to multiple slave devices through logical addressing

Logical addressing is used for the cyclical exchange of process data. The header and data are used to specify the operation that the slave must perform, and the working counter is updated by the slave to let the master to know that a slave has processed the command.

Every EtherCAT datagram ends with a 16 Bit Working Counter (WKC). The Working Counter counts the number of devices that were successfully addressed by this EtherCAT datagram.

EtherCAT datagrams are processed before receiving the complete frame. In the case that the data is invalid, the frame check sum (FCS) is not valid and the slave will not set data for the local application.

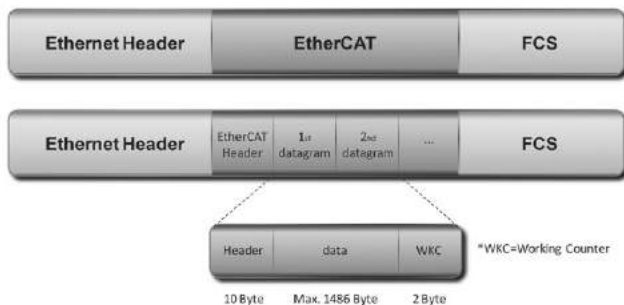

### Topology

EtherCAT supports a variety of network topologies, including line, tree, ring and star. The line and tree topologies are more conducive to fieldbus applications because they require fewer connections and utilize a much simpler and more flexible cabling schema that switches and hubs are not necessary for lines or trees topology.

Inexpensive industrial Ethernet cable can be used between two nodes up to 100m apart in 100BASE-TX mode. EtherCAT makes a pure bus or line topology with hundreds of nodes possible without the limitations. Up to 65,535 devices can be connected to EtherCAT, so network expansion is almost unlimited.

EtherCAT supports individual nodes to be connected/disconnected during operation. If one of the slaves in the network is removed, the rest of the network can continue to operate normally. EtherCAT also enables other communication features such as cable redundancy or master redundancy with Hot Standby.

### Synchronization

Distributed Clocks (DC) mechanism provides highly precise time synchronization between slaves in an EtherCAT network, which is equivalent to the IEEE 1588 Precision Time Protocol standard. By using distributed clocks, EtherCAT is able to synchronize the time in all local bus devices within a very narrow tolerance range. All EtherCAT slaves are provided with an internal clock which named as System Time (Local Time). One EtherCAT Slave, is used as a Reference Clock and distributes its Clock cyclically.


Possible misalignment between the reference clock and the clocks of the other slaves are caused when a slave is switched on, the internal free-running register that holds the current time is reset to zero. Unfortunately, this action doesn't happen at the same time, and this result in an initial offset ( $t_{offset}$ ) among clocks has to be compensated.

Typically, masters send a broadcast to all other slaves in the system. Having received the message, slaves will latch the value of their internal clock. There are two latch values, one is receiving and the other is returning back. Thus, the master can read all latched values and calculate the delay for each slave ( $t_{propagation\ Delay}$ ). Delays will be stored into offset register. In the following, the master will send a message periodically to all other Masters in EtherCAT network to make the first slave the reference clock and forcing all other slaves to set their internal clock by the calculated offset.

$$\Delta t = (t_{Local\ Time} + t_{offset} - t_{propagation\ Delay}) - t_{Received\ System\ Time}$$

Because synchronization between slaves in DC mode is done by internal clocks in hardware, EtherCAT guarantee the time jitter is less than 1us.

### Diagnosis with exact localization

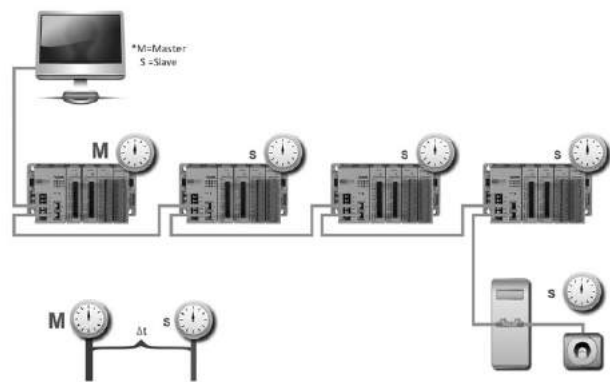

EtherCAT is an ultra-fast I/O system. To reach the best high-speed communication, high communication accuracy is demanded. EtherCAT comprises a wide range of system-inherent diagnostic features which help detect and locate system errors precisely.

Every EtherCAT datagram ends with a 16 Bit Working Counter (WKC) to count the number of devices that were successfully addressed by this EtherCAT datagram. The Master can check the data exchange situation by WKC in the same cycle and the error frame can be detected by analyzing the nodes' error counters. The slave application will be executed only as the frame is received correctly.

The automatic evaluation of the associated error counters enables precise localization of critical network sections.

Bit errors during transmission are detected reliably by the analysis of the CRC (Cyclic Redundancy Check) check sum. CRC is an error-detecting code commonly used in digital networks and storage devices to detect accidental changes to raw data.


In addition to the error detection and localization protocol, transmission physics and topology of the EtherCAT system allow an individual quality monitoring of every single transmission path.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1203

## 2-port EtherCAT Universal PCI Master Card

NEW

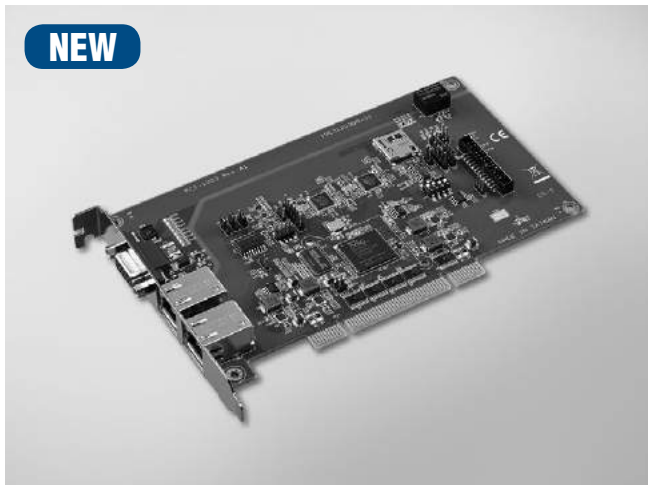

### Features

- 650MHz dual-core ARM processor
- On-board real-time OS support
- Support common motion SDK for user programming
- Support ADAM-5000/ECAT slave device
- Support EtherCAT Drive/motor IO slave device
- 20-ch customer-defined programmable GPIOs by extension board
- MicroSD slot is designed for data logger
- Unique slot-number assignment via DIP switch

### Introduction

PCI-1203 is a 2-port EtherCAT PCI Universal card. It is a ready-to-use, embedded software and Ethernet control development platform for all PC-based industrial automation. The EtherCAT protocol stack is executed autonomously on the PCI card and process data is exchanged via Dual-Port RAM without wasting CPU time.

It allows the host to handle up to 2 EtherCAT network with two trimode (1Gbit/100Mbit/10Mbit) Ethernet PHY. There is extremely short cycle time for pure IO application. For motion control, communication cycle time is no more than 1ms for connecting 24 axes of servo motors and 20 sets of ADAM-5000/ECAT high speed I/O system. An additional microSD slot is designed for data logger. Besides, there are 4-channel isolated digital outputs and 8-channel isolated inputs with 100KHz bandwidth on PCI-1203 to meet the extra I/O requirement. The resulting machine control is highly customizable and has hard real-time, high-precision capabilities.

In addition, all Advantech motion controllers use the "Common Motion API" architecture which is a unified user programming interface and graphical utility. This architecture saves application maintenance and upgrades. Programmers can benefit from integrating any Advantech SoftMotion controller without changing large amounts of the application code. User-friendly examples decrease programming load, helping users complete configuration and diagnosis easily.

### Specifications

#### EtherCAT

- **Number of Rin** 2 rings
- **Memory** 256MB DDR3 x 16 (1600Mbps bandwidth)  
32MB Serial Flash QSPI Interface x 1  
Micro SD x 1
- **Serial Interface** Trimode (1Gbit/100Mbit/10Mbit) Ethernet PHY x 2
- **Cable Type** CAT5 UTP/STP Ethernet cable and above
- **Surge Protection** 10 kV
- **Communication Time** 100us~1ms Max.
- **Communication Motion Slave** 24 Servo Drive Max.(eq. Panasonic A5B)
- **Communication IO Slave** 128 port DI (128 byte) / 128 port DO (128 byte)  
128 channel AI (256 byte) and 128 channel AO (256 byte) (based on ADAM-5000/ECAT)

#### Isolated Digital Input

- **Channels** 4
- **Input Voltage** Dry contact (need external input voltage +24V)
- **Isolation Protection** 1,500 V<sub>DC</sub>
- **Input Resistance** 8.4 k $\Omega$

#### Isolated Digital Output

- **Channels** 8
- **Output Type** Sink
- **Isolation Protection** 1,500 V<sub>DC</sub>
- **Output Voltage** 10 ~ 30 V<sub>DC</sub>
- **Sink Current** 1 ch: Max. 0.3 A

#### General

- **Bus Type** Universal PCI V2.2
- **certification** CE, FCC Class A
- **Connectors** 2 x RJ45, 1x GPIO box header
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** 5 VDC @ 0.5 A typical
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temp.** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temp.** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCI-1203-AE** 2-port EtherCAT Universal PCI Master Card



# ADAM-5000/ECAT

## 4-slot Distributed High Speed I/O System for EtherCAT



RoHS  
COMPLIANT  
2002/95/EC

CE FCC

### Features

- 32-bit ARM RISC Processor
- 4 slots with various digital and analog I/O modules is just a single EtherCAT node on the network.
- Supports EtherCAT Distributed Clock (DC) mode and SyncManager mode
- Supports the Modular Device Profile (MDP) when all modules are a pure I/O function
- Configure I/O module parameters and upgrade via a utility
- Node addresses can be fixed by rotary switches, or set by software
- Compatible with Advantech Common Motion SDK or other EtherCAT master through ENI file generation
- 8-bit DIP switch for Mode setting and three rotate switch for up to 4,096 slave IDs (x1, x10, x100)

\* I/O modules are optional

### Introduction

The ADAM-5000/ECAT 4-slot distributed flexible system can provide high-speed, high-precision remote I/O for EtherCAT. It is the link between the EtherCAT automation control network and the EtherCAT I/O modules ranging from basic DI/O's to high-speed AI/O models for different application scenarios. All our EtherCAT devices have been designed and tested to meet Advantech's stringent requirements on noise immunity. Fast, accurate, highly -efficient data transmission and easy remote configuration make ADAM-5000/ECAT the perfect match in industrial automation architecture.

### Specifications

#### Control System

- **CPU** 32-bit ARM RISC Processor
- **I/O Slots** 4
- **Memory** Flash ROM: 64M SPI  
RAM: 4G DDR3
- **Operating System** Real-time OS
- **LED Indicators** Power LED  
System status LED  
EtherCAT RUN LED  
EtherCAT ERROR LED  
EtherCAT Port 0 LINK LED  
EtherCAT Port 1 LINK LED

#### Communications

- **Data Transfer Rate** Up to 100 Mbps
- **Communication Cycle Time** 100 us
- **Interface** 2 x RJ-45
- **Wiring** UTP, category 5 or greater

#### Power

- **Power Consumption** 2.5 W @ 24 V<sub>DC</sub>  
(not including I/O modules)
- **Power Input** 10 ~ 30 V<sub>DC</sub>

#### Software

- **API** Advantech Common Motion Library
- **Windows Utility** Network setting, I/O configuration & calibration

#### Protection

- **I/O Module Isolation** 3.000 V<sub>DC</sub>
- **LAN Communication** 1.500 V<sub>DC</sub>
- **Overvoltage Protection** Yes
- **Power Reversal Protection** Yes

#### General

- **Certification** CE, FCC class A
- **Connectors** 1 x Screw-terminal for RS-485 (communication)  
1 x DB9-M for RS-232 (internal use)  
1 x Screw-terminal for power input  
2 x RJ-45
- **Dimensions (W x H x D)** 231 x 110 x 75 mm
- **Mounting** DIN-rail, wall

#### Environment

- **Operating Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** - 10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** - 25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **ADAM-5000/ECAT** 4-slot EtherCAT Distributed High Speed I/O System

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules

16  
IoT Ethernet I/O  
Modules

17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# EtherCAT IO Module Selection Guide

## Analog Input/Output Modules




Module		ADAM-E5017	ADAM-E5017UH	ADAM-E5024H	ADAM-E5051S	ADAM-E5053S
Analog Input	Resolution	16 bit	12 bit	-	-	-
	Input Channel	8	8	-	-	-
	Sampling Rate	10 (total*)	200K**	-	-	-
	Voltage Input	±150 mV, ±500 mV ±1 V, ±5 V, ±10 V	±10 V, 0 ~ 10 V	-	-	-
	Current Input	±20 mA	0 ~ 20 mA, 4 ~ 20 mA	-	-	-
	Direct Sensor Input	-	-	-	-	-
Analog Output	Output Channels	-	-	4	-	-
	Resolution	-	-	12 bit	-	-
	Voltage Output	-	-	0 ~ 10 V	-	-
	Current Output	-	-	0 ~ 20 mA 4 ~ 20 mA	-	-
Digital Input and Digital Output	Digital Input Channels	-	-	-	16 (ADAM-5051) 16w/LED (5051D/5051S)	32
	Digital Output Channels	-	-	-	-	-
Isolation		3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	2,500 V <sub>DC</sub> (5051S)	2,500 V <sub>DC</sub>
Page		online	online	online	online	online

\*Sampling rate value depends on used channel number.

Example: Using 5 channels on ADAM-E5017, sampling rate for each used channel will be 10/5 = 2 samples/second.


\*\*The sampling rate vary with the controller.

## Digital Input/Output Modules

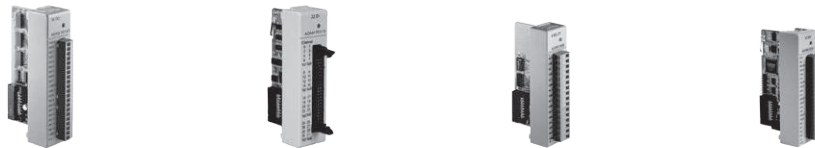


Module		ADAM-E5056S ADAM-E5056SO	ADAM-E5057	ADAM-E5069	ADAM-E5082
Digital Input and Digital Output	Digital Input Channels	-	-	-	-
	Digital Output Channels	16 w/LED	32	8 power relay (form A)	-
Counter (32-bit)	Channels	-	-	-	2
	Input Frequency	-	-	-	5 Hz ~ 1 MHz max. (frequency mode) 1 MHz max. (counter mode)
	Mode	-	-	-	Frequency, Counter (Up/Down, Bi-direction, Up, A/B/Z Phase)
Communication	Channels	-	-	-	-
	Type	-	-	-	-
Isolation		2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>
Page		online	online	online	online

# Selection Guide

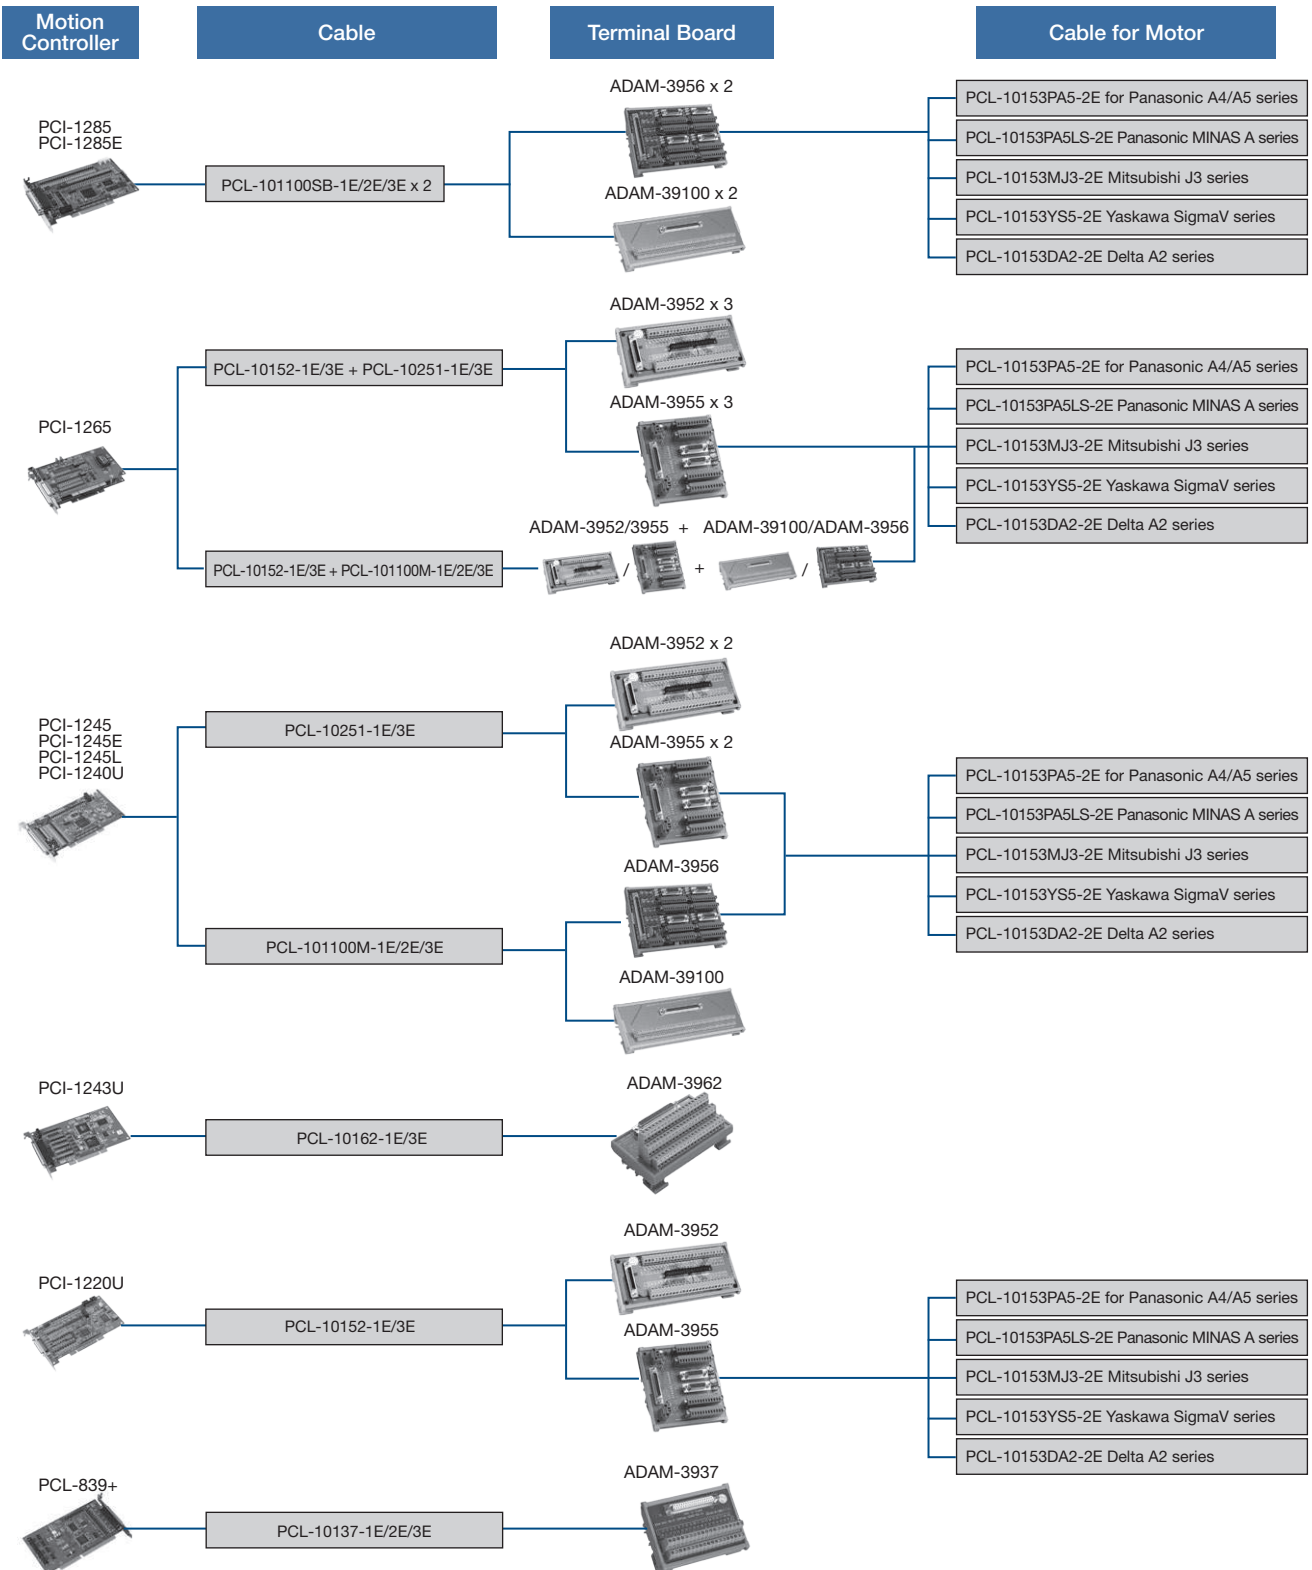

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Selection Guide

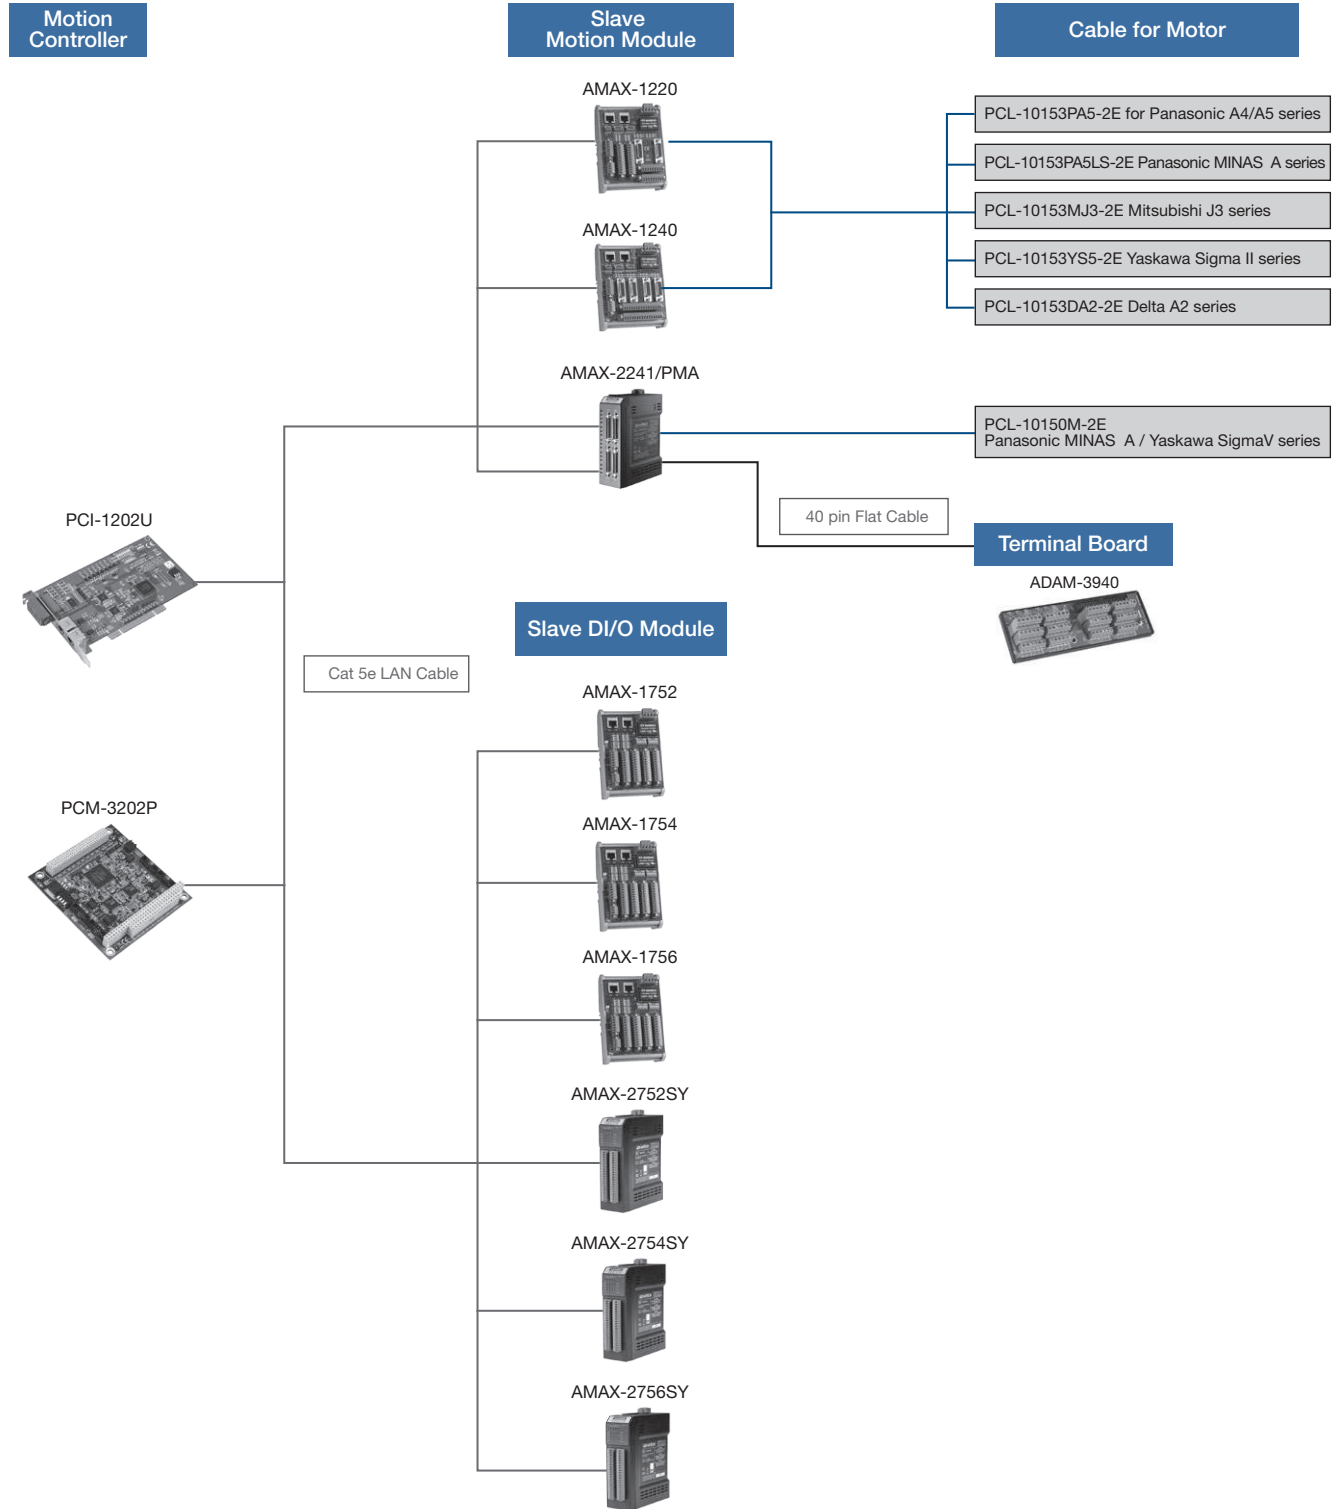

# Accessories

## DIN-rail Terminal Boards



### ADAM-3940


#### 40-pin Wiring Board with LED

#### Features

- DIN-rail wiring board
- Dimensions (W x L x H): 160 x 50 x 43 mm (6.3" x 2" x 1.7")
- 40-pin box header connector
- LED indicators

#### To Be Used With

AMAX-2241, AMAX-2242, AMAX-2243

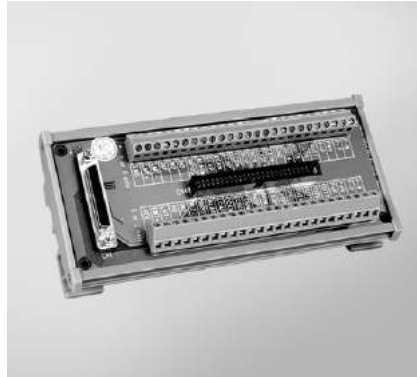

### ADAM-3952


#### 50-pin SCSI and IDC DIN-rail Wiring Board

#### Features

- DIN-rail wiring board
- Dimensions (W x L x H): 77.5 x 179.5 x 41.5 mm (3.1" x 7.1" x 1.6")
- 50-pin SCSI and IDC connectors

#### To Be Used With

PCI-1220U, PCI-1240U, PCI-1245, PCI-1245E, PCI-1245L, PCI-1265, PEC-3240

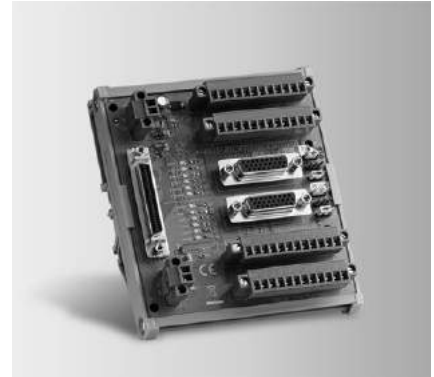

### ADAM-3955

#### 50-pin SCSI DIN-rail Motion Wiring Board

#### Features

- DIN-rail wiring board
- Dimensions (W x L x H): 103 x 120 x 45 mm (4.12" x 4.8" x 1.8")
- DB-26 and connector
- LED indicators

#### To Be Used With

PCI-1220U, PCI-1240U, PCI-1245, PCI-1245E, PCI-1245L, PCI-1265, PEC-3240



### ADAM-3956


#### 100-pin SCSI DIN-rail Motion Wiring Board

#### Features

- DIN-rail wiring board
- Dimensions (W x L x H): 122 x 171 x 45 mm (4.8" x 6.73" x 1.77")
- DB-26 and connector
- LED indicators

#### To Be Used With

PCI-1240U, PCI-1245, PCI-1245E, PCI-1245L, PCI-1265, PCI-1285, PCI-1285E

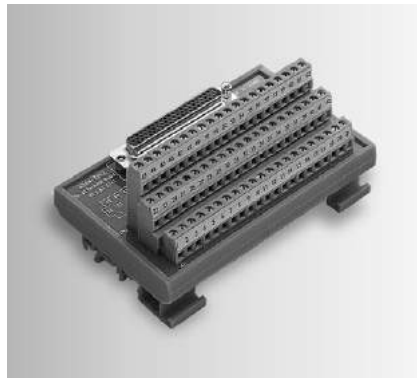

### ADAM-3962


#### DB62 DIN-rail Wiring Board

#### Features

- Low cost universal DIN-rail mounting screw terminal module with DB62 female connector
- Screw-clamp terminal blocks allow easy and reliable connections
- Case dimensions (W x L x H): 77.5 x 124.5 x 63.5 mm (3.1" x 4.9" x 2.5")

#### To Be Used With

PCI-1243U

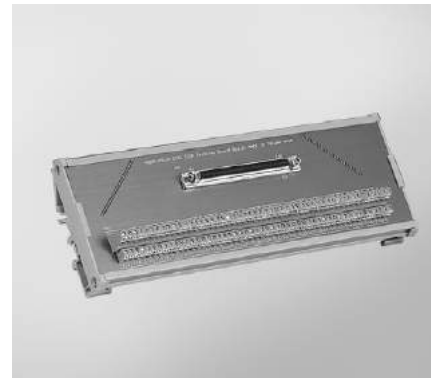

### ADAM-39100

#### 100-pin DIN-rail SCSI Wiring Board

#### Features

- Low cost universal DIN-rail mounting screw terminal module for industrial applications with 100-pin SCSI female connector
- Dimensions (W x L x H): 80 x 230 x 42 mm (3.14" x 9.05" x 1.65")

#### To Be Used With

PCI-1240U, PCI-1245, PCI-1245E, PCI-1245L, PCI-1265, PCI-1285, PCI-1285E

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# Cable Accessory



**PCL-101100M**

100-pin SCSI Cable



**PCL-10162**

DB-62 Cable



**PCL-10150M**

50-Pin SCSI Cable, Ribbon Type



**PCL-10152**

50-pin SCSI Cable



**PCL-10251**

100-pin to Two 50-pin SCSI Cable



**PCL-10153PA5**

50-pin Cable to Panasonic A4 and A5 Servo



**PCL-10153YS5**

50-pin Cable to Yaskawa Sigma V Servo



**PCL-10153MJ3**

50-pin Cable to Mitsubishi J3 Servo



**PCL-10153PA5LS**

50-pin Cable to Panasonic MINAS A Servo



**PCL-10153DA2**

50-pin Cable to Delta A2 Servo



**PCL-101100SB**

Mini-SCSI 100-pin Cable

## Power & Energy Automation

<b>Power &amp; Energy Automation Overview</b>		<b>3-2</b>
<b>P&amp;E Automation Computers &amp; Controllers Selection Guide</b>		<b>3-4</b>
<b>UNO-4671A</b>	Intel® Atom™ D510/D525 Power & Energy Automation Computers with 6 x LAN, 10 x COM, and 1 x PCI-104	<b>3-6</b>
<b>ECU-4674</b>	Intel® Atom™ N2600 Power & Energy Computers with 8xLAN, 18xCOM, 8DI, 8DO, 1x IRIG-B and 1 x PCI-104	<b>3-7</b>
<b>ECU-4574</b>	Intel® Atom™ N2600 Power & Energy Computers with 8 x LAN, 10 x COM Ports	<b>3-8</b>
<b>UNO-4673A</b> <b>UNO-4683</b>	Intel® Atom™ / Core™ i7 Automation Computers with 6 x LAN, 2 x COM and 3 x Expansion Slots	<b>3-9</b>
<b>ECU-4784</b>	Intel® Haswell Core i7 Power & Energy Automation Computer with 8 x LAN, 2 x COM and 2 x Expansion Slots	<b>3-10</b>
<b>UNOP-1628D/1618D</b> <b>UNOP-1624D</b> <b>UNOP-1514RE/PE</b>	8-port Isolated/Non Isolated RS-232/422/485 4-port Isolated RS-232/422/485 with IRIG B 4-Port Gigabit Base Ethernet Card	<b>3-11</b>
<b>ECU-1710A</b>	Intel® Atom™ D510 Controller with 16-ch AI, 4-ch AO and 32-ch Isolated DI/O	<b>3-12</b>
<b>ECU-1871</b>	Intel® Atom™ D510 Energy Controller with 2 x LAN, 3 x COM, IRIG-B, and I/O Extension	<b>3-13</b>
<b>ECU-1911</b>	Xscale @ PXA-270 520 MHz RTU with 8-ch 16-bit AI, 32-ch DI, 32-ch DO	<b>3-14</b>
<b>ECU-P1706</b> <b>ECU-P1702</b> <b>ECU-P1300</b>	250 KS/s, 16bit, Simultaneous 8-ch Analog input PCI-104 10 MS/s, 12bit, Simultaneous 4-ch Analog input PCI-104 Vibration Signal Modulate Card	<b>3-15</b>
<b>DMU-3010</b>	8-ch AI, 8-ch DI, 4-ch DO Ethernet I/O Module	<b>3-16</b>



# Power & Energy Automation Overview

## Introduction

Advantech is dedicated to exploring new technologies for the power and energy industry. With an edge in the research and design of industrial products, Advantech provides rugged and highly reliable system components that are not only environmentally friendly, but also power efficient with control technology enabled by intelligent software. Advantech's products can be applied to various power and energy markets, including renewable solar and wind power generation, nuclear simulation, substation automation systems, electrical car charging station solutions, and building energy saving systems.

On the other hand, power & energy applications are becoming more and more critical as demand for electricity continues to increase worldwide. Additionally, new challenges are arising due to the limitations of traditional power resources as we try to minimize the impact our power usage has on the environment. To that end, renewable energies, such as wind and solar power are playing more significant roles in modern electricity grids. Furthermore, the modernization of legacy Transmission & Distribution (T&D) systems and providing reliable T&D information for electric power management are becoming key goals for today's power and energy applications. Thus, Advantech's power & energy solutions will focus on renewable energy generation and substation automation system development.

## Smart Substation Automation

### Station and Bay Level Application

#### ▪ HMI/SCADA Application in Substations

Working status of devices within cabinet is controlled and monitored via HMI/SCADA, besides information and event trigger collection, time synchronization, such as IRIG-B function is also implemented in the automation controller.

- Application Requirements
  - Reliable IEC 61850-3 platform
  - Redundancy

#### ▪ Cyber Security for Smart Grids

Communication within smart substations is based on network connection, and so is connection between smart substations. Hence, the cyber security to ensure smart substation maintenance becomes more critical than before. The UTM (Unified Threat Management) is the key to preventing hacker attacks.

- Application Requirements
  - Reliable IEC 61850-3 platform
  - Fiber optic LAN

#### ▪ Network Recorder and Analyzer

A network recorder at substation operates in the same way as an aircraft flight recorder and is critical for recording and analyzing network flow information. It is possible to record and analyze data to discover the reason behind IED damage.

- Application Requirements
  - Reliable IEC 61850-3 platform
  - High-speed computing & packet acquisition
  - Synchronized time stamp
  - RAID for storage

#### ▪ Data Gateway for IEC 61850

Within a substation, there are lots of devices using a wide variety of protocols. Status and information of devices need to be monitored and controlled reliably; hence, a reliable automation controller plays such an important data protocol gateway, communication server and IED analyzer at a substation.

- Application Requirements
  - Reliable IEC 61850-3 platform
  - Isolated COM port
  - IRIG-B Time Sync. Receiver
  - Fiber optic LAN

### Bay and Process Level Application

#### ▪ Partial Discharge Detection & Analytic Device

In electrical engineering, partial discharge is a localized dielectric breakdown if a small portion of a solid or fluid electrical insulation system under high voltage stress, which does not bridge the gap between two conductors. Protracted partial discharge can erode solid insulation and eventually lead to breakdown of insulation. Hence, a detection and analytic device to monitor the partial discharge is essential.

- Application Requirements
  - Reliable IEC 61850-3 platform
  - High-speed analog input for partial discharge detection

#### ▪ Vibration Detection & Analytic Device

The most common cause of power transformer failures in mechanical defect is excessive vibration, which is formed by the combination of multiples of a frequency of 120 Hz. The vibration generated from machine structures causes abnormal vibration, breakage of machine and noise. The vibration level depends on the transformer construction and design, and it is increased through fault current, phase to ground or phase to phase fault. This electrical fault will change the transformer core or winding construction by mechanical force produced. The effect of the fault can be found by measuring the vibration level before and after several faults on low voltage side. Thus, a vibration analysis of the structure is important to prevent this vibration.

- Application Requirements
  - Reliable IEC 61850-3 platform
  - High-speed analog input for partial discharge detection


#### ▪ Distribution Substation RTU Application

In substation automation systems, the RTU has interfaces towards protection and control equipment, as well as metering devices and other automation products. Local and remote monitoring and control can be easily achieved via the integrated RTU. The IEC 61850 client and server functionality of the RTU opens up an additional application area. It allows the combination of traditional protocols, parallel wiring and the IEC 61850 station bus. The hybrid solution provides the possibility to gradually upgrade the station to an IEC 61850 architecture.

- Application Requirements
  - High isolation for I/O and communication
  - Powerful platform bundled with high density I/O



# Power & Energy Automation Overview

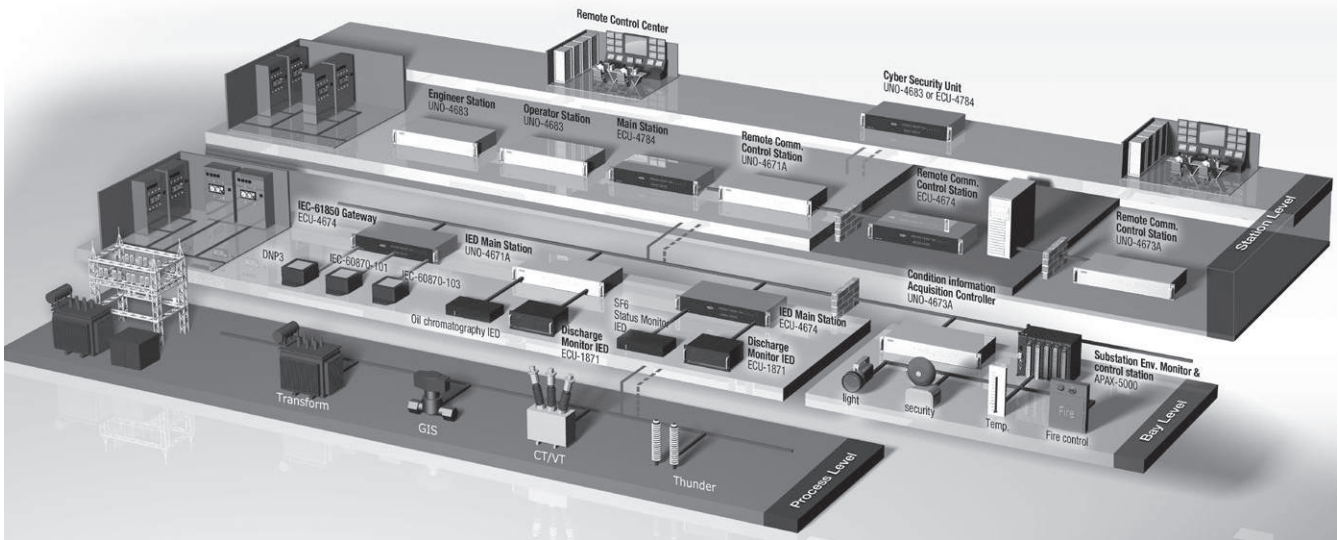

## Renewable Solar Energy and Wind Power Generation

Renewable solar and wind generation play important roles in high power and low carbon demand. With harsh environment factors, such as drastic day-night temperature differences, dust/sand storms, vibration, heat and electrical noise, Advantech provides rugged, reliable and real-time communication, monitoring, tracking, testing and DAQ control solutions for renewable energy applications.

### Wind Power Generation Monitoring Solution

#### Wind Power Turbine Gearbox Vibration Monitoring System



The vibration signals of a wind turbine gearbox contain a wide range of data, which can be used to detect defects within the gearbox. With an Energy Controller, vibration signal modulation card and simultaneous analog input card, Advantech provides an ideal solution for a Wind Power Turbine Gearbox Vibration Monitoring System. With a redundant Ethernet communication port, the analysis of data can be transferred to the remote management center in real time.

#### Wind Power Box-type Transformer Monitoring System

Box-type substations in a wind power turbine integrate the generated power into a power grid. Like traditional substation monitoring systems, the status of the transformer must be monitored in real time. Advantech Energy remote I/O monitors the status of the various parts of the transformer i.e. oil temperatures, 3-phase voltage, current, active and in-active power, and transfers the data to the remote control center via Ethernet.

### Solar Power Monitoring System

Solar Power Plant management requires fast sampling, recording and analysis of data such as sunlight strength and overall direct current power. Average energy conversion efficiency of solar cell modules and power converters are also important. Advantech's Open Embedded Controllers, compact and fanless UNO-1000 series, can serve as communication controllers and protocol converters. Also, Advantech offers Data acquisition I/O modules, ADAM-4000 series, including ADAM-4117 analog input module, ADAM-4118, thermocouple input module, and ADAM-4150 digital I/O module, which support Modbus communication protocol and are used to measure and collect solar plant information.

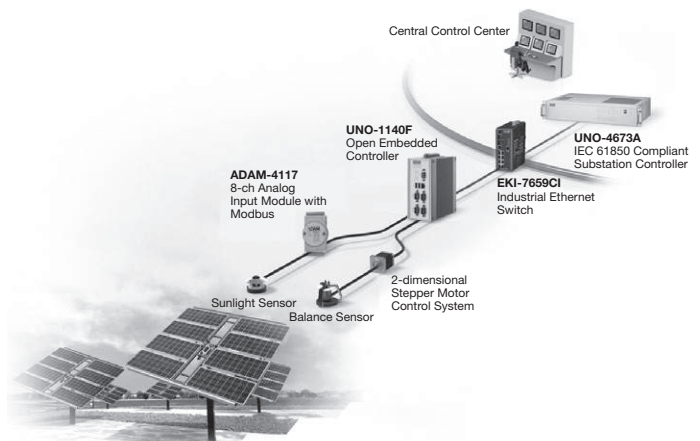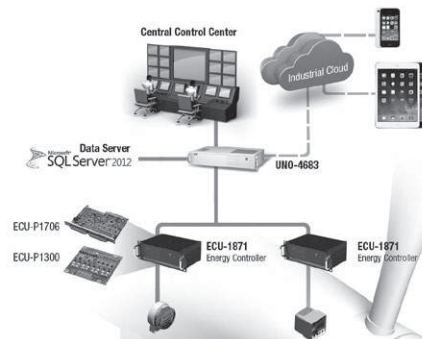

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# P&E Automation Computers & Controllers Selection Guide

## P&E Automation Computers



Model Name	UNO-4671A	ECU-4674	ECU-4574	UNO-4673A/4683	ECU-4784
Certification	IEC 61850-3 / IEEE 1613 Compliant China Electricity Certificate IV level	IEC 61850-3 / IEEE 1613 Compliant China Electricity Certificate IV level	IEC 61850-3/IEEE 1613 China Electricity Certificate IV level	IEC 61850-3/IEEE 1613 Compliant China Electricity Certificate IV level	IEC 61850-3/ IEEE 1613/ UL Certificate
CPU	Intel Atom D510 1.66GHz Intel Atom D525 1.8GHz	Intel Atom N2600 1.66GHz	Intel Atom N2600 1.66GHz	Intel Atom D510, 1.6 GHz Intel Core i7, 2.0 GHz	Intel Haswell Core i7-4650U 1.7 GHz
RAM	2GB DDR2 SDRAM 4GB DDR3 SDRAM	2G DDR3 SDRAM	2G DDR3 SDRAM	2GB DDR2 SDRAM 4GB DDR3 SDRAM	8G DDR3L SDRAM 16G DDR3L SDRAM
Battery-Backup RAM	-	1 MB	1 MB	1 MB	-
Display	VGA	VGA	VGA	VGA/DVI-I	VGA/DVI
Serial Ports	2 x Isolated RS-232, 4 x Isolated RS-422/485, 4 x Isolated RS-485	2 x Isolated RS-232, 16 x Isolated RS-232/485	2 x isolated RS-232 8 x isolated RS-232/485	2 x Isolated RS-232/422/485	2 x Isolated RS-232 (Standard), 8 x RS-232/422/485
Ethernet Ports	6 x 10/100Base-T RJ-45/ 2 x 10/100/1000Base-T and 4 x 10/100 Base-T RJ-45	2 x 10/100/1000Base-T 6 x 10/100Base-T	2 x 10/100/1000Base-T 6 x 10/100Base-T	2 x 10/100/1000, 4 x 10/100 Base-T RJ-45	1 x 10/100/1000 Base T RJ45 (Support AMT) 7 x 10/100/1000 Base T RJ45
Smart LAN	-	-	-	-	-
USB Ports	Four (One internal)	Five (One internal)	Four	Six (One internal)	Six (One internal)
PC/104 Expansion	PCI-104	PCI-104	-	-	-
Onboard I/O	-	8 x isolated DI, 8 x isolated DO	-	-	-
Watchdog Timer	Yes	Yes	Yes	Yes	Yes
CompactFlash Slots	One Internal	One Internal	One Internal	One Internal	One Internal
2.5" HDD Expansion	1 x SATA	2 x SATA	1 x SATA	1 x SATA	2 x SATA
Operating Systems	WES2009, WES7, Windows CE 6.0 and Linux	WES7, Windows7, Linux	WES 7, WES 2009, Windows XP, Windows CE 6.0, Linux	WES, Windows XP Embedded, Windows CE 6.0, Windows 2000/XP, Linux, QNX, Window server 2008 R2 (64bits)	WES7, Windows7, Linux Window server 2008 R2 (64bits)
Mounting	2U Rackmount	2U Rackmount	1U Rackmount	2U Rackmount	2U Rackmount
Anti-Vibration	2 G w/CF, 0.5 G w/HDD	2 G w/CF, 1 G w/HDD	2 G w/CF, 1 G w/HDD	2 G w/CF, 1 G w/HDD	2 Gw/CF, 1 Gw/HDD
Anti-Shock	30 G w/CF, 20 G w/HDD	30 G w/CF, 20 G w/HDD	30 G w/CF, 20 G w/HDD	30 G w/CF, 20 G w/HDD	30 G w/CF, 20 G w/HDD
Operating Temperature	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 70°C (-4 ~ 158°F)	-20 ~ 70°C (-4 ~ 158°F)	-20 ~ 70°C (-4 ~ 158°F)	-20 ~ 70°C (-4 ~ 158°F)
Power Consumption Typical	30 W	-	45 W	45 W	-
Power Requirements	Supports Redundant power input: Power 1:100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub> (Optional: 18 ~ 30 V <sub>DC</sub> ) Power 2:100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub> (Optional: 18 ~ 30 V <sub>DC</sub> )	Supports Redundant power input Power 1: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub> Power 2: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub>	Supports Redundant power input Power 1: 100 ~240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub> Power 2: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub>	Supports Redundant power input Power 1: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub> Power 2: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub>	Supports Redundant power input Power 1: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub> Power 2: 100 ~ 240 V <sub>AC</sub> or 100 ~ 240 V <sub>DC</sub>
Dimensions (W x D x H)	440 x 220 x 88 mm (17.3" x 8.6" x 3.4")	440 x 220 x 88 mm (17.3" x 8.6" x 3.4")	440 x 272 x 44 mm (17.3" x 8.6" x 3.4")	440 x 220 x 88 mm (17.3" x 8.6" x 3.4")	440 x 220 x 44 mm (17.3" x 8.6" x 1.7")
Weight	~5.5 kg	~6.0 kg	4.6 Kg	~6.0 kg	~6.0 kg
Page	3-6	3-7	3-8	3-9	3-10

## Energy Automation Controller

**NEW**



**NEW**



**NEW**



Model Name	ECU-1710A	ECU-1871	ECU-1911
Certification	-	IEC 61850-3 / IEEE 1613 Compliant China Electricity Certificate IV level	-
CPU	Intel Atom D510, 1.66 GHz	Intel Atom D510, 1.66 GHz	Xscale @ PXA-270 520MHz
RAM	1GB DDR2 667MHZ	2GB DDR2 SDRAM	64MB SDRAM 32 MB Flash
Battery-Backup RAM	1MB	-	-
Display	VGA	VGA	-
Serial Ports	2 x RS-232	1 x RS-232 2 x Isolated RS-485	1 x RS-232 3 x isolated RS-485
Ethernet Ports	2 x 10/100Base-T RJ-45	2 x 10/100/1000 Base-T RJ-45	2 x 10/100Base-T RJ-45
Smart LAN	-	-	-
USB Ports	Two	Two	One
PC/104 Expansion	-	PCI-104	-
Onboard I/O	8-ch AI 4-ch AO 16-ch Isolated DI/DO 1-ch Isolated Counter	Support Expansion IO: (1) ECU-P1702: 10Ms/S, 12-bit Simultaneous 4-ch PCI-104 card (2) ECU-P1706: 250Ks/S, 16-bit Simultaneous 8-ch PCI-104 card (3) ECU-P1300: Vibration Signal Modulate card	8-ch AI 32-ch isolated DI 32-ch isolated DO
Watchdog Timer	Yes	Yes	Yes
CompactFlash Slots	One Internal	One Internal	One Internal
2.5" HDD Expansion	1 x SATA	1 x SATA	-
Operating Systems	WES2009, WinCE 5.0, Linux	WES 7, WES 2009, Windows CE 5.0 & 6.0, Linux	Windows CE 5.0
Mounting	Wall & Rack Mount	Wall & Rack Mount	DIN-rail
Anti-Vibration	-	2 G w/CF, 1 G w/HDD	-
Anti-Shock	-	30 G w/CF, 20 G w/HDD	-
Operating Temperature	-20 ~ 70°C (-4 ~ 158°F)	-20 ~ 70°C (-4 ~ 158°F)	-20 ~ 70°C (-4 ~ 158°F)
Power Consumption Typical	28 W	24 W	< 10 W
Power Requirements	18 ~ 30 V <sub>DC</sub> (e.g 24 V @ 2 A) (Min. 48 W), AT	18 ~ 30 V <sub>DC</sub> (e.g 24 V @ 2 A) (Min. 48 W), AT	DC: 10 ~ 30 V <sub>DC</sub>
Dimensions (W x D x H)	255 x 152 x 59 mm (10" x 6.0" x 2.3")	220 x 150 x 89 mm (8.7" x 5.9" x 3.5")	266 x 146 x 45 mm (10.5" x 5.7" x 1.8")
Weight	~2.4 kg	~2.4 kg	~1.5 kg
Page	3-12	3-13	3-14

## Extension IO Cards



Module Name		ECU-P1706	ECU-P1702
BUS		PCI-104	PCI-104
Analog Input	Resolution	16-bit	12-bit
	Channels	8	4
	Onboard FIFO	8K samples/total	32K samples/per channel
	Sampling Rate	250KS/s	10MS/s
Input Range/ Bipolar Inputs		±10, 5, 2.5, 1.25	±5, 2.5, 1, 0.5
Timer/ Counter	Channels	2 channels (Isolation)	-
	Resolution	32-bit	-
	Max. Input Frequency	1 M Hz	-
	Isolation Voltage	2500 V <sub>DC</sub>	-
Page		3-15	3-15



Module Name		ECU-P1300
Inputs	Voltage Input Range	±5 V Maximum*
	Channels	8
	Amplifier Input Impedance	20k (min)
Outputs	Input Coupling	AC
	Maximum Output Voltage	±10V
	Accelerometer Input	4 mA ±1% , 24 V compliant
Page		3-15

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-4671A

## Intel® Atom™ D510/D525 Power & Energy Automation Computers with 6 x LAN, 10 x COM, and 1 x PCI-104

NEW



### Features

- IEC 61850-3 and IEEE 1613 compliant for Power & Energy automation applications
- China Electricity Certificate IV level
- Onboard Intel Atom D510 1.66GHz/D525 1.8 GHz processor
- Supports wide range and dual power input
- 2 x RS-232 isolated ports, 4 x RS-422/485 isolated ports and 4 x RS-485 isolated ports
- 6 x 10/100Base-T RJ-45 connector/2 x 10/100/1000Base-T and 4 x 10/100 Base-T RJ-45 connector
- Supports 1 x internal CF card and 1 x 2.5" SATA HDD
- Fanless design
- WES 2009, Windows XP, Windows CE 6.0, WES7 and Linux ready solution

### Introduction

The UNO-4671A is compliant with Electricity Certificate level IV (especially for China) and IEC 61850-3 certification, which defines the international standards of network and system communications in power substations. Featuring a fanless design with low power consumption and high performance Intel Atom D510/D525 processor, the UNO-4671A comes with 10 isolated serial ports, 6 x LAN, 4 x USB (Internal) and 1 x PCI-104 extension. With rich OS and driver support, such as WES 2009, Windows XP, Windows CE 6.0, WES7 and Linux, users can integrate applications easily with a platform that can provide versatile functions to fulfill diverse requirements.

### Specifications

#### General

- **Certification** CE, FCC class A, CCC, Electricity IV level for China (Compatible IEC 61850-3, IEEE 1613)
- **Dimensions (W x D x H)** 2U (440 x 220 x 88 mm/17.3" x 8.6" x 3.4") fits into standard 19 inch rack
- **Enclosure** SECC & Aluminum
- **Mounting** 2U Rackmount
- **Power Consumption** 30 W @ 24 V (Typical)
- **Power Requirements** Supports Redundant power input  
Power 1: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>  
Power 2: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>
- **Weight** < 5.5 kg
- **System Design** Fanless design
- **OS Support** WES 2009, Windows XP, Windows CE 6.0, WES7 and Linux
- **Remote Management** Built-in Advantech DiagAnywhere agent on Windows CE/XPe/7

#### System Hardware

- **CPU** Intel Atom D510 1.66 GHz/D525 1.8 GHz
- **Memory** 2GB DDR2/4GB DDR3 SDRAM
- **Indicators** LEDs for Power1&2, IDE, LAN (Active,Link) and Serial (Tx, Rx)
- **Storage** 1 x Internal type/II CompactFlash® slot, 1 x Built-in 2.5" SATA HDD bracket
- **Display** VGA, 1920 x 1080
- **Reset Button** Yes
- **WatchDog Timer** Programmable 256 levels time interval, from 1 to 255 seconds for each tier

#### I/O Interface

- **Serial Ports** 10 ports, 2 x RS-232, 4 x RS-422/485, 4 x RS-485 (Automatic RS-485 data flow control)
- **Communication Speed** RS-232: 50 ~ 115.2 kps, RS-422/485: 50 ~ 921600 bps
- **LAN** 6 x 10/100 Base-T RJ-45 ports (For UNO-4671A-A33E) 2x 10/100/1000 Base-T RJ-45 ports and 4 x 10/100 Base-T RJ-45 ports (For UNO-4671A-A44BE)
- **USB Ports** 4 x USB (include 1 x internal USB), UHCI, Rev. 2.0 compliant
- **Expansion** 1 x PCI-104

#### Environment

- **Storage Humidity** 95% @ 40°C (non-condensing)
- **Operating Temperature** IEC 60068-2-2 with 100% CPU/ I/O loading, 48 hrs -20 ~ 60°C (-4 ~ 140°F)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Shock Protection** IEC 68 2-27 CompactFlash®: 30 G half sine, 11 ms HDD: 20 G half sine, 11 ms
- **Vibration Protection** IEC 68 2-64 (Random 1 Oct./min, 1hr/axis.) CompactFlash: 2 Grms @ 5 ~ 500 Hz

### Ordering Information

- **UNO-4671A-A33E** Intel Atom D510 1.66 GHz, 2 GB RAM Power & Energy Automation Computer
- **UNO-4671A-A44BE** Intel Atom D525 1.8 GHz, 4GB RAM Power & Energy Automation Computer
- **1757004251-01(\*)** SPS AC 100-240V 120W W/PFC EOFP-120MA (For UNO-4671A Dual Power, by CTOS configuration center)

# ECU-4674

## Intel® Atom™ N2600 Power & Energy Computers with 8xLAN, 18xCOM, 8DI, 8DO, 1x IRIG-B and 1 x PCI-104

**NEW**



### Features

- China Electricity Certificate IV level
- IEC 61850-3 and IEEE 1613 compliant for substation automation applications
- Intel Atom N2600 1.6GHz processor
- 2 x RS-232 isolated serial ports, 16 x RS-232/485 isolated serial ports
- 2 x 10/100/1000 Base-T RJ-45 connector (Support teaming function and IEEE-1588 hardware capability) and 6 x 10/100 Base-T RJ-45 connector
- Support 1 x internal CF, 2x 2.5" SATA HDD
- 5x USB2.0 (1 x internal)
- Front or Rear wiring, programmable LED indicator
- Isolated 8-ch Digital Input and 8-ch Digital Output
- 1 x Time Synchronize IRIG-B
- Fanless design
- Supports Redundant isolated power with wide AC/DC input range
- iCDManager: intelligent Connectivity Diagnosis and Management

### Introduction

The ECU-4674 series of products is compliant with Electricity Certificate level IV (especially for China) and IEC 61850-3 and IEEE 1613 certification, which provide higher reliability and stability, suitable for any Global P&E automation market and harsh environment. With versatile communication interface to use for Smart substation Communication server and IED Analyzer to fulfill the Data Gateway & Protocol Conversion requirement easily. Featuring a fanless design with high performance Intel Atom N2600 processor, the ECU-4674 comes with 18 isolated serial ports, 8 x LAN and 1 x PCI-104 extension. With iCDManager support, users can easily diagnose System & Communication and enhance maintenance efficiency, with Structured and functional module Internal design for easy customization and Fast assembly to fulfill the different kind of application.

### Specifications

#### General

- **Certification** CE, FCC class A, CCC, Electricity IV level for China (Compatible IEC 61850-3, IEEE 1613)
- **Dimensions (W x D x H)** 440 x 220 x 88 mm
- **Enclosure** SECC & Aluminum
- **Mounting** 2U Rack mount
- **Power Requirements** Supports Redundant power input  
Power 1: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>  
Power 2: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>  
Supports Power Monitoring during power loss < 5.5 kg
- **Weight** < 5.5 kg
- **OS Support** WES7, Windows7, Linux
- **System Design** Fanless

#### System Hardware

- **CPU** Intel Atom N2600, 1.6GHz
- **Memory** 2G DDR3 SDRAM built-in
- **Indicators** LEDs for Power, HDD, Programmable LED, IRIG-B, LAN (Active, Status) and Serial (Tx, Rx)
- **Storage** 1 x internal CF, 2 x 2.5" SATA HDD
- **Display** DB15 VGA connector
- **PC/104 slot** 1 x PCI-104
- **Watchdog Timer** Programmable 256 levels time interval, from 1 to 255 seconds for each tier

#### I/O Interface

- **Serial Ports** 18 Ports, 2 x RS-232, 16 x RS-232/485  
2000 V<sub>DC</sub> isolation  
(Automatic RS-485 data flow control)
- **Serial Port Speed** RS-232: 50 ~ 115.2 kbps,  
RS-485: 50 ~ 921.6 kbps
- **LAN** 2 x 10/100/1000Base-T RJ-45 ports, teaming function supported, IEEE-1588 hardware capability,  
6 x 10/100Base-T RJ-45 ports
- **USB Ports** 5 x USB (1x internal), UHCI, Rev. 2.0 compliant

- **Digital Input** 8-ch isolated digital input  
Wet contact: Logic 0:0~3 V<sub>DC</sub>; Logic 1: 10~30 V<sub>DC</sub>  
Isolation protect: 2000 V<sub>DC</sub>, 30~50 V<sub>DC</sub> over voltage protection (Only for ECU-4674-A53SAE)  
Opto-Isolator Response: 25us-interrupt capable
- **Digital Output** 8-ch isolated digital output  
2000 V<sub>DC</sub> isolation, 200mA max/channel sink current  
Keeps output status after system hot reset  
Open collector to 40V (200mA maximum sink current load) 3 kHz speed (Only for ECU-4674-A53SAE)  
8-ch programmable LED indicator  
Only for ECU-4674-A53SAE
- **Programmable LED** Only for ECU-4674-A53SAE

#### Time Synchronization Interface (Only for ECU-4674-A53SAE)

- **Type** IRIG-B (RS-485)
- **Channel** 1
- **Support Format** IRIG-B00X according to IRIG STANDARD 04, 200-98
- **Message Syntax** QQQHMMSS (year, day, hour, minute & second)
- **Resolution of Time** 1s

#### Environment

- **Storage Humidity** 95% @ 40°C (non-condensing)
- **Operating Temperature** IEC 60068-2-2 with 100% CPU/ I/O loading, 48 hrs  
-20~ 70°C (-4 ~ 140°F)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Shock Protection** IEC 68 2-27 CompactFlash®: 30 G half sine, 11 ms  
HDD: 20 G half sine, 11 ms
- **Vibration Protection** IEC 68 2-64 (Random 1 Oct./min, 1hr/axis.)  
CompactFlash: 2 Grms @ 5 ~ 500 Hz  
HDD: 1 Grms @ 5 ~ 500 Hz

### Ordering Information

- **ECU-4674-A53SAE** Intel Atom N2600 1.6GHz 8LAN 18COM 8DI/DO, 1IRIG Computer
- **ECU-4674-LBA53SAE** Intel Atom N2600 1.6GHz 8LAN 10COM+IRIG Computer
- **XECU-FSP150-1H35(\*)** FSP AC 100-240V 150W W/PFC (Note: For ECU-4674 Dual Power, by CTOS configuration center)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ECU-4574

## Intel® Atom™ N2600 Power & Energy Computers with 8 x LAN, 10 x COM Ports

NEW



### Features

- China Electricity Certificate level IV
- IEC 61850-3 and IEEE 1613 compliant for substation automation applications
- Intel Atom N2600 1.6GHz processor
- 2GB DDR3 SDRAM and 1MB Battery Backup RAM
- 2 x RS-232 isolated serial ports, 8 x RS-232/485 isolated serial ports
- 2 x 10/100/1000 Base-T RJ-45 connector, 6 x 10/100 Base-T RJ-45 connector
- Supports 1 x CF, 2 x SATA 2.5" HDD
- Mounting: 1U Rack-mount
- Fanless design
- Support Redundant isolated power with wide AC/DC input range
- WES7, Windows7, Linux
- Intelligent Connectivity Diagnose Manager (iCDManager)

### Introduction

The ECU-4574 product is compliant with Electricity Certificate level IV, IEC 61850-3 and IEEE 1613 certification, provides higher reliability and stability performance that is suitable for global smart substations. With a flexible communication interface, the ECU-4574 works as an IED Analyzer that fulfills the smart substation bay level requirements. Featuring a fanless design with Intel Atom N2600 processor, 10 isolated serial ports, eight Ethernet ports and iCDManager software, the ECU-4574 is easy for customization and fast assembly to fulfill different kinds of applications.

### Specifications

#### General

- **Certification** CE, FCC class A, CCC, Electricity IV level for China (Compatible IEC 61850-3, IEEE 1613)
- **Dimensions (W x D x H)** 440 x 220 x 72 mm
- **Enclosure** SECC & Aluminum
- **Mounting** 1U Rack mount
- **Power Requirements** Supports Redundant power input  
Power 1: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>  
Power 2: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>
- **Weight** < 5.5 kg
- **OS Support** WES7, Windows7, Linux
- **System Design** Fanless

#### System Hardware

- **CPU** Intel Atom N2600, 1.6GHz
- **Memory** 2G DDR3 SDRAM built-in
- **Indicators** LEDs for Power, IDE, LAN(LINK, ACT) and Serial (Tx, Rx)
- **Storage** 1 x internal CF, 2 x 2.5" SATA HDD
- **Display** DB15 VGA connector
- **Watchdog Timer** Programmable 256 levels time interval, from 1 to 255 seconds for each tier

#### I/O Interface

- **Serial Ports** 2 x RS-232, 8 x RS-232/485  
2000 V<sub>DC</sub> isolation
- **Serial Port Speed** RS-232: 50 ~ 115.2 kbps,  
RS-485: 50 ~ 921.6 kbps
- **LAN** 2 x 10/100/1000Base-T RJ-45 ports, teaming function supported, IEEE-1588 hardware capability,  
6 x 10/100Base-T RJ-45 ports
- **USB Ports** 4 x USB, UHCI, Rev. 2.0 compliant

#### Environment

- **Storage Humidity** 95% @ 40°C (non-condensing)
- **Operating Temperature** IEC 60068-2-2 with 100% CPU/ I/O loading, 48 hrs  
-20~ 70°C (-4 ~ 140°F)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Shock Protection** IEC 68 2-27 CompactFlash®: 30 G half sine, 11 ms  
HDD: 20 G half sine, 11 ms
- **Vibration Protection** IEC 68 2-64 (Random 1 Oct./min, 1hr/axis.)  
CompactFlash: 2 Grms @ 5 ~ 500 Hz  
HDD: 1 Grms @ 5 ~ 500 Hz

### Ordering Information

- **ECU-4574-A53SAE** 1U Intel® Atom™ N2600 Power & Energy Computers
- **XECU-FSP150-1H35(\*)** FSP AC 100-240V 150W W/PFC (Note: For ECU-4574 Dual Power, by CTOS configuration center)

# UNO-4673A UNO-4683

## Intel® Atom™ / Core™ i7 Automation Computers with 6 x LAN, 2 x COM and 3 x Expansion Slots

**NEW**



### Introduction

The UNO-4673A and UNO-4683 are compliant with the hardware requirements of IEC 61850-3, which defines the international standards of network and system communications in power substations. Featuring fanless designs with built-in isolated PSU and 3 expansion slots for I/O plug-in cards, the UNO-4673A and UNO-4683 are suitable for harsh environment applications. The rear I/O connection and LEDs on front panel for all ports and modes highly simplify monitoring for operation and maintenance.

### Specifications

#### General

- **Certification** IEC 61850-3, IEEE 1613, CE, FCC Class A, UL, CCC
- **Dimensions (W x D x H)** 2U (440 x 280 x 88) mm (17.3" x 11" x 3.4")  
fits into standard 19 inch rack
- **Enclosure** SECC
- **Mounting** 2U Rackmount
- **Power Consumption** 45W (Typical)
- **Power Requirements** AC : 100 ~ 240 V<sub>AC</sub> (47 ~ 63 Hz)  
DC : 106 ~ 250 V<sub>DC</sub>  
With isolation protection, AT
- **Weight** 6.0 kg
- **OS Support** WES, Windows XP Embedded, Windows /XP, Windows CE 6.0, Linux, QNX
- **System Design** Fanless
- **Remote Management** Built-in Advantech DiagAnywhere agent on Windows CE/XPe

#### System Hardware

- **CPU** Intel Dual Core Atom D510 1.66 GHz / Core i7 2.0 GHz
- **Memory** 2G DDR2 SDRAM/4G DDR3 SDRAM built-in
- **Indicators** LEDs for Power, IDE, Alarm for battery backup SRAM, Diagnosis (programmable), LAN (Active, Status) and Serial (Tx, Rx)
- **Keyboard/Mouse** 2 x PS/2 connector for Keyboard & Mouse
- **Storage** CF 1 x internal type I/II CompactFlash® slot  
HDD 1 x build-in 2.5" SATA HDD bracket  
\*RAID capable with 2nd HDD kit
- **Display** DB15 VGA connector, 2048 x 1536 @ 85 Hz (UNO-4673A)  
1 x DVI-I, 1 x DVI-D (UNO-4683)
- **Watchdog Timer** Programmable 7-tier event handler, from 1 to 255 seconds for each tier
- **Battery Backup SRAM** 1 MB
- **Relay:** Relay output: Form C  
Contact: 5A@250V<sub>AC</sub>/5A@30V<sub>DC</sub>

### Features

- IEC 61850-3 and IEEE 1613 compliant for substation automation applications
- Onboard Intel Atom 1.66 GHz / Core i7 2.0 GHz processor
- 2 x RS-232/422/485 isolated serial ports with automatic flow control and 128KB FIFO
- 2 x 10/100/1000 Base-T (supports teaming function) and 4 x 10/100 Base-T
- Supports 1 x internal CF card and 1 x 2.5" SATA HDD
- 6 x USB 2.0 (1 x internal) and 3 x Domain I/O expansions
- Rear wiring, multiple system & I/O LED status indicators
- Windows® CE 6.0, Windows XP Embedded SP2, and Linux ready solution
- Fanless design
- Isolation power design with wide AC / DC input range
- Isolation between chassis and power ground
- One internal USB for dongle and flash drive
- Redundant power supplier for system power backup

#### I/O Interface

- **Serial Ports** 2 x DB-9  
Automatic RS-485 data flow control  
2000 V<sub>DC</sub> EFT protection & 2000 V<sub>DC</sub> isolation
- **Serial Port Speed** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 921.6 kbps (Max.)
- **LAN** 2 x 10/100/1000 Base-T RJ-45 ports, teaming function supported  
4 x 10/100Base-T RJ-45 ports
- **Audio** Line-out
- **USB Ports** 6 x USB, UHCI, Rev. 2.0 compliant  
2 x Front, 3 x Rear and 1 x Internal ports
- **Expansion** 3 x Domain I/O expansions (Only slot 1 supports PCIe resource)

#### Environment

- **Humidity** 95% @ 40°C (non-condensing)
- **Operating Temperature** IEC 60068-2-2 with 100% CPU/ I/O loading, 48 hrs -20 ~ 70°C
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Shock Protection** IEC 60068-2-27 CompactFlash®: 50 G half sine, 11 ms  
HDD: 20 G half sine, 11 ms
- **Vibration Protection** IEC 60068-2-64 (Random 1 Oct./min, 1hr/axis.)  
CompactFlash®: 2 Grms @ 5 ~ 500 Hz,  
HDD: 1 Grms @ 5 ~ 500 Hz

### Ordering Information

- **UNO-4673A-A33E** Intel Atom 1.66 GHz, 2 GB RAM Automation Computer
- **UNO-4683-D34E** Core i7 2.0 GHz, 4 GB RAM Automation Computer
- **UNO-4673ADP-A33E** Intel Atom 1.66 GHz, 2 GB RAM, dual PSU Automation Computer
- **UNO-4683DP-D34E** Core i7 2.0 GHz, 4 GB RAM, dual PSU Automation Computer

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIW-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# ECU-4784

## Intel® Haswell Core i7 Power & Energy Automation Computer with 8 x LAN, 10 x COM and 2 x Expansion Slots

NEW



### Features

- TUV IEC 61850-3 and IEEE 1613 compliant for substation automation applications
- Intel Haswell Core i7 4650U 1.7GHz processor
- Supports Intel Virtualization Technology for Direct IO (VT-D)
- Supports Intel Active Management Technology(AMT)
- 2 x 2.5" SATA HDD , RAID (RAID 0 & RAID 1), Hot swap installation
- 1 x 10/100/1000 Base T RJ45 (Support AMT, Teaming Function, PXE)  
7 x 10/100/1000 Base T RJ45 (Support Teaming Function, PXE)
- Security Protection: Trusted Platform Module
- Front or Rear wiring, programmable LED indicator
- Support Redundant Display (DVI& VGA)
- Support Redundant isolated power with wide AC/DC input range

### Introduction

ECU-4784 series products are compliant with TUV IEC 61850-3 and IEEE 1613 certification, which can provide higher reliability and stability, suitable for any global P&E automation market and harsh environment. With high computing and high integration performance , ECU-4784 is target to Smart Substation station level 's Server application, Featuring a fanless design with high performance processor (Intel Haswell Core i7 4650U), the ECU-4784 comes with 10 isolated serial ports, 8 x LAN and 2 x Expansion Slots. ECU-4784 are easy to expand more kinds domain I/O by functional module to extend data collection variety and highly simplify monitoring for operation and maintenance.

### Specifications

#### General

- **Certification** CE, FCC class A, CCC, Electricity IV level for China (Compatible IEC 61850-3, IEEE 1613), UL
- **Dimensions (W x D x H)** 440 x 280 x 88 mm
- **Enclosure** SECC & Aluminum
- **Mounting** 2U Rack mount
- **Power Requirements** Supports Redundant power input  
Power 1: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>;  
Power 2: 100 ~ 240 V<sub>AC</sub> or 100 ~ 240 V<sub>DC</sub>
- **Weight** 6.0 kg
- **OS Support** WES7, Windows7, Linux  
Windows server 2008 R2 (64bits),  
Windows Embedded 8.1(32/64bits)
- **System Design** Fanless

#### System Hardware

- **CPU** Intel Haswell Core i7 4650U 1.7GHz
- **Memory** DDR3L 1.35V non-ECC 8G (Up to 16G by 2 Piece 8G)
- **Indicators** LEDs for Power, HDD, Programmable LED,  
LAN (Active, Status) and Serial ( Tx , Rx)
- **Storage** 2 x 2.5" SATA HDD( RAID 0,1);  
1 x CFast socket
- **Display** DB15 VGA connector, 1 x DVI
- **Watchdog Timer** Programmable 256 levels time interval, from 1 to 255 seconds for each tier

#### Relay

- **Relay Output** Form C
- **Contact** 5 A @ 250 V<sub>AC</sub>/5 A @ 30 V<sub>DC</sub>
- **Channel** 1

#### I/O Interface

- **Serial Ports** 2 x RS-232 (DB-9 connectors) (Standard ),  
8 x RS-232/422/485 (Terminal Block)  
2000 V<sub>DC</sub> isolation
- **Serial Port Speed** RS-232: 50 ~ 115.2 kbps,  
RS-422/ RS-485: 50 ~ 921.6 kbps (Max.)
- **LAN** 1 x 10/100/1000 Base T RJ45 ports  
(Supports AMT, Teaming Function, PXE)  
7 x 10/100/1000 Base T RJ45 ports  
(Support Teaming Function, PXE)
- **USB Ports** 6 x USB, UHCI, Rev.2.0 Compliant  
2 x Front, 3 x Rear and 1 x Internal
- **Expansion** 2 Domain I/O Expansions  
(Each Expansion Slot supports 1 x PCIe and 2 x PCI Interface)

#### Environment

- **Storage Humidity** 95% @ 40°C (non-condensing)
- **Operating Temperature** IEC 60068-2-2 with 100% CPU/ I/O loading, 48 hrs  
-20~ 70°C (-4 ~ 158°F)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Shock Protection** IEC 68 2-27 CFast®: 50 G half sine, 11 ms  
HDD: 20 G half sine, 11 ms
- **Vibration Protection** IEC 60068-2-64 (Random 1 Oct./min, 1hr/axis.)  
CFast®: 2 Grms @ 5 ~ 500 Hz,  
HDD: 1 Grms @ 5 ~ 500 Hz

### Ordering Information

- **ECU-4784-D55SAE** Intel Core i7 1.7GHz, 8GB RAM, 8 x LAN, 10 x COM, 2 x Slot Computer
- **ECU-4784-D56SAE** Intel Core i7 1.7GHz, 16GB RAM, 8 x LAN, 10 x COM, 2 x Slot Computer
- **XECU-FSP150-1H35(\*)** FSP AC 100-240V 150W W/PFC (Note: For ECU-4784 Dual Power, by CTOS configuration center)



# UNOP-1628D/1618D

# UNOP-1624D

# UNOP-1514RE/PE

8-port Isolated/Non Isolated RS-232/422/485

4-port Isolated RS-232/422/485 with IRIG B

4-Port Gigabit Base Ethernet Card



## Specifications

### General

- **Connector** 120-pin connector for UNO-4673A/PCI, UNO-4683/PCI
- **Dimensions** 5.3" x 6.0" (136 x 150 mm)
- **Power Consumption** 5V ± 5% @ 620mA typical  
3.3V ± 5% @ 75mA typical  
CE/FCC
- **Certification**

### Communication

- **IRQ** All COM ports use the same IRQ assigned by PCI Bus
- **COM Ports** 8 x RS-232/422/485 ports
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Even, Odd
- **Baud-rate (bps)** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 921.6 kbps (max.)
- **Data Signals** Tx+, Tx-, Rx+, Rx-, GND for RS-485  
TxD, RxD, RTS, CTS, RI, DSR, DTR, DCD, GND for RS-232  
Data+, Data-, GND for RS-485

### Protection

- **Isolation Protection** 2500 V<sub>oc</sub> (UNOP-1628D)

### Environment

- **Operating Temp.** -20 ~ 70°C (-4 ~ 158°F)
- **Operating Humidity** 10 ~ 90% RH non-condensing (refer to IEC 60068-2-3)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 60068-2-3)

## Ordering Information

- **UNOP-1618D-AE** 8-port RS-232/422/485 for UNO-4673A & UNO-4683
- **UNOP-1628D-AE** 8-port Iso. RS-232/422/485 for UNO-4673A & UNO-4683

## Specifications

### General

- **Connector** 120-pin connector for UNO-4673A/PCI, UNO-4683/PCI
- **Dimensions** 5.3" x 6.0" (136 x 150 mm)
- **Power Consumption** 5V ± 5% @ 500mA typical.  
3.3V ± 5% @ 180mA typical.  
CE/FCC
- **Certification**

### Communication

- **IRQ** All COM ports use the same IRQ assigned by PCI Bus
- **COM Ports** 4 x RS-232/422/485 ports
- **Baud rate (bps)** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 921.6 kbps (Max.)
- **Data Signals** TxD, RxD, RTS, CTS, RI, DSR, DTR, DCD, GND for RS-232  
Data+, Data-, GND for RS-485  
Tx+, Tx-, Rx+, Rx-, GND for RS-422

### IRIG Time Code Input

- **IRIG Interface** Male 9-pole D-Sub connector (COM4 or IRIG-B)
- **ST Multi-Mode** Fiber connector
- **Input Signal** Female BNC  
RS-422 input signal isolated by optocoupler  
Optical signal @ 820nm; TTL
- **Supported Formats** IRIG-B according to IRIG STANDARD 200-04, 200-98

### IRIG Time Code Output

- **IRIG Interface** Male 9-pole D-Sub connector (COM4 or IRIG-B)
- **Output Signal** Female BNC  
RS-422 output signal; TTL

### IRIG Time Code Decoding

- **Message syntax** YYYYQQQHHMMSS (yr, d, h, min, sec)
- **Resolution of the time** 1s
- **Status info** 1 status LED for indication

### Protection

- **Isolation Protection** 2500 V<sub>oc</sub> for COM/IRIG

### Environment

- **Operating Temp.** -20 ~ 70°C (-4 ~ 158°F)
- **Operating Humidity** 10 ~ 90% RH non-condensing (refer to IEC 60068-2-3)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 60068-2-3)

## Ordering Information

- **UNOP-1624D-AE** 4-port Iso. RS-232/422/485 and IRIG B for UNO-4673A & UNO-4683

## Specifications

### General

- **Connector** 120-pin connector for UNO-4673A/4683 series PCIe
- **Bus Interface** PCI Express® x 1 compliant
- **Dimensions** 5.3" x 6.0" (136 x 150 mm)
- **Power Consumption** 5V ± 5% @ 400mA typical  
CE/FCC
- **Certification**

### UNOP-1514PE

- **Connector** SFP
- **Ports** 4
- **Compatibility** IEEE 802.3 Ethernet interface
- **Speed** 1000M bps

### UNOP-1514RE

- **Connector** RJ45
- **Ports 4**
- **Compatibility** IEEE 802.3 Ethernet interface
- **Speed** 10/100/1000M bps

### Environment

- **Operating Temp.** -20 ~ 70°C (-4 ~ 158°F)
- **Operating Humidity** 10 ~ 90% RH non-condensing (refer to IEC 60068-2-3)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 60068-2-3)

## Ordering Information

- **UNOP-1514RE-AE** 4-port RJ45 Gigabit Base Ethernet Card
- **UNOP-1514PE-AE** 4-port SFP Gigabit Base Ethernet Card

## Accessories

- **SFP-GTX/RJ45** 1000Base RJ45 SFP module
- **SFP-GSX/LC** 1000Base-SX Multi-mode SFP module
- **SFP-GLX/LC-10** 1000Base-LX Single-mode SFP module (10 km)
- **SFP-GLX/LC-20** 1000Base-LX Single-mode SFP module (20 km)
- **SFP-GLX/LC-40** 1000Base-LX Single-mode SFP module (40 km)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ECU-1710A

Intel® Atom™ D510 Controller with  
16-ch AI, 4-ch AO and 32-ch Isolated DI/O

**NEW**



## Features

- Onboard Intel Atom D510 1.66 GHz processor
- 2 x RS-232 ports
- 2 x 10/100Base-T RJ-45 ports
- 2 x USB ports
- Integrated PCI-1710UL & PCI-1720U modules
- 16-ch single-ended or 8-ch differential or a combination of Analog Input
- 12-bit A/D converter, with up to 100kS/s sampling rate
- 4-ch 12-bit Analog Output
- 16-ch Isolated Digital Input/Digital Output
- 1-ch Isolated Counter

## Introduction

The ECU-1710A is a standalone automation controller with integrated PCI-1710UL and PCI-1720U to provide 16-ch Analog Input, 4-ch Analog Output, 16-ch Isolated Digital Input and 16-ch Isolated Digital Output. This controller also supports serial communication ports and several other networking interfaces. You can seamlessly integrate your applications into the ECU-1710A and speed up your system development with these application ready controllers.

## Specifications

### General

- Dimensions (W x D x H)** 255 x 152 x 59 mm (10" x 6.0" x 2.3")
- Power Consumption** 28 W (Typical)
- Power Requirements** 18 ~ 30 V<sub>DC</sub> (e.g 24 V @ 2 A) (Min. 48 W), AT
- Weight** 2.4 kg (Typical)
- OS Support** WES 2009

### System Hardware

- CPU** Intel Atom D510 1.66 GHz/ 512 KB L2 Cache
- Memory** 1GB DDRII 667MHZ
- Indicators** LEDs for Power, IDE and LAN (Active, Status)
- Keyboard/Mouse** 1 x PS/2
- Storage** 1 x internal type/II CompactFlash® slot, 1 x Built-in 2.5" SATA HDD bracket

### I/O Interface

- Serial Ports** 2 x RS-232
- LAN** 2 x 10/100Base-T RJ-45 ports
- USB Ports** 2 x USB, EHCI, Rev. 2.0 compliant

### Analog Input

- Channels** 16 single-ended/ 8 differential
- Resolution** 12 bits
- Max. Sampling Rate** 100 kS/s
- FIFO Size** 4,096 samples
- Overvoltage Protection** 30 Vp-p
- Input Impedance** >18M ohm
- Sampling Mode** Delay to Start, Delay to Stop, None
- Input Range** (V)

<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Bipolar</b>	±10	±5	±2.5	±1.25	±0.625
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4

### Analog Output

- Channels** 4
- Resolution** 12 bits

- Output Range** (Software programmable)  
Unipolar (V) 0 ~ 5, 0 ~ 10  
Bipolar (V) ±5, ±10  
Current Loop (mA) 0 ~ 20, 4 ~ 20
- Driving Capability** 5 mA
- Accuracy** Relative: ±1 LSB; Differential Non-Linearity: ±1 LSB (monotonic)  
48 V (max.)
- Excitation Voltage** 48 V (max.)

### Digital Input /Output / Counter

- DI Channels** 16
- DI Input Voltage** Logic 0: 2 V max.  
Logic 1: 5 V min. (30 V max.)
- DO Channels** 16
- DO Output Type** Sink Type (NPN)
- DO Output Voltage** 5 ~ 40 V<sub>DC</sub>
- DO Sink Current** 300 mA max. per channel
- Counter Channels** 1
- Counter Resolution** 16 bits
- Counter Input Voltage** Logic 0: 2 V max.  
Logic 1: 5 V min. (30 V max.)
- Counter Max. Input Frequency** 1 MHz
- Isolation Protection** 1,000 V<sub>DC</sub>

### Environment

- Storage Humidity** 5 ~ 95% RH, non-condensing (IEC-60068-2-3)
- Operating Temperature** -10 ~ 60°C (14 ~ 140°F) @ 5 ~ 85% RH
- Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)

## Ordering Information

- ECU-1710A-A32E** Intel Atom D510 1.66 GHz controller with AI/O and DI/O

### Accessories

- ADAM-3925-AE** DB25 DIN-rail Wiring Board
- ADAM-3937-BE** DB37 DIN-rail Wiring Board

# ECU-1871

## Intel® Atom™ D510 Energy Controller with 2 x LAN, 3 x COM, IRIG-B, and I/O Extension

NEW



### Features

- Onboard Intel Atom D510 1.66 GHz CPU
- IEC 61850-3 and IEEE-1613 compliant for substation application
- China Electricity Certificate IV level
- Built-in Time Synchronize IRIG-B
- Supports more Smart-Substation application I/O extension
- 1 x RS-232 port/ 2 x RS-485 isolation ports
- 2 x 10/100/1000Base-T RJ-45 ports
- Windows® CE 6.0, WES 2009, WES 7, and Linux ready solution
- Supports PCIe-104 & PCI-104 extension

### Introduction

The ECU-1871 is compliant with Electricity Certificate IV Level (especially for China) and IEC 61850-3 certification. Featuring a fanless design with low power consumption and high performance Intel Atom D510 processor, the ECU-1871 comes with 2 x Ethernet, 1 x RS-232, and 2 x isolation RS-485 ports. The ECU-1871 supports two extension interfaces, PCI-104 & PCIe-104, and users can easily order other Energy I/O boards to integrate into the ECU-1871 and speed up your system development with an energy controller.

### Specifications

#### General

- **Dimensions (W x D x H)** 220 x 150 x 89 mm (8.7"x 5.9"x 3.5")
- **Power Consumption** 24 W (Typical)
- **Power Requirements** 18 ~ 30 V<sub>DC</sub> (e.g 24 V @ 2 A) (Min. 48 W), AT
- **Weight** 2.4 kg (Typical)
- **Mounting** 2U Rack-mount & Wall-mount
- **OS Support** WES 2009, WES 7, WinCE 6.0, Linux
- **System Design** Fanless

#### System Hardware

- **CPU** Intel Atom D510 1.66 GHz/ 512 KB L2 Cache
- **Memory** 2G DDRII 667 MHz
- **Indicators** LEDs for Power, HDD, IRIG, COM(Tx Rx) and LAN (Active Statue)
- **Storage** SSD: 1 x type I/II CompactFlash® slot  
HDD: 1 x integrated 2.5" SATA HDD bracket
- **Display** VGA, 1600 x 1200 @ 85 Hz
- **Watchdog Timer** Programmable 256 levels time interval, from 1 to 255 seconds for each tier
- **PCI-104/PCIe-104** Supports +3.3/ +5 V power

#### Communication Interface

- **Serial Ports** 3 Ports, 1 x RS-232, 2 x RS-485
- **Serial Ports Speed** RS-232 50 ~ 115.2 kbps  
RS-485 50 ~ 921.6 kbps
- **LAN** 2 x 10/100/1000Base-T RJ-45 ports
- **USB Ports** 4 x USB (include 1x internal USB), EHCI, Rev. 2.0 compliant

#### Time Synchronization Interface

- **Type** IRIG-B
- **Channel** 1
- **Support Format** IRIG-B00X according to IRIG STANDARD 04, 200-98
- **Input Signal** ST Multi-mode, 1 Isolation RS-485 (Optional)
- **Message Syntax** QQQHMMSS(year, day, hour, minute & second)
- **Resolution of Time** 1s

#### Environment

- **Storage Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** -20 ~ 70°C (-4 ~ 158°F) @ 5 ~ 85% RH
- **Storage Temperature** -40 ~ 80°C (-40 ~ 176°F)

### Ordering Information

- **ECU-1871 -A33CAE** Intel Atom Energy Controller with 2 x LAN, 3 x COM, IRIG-B and I/O Extension

#### Accessories

- **ECU-P1706-AE** 250 KS/s, 16 bit, Simultaneous 8-ch Analog input PCI-104 Card
- **ECU-P1300-AE** Vibration Signal Modulate, Vibration Sensor Driver, 8-order Low-pass Filter
- **ECU-P1702-LAE** 10 MS/s, 14bit, Simultaneous 4-ch Analog input PCI-104 Card

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules


17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# ECU-1911

Xscale @ PXA-270 520 MHz RTU with  
8-ch 16-bit AI, 32-ch DI, 32-ch DO

NEW

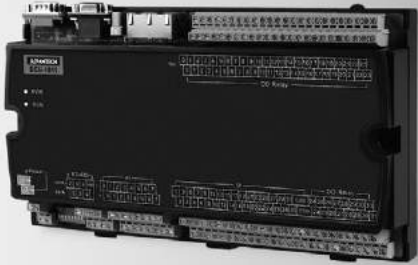

CE FCC

## Features

- Onboard Xscale @ PXA-270 520 MHz CPU
- 1 x RS-232 port
- 3 x RS-485 isolated ports
- 2 x 10/100Base-T RJ-45 ports
- 8-ch 16-bit differential Analog Input
- 32-ch isolated Digital Input
- 32-ch isolated Digital Output
- Built-in Window CE 5.0

## Introduction

The ECU-1911 focuses on RTU monitor application. The ECU-1911 is also a standalone RTU that provides a 16-bit 8-ch A/D converter, 32-ch Relay and 32-ch Digital Input. This controller also supports four serial communication ports and two networking interfaces. You can seamlessly integrate your applications into the ECU-1911 and speed up your system development with this application ready RTU.

## Specifications

### General

- **Power Consumption** <10 W (Typical)
- **Power Requirements** 24 V<sub>DC</sub> (Typical) (10 V<sub>DC</sub> Min ~ 30 V<sub>DC</sub> Max)
- **OS Support** Windows CE 5.0

### System Hardware

- **CPU** Xscale @ PXA-270 520MHz
- **Memory** Onboard 64 MB SDRAM/ 32 MB Flash
- **Storage** 1 x type I/II Compact Flash slot
- **Display** VGA 640 x480 @ 60Hz

### Digital Input

- **Channels** 32
- **I/O Type** Sink
- **Wet Contact** Logic 0: 0 ~ 10 V  
Logic 1: 19 ~ 30 V
- **Isolation** 3000 V<sub>DC</sub>
- **Connector** Terminal Block (#14 ~ 22 AWG)

### Digital Output

- **Channels** 32
- **I/O Type** Power Relay Form A
- **Contact Rating** AC: 5A @ 250 V; DC: 30 V @ 5 A (Resistive Load)
- **Isolation** 500 V<sub>DC</sub>
- **Connector** Terminal Block (#14 ~ 22 AWG)

### Analog Input

- **Channels** 8 differential
- **Resolution** 16 bits
- **Sampling rate** 10 Hz/sec (total)
- **Input Impedance** 700 k $\Omega$
- **Input Range** 0 ~ 150 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V,  
0 ~ 15 V,  $\pm 150$  mV,  $\pm 500$  mV,  $\pm 1$  V,  $\pm 5$  V,  $\pm 10$  V,  
 $\pm 15$  V,  $\pm 20$  mA, 4 ~ 20 mA
- **Accuracy** Voltage :  $\pm 0.1$  %  
Current :  $\pm 0.2$  %
- **Span Drift**  $\pm 25$  ppm/ $^{\circ}$ C
- **Zero Drift**  $\pm 6$   $\mu$ V/ $^{\circ}$ C

### Environment

- **Storage Humidity** 5 ~ 95% @ 40 $^{\circ}$ C (non-condensing)
- **Operating Temperature** -20 ~ 70 $^{\circ}$ C (-4 ~ 158 $^{\circ}$ F) @ 5 ~ 85% RH
- **Storage Temperature** -40 ~ 80 $^{\circ}$ C (-40 ~ 176 $^{\circ}$ F)

### I/O Interface

- **Serial Ports** 1 x RS-232, 3 x RS-485 (Automatic RS-485 data flow)
- **LAN** 2 x 10/100Base-T RJ-45 ports
- **USB Port** 1 x USB, OpenHCI, Rev. 1.1 compliant

## Ordering Information

- **ECU-1911-R0CAE** Xscale @ PXA-270 520 MHz RTU with 8-ch 16-bit Analog Input, 32-ch Digital Input, and 32-ch Digital Output

# ECU-P1706 ECU-P1702 ECU-P1300

250 KS/s, 16bit, Simultaneous 8-ch Analog input PCI-104

10 MS/s, 12bit, Simultaneous 4-ch Analog input PCI-104

Vibration Signal Modulate Card

**NEW**



## Features

- Designed for Smart-Grid Applications
- ECU-P1706 focuses on the Vibration/ Substation Signal Analytics (Wind-Power / Smart Substations)
- ECU-P1702 focuses on the Partial Discharge Detection and Analytical Devices (Smart Substations)
- ECU-P1300 focuses on Vibration Applications (Wind-power / Smart Substations)
- Easy to install to ECU-1871 Energy Controller

### ECU-P1706

## Specifications

### General

- **Power Consumption** Typical: 5V @ 850mA PCI-104
- **Bus Type** Plug-in Terminal Block
- **I/O Connector** -20 ~ 70°C (-4 ~158°F)
- **Operating Temperature** @ 5 ~ 85% RH
- **Storage Temperature** -40 ~ 80°C (-40 ~176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)

### Analog Input

- **Channels** 8 differential
- **Resolution** 16 bits
- **Max. Sampling Rate** 250 KS/s
- **FIFO Size** 8K samples
- **Overvoltage Protection** ±30V
- **Input Impedance** 18MΩ
- **Sampling Mode** Software, onboard programmable pacer and external (TTL Level)
- **Trigger mode** Delay To Start Trigger, Delay To Stop Trigger
- **Trigger Source** Analog Trigger, External Trigger
- **Input Range** (V. Software Programmable)

Bipolar	±10V	±5V	±2.5V	±1.25V
Accuracy % of FSR±1LSB	0.04	0.04	0.06	0.08

### Timer Counter

- **Channels** 2
- **Resolution** 32 bits
- **Mode** In: Event counting, Frequency In, PWM In
- **Compatibility** Isolated 24V<sub>DC</sub>
- **Max. Input Frequency** 1 MHz
- **Max. Output Frequency** 1 MHz

## Ordering Information

- **ECU-P1706-AE** 250 KS/s, 16bit, Simultaneous 8-ch PCI-104

### ECU-P1702

## Specifications

### General

- **Power Consumption** 5V @ 700mA (Max.) 3.3V @ 850mA (Max.) PCI-104
- **Bus Type** BNC
- **I/O Connector** -20 ~ 70°C (-4 ~158°F)
- **Operating Temperature** @ 5 ~ 85% RH
- **Storage Temperature** -40 ~ 80°C (-40 ~176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)

### Analog Input

- **Channels** 4 Single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** 10 MS/s
- **FIFO Size** 32K samples
- **Overvoltage Protection** ±15V
- **Input Impedance** 50 ohm/1M ohm/Hi Z switch selectable
- **Sampling Mode** Software, onboard programmable pacer and external (TTL Level)
- **Trigger mode** Delay To Start Trigger, Delay To Stop Trigger
- **Trigger Source** Analog Trigger, External Trigger
- **Input Range** ±5V, ±2.5V, ±1V, ±0.5V

## Ordering Information

- **ECU-P1702-LAE** 10 MS/s, 12bit, Simultaneous 4-ch PCI-104

### ECU-P1300

## Specifications

### General

- **Power Consumption** Typical: 5V @ 700mA; 12V @ 100mA
- **Operating Temperature** -20 ~ 70°C (-4 ~158°F)
- **Storage Temperature** -40 ~ 80°C (-40 ~176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)

### Vibration Modulate

- **Channels** 8
- **Input Range** ±5V (Max.)
- **Output Range** ±10V
- **Input Coupling** AC
- **Sensor Current Supply** 4mA ±1%, 24V compliant
- **Precision** 0.1%
- **Drive Ability** 0 ~ 5K
- **Sensor Signal Gain** 1
- **Signal Gain** 1
- **Analog Filter** 8th order Lowpass Bessel Filters
- **Filter Adjustable** 0.1 Hz ~ 25KHz Adjustable by Software Program

## Ordering Information

- **ECU-P1300-AE** Vibration Signal Modulate Card

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# DMU-3010

## 8-ch AI, 8-ch DI, 4-ch DO Ethernet I/O Module



RoHS  
COMPLIANT  
2002/95/EC

CE FCC

### Features

- Industrial Modbus/TCP protocol
- Mixed I/O in the Module
- Advantech Domain Focused Configuration Tool
- Remote maintenance through Ethernet
- Supports online device auto-scan or manual configure function
- Auto push data to specification target function
- Supports High/Low Alarm function
- Supports cable burn-out check
- Supports pulse/ accumulator input

### Introduction

The DMU-3010 is an Ethernet I/O module that supports the Modbus TCP protocol, and delivers various onboard I/Os including analog input, digital input, and digital output, providing flexible options to satisfy versatile application requirements. It also features the powerful Advantech Domain Focused Configuration Tool for engineers to quickly develop their applications.

### Specifications

#### General

- **Dimensions (W x H x D)** 120 x 120 x 44 mm (4.72" x 4.72" x 1.73")
- **LAN** 10/100Base-T
- **Connector** 1 x RJ-45 (LAN)  
4 x Plug-in screw terminal block (I/O & Power)
- **Watchdog** System (1.6 sec)
- **Supported Protocols** Modbus/TCP
- **Power Input** 10 ~ 30 V<sub>DC</sub>
- **Power Consumption** 3 W @ 24 V<sub>DC</sub>

#### Analog Input

- **Channels** 8
- **Input Type** V, mA\*1, RTD\*2
- **Voltage Range** 0 ~ 10 V
- **Current Range** 0 ~ 20 mA, 4 ~ 20 mA
- **RTD Type**
  - Pt 100 (3-wire): -50 ~ 150°C  
0 ~ 100°C  
0 ~ 200°C  
0 ~ 400°C  
-50 ~ 200°C
  - Pt 1000 (3-wire): -40 ~ 160°C
  - IEC RTD 100 ohms (=0.0385)
  - JIS RTD 100 ohms (=0.0392)
- **Input Impedance** 2 MΩ (voltage)
- **Accuracy** ±0.1%, (voltage); ±0.2% (current); ±0.5°C (RTD); or Better
- **Span Drift** ±25 ppm/°C
- **Zero Drift** ±6 μV/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 samples/second
- **CMR @ 50/60 Hz** 90 dB
- **NMR @ 50/60 Hz** 60 dB
- **Over Voltage Protection** ±35 V<sub>DC</sub>

#### Built-in TVS/ESD Protection

- **Isolation Protection** 2500 V<sub>DC</sub>  
Channels 0~7 support V, mA  
Channel 4~7 also support RTD input

#### Digital Input

- **Channels** 8
- **Dry Contact** Logic level 0: Open  
Logic level 1: Close to Ground
- **Supports 200 Hz pulse/accumulator input**
- **Isolation Protection** 2500 V<sub>DC</sub>

#### Digital Output

- **Channels** 4  
Open Collector to 30V  
30mA max load.
- **Power Dissipation** 300 mW for each channel
- **PWM Period** 20 ms ~ 3600 sec
- **PWM Minimum Duty On** 2 ms
- **Isolation Protection** 2500 V<sub>DC</sub>

#### Environment

- **Humidity** 5 ~ 95% RH
- **Operation Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -40 ~ 70°C (-40 ~ 158°F)

### Ordering Information

- **DMU-3010-AE** 8-ch AI, 8-ch DI, 4-ch DO Ethernet IO Module

# Automation Software

<b>Advantech WebAccess</b>	Browser-based HMI/SCADA Software	4-2
<b>WebOP Designer / Panel Express</b>	HMI Runtime Software	4-5
<b>KW Multiprog</b>	IEC 61131-3 softlogic control software	4-7
<b>OPC Server</b>	OPC Server for ADAM & Modbus Devices	4-8
<b>DAQnavi</b>	Software Development Package for Advantech DAQ Product	4-9

To view all of Advantech's Automation Software, please visit [www.advantech.com/products](http://www.advantech.com/products).



# Advantech WebAccess

Browser-based  
HMI/SCADA Software



## Features

- Remote engineering and support with WebAccess Cloud Architecture
- Business Intelligence Dashboard - cross-browser, cross-platform WebAccess HMI based on HTML5
- Open Interfaces - Web Services, Widget Interfaces and WebAccess APIs
- Excel Report integration for report format customization
- Multi-touch gesture support
- Google Maps and GPS location tracking integration
- WebAccess Express - The auto-configuration tool for various devices
- Distributed SCADA architecture with central database server and Multi-layer inter-operable SCADA nodes
- Supports ample drivers, including Advantech I/O, controllers and major PLCs
- Redundant SCADA, ports and devices - High availability
- Web-enabled video, audio and animation in WebAccess View
- Open data connectivity by providing industrial protocol and ODBC integration
- Advanced SCADA Function - Alarm, Schedule and Real-time database

## Introduction

Advantech WebAccess is a web browser-based software package for human-machine interfaces (HMI) and supervisory control and data acquisition (SCADA). All the features found in conventional HMI and SCADA software including Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. The basic components are:

1. SCADA Node: it communicates in real-time with automation equipment and controls the equipment via serial, ethernet or proprietary communication via multiple built-in device drivers. Not only does it run local controls and monitoring, but also provides real-time data to all remote clients.
2. Project Node: it is the development platform for WebAccess and is a web server for all clients to connect to the development project or remotely monitor and control the system. All system configuration, project database files and graphics are stored here.
3. Client node: through the ActiveX control inside Microsoft Internet Explorer, it monitors and controls the SCADA Node. The client connects to the Project Node and get the address of the SCADA Node, then communicates directly with the SCADA Node using proprietary communications over a TCP/IP connection. Data is displayed in real-time with dynamically animated graphics along with real-time, historical trending and alarm information. Users can acknowledge alarms and change set-points, status and other data.
4. Mobile Client: the Mobile Client interface is intended for use with smart mobile devices, such as iOS, Android; and Windows. In the mobile client users can browse graphics, data-log trends, and tag information in real-time. Setting the value to tag or acknowledge alarms can also be supported via an intuitive interface.

WebAccess 8.0 releases a new generation of WebAccess HMI. Business Intelligence Dashboard, provides users with cross-platform, cross-browser data analysis and user interface based on HTML5 technology. WebAccess 8.0 can also act as an IoT Platform by providing open interfaces for partners to develop IoT applications for different vertical markets.

## Feature Details

### WebAccess Cloud Architecture

WebAccess is a 100% web based HMI and SCADA software with private cloud software architecture. WebAccess can provide large equipment vendors, SIs, and Enterprises to access and manipulate centralized data and to configure, change/update, or monitor their equipment, projects, and systems all over the world using a standard web browser. Also, all the engineering works, such as: database configuration, graphics drawing and system management and the troubleshooting can be operated remotely. This can significantly increase the efficiency of maintenance operations and reduce maintenance costs.

### HTML5 Business Intelligence Dashboard

WebAccess 8.0 provides an HTML5 based Dashboard as the next generation of WebAccess HMI. System integrators can use Dashboard Editor to create the customized information page by using analysis charts and diagrams which are called widgets. Ample widgets have been included in the built-in widget library, such as trends, bars, alarm summary, maps...etc. After the dashboard screens have been created, end user can view the data by Dashboard Viewer in different platforms, like Internet Explorer, Safari, Chrome, and Firefox for a seamless viewing experience across PCs, Macs, tablets and smartphones.

### Open Interfaces

WebAccess opens three kinds of interfaces for different use. First, WebAccess provides a Web Service interface for partners to integrate WebAccess data into APPs or application system. Second, a pluggable widget interface has been opened for programmer to develop their widget and run on WebAccess Dashboard. Last, WebAccess API, a DLL interface for programmer to access WebAccess platform and develop Windows applications. With these interfaces, WebAccess can act as an IoT platform for partners to develop IoT applications in various vertical markets.

### Excel Report

WebAccess provides Excel Reports for fulfilling the requirements of self-defined report functionality. Users can build self-defined Excel templates and generate daily/weekly/monthly/yearly or on demand reports automatically in Microsoft EXCEL format. The Excel Report function is also web-based. Excel reports can be generated and viewed in a Web browser from wherever is needed.

### Multi-touch Gesture Support


WebAccess supports multi-touch functionality with various pre-set gestures, such as flick to change pages, zooming in and out of the display and 2-handed operation maximizing operating safety, increasing usability and decreasing training time due to the more intuitive handling. In addition, multi-touch also supports multi-finger tap, multi-finger grab, and multi-finger spread gestures to operate pre-defined actions.

### Google Maps and GPS Tracking Integration

WebAccess integrates real-time data on each geographical site with Google Maps and GPS location tracking. For remote monitoring, users can intuitively view the current energy consumption on each building, production rate on each field or traffic flow on the highway together with alarm status. By right-clicking on Google Maps or entering the coordinate of the target, users can create a marker for the target and associate the real-time data of three sites with a display label. Furthermore, this function also integrates with GPS modules to track the location of the marker in Google Maps and allows it to be used in vehicle systems.



1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIY-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

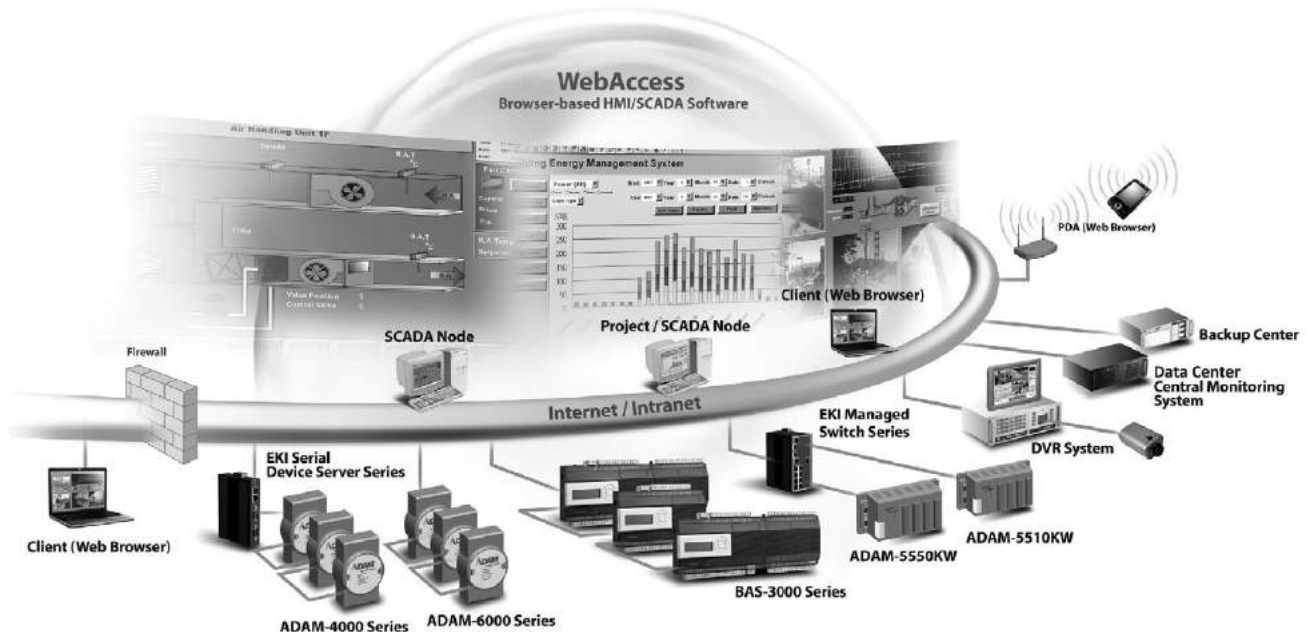

## Auto-Configuration - WebAccess Express

Advantech WebAccess Express is an automated graphical remote control application program with 1-click to bring device information online. It automatically discovers the ADAM and EKI modules on the network and serial ports, generates a database and brings real-time data online with prebuilt monitoring graphics. Express also provides remote monitoring functions and allows users to communicate and exchange data with SNMP, DiagAnywhere Server or SUSI 4.0 APIs and then check the health of the CPU, memory, temperature, and voltage of the target machine as device monitoring platform. With SNMP, DiagAnywhere, or SUSI API Driver integration, users can configure the alarm function if any abnormal or suspicious data is detected in WebAccess.

## Distributed SCADA Architecture with Central Database Server

SCADA nodes run independent of any other node. Each SCADA node communicates to automation equipment using communication drivers supplied with Advantech WebAccess. The Project Node is a centralized database server of configuration data. A copy of the database and graphics of all SCADA nodes is kept on the Project Node. The historical data is also stored in the database in project node.

## Ample Driver Support

WebAccess supports hundreds of devices. In addition to Advantech I/Os and controllers, WebAccess also supports all major PLCs, controllers and I/Os, like Allen Bradley, Siemens, LonWorks, Mitsubishi, Beckhoff, Yokogawa etc. WebAccess can easily integrate all devices in one SCADA. All of these device drivers are integrated into WebAccess and free of charge. For a complete list of WebAccess drivers, refer to [webaccess.advantech.com](http://webaccess.advantech.com).

## Redundant SCADA, COM Ports and Devices

Advantech WebAccess assures continuous, reliable communication to automation equipment. WebAccess Backup node activates when the Primary node is down. WebAccess device drivers communicate with backup ports or devices if the primary connection is lost and automatically restores to the primary item when it becomes available.

## Alarm Management System

WebAccess advanced Alarm Management System (AMS) delivers alarm messages via SMS, email or audio announcement to multiple receivers by predefined alarm group, user groups, time schedule and priority setting.

## Web-enabled Video, Audio, Animation

WebAccess allows operators and users to monitor equipment and facilities directly using web-enabled full-motion video cameras, audio, and web cams. It also supports the use of live video cameras that are IP-enabled via ActiveX control, Windows Media Player, JPEG and other formats supported by Microsoft Internet Explorer 8.0 (or later). The video image appears in the same display area as graphics, animation, alarms and trends displays. With vector-based graphics, WebAccess graphics can be built at any resolution and displayed at any resolution. It also has the options to allow users to define the aspect ratio, 16:9, 16:10 or 4:3, to view their graphics to avoid distortion when displaying in certain aspect ratio display.

## Open Data Connectivity

Advantech WebAccess exchanges online data with 3rd party software in real-time by supporting OPC UA/DA, DDE, Modbus and BACnet Server/Client. It supports SQL, Oracle, MySQL, and MS Access for offline data sharing.

## Real-Time Database

WebAccess Real-Time Database (RTDB) is designed to meet industrial high speed and large quantity data access requirements. With the fully integrated design, users do not need to learn how to operate this database. Just by enabling the usage of RTDB in WebAccess configuration page, WebAccess SCADA node can serve data processing (collection and retrieval at the same time) at a rate of millions of records per second. Also, the RTDB maintenance feature can automatically archive and delete obsolete data.

## Gateway with WebAccess Installed

With open real-time data connectivity and hundreds of device drivers, WebAccess can integrate all devices and a selected hardware platform with pre-installed WebAccess becomes the perfect protocol gateway or data concentrator. With intuitive setup, WebAccess converts field device data to Modbus, OPC DA, OPC UA or BACnet protocol, so other software, such as ERP and MES can gain access without knowing the field device protocol. WebAccess+ Solution Products, a bundle of WebAccess Professional 8.0 and Windows 7 Embedded built in to Advantech's robust hardware platform, can be used as a high performance, low cost data gateway solution.

## WebAccess Scheduler

WebAccess Scheduler provides on/off control and setpoint changes based on the time of day, day of the week and the calendar. Users can control lights, temperature and equipment for saving energy during work days. WebAccess Scheduler allows the definition of up to 16 periods per day and preserved functions for setpoints.

### Software Specifications

#### Advantech WebAccess Professional

▪ I/O Tag Number	75/150/300/600/1500/5000/20K/64K
▪ Internal Tag Number	75/150/300/600/1500/5000/20K/64K
▪ Web Client	1024
▪ Alarm Logs	5000
▪ Action Logs	5000

#### Graphics

▪ Number of Graphic Pages	Unlimited (limited by H/D size)
▪ Variables per Graphic Pages	4000
▪ Tag Source	Global
▪ Multi-touch Gesture	Yes

#### Dashboard

▪ Cross Browser and Platform	Yes
▪ Number of Built-in Widget	37
▪ Open Widget Interface	Yes

#### Group Trend Log

▪ Number of Data Logging	Number of I/O tags license x 2
▪ Alarm Groups per SCADA	9999

#### Receipt

▪ Recipes per Project	Unlimited (limited by H/D size)
▪ Unit per Recipe	999
▪ Item per Unit	999

#### Scheduler

▪ Holiday Configuration Group	9999
▪ Time Zone Group	9999
▪ Device Loop Group	9999
▪ Equipment Group	9999
▪ Scheduler Reservation Group	9999

#### Web-enabled Integration

▪ Video	Yes
▪ Google Maps and GPS Location Tracking	Yes

#### Open Connectivity

▪ Modbus Server	Yes
▪ BACnet Server	Yes
▪ ODBC and SQL Query	Yes
▪ OPC DA/UA Server	Yes
▪ DDE Server	Yes

#### Others

▪ Centralized logs on project	Yes node via ODBC
▪ SCADA Redundancy	Yes
▪ Script language	TclScript/VBScript/JScript
▪ Data Transfer	Yes
▪ Reporting / Excel Reporting	Yes
▪ Device Redundancy	Yes
▪ Supports IPv6	Yes
▪ WebAccess Express	Yes

### Minimum Requirements

#### Project Node \ SCADA Node

▪ Operating System	Windows XP (SCADA Node Only), Windows 7 SP1 Professional, Windows 8 Professional, Windows Server 2008 R2 or later Net Framework 4.5 or later version
▪ Hardware	Intel Atom or Celeron. Dual Core processors or higher recommended 2GB RAM minimum, more recommended 30GB or more free disk space
▪ Display Resolution	1024 x 768 or higher (recommended) Lower resolutions also supported
▪ USB Port	USB port for License Hardkey on SCADA node

### Ordering Information

#### Professional Versions

▪ WA-P80-U075E	WebAccess V8.0 Professional Software with 75 tags
▪ WA-P80-U150E	WebAccess V8.0 Professional Software with 150 tags
▪ WA-P80-U300E	WebAccess V8.0 Professional Software with 300 tags
▪ WA-P80-U600E	WebAccess V8.0 Professional Software with 600 tags
▪ WA-P80-U15HE	WebAccess V8.0 Professional Software with 1,500 tags
▪ WA-P80-U50HE	WebAccess V8.0 Professional Software with 5,000 tags
▪ WA-P80-U20KE	WebAccess V8.0 Professional Software with 20,000 tags
▪ WA-P80-U64KE	WebAccess V8.0 Professional Software with Unlimited tags

#### Version Upgrade\*

▪ WA-X80-U000E	WebAccess Upgrade to Version 8.0
----------------	----------------------------------

\* Upgrade the WebAccess Version from V.7.X to V8.0.

#### Upgrade\*

▪ WA-X80-U075E	WebAccess software license, 75 Tags upgrade
▪ WA-X80-U300E	WebAccess software license, 300 Tags upgrade
▪ WA-X80-U600E	WebAccess software license, 600 Tags upgrade
▪ WA-X80-U15HE	WebAccess software license, 1,500 Tags upgrade
▪ WA-X80-U50HE	WebAccess software license, 5,000 Tags upgrade

\* Original serial number from WebAccess Professional version is required to purchase WebAccess upgrade. The serial number can be found on the USB dongle.

#### WebAccess+ Bundled Products

▪ WA-TPC1771-T600E	17" Touch Panel Computer, 600 tags WebAccess with Traditional Chinese
▪ WA-TPC1771-T50HE	17" Touch Panel Computer, 5,000 tags WebAccess with Traditional Chinese
▪ WA-TPC1771-C600E	17" Touch Panel Computer, 600 tags WebAccess with Simplified Chinese
▪ WA-TPC1771-C50HE	17" Touch Panel Computer, 5,000 tags WebAccess with Simplified Chinese
▪ WA-TPC1771-E600E	17" Touch Panel Computer, 600 tags WebAccess with English
▪ WA-TPC1771-E50HE	17" Touch Panel Computer, 5,000 tags WebAccess with English
▪ WA-UNO2178-T600E	Automation Computer, 600 tags WebAccess with Traditional Chinese
▪ WA-UNO2178-T50HE	Automation Computer, 5,000 tags WebAccess with Traditional Chinese
▪ WA-UNO2178-C600E	Automation Computer, 600 tags WebAccess with Simplified Chinese
▪ WA-UNO2178-C50HE	Automation Computer, 5,000 tags WebAccess with Simplified Chinese
▪ WA-UNO2178-E600E	Automation Computer, 600 tags WebAccess with English
▪ WA-UNO2178-E50HE	Automation Computer, 5,000 tags WebAccess with English

#### Dashboard Viewer

▪ Hardware	PC: Intel Core I3 or higher; 4GB RAM or higher iPhone: iPhone 5 or later version Android: 1.5GHz Quad Core or higher; 2GB RAM or higher Windows Phone: 1.5GHz Quad Core or higher; 2GB RAM or higher
▪ Browser	Internet Explorer: Version 9 or later version Chrome: Version 37 or later version Firefox: Version 31 or later version Safari: Version 7 or later version

# WebOP Designer Panel Express

HMI Runtime Software



## Software Features

- Allows users to manage multiple HMI applications in one project
- Allows users to switch multi-language UI dynamically, with Unicode and multilingual screen text supported
- Provides password protection of designs, macros and upload/download operations
- Running various applications on Open Platform with different O.S. - RTOS/WinCE and Windows O.S.
- Link and Control automation controller directly from platform
- Provides index registers for modifying device addresses at runtime
- Collects data from many devices with various methods
- Supports various data acquisition and trend presentation
- Operation log helps the review and investigation of important events
- Flexible runtime download through serial / Ethernet and memory cards.
- Allows to use the USB Memory Sticker for the trouble-free update of the application
- Supports over 300 industrial communication protocols such as SIMATIC S7-1200, BACNet MSTP/BACNet IP etc. and the driver list is growing

## Introduction

WebOP Designer is powerful yet intuitive software to create total solutions for WebOP series Human Machine Interface products. WebOP Designer is proven in many application fields and is an easy to use integrated development tool. The features include solution-oriented screen objects, high-end vector graphics, Windows fonts for multi-language applications, recipes, alarms, data loggers and operation logging. WebOP Designer also includes online/offline simulation and other utility programs such as Data Transfer Helper (DTH); recipes editors and text editors.


Panel Express runtime, a part of WebOP Designer, guarantees reliability and performance of Open Platform because of the minimum system overhead, high communication data rates, sub-second screen switching, and 24/7 operation. Our fast response software team adds new functions, communication drivers and solutions to the software all the time to meet dynamic needs.

## System Requirements

### Minimum OS Requirements:

- Windows XP SP2 (for all flavors of XP such as Home, Media Center, Tablet PC)
- Windows Server 2003
- Windows Vista
- Windows 7

## Project Development Steps

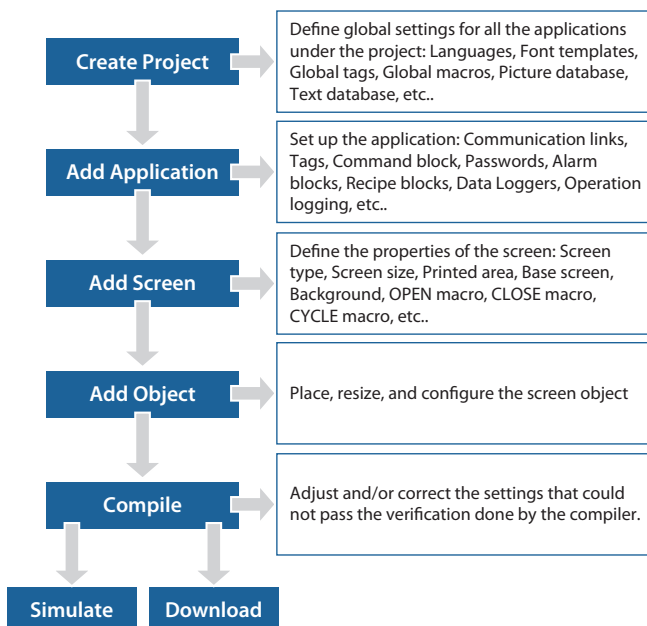

## Feature Details

### Global Settings and Resources Sharable to all Applications of the Same Project

- Multi-languages (up to 10 languages)
- Font templates (up to 20 fonts for each language, TrueType fonts supported)
- Picture database (+PNG & SVG), Sound database (WAV), Text Database
- Global Tags
- Global Macros

### Plenty of Solution-oriented Screen Objects


- For common HMI needs: Buttons, Lamps, Message displays, Numeric displays, Numeric entries, Character displays, Character entries, Time displays, Date displays, Bar Graphs, Meters, etc.
- For animation: Pictures displays, GIF displays, Animated graphics, Dynamic rectangles, Dynamic circles, Pipelines, Circular bar graph, etc. Color of basic graphic objects (text, lines, rectangles, circles, etc.) changeable. Shape and color of buttons and lamps changeable.
- For advanced functions: Line chart, Scatter chart, Recipe selector, Recipe table, Alarm history display, Active alarm display, Alarm count display, Historic trend graph, Historic data table, Historic event table, Historic line chart, Operation log display, Sub-link table, etc.

### Communication Links

The WebOP series HMI products can have at most 4 built-in communication ports. The WebOP Designer software allows you to create up to 4-links and 255 sub-links for one application. More than 400 communication drivers allow 1-to-N (one panel to a wide variety of industrial devices) or N -to-1 (multiple panels to one device) connections.

The Panel Express can have at most 16 built-in communication ports. It also allows you to create up to 16-links for 255 sub-links with serial port & 128 sub-links with Ethernet ports in one application.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

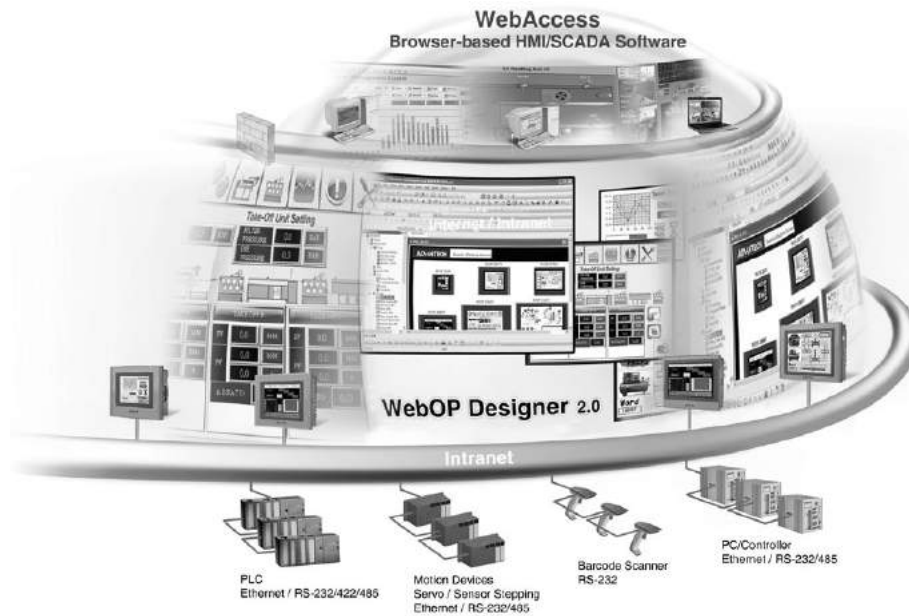

## One Design for all Models

The WebOP Designer software provides the auto resizing function to resize all the objects so they can fit the new screen size when you change the HMI model. It makes the HMI model changes done in seconds.

## Easy to Accumulate/Reuse Design Achievements

- Import/Export Function  
The WebOP Designer software provides the simple method for importing and exporting data between applications or projects. The data includes Language setting, Font templates, Pictures, Sounds, Text, Tags, Macros, Application, Screen, Alarm messages, Control block and status word settings, etc.
- Object Library  
The object library makes configuring, managing and sharing user-defined objects easier. It contains default objects, common objects, object groups and global objects.

## Enhanced Intellectual Property (IP) Protection

WebOP Designer strengthens the IP protection by password with different levels. You can set the password to protect project, password table and global macros. You can also use up to 9 levels of passwords to secure the operations and restrict access to the objects. You can choose to prohibit uploading and copying of the panel application stored in the HMI unit.

## Recipe

Distinguish from the conventional recipe operations, the WebOP Designer provides complete solutions to deal with recipes:

- Supports up to 16 recipe blocks
- Provides recipe selector for selecting a recipe and recipe table for displaying and modifying recipe data at runtime
- Provides Recipe Editor, an independent executable program, to view and edit recipe data saved in a binary file on PC
- Able to notify a bit when the recipe operations are performed successfully to prevent data loss

## Data Collected into a CSV/TXT file

Allows to save/load collected data to/from CSV or TXT files. Those two standard file formats allow the easy manipulation data on PC.

## Alarm

The WebOP Designer supports up to 16 discrete alarm blocks and up to 16 analog alarm blocks. It provides alarm history display, active alarm display, alarm count display and alarm marquee to display alarms in the application.

## Macros, an easy-to-learn language with simple syntax

Application developers may program their own solutions using the macro commands for:

- Operations that are not supported in a standard object or feature of WebOP Designer
- Sequential, Interactive, Conditional and File operations
- Non-linear data conversions
- Data exchange between two controllers
- Simple communication drivers
- Hard-to-implement tasks in controllers
- Offloading the burden of controllers to boost their performance

## Simplified Architecture


- Real time WYSIWYG screen editor, 8 toolbars and screen manager
- Screen overview that shows the relations among screens of the current application
- Link overview that shows the relations among links of the current application
- Object list that shows the screen objects and the associated I/O address of the current screen
- I/O list that shows all the I/O addresses of the project and their owners
- Compiler to verify, optimize, and build the designs
- Online/offline simulation for design verification
- Data Transfer Helper (DTH), an independent executable program, to help you get/update application data through serial port or Ethernet port
- Text Editor for editing all screen texts in multi-languages

## Ordering Information

- |               |   |
|---------------|---|
| ▪ 968WEXP015E | PanelExpress V2.0 1500 tags S/W license (WinCE) |
| ▪ 968WEXP050E | PanelExpress V2.0 5000 tags S/W license (WinCE) |
| ▪ 968WEXP003X | PanelExpress V2.0 300 tags S/W license          |
| ▪ 968WEXP015X | PanelExpress V2.0 1500 tags S/W license         |
| ▪ 968WEXP050X | PanelExpress V2.0 5000 tags S/W license         |
| ▪ 968WEXP1USB | PanelExpress V1.2 S/W USB dongle                |
| ▪ 968WEXP2USB | PanelExpress V2.0 S/W USB dongle                |

# KW MULTIPROG®

## IEC 61131-3 SoftLogic Control Software

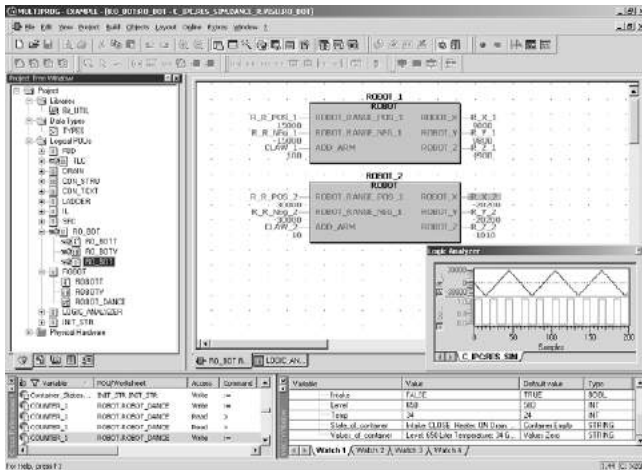

### Features

- IEC 61131-3 programming languages
- Intuitive programming with a clear project structure
- Cross-compiling: FBD, LD and IL can be cross-compiled to each other
- Multi user functionality shortens programming time
- Management of distributed controls
- Network variables: Easy and powerful configuration of distributed communication
- Powerful debugging tools: Online changes, PLC simulation, overwriting & forcing, breakpoints, watch windows & recipes, logic analyzer, and cross reference
- Online program download
- Download Change Function
- Advantech FBs Support (Auto-Tuning PID, Batch Control)

### Introduction

Advantech's Programmable Automation Controllers (PAC) leverage KW-Software's Multiprog and ProConOS as a single development tool with the SoftLogic control kernel. Requiring only a one-time design, users can easily leverage the control know-how into different control platforms to meet versatile automation projects needs. KW SoftLogic also creates single tagging database and HMI Software, such as WebAccess and other 3rd party SCADA software, all the features can help users to save the visible and invisible cost.

Multiprog supports all IEC 61131-3 programming languages. Depending on the task to be handled, your experience and company standards, you may choose one of the five standardized programming languages. The use of Multiprog offers you many advantages. Our long-term experience in the automation industry guarantees you a sophisticated software product.

### Specifications

#### Hardware Requirements

Device	Recommended
IBM compatible PC with Pentium Processor	Pentium 4, 2 GHz or above
System RAM	Windows XP : 512 MB Windows Vista : 1 GB Windows 7 : 1 GB
Hard Disk	1 GB free memory space
VGA Monitor Color Settings Resolution	True color 1024 x 768
RS-232 interface	Optional
Mouse	Recommended

#### Advantech Hardware Supported

- APAX-6000 Series
- APAX-5000 Series
- ADAM-55X0KW Series

#### Software Requirements

- Microsoft Windows 7
- Microsoft Windows Vista ( SP2 )
- Microsoft Windows XP (SP3)
- Microsoft Internet Explorer 6.0 or higher

#### IEC 61131-3 Programming Languages

- Instruction List (IL)
- Structured Text (ST)
- Function Block Diagram (FBD)
- Ladder Diagram (LD)
- Sequential Function Chart (SFC)
- All programming languages can be mixed within one project


### Ordering Information

- **MPROG-PRO535E** KW Multiprog Pro v5.35 (128k bytes I/O, Win7 32-bit support)



# OPC Server

## OPC Server for ADAM & Modbus Devices

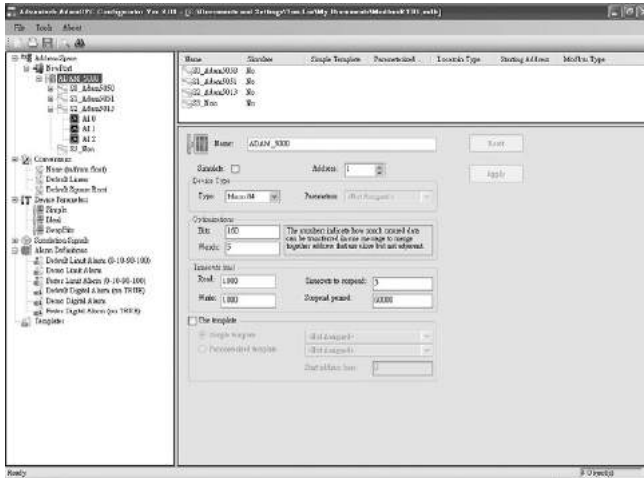

### Features

- Supports Microsoft Windows 8/7/XP/2000/NT/98
- Supports Advantech ASCII, MODBUS/RTU, and MODBUS/TCP protocol
- Compliant with the latest OPC Data Access 1.0, 2.04 and 3.0 standards
- Compliant with the latest OPC Alarm and Events 1.0 and 1.2 standards
- OPC DA and AE Client for rapid testing of your OPC data connections

### Introduction

The Industrial Automation Group of Advantech introduces a standardized interface for industrial device servers, the OPC (OLE for process control) Server. An OPC server provides devices, such as an I/O device, to communicate with a wide range of HMI/SCADA software packages residing on a host. Any software system with OPC client capabilities can access the Advantech OPC server drivers.

#### Key Features of the OPC Servers

- Supports Microsoft Windows 8/7/XP/2000/NT/98
  - Supports Windows 7 / 8 both 32-bit and 64 bit versions
- Supports Advantech ASCII, MODBUS/RTU, and MODBUS/TCP protocol.
- Compliant with the latest OPC Data Access 1.0, 2.04 and 3.0 standards.
  - Compliant with the latest OPC Alarm and Events 1.0 and 1.2 standards.
  - Built-in OPC tag simulation and value conversion.
  - Wizards to create OPC Server tags about ADAM series quickly.
- Compatible with OPC client compliant application software.
- Provides OPC custom interface.
- Online configuration capability; add new signals and tags during runtime.
- Tag Multiplier let you create tags quickly.
- OPC DA and AE Client for rapid testing of your OPC data connections.

### Specifications

#### Supported Hardware

- All ADAM-4000 series modules
- All ADAM-5000 series modules
- All ADAM-6000 series modules

### Ordering Information

- **PCLS-OPC/ADM30** OPC Server for ADAM ASCII protocol
- **PCLS-OPC/MTP30** OPC Server for Modbus/TCP protocol
- **PCLS-OPC/RTU30** OPC Server for Modbus/RTU protocol

# DAQNavi

## Software Development Package for Advantech DAQ Products



### Features

- Supports multiple operating systems including Windows (32-bit and 64-bit), Linux
- Supports common-used development environment including Visual C/C++, Borland C Builder, Visual Basic .NET, Visual C#, Delphi, Java, VB, LabVIEW
- Supports Advantech PCI Express, PCI, PC/104, PCI-104, USB DAQ devices
- Integrated utility environment (Advantech Navigator) for device functionality testing without programming
- Able to generate a simulator device in utility to program and run application without real hardware device
- Pre-defined scenario application examples with source code to shorten programming learning and development time
- Express VI and Polymorphic VIs for both beginner and advanced programming in LabVIEW environment
- Complete documentations and tutorials for hardware specifications, wiring, example code and SDK programming

### Introduction

DAQNavi is a completed software package, for programmers to develop their application programs using Advantech DAQ boards or devices. This integrated software package includes drivers, SDK, tutorial and utility. With the user-friendly design, even the beginner can quickly get familiar with how to utilize DAQ hardware and write programs through the intuitive "Advantech Navigator" utility environment. Many example codes for different development environment dramatically decrease users' programming time and effort.

You can go to <http://www.advantech.com/dagnavi> for more information about Advantech DAQNavi.

### Feature Details

#### Multiple Operating System Support

DAQNavi supports many popular operating systems (OS) used in automation applications. For different OSs, API functions will be the same, so users can simply install the driver without modifying their program again when migrating between two different OSs.

DAQNavi supports latest Windows 7/Vista/XP and Windows CE (both 32-bit and 64-bit). Besides Windows operating system, Linux is famous for its openness and flexibility. DAQNavi software package also supports Linux OS distributions including Ubuntu, Fedora, Debian and, Susi. For other distributions, contact with Advantech local branch or dealer in your area, for more information.

#### .NET Support

DAQNavi offers a series of .NET Component objects, that you can benefit from platform-unified feature with the latest .NET technology. Users can simply drag and drop the .NET Components within .NET programming environment, such as Microsoft Visual C# and VB .NET. An intuitive window (called "DAQNavi Wizard") will pop-up, and user can perform all configurations by sequence. Then, related source code will be generated automatically. Programmers also can choose writing code manually with the .NET Component, to have a more flexible object calling. With Advantech CSCL technology, engineers can do the similar programming in Native environment such as Visual C++.

#### LabVIEW Support

LabVIEW is one popular graphical development environment used for measurement and automation. For LabVIEW user, DAQNavi offer two options for programming: Express VI and Polymorphic VI. DAQNavi Express VI for LabVIEW helps user quickly complete his LabVIEW without extra wiring. When the user drags the Express VI on LabVIEW Block Diagram, a pop-up intuitive wizard window will appear and user can perform hardware parameter configurations. After that, the programming is done. So it is similar to the .NET control used in Microsoft Visual Studio environment, suitable for programming beginners. As for the Polymorphic VI, users can use several VIs and wiring to build more complex program.

#### C++, Delphi, ActiveX and Java Support

DAQNavi also offers C++ Class Library (for VC++ and Borland C++ Builder) and ActiveX (for Visual Basic, Delphi and BCB) for Native programming environment with the same calling interface as .NET Class Library. With DAQNavi Java Class Library, user can develop Java program to across different platforms (including Windows and Linux) by means of Java engine.

#### Support Modules

DAQNavi supports all Advantech PCI Express, PCI, PC-104, and PCI-104 cards, as well as all USB DAQ devices.

#### Intuitive Utility

DAQNavi delivers one integrated easy-to-use and powerful utility, called Advantech Navigator. Within the Navigator, engineers can quickly start configuration and function testing for all Advantech DAQ devices, without any programming. Related user manuals are also displayed in the same environment. Besides, to help shorten development time, Advantech offers a series of DAQ applications examples (called "scenarios" in the Advantech Navigator). So programmers can refer to its source code and develop their own application based on it, as well as the wiring information. Without a DAQ device at hand, engineers can generate a simulated device and use that device for programming and testing. Except device testing, Navigator also offers complete documentation to describe how to use DAQNavi SDK to program in various development environments. Moreover, a video tutorial for how to create an application program in a different development environment is available.

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards





## Intelligent Operator Panel

<b>Operator Panel Selection Guide</b>		<b>5-2</b>
<b>Web Operator Panels</b>		
<b>WebOP-3120T</b>	12" SVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range	<b>5-4</b>
<b>WebOP-3100T</b>	10.1" WSVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range	<b>5-6</b>
<b>WebOP-3070T</b>	7" WVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range	<b>5-8</b>
<b>TPC-31T</b> <b>TPC-61T</b>	3.5"/5.7" QVGA TFT LED LCD TI Cortex-A8 Touch Panel Computer	<b>5-10</b>
<b>Entry Operator Panels</b>		
<b>WebOP-2100T</b>	10.1 WSVGA Operator Panel with WebOP Designer Software	<b>5-12</b>
<b>WebOP-2080T</b>	8" SVGA Operator Panel with WebOP Designer Software	<b>5-14</b>
<b>WebOP-2070T</b>	7" WVGA Operator Panel with WebOP Designer Software	<b>5-16</b>
<b>WebOP-2050T</b>	5.6" QVGA Operator Panel with WebOP Designer Software	<b>5-18</b>
<b>WebOP-2040T</b>	4.3" WQVGA Operator Panel with WebOP Designer Software	<b>5-20</b>
<b>Supported PLC and Controllers list</b>	Communication Port	<b>5-22</b>

To view all of Advantech's Operator Panels, please visit [www.advantech.com/products](http://www.advantech.com/products).



# Selection Guide

NEW

NEW

NEW



Model		TPC-31T	TPC-61T	WOP-3070T	WOP-3100T	WOP-3120T
Ordering Information		TPC-31T-E3AE	TPC-61T-E3AE	WOP-3070T-C4AE	WOP-3100T-C4AE	WOP-3120T-C4AE
CPU		RISC 32 bits, 600 MHz (ARM® Cortex™-A8)	RISC 32 bits, 600 MHz (ARM® Cortex™-A8)	RISC 32 bits, 600 MHz (ARM® Cortex™-A8)	RISC 32 bits, 600 MHz (ARM® Cortex™-A8)	RISC 32 bits, 600 MHz (ARM® Cortex™-A8)
Backup Memory		FRAM 128KB	FRAM 128KB	FRAM 1M bit (=128K Byte, 64word)	FRAM 1M bit (=128K Byte, 64word)	FRAM 1M bit (=128K Byte, 64word)
Working Memory		DDR2 256M Bytes	DDR2 256M Bytes	DDR2 256M Bytes	DDR2 256M Bytes	DDR2 256M Bytes
Storage		512MB on board SLC type	512MB on board SLC type	512MB on board SLC type	512MB on board SLC type	512MB on board SLC type
Operating System		Microsoft® Windows CE 6.0	Microsoft® Windows CE 6.0	Microsoft® Windows CE 6.0	Microsoft® Windows CE 6.0	Microsoft® Windows CE 6.0
Display	Type	QVGA TFT LCD	QVGA TFT LCD	WVGA (16:9) TFT LCD	WSVGA (16:9) TFT LCD	XGA TFT LCD
	Size	3.5"	5.7"	7"	10.1"	12"
	Max. Resolution	320 x 240	320 x 240	800 x 480	1024 x 600	1024 x 768
	Max. Colors	65,536 colors	65,536 colors	65,536 colors	65,536 colors	65,536 colors
	Luminance (cd/m <sup>2</sup> )	450	800	500	550	500
	Viewing Angle (H/V°)	160/140	160/140	140/120	140/110	160/140
	Backlight Life (hr)	LED, 30,000	LED, 50,000	LED, 50,000	LED, 50,000	LED, 50,000
	Dimming	-	-	Adjustable	Adjustable	Adjustable
Touchscreen		4 wires Analog resistive	4 wires Analog resistive	5 wire Analog Resistive	5 wire Analog Resistive	5 wire Analog Resistive
Power-On LED		-	-	Yes	Yes	Yes
Communication LED		-	-	-	-	-
Front USB Access		-	-	-	-	-
Communication Interface	COM1	RS-232/485 (DB9)	RS-232 (DB9)	RS-232/422485 (DB9)	RS-232/422485 (DB9)	RS-232/422485 (DB9)
	COM2	-	RS-232 (DB9)	RS-422/485 (Terminal 4pin+Ground)	RS-422/485 (Terminal 4pin+Ground)	RS-422/485 (Terminal 4pin+Ground)
	COM3	-	RS-422/485 (DB9)	RS-485 (Terminal 2pin)	RS-485 (Terminal 2pin)	RS-485 (Terminal 2pin)
	CAN	CAN (DB9)	-	Terminal 2pin	Terminal 2pin	Terminal 2pin
	Ethernet (RJ45)	10/100-BaseT	10/100-BaseT	10/100-BaseT	10/100-BaseT	10/100-BaseT
I/Os	USB Client	-	USB 2.0	USB 2.0 Client x 1	USB 2.0 Client x 1	USB 2.0 Client x 1
	USB Host	USB 2.0	USB 2.0	USB 2.0 Host x 1 (Top)	USB 2.0 Host x 1 (Top)	USB 2.0 Host x 1 (Top)
	Micro-SD Slot	-	-	Yes	Yes	Yes
	SD Slot	Yes	Yes	-	-	-
	Audio	-	-	1 Lin out / 1 Mic in	1 Lin out / 1 Mic in	1 Lin out / 1 Mic in
	Power Isolation	-	-	Yes	Yes	Yes
	I/O Isolation	-	-	Yes	Yes	Yes
	Power Supply Voltage	18 ~ 32 V <sub>DC</sub>	18 ~ 32 V <sub>DC</sub>	24VDC ± 10%	24VDC ± 10%	24VDC ± 10%
Power Consumption	8W	12W	7W Typical	9W Typical	12W Typical	
Dimensions W x H x D (mm)	120.79 x 85.5 x 26.5 mm (4.76" x 3.37" x 1.04")	195 x 148 x 44.4 mm (7.68" x 5.83" x 1.75")	203.4 x 150 x 43.7 mm (8.01" x 5.91" x 1.72")	271.5 x 213.5 x 43.2 mm (10.69" x 8.41" x 1.7")	311 x 237 x 46.8 mm (12.24" x 9.33" x 1.84")	
Cut-out Dimensions W x H (mm)	115 x 79.5 mm (4.6" x 3.18")	189 x 142 mm (7.56" x 5.68")	192 x 138.5 mm (7.56" x 5.45")	259.5 x 201.5 mm (10.22" x 7.93")	302.5 x 228.5 mm (12.1" x 9.14")	
Front Panel thickness (mm)	6 mm	6 mm	6 mm	6 mm	6 mm	
Enclosure	PC + ABS	PC + ABS	Die-cast aluminum alloy front bezel	Die-cast aluminum alloy front bezel	Die-cast aluminum alloy front bezel	
Net Weight	0.25 kg (0.55 lbs)	0.8 kg (1.76 lb)	1 kg (2.20 lbs)	1.2 kg (2.65 lbs)	2.5 kg (5.51 lb)	
Operating Temperature	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	
Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-30 ~ 70°C (-22 ~ 158°F)	-30 ~ 70°C (-22 ~ 158°F)	-30 ~ 70°C (-22 ~ 158°F)	
Humidity	10% ~ 90% RH @ 40°C, non-condensing	10% ~ 90% RH @ 40°C, non-condensing	10% ~ 90% RH @ 40°C, non-condensing	10% ~ 90% RH @ 40°C, non-condensing	10% ~ 90% RH @ 40°C, non-condensing	
Ingress Protection	Front panel: IP65	Front panel: IP65	Front panel: IP66	Front panel: IP66	Front panel: IP66	
Certification	CE / FCC / BSMI / UL	CE / FCC / BSMI / UL	CE / FCC / BSMI / CCC / UL-508	CE / FCC / BSMI / CCC / UL-508	CE / FCC / BSMI / CCC / UL-508	
Page	5-4	5-4	5-6	5-8	5-10	

# Selection Guide



WOP-2040T		WOP-2050T		WOP-2070T		WOP-2080T		WOP-2100T	
WOP-2040T-S1AE	WOP-2040T-N1AE	WOP-2050T-S1AE		WOP-2070T-S2AE	WOP-2070T-N2AE	WOP-2080T-S2AE	WOP-2080T-N2AE	WOP-2100T-S2AE	WOP-2100T-N2AE
RISC 32bits, 200MHz		RISC 32bits, 200MHz		RISC 32bits, 200MHz		RISC 32bits, 200MHz		RISC 32bits, 200MHz	
128KB		128KB		128KB		128KB		128KB	
32 MB SDRAM		32 MB SDRAM		64 MB SDRAM		64 MB SDRAM		64 MB SDRAM	
8MB NOR Flash	8MB NOR Flash	8MB NOR Flash		8MB NOR Flash	8MB NOR Flash	8MB NOR Flash	8MB NOR Flash	8MB NOR Flash	8MB NOR Flash
-	128M NAND Flash	128M NAND Flash		-	128M NAND Flash	-	128M NAND Flash	-	128M NAND Flash

HMI RTOS, WebOP Designer 2.0


WQVGA(16:9) TFT LCD		QVGA TFT LCD		WVGA(16:9) TFT LCD		SVGA TFT LCD		WSVGA(16:9) TFT LCD	
4.3"		5.6"		7"		8"		10.1"	
480 x 272		320 x 234		800 x 480		800 x 600		1024 x 600	
65,536 colors		65,536 colors		65,536 colors		65,536 colors		65,536 colors	
400		330		300		250		250	
100/95		130/110		140/130		140/130		140/110	
LED, 20,000		LED, 20,000		LED, 20,000		LED, 30,000		LED, 20,000	
-		-		-		-		-	
4 wires Analog resistive		4 wires Analog resistive		4 wires Analog resistive		4 wires Analog resistive		4 wires Analog resistive	
Yes		Yes		Yes		Yes		Yes	
-		-		-		-		-	
-		-		-		-		-	
RS232/422/485		RS232/422/485 (DB9)		RS232/422/485 (DB9)		RS232/422/485 (DB9)		RS232/422/485 (DB9)	
RS422/485 (Terminal 5pin)		RS422/485 (Terminal 5pin)		RS422/485 (Terminal 5pin)		RS422/485 (Terminal 5pin)		RS422/485 (Terminal 5pin)	
RS232 (COM1: Pin5; 7; 8)		RS232 (COM1: Pin5; 7; 8)		RS232 (COM1: Pin5; 7; 8)		RS232 (COM1: Pin5; 7; 8)		RS232 (COM1: Pin5; 7; 8)	
-		-		-		-		-	
-		10/100-BaseT		-		10/100-BaseT		-	
-		-		-		-		-	
Yes		Yes		Yes		Yes		Yes	
Yes		Yes		Yes		Yes		Yes	
-		Yes		-		Yes		-	
-		-		-		-		-	
-		-		-		-		-	
-		-		-		-		-	
-		-		-		-		-	
24 V <sub>DC</sub> ± 10%		24 V <sub>DC</sub> ± 10%		24 V <sub>DC</sub> ± 10%		24 V <sub>DC</sub> ± 10%		24 V <sub>DC</sub> ± 10%	
5W		10W		10W		10W		10W	
130 x 106.2 x 36.4 mm (5.11" x 4.18" x 1.43")		188 x 143.3 x 30 mm (7.4" x 5.64" x 1.18")		188 x 143.3 x 30 mm (7.4" x 5.64" x 1.18")		231.5 x 174.6 x 37 mm (9.11" x 6.87" x 1.46")		269.8 x 212 x 37.4 mm (10.62" x 8.35" x 1.47")	
118.5 x 92.5 mm (4.66" x 3.64")		175 x 132.5 mm (6.89" x 5.21")		175 x 132.5 mm (6.89" x 5.21")		221 x 164 mm (8.70" x 6.46")		259.5 x 201.5 mm (10.22" x 7.93")	
5 mm		6 mm		6 mm		6 mm		6 mm	
PC + ABS		PC + ABS		PC + ABS		PC + ABS		PC + ABS	
0.3 kg (0.66 lbs)		0.51 kg (1.12 lbs)		0.6 kg (1.32 lbs)		0.93 kg (2.05 lbs)		1.2 kg (2.64 lbs)	
0 ~ 50°C (32 ~ 122°F)		0 ~ 50°C (32 ~ 122°F)		0 ~ 50°C (32 ~ 122°F)		0 ~ 50°C (32 ~ 122°F)		0 ~ 50°C (32 ~ 122°F)	
-20 ~ 60°C (-4 ~ 140°F)		-20 ~ 60°C (-4 ~ 140°F)		-20 ~ 60°C (-4 ~ 140°F)		-20 ~ 60°C (-4 ~ 140°F)		-20 ~ 60°C (-4 ~ 140°F)	
10% ~ 90% RH @ 40°C, non-condensing		10% ~ 90% RH @ 40°C, non-condensing		10% ~ 90% RH @ 40°C, non-condensing		10% ~ 90% RH @ 40°C, non-condensing		10% ~ 90% RH @ 40°C, non-condensing	
Front panel: IP66		Front panel: IP66		Front panel: IP66		Front panel: IP66		Front panel: IP66	
CE / FCC / BSMI / CCC / UL		CE / FCC / BSMI / CCC / UL		CE / FCC / BSMI / CCC / UL		CE / FCC / BSMI / CCC / UL		CE / FCC / BSMI / CCC / UL	
5-12		5-14		5-16		5-18		5-20	

- 1** WebAccess+ Solutions
- 2** Motion Control
- 3** Power & Energy Automation
- 4** Automation Software
- 5** Intelligent Operator Panel
- 6** Automation Panels
- 7** Panel PCs
- 8** Industrial Wireless Solutions
- 9** Industrial Ethernet Solutions
- 10** Industrial Gateway Solutions
- 11** Serial communication cards
- 12** Embedded Automation PCs
- 13** DIN-Rail IPCs
- 14** CompactPCI Systems
- 15** IoT Wireless I/O Modules
- 16** IoT Ethernet I/O Modules
- 17** RS-485 I/O Modules
- 18** Data Acquisition Boards

# WebOP-3120T

## 12" XGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range

NEW

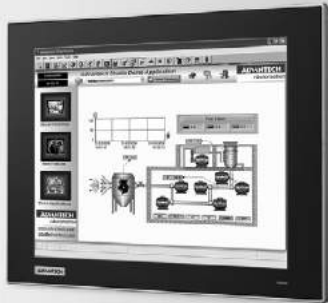

### Features

- RISC 32 bits TI ARM® Cortex™-A8 processor
- Various LCD sizes (7", 10.1", 12")
- Full line LED BL TFT LCD with 50K life time
- Embedded Microsoft® WinCE 6.0 OS
- Bundle Panel Express HMI Runtime software (300 tags)
- Backup Memory FRAM in 128KB (64 words) without battery concern
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C wide operating temperature range
- Supports CANopen library registered by CiA 301 V4.02
- RS-422/RS-485/CAN terminal I/O ports support Termination Resistor 120Ω
- Front panel IP66 compliant
- Die-cast aluminum alloy front bezel
- Level 4 ESD protection (Air:15KV / Contact:8KV)
- Industrial Control Equipment - UL 508 certification

### Introduction

With a brand-new ID design, the WebOP-3120T provides stringent standards required in the automation market. Advantech offers the WebOP-3120T with Cortex™-A8 processor which consumes minimum power without sacrificing performance. The WebOP-3000T supports a variety of LCD sizes from 4.3" to 12" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. It's also provided with a wide operating temperature range to fulfill the requirements of harsh environments. The built-in Microsoft® WinCE 6.0 OS platform which bundles WebOP Designer lets the WebOP-3120T become a control HMI solution for flexible system integration.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 311.8 x 238 x 54.5 mm (12.28" x 9.37" x 2.15")
- **Cut-out Dimensions** 302.5 x 228.5 mm (12.1" x 9.14")
- **OS Support** Microsoft® Windows CE 6.0
- **Power Input** 24 V<sub>DC</sub> ±10%
- **Power Consumption** 20 W
- **Enclosure Housing** PC + ABS
- **Mounting** Panel
- **Weight (Net)** 2.5 kg (5.51 lb)

#### System Hardware

- **CPU** RISC 32 bits, 600 MHz (ARM® Cortex™-A8)
- **Backup Memory** FRAM 1M bit (=128K Byte, 64 word)
- **Memory** DDR2 256M Bytes
- **Storage** 512MB on board SLC type
- **Power-On LED** Yes

#### Communication Interface

- **COM1** RS-232/RS-422, RS-485 (DB9), 300~115.2 kbps
- **COM2** RS-422/RS-485 (Terminal 4 pin+Ground), 300~115.2 kbps
- **COM3** RS-485 (Terminal 2 pin), 300~115.2 kbps
- **CAN** Terminal 2 pin
- **Ethernet (RJ45)** 10/100-BaseT
- **I/Os**
  - USB Client USB 2.0 Client x 1
  - USB Host USB 2.0 Host x 1 (Top)
  - Micro-SD Slot Yes
  - Audio 1 Line-out / 1 Mic-in

#### LCD Display

- **Display Type** XGA TFT LCD
- **Display Size** 12"
- **Max. Resolution** 1024 x 768
- **Max. Colors** 64K
- **Luminance (cd/m<sup>2</sup>)** 500
- **Viewing Angle (H/V)** 160/140
- **Backlight Life** LED, 50,000 hrs
- **Dimming** Adjustable by touch panel
- **Contrast Ratio** 500:1

#### Touchscreen

- **Lifespan** 36 million touches at 8mm-diameter finger point through silicone rubber bearing at least 250g 2 times per second.
- **Light** Transmission Above 80%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment


- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Humidity** 10% ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)

### Ordering Information

- **WOP-3120T-C4AE** 12" XGA, Cortex™-A8, 256MB DDR, WinCE 6.0

## Dimensions

Unit: mm

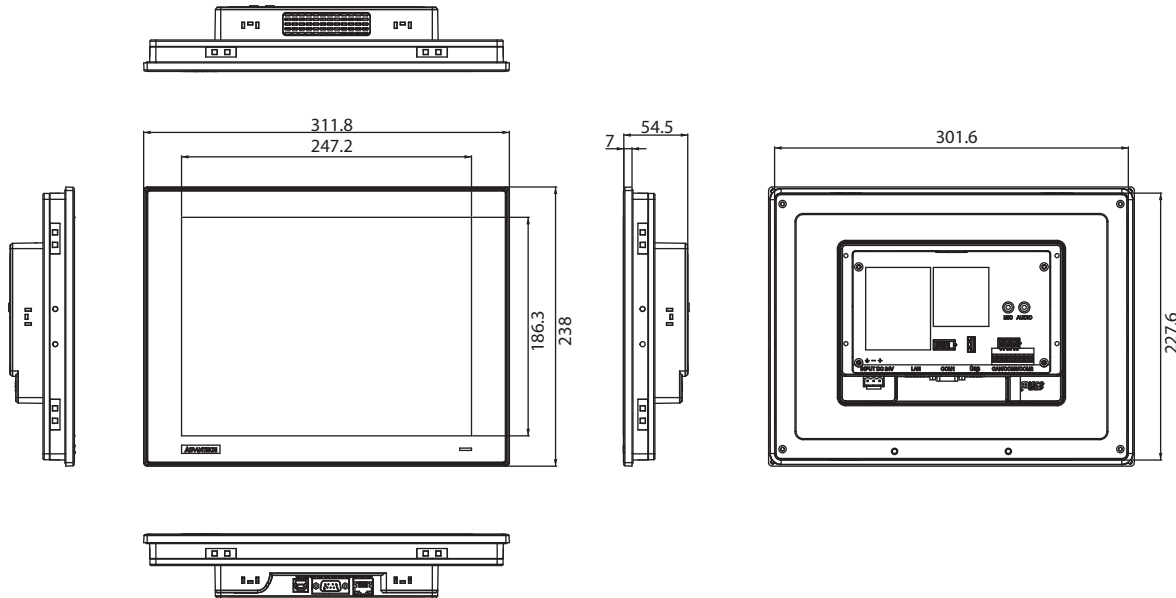

**Panel Cut-out Dimensions: 302.5 x 228.5 mm (12.1" x 9.14")**


## Accessories

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **WOP-3000T-WMKE** WOP-3000T Series Wallmount Kits
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

## Automation Software


- **968WEXP015E** PanelExpress V2.0 1500 tags S/W license (WinCE)
- **968WEXP050E** PanelExpress V2.0 5000 tags S/W license (WinCE)

## Base View

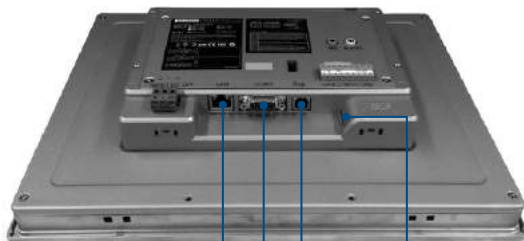

Ethernet  
COM1 (RS-232/422/485)  
USB Client  
Micro SD Slot

## Rear View

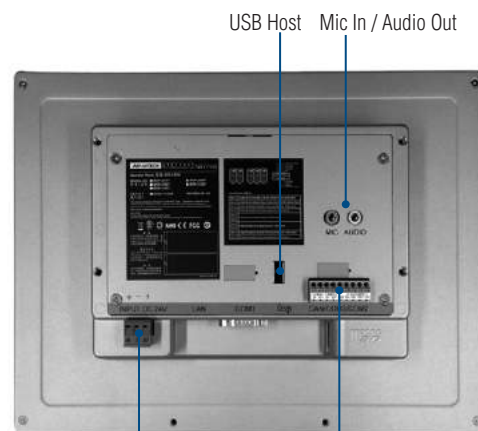

USB Host  
Mic In / Audio Out  
Isolation Power Input  
Isolation Terminal I/O Ports



Isolation Terminal I/O Ports

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-3100T

## 10.1" WSVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range

NEW



### Features

- RISC 32 bits TI ARM® Cortex™-A8 processor
- Various LCD sizes (7", 10.1", 12", 15")
- Full line LED BL TFT LCD with 50K life time
- Embedded Microsoft® WinCE 6.0 OS
- Supports WebOP Designer HMI Runtime development tool
- Backup Memory FRAM in 128KB(64 words) without battery concern
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C wide operating temperature range
- Supports CANopen library registered by CiA 301 V4.02
- RS-422/RS-485/CAN terminal I/O ports support Termination Resistor 120Ω
- Front panel IP66 compliant
- Die-cast aluminum alloy front bezel
- Level 4 ESD protection (Air:15KV / Contact:8KV)
- Industrial Control Equipment - UL 508 certification

### Introduction

With brand-new ID design, the WebOP-3100T provides stringent standards required in the automation market. Advantech offers the WebOP-3100T with Cortex™-A8 processor which consumes minimum power without sacrificing performance. The WebOP-3100T supports a variety of LCD sizes from 4.3" to 15" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. It's also provided with a wide operating temperature range to fulfill the requirements of harsh environments. The built-in Microsoft® WinCE 6.0 OS platform which bundles WebOP Designer lets the WebOP-3100T become a control HMI solution for flexible system integration.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 271.5 x 213.5 x 43.2 mm (10.69" x 8.41" x 1.7")
- **Cut-out Dimensions** 260 x 201.5 mm (10.24" x 7.93")
- **OS Support** Microsoft® Windows CE 6.0
- **Power Input** 24V<sub>DC</sub> ±10%
- **Power Consumption** 9W (Typical)
- **Enclosure Housing** PC + ABS
- **Mounting** Panel
- **Weight (Net)** 1.2 kg (2.65 lbs)

#### System Hardware

- **CPU** RISC 32 bits, 600 MHz (ARM® Cortex™-A8)
- **Backup Memory** FRAM 128KB
- **Memory** DDR2 256MB on board
- **Storage** 512MB on board SLC type
- **Power-On LED** Yes

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Male)
- **COM2** RS-422/485 (Terminal Plug 4-Pin)
- **COM3** RS-485 (Terminal Plug 2-Pin)
- **CAN** Terminal Plug 2-Pin
- **Ethernet (RJ45)** 10/100-BaseT
- **I/Os**

USB Client	USB 2.0 Client x 1
USB Host	USB 2.0 Host x 1
Micro-SD Slot	Yes
Audio	1 Line-out / 1 Mic-in

#### LCD Display

- **Display Type** WSVGA TFT LCD
- **Display Size** 10.1"
- **Max. Resolution** 1024 x 600
- **Max. Colors** 64K
- **Luminance (cd/m2)** 550
- **Viewing Angle (H/V)** 140/110
- **Backlight Life** LED, 50,000 hrs
- **Dimming** Adjustable by touch panel
- **Contrast Ratio** 500:1

#### Touchscreen


- **Lifespan** 36 million touches at 8mm-diameter finger point through silicone rubber bearing at least 250g 2 times per second.
- **Light** Transmission Above 80%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment

- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)

## Dimensions

Unit: mm

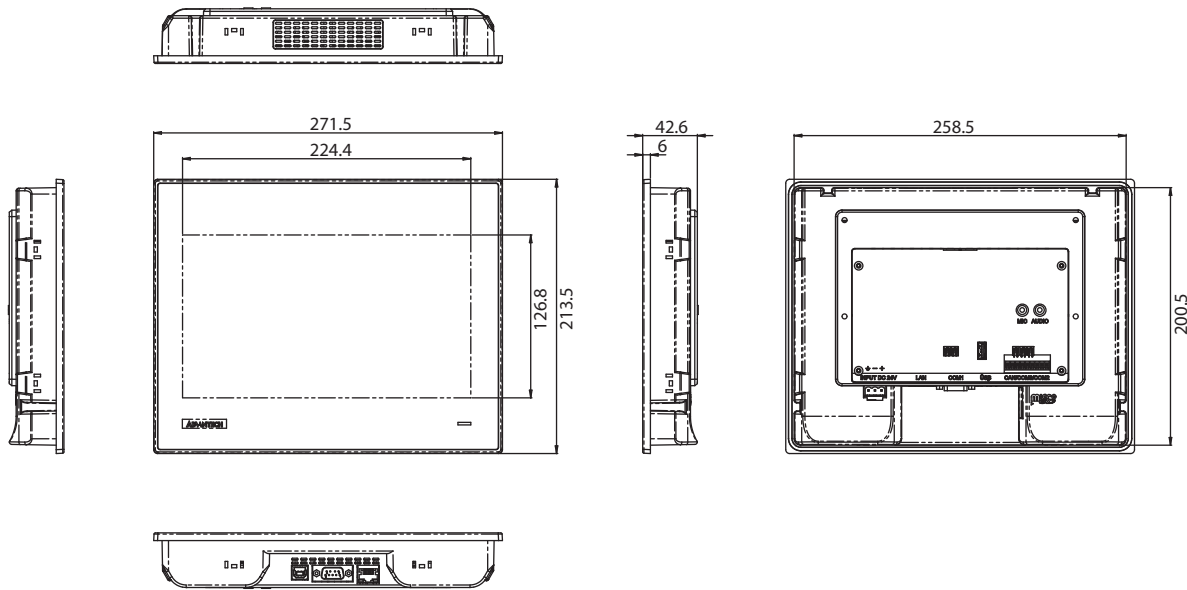

**Panel Cut-out Dimensions: 260 x 201.5 mm (10.24" x 7.93")**


## Ordering Information

- **WOP-3100T-C4AE** 10.1" WSVGA, Cortex™-A8, 256MB DDR, WinCE 6.0

## Accessories


- **PWR-247-AE** 24 V 50 W AC-DC Power Adapter
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702031836** Power Cable China/Australia Plug 1.8 M

## Base View

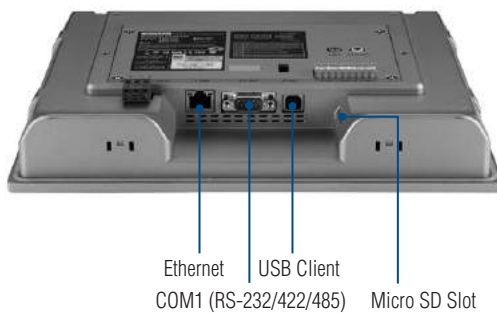

Ethernet    USB Client  
COM1 (RS-232/422/485)    Micro SD Slot

## Rear View

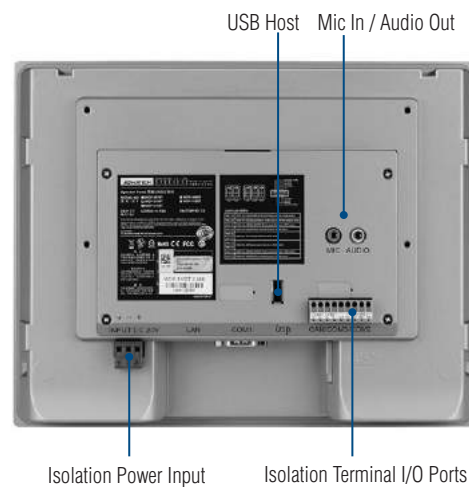

Isolation Power Input    Isolation Terminal I/O Ports



Isolation Terminal I/O Ports

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-3070T

## 7" WVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range

NEW



### Features

- RISC 32 bits TI ARM® Cortex™-A8 processor
- Various LCD sizes (7", 10.1", 12", 15")
- Full line LED BL TFT LCD with 50K life time
- Embedded Microsoft® WinCE 6.0 OS
- Supports WebOP Designer HMI Runtime development tool
- Backup Memory FRAM in 128KB(64 words) without battery concern
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C wide operating temperature range
- Supports CANopen library registered by CiA 301 V4.02
- RS-422/RS-485/CAN terminal I/O ports support Termination Resistor 120Ω
- Front panel IP66 compliant
- Die-cast aluminum alloy front bezel
- Level 4 ESD protection (Air:15KV / Contact:8KV)
- Industrial Control Equipment - UL 508 certification

### Introduction

With brand-new ID design, the WebOP-3070T provides stringent standards required in the automation market. Advantech offers the WebOP-3070T with Cortex™-A8 processor which consumes minimum power without sacrificing performance. The WebOP-3000T supports a variety of LCD sizes from 4.3" to 15" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. It's also provided with a wide operating temperature range to fulfill the requirements of harsh environments. The built-in Microsoft® WinCE 6.0 OS platform which bundles WebOP Designer lets the WebOP-3070T becomes a control HMI solution for flexible system integration.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 203.4 x 150 x 43.7 mm (8.01" x 5.91" x 1.72")
- **Cut-out Dimensions** 192 x 138.5 mm (7.56" x 5.45")
- **OS Support** Microsoft® Windows CE 6.0
- **Power Input** 24V<sub>DC</sub> ±10%
- **Power Consumption** 7W (Typical)
- **Enclosure Housing** PC + ABS
- **Mounting** Panel
- **Weight (Net)** 1 Kg (2.20 lbs)

#### System Hardware

- **CPU** RISC 32 bits, 600 MHz (ARM® Cortex™-A8)
- **Backup Memory** FRAM 128KB
- **Memory** DDR2 256MB on board
- **Storage** 512MB on board SLC type
- **Power-On LED** Yes

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Male)
- **COM2** RS-422/485 (Terminal Plug 4-Pin)
- **COM3** RS-485 (Terminal Plug 2-Pin)
- **CAN** Terminal Plug 2-Pin
- **Ethernet (RJ45)** 10/100-BaseT
- **I/Os**
  - USB Client USB 2.0 Client x 1
  - USB Host USB 2.0 Host x 1
  - Micro-SD Slot Yes
  - Audio 1 Line-out / 1 Mic-in

#### LCD Display

- **Display Type** WVGA TFT LCD
- **Display Size** 7"
- **Max. Resolution** 800 x 480
- **Max. Colors** 64K
- **Luminance (cd/m²)** 500
- **Viewing Angle (H/V)** 140/120
- **Backlight Life** LED, 50,000 hrs
- **Dimming** Adjustable by touch panel
- **Contrast Ratio** 700:1

#### Touchscreen

- **Lifespan** 36 million touches at 8mm-diameter finger point through silicone rubber bearing at least 250g 2 times per second.
- **Light** Transmission Above 80%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive


#### Environment

- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)



## Dimensions

Unit: mm

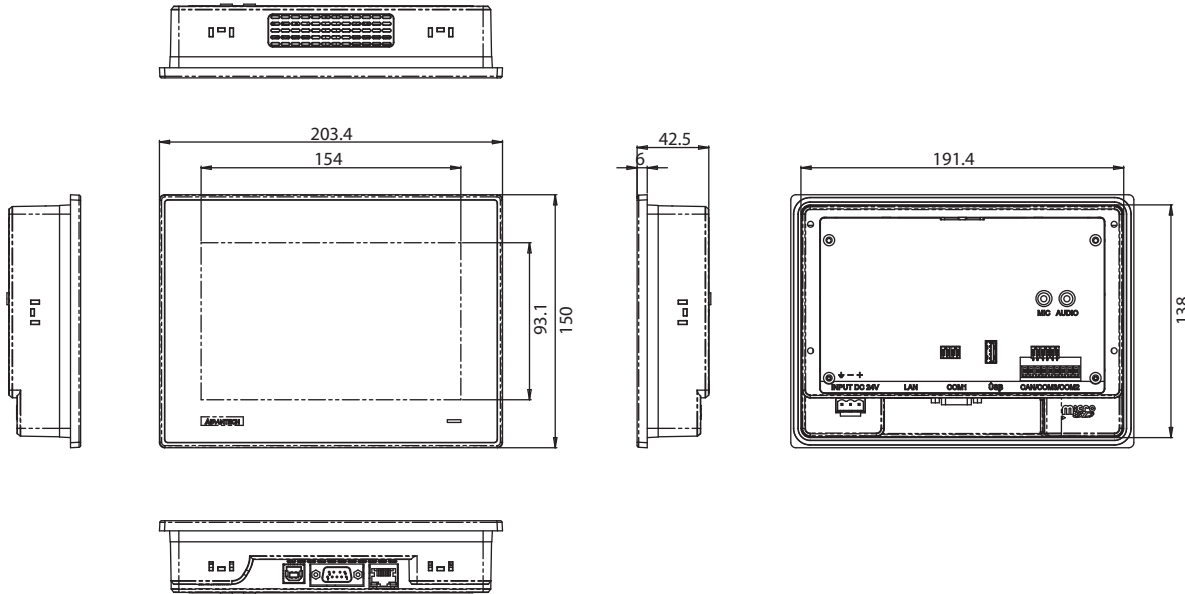

**Panel Cut Out Dimensions: 192 x 138.5 mm (7.56" x 5.45")**


## Ordering Information

- **WOP-3070T-C4AE** 7" WVGA, Cortex™-A8, 256MB DDR, WinCE 6.0

## Accessories


- **PWR-247-AE** 24 V 50 W AC-DC Power Adapter
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702031836** Power Cable China/Australia Plug 1.8 M

## Base View

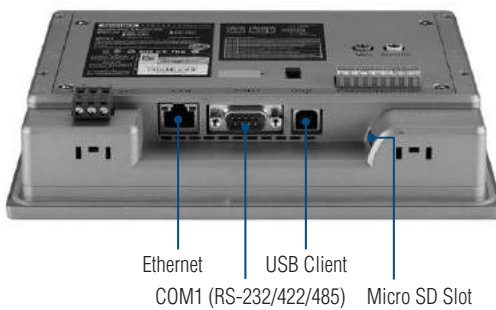

Ethernet  
COM1 (RS-232/422/485)  
USB Client  
Micro SD Slot

## Rear View

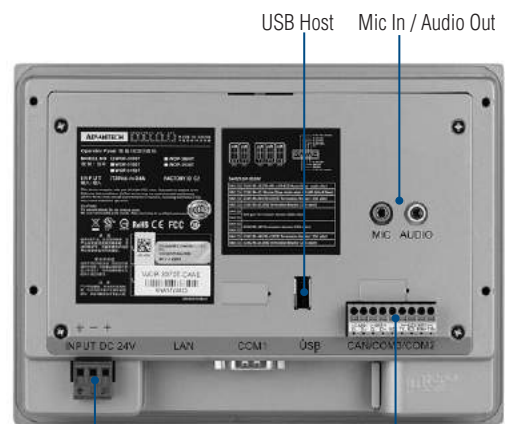

Isolation Power Input

Isolation Terminal I/O Ports



Isolation Terminal I/O Ports

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-31T TPC-61T

## 3.5"/5.7" QVGA TFT LED LCD TI Cortex-A8 Touch Panel Computer



### Features

- TI Cortex-A8 processor on board
- 3.5"/5.7" QVGA TFT LED LCD
- Super slim and compact design with plastic housing
- Fanless cooling system
- IP65 compliant front panel
- Built-in micro SD card with Windows® CE OS
- 1 x SD card slot
- Automatic data flow control RS-485
- Supports 1Mbit FRAM for data back-up

### Introduction

The TPC-31T/61T model is a compact platform without redundant functions, and has been designed for small-sized operator interface applications. It has a 3.5"/5.7" TFT LCD display which is a cost effective choice for a limited budget. Its RISC kernel, the TI Cortex-A8 processor consumes minimum power without sacrificing performance. The TPC-31T/61T has a 10/100Base-T Ethernet port offering solid communication ability and comes bundled with a Windows® CE OS that supports Thin-Client solutions. The built-in Windows CE OS platform lets the TPC-31T/61T become an Open HMI solution for system integration.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** TPC-31T: 120.79 x 85.5 x 26.5 mm (4.76" x 3.37" x 1.04")  
TPC-61T: 195 x 148 x 44.4 mm (7.68" x 5.83" x 1.75")
- **Enclosure** TPC-31T: ABS  
TPC-61T: PC/ABS Resin
- **Mounting** Panel
- **OS Support** Windows CE 6.0
- **Power Consumption** 8 W/12 W (typical)
- **Power Input** 18 ~ 32 V<sub>DC</sub>
- **Watchdog Timer** Programmable as 250 ms, 500 ms, 1 second
- **Weight (Net)** 0.25 kg (0.55 lbs)/0.8 kg (1.76 lb)

#### System Hardware

- **CPU** TI Cortex-A8 600MHz
- **Memory** DDR2 256MB on board
- **LAN** 10/100Base-T x 1
- **Storage** 512MB on board micro SD card  
1 x SD Card slot  
1Mbit FRAM for Data back-up
- **I/O** TPC-31T: RS-232/RS-485 X1 with auto data flow control, USB 2.0(Host) x 1, CAN x 1  
TPC-61T: RS-232 x 2 (COM1,2) RS-422/RS-485 x 1 (COM 3) with auto data flow control, USB2.0 (Host) x 1, USB2.0 (Client) x 1

#### LCD Display

- **Display Type** QVGA TFT LED LCD
- **Display Size** 3.5"/5.7"
- **Max. Resolution** 320 x 240
- **Max. Colors** 64 K
- **Luminance cd/m<sup>2</sup>** 450/800
- **Viewing Angle (H/V)** 160/140
- **Backlight Life** 30,000/50,000 hrs
- **Contrast Ratio** 300:1/800:1

#### Touchscreen

- **Lifespan** 1 million times with an 8mm diameter finger of silicone rubber
- **Light** Transmission Above 80%
- **Resolution** Linearity
- **Type** 4-wire, analog resistive

#### Environment


- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP65
- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Vibration Protection** 2 Grms (5 ~ 500 Hz) (Operating, random vibration)

### Ordering Information


- **TPC-31T-E3AE** 3.5" QVGA Touch Panel PC, TI AM3517 600 MHz, 256 MB with WinCE 6.0
- **TPC-61T-E3AE** 5.7" QVGA Touch Panel PC TI AM3517 600 MHz, 256 MB with WinCE 6.0

**Dimensions**

**TPC-31T**

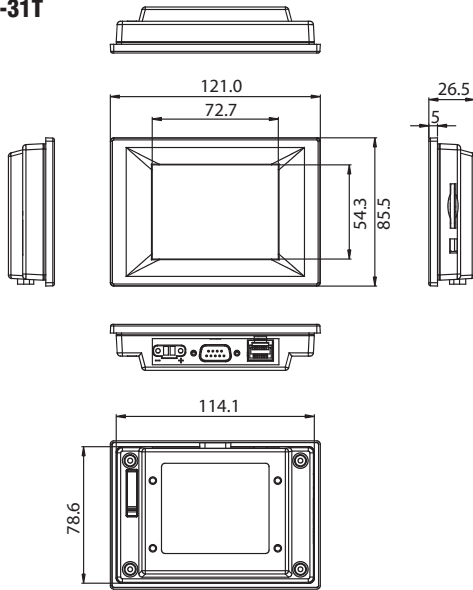

**TPC-61T**

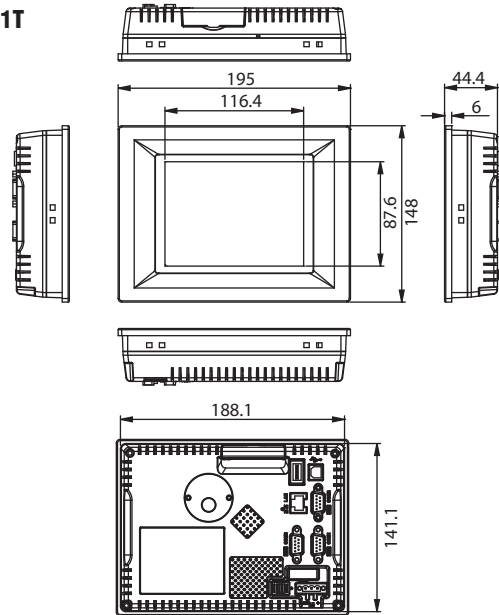

Unit: mm


**Panel Cut-out Dimensions: TPC-31T: 115 x 79.5 mm (4.6" x 3.18")  
TPC-61T: 189 x 142 mm (7.56" x 5.68")**

**Accessories**


- PWR-247-BE 63W DC 24V/2.62A Output Power Supply
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M

**Rear View**

**TPC-31T**

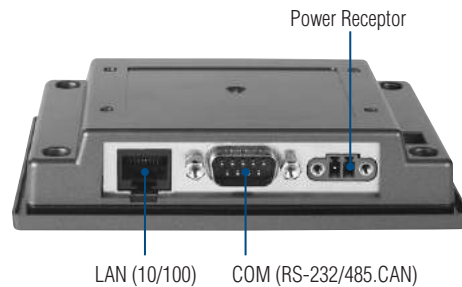

**TPC-61T**

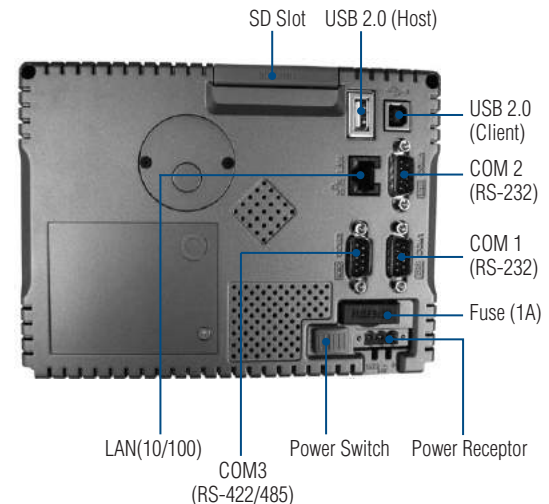

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-2100T

## 10.1 WSVGA Operator Panel with WebOP Designer Software



### Features

- Various LCD sizes (4.3", 5.6", 7", 8", 10.1")
- Supports ARM9-based CPUs with 200MHz and 128MB flash memory
- Supports RTC, battery backup RAM, and Ethernet-based operator panels
- Supports runtime data downloads through Serial, Ethernet, USB
- Supports adjustable brightness controls via touch panel
- Reliable firmware for 24/7 operation
- Supports Windows XP/7/Vista-based WebOP Designer development tool
- Easy to switch one application to different LCD sizes in seconds
- Supports vertical and horizontal application screen rotation
- Supports over 400 PLC industrial communication protocols
- Communicates with up to four types of devices
- Panel mounting for machinery
- Front panel is IP66 compliant

### Introduction

To satisfy the stringent standards required in the automation market, especially packaging, label slitting, and motion-based robot dispensing, Advantech offers the WebOP-2000T series with 200MHz ARM9-based RISC CPU's and 128MB flash memory for application software. The WebOP-2000T series also support a variety of LCD sizes from 4.3" to 10.1" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. The WebOP-2000T series is bundled with WebOP Designer: a software development kit which helps create application solutions for labor-saving, improved efficiency of manufacturing and easy control of every machine in the factory. WebOP Designer offers an outstanding price performance ratio for various markets such as conventional operator panels, HMI + Low mini SCADA systems, and HMI + communication gateways.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 269.8 x 212 x 37.4mm (10.62" x 8.35" x 1.47")
- **Cut-out Dimensions** 259.5 x 201.5 mm (10.22" x 7.93")
- **Front Panel Thickness** 6mm
- **Operating System** HMI RTOS, WebOP Designer
- **Power Supply Voltage** 24V<sub>DC</sub> ±10%
- **Power Consumption** 10W
- **Enclosure Housing** Plastic
- **Mounting** Panel
- **Weight (Net)** 1.2 kg (2.64 lbs)

#### System Hardware

- **CPU** RISC 32bits, 200MHz
- **Battery Backup Memory** 128KB
- **Flash Memory** 8MB/ 8MB + 128M NAND flash
- **Power-On LED** Yes
- **Communication LED** No
- **Front USB Access** No

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Female)
- **COM2** RS-422/485 (5-Pin Plug Connector)
- **COM3** RS-232 (Com1: Pin5;7;8)
- **Ethernet (RJ45)** 10/100-BaseT (for N2AE model)
- **I/Os**
  - USB Client Yes
  - USB Host Yes
  - Micro-SD Slot Yes (for N2AE model)

#### LCD Display and Touchscreen

- **Display Type** WSVGA TFT LCD
- **Display Size** 10.1"
- **Max. Resolution** 1024 x 600
- **Max. Colors** 65,536 colors
- **Luminance (cd/m<sup>2</sup>)** 250
- **Backlight Life** LED, 20,000 hrs
- **Dimming** Adjustable by touch panel
- **Touchscreen** 4 wire analog resistive

#### Environment


- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)

### Ordering Information

- **WOP-2100T-S2AE** 10.1" WSVGA, 64MB (SDRAM), 8MB (NOR)
- **WOP-2100T-N2AE** 10.1" WSVGA, 64MB (SDRAM), 8MB (NOR) & 128MB (NAND)

## Dimensions

Unit: mm

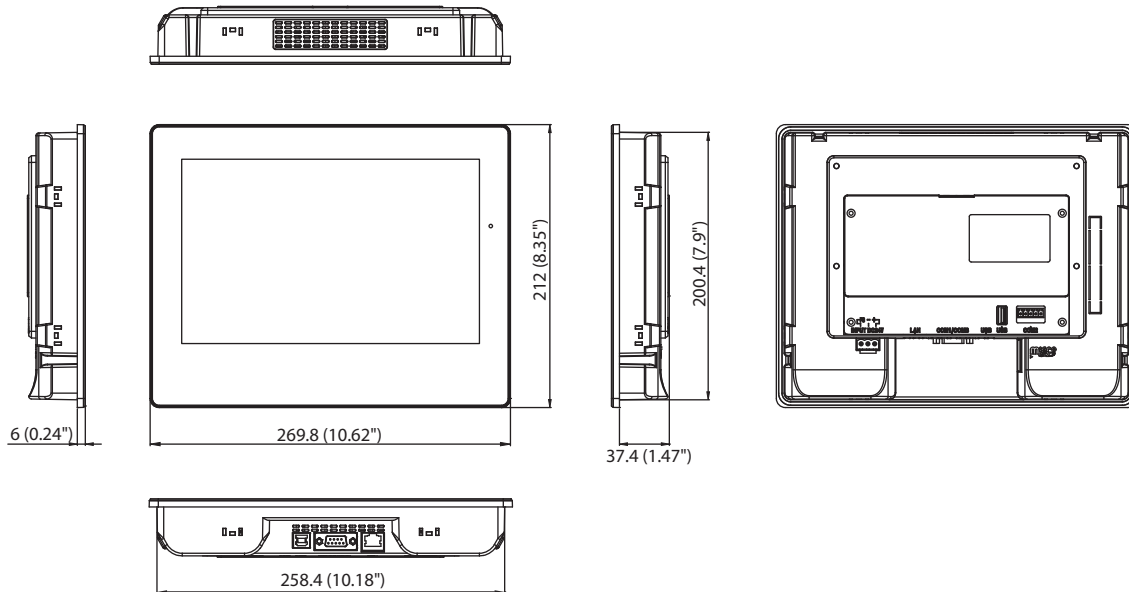


**Panel Cut-out Dimensions: 259.5 x 201.5 mm (10.22" x 7.93")**

## Accessories

- **CWOP-P2HFM-AD12E** PC to HMI program download cable, DB9/2m
- **CWOP-P2HAB-ADU2E** PC to HMI program download cable, USB/2m
- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **170000596** Power Cable China/Australia Plug 1.8 M


## Rear View

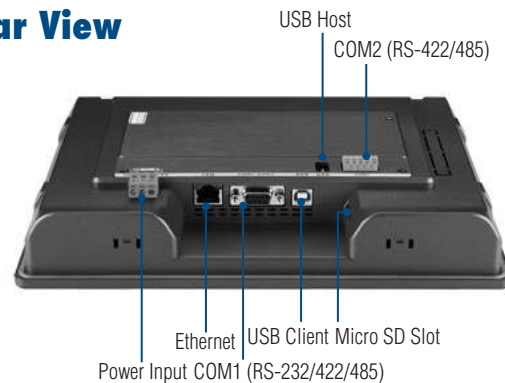


## Communication Links

### Direct Link


#### 1-to-1 Connection



#### 1-to-N Connection



#### N-to-1 Data Sharing Connection




### In-Direct Link


#### 2-to-1 Connection



#### N-to-1 Connection

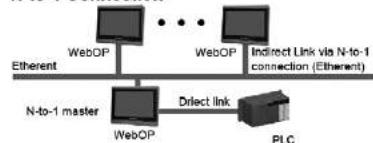

#### 2-to-1 Transparent Connection

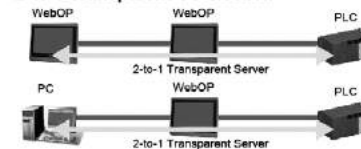

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-2080T

## 8" SVGA Operator Panel with WebOP Designer Software



### Features

- Various LCD sizes (4.3", 5.6", 7", 8", 10.1")
- Supports ARM9-based CPUs with 200MHz and 128MB flash memory
- Supports RTC, battery backup RAM, and Ethernet-based operator panels
- Supports runtime data downloads through Serial, Ethernet, USB
- Supports adjustable brightness controls via touch panel
- Reliable firmware for 24/7 operation
- Supports Windows XP/7/Vista-based WebOP Designer development tool
- Easy to switch one application to different LCD sizes in seconds
- Supports vertical and horizontal application screen rotation
- Supports over 400 PLC industrial communication protocols
- Communicates with up to four types of devices
- Panel mounting for machinery
- Front panel is IP66 compliant

### Introduction

To satisfy the stringent standards required in the automation market, especially packaging, label slitting, and motion-based robot dispensing, Advantech offers the WebOP-2000T series with 200MHz ARM9-based RISC CPU's and 128MB flash memory for application software. The WebOP-2000T series also support a variety of LCD sizes from 4.3" to 10.1" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. The WebOP-2000T series is bundled with WebOP Designer: a software development kit which helps create application solutions for labor-saving, improved efficiency of manufacturing and easy control of every machine in the factory. WebOP Designer offers an outstanding price performance ratio for various markets such as conventional operator panels, HMI + Low mini SCADA systems, and HMI + communication gateways.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 231.5 x 174.6 x 37 mm (9.11" x 6.87" x 1.46")
- **Cut-out Dimensions** 221 x 164 mm (8.70" x 6.46")
- **Front Panel Thickness** 6 mm
- **Operating System** HMI RTOS, WebOP Designer
- **Power Supply Voltage** 24V<sub>DC</sub> ±10%
- **Power Consumption** 10W
- **Enclosure Housing** Plastic
- **Mounting** Panel
- **Weight (Net)** 0.93 kg (2.05 lbs)

#### System Hardware

- **CPU** RISC 32bits, 200MHz
- **Battery Backup Memory** 128KB
- **Flash Memory** 8MB/ 8MB + 128M NAND flash
- **Power-On LED** Yes
- **Communication LED** No
- **Front USB Access** No

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Female)
- **COM2** RS-422/485 (5-Pin Plug Connector)
- **COM3** RS-232 (Com1: Pin5;7;8)
- **Ethernet (RJ45)** 10/100-BaseT (for N2AE model)
- **I/Os**
  - USB Client Yes
  - USB Host Yes
  - Micro-SD Slot Yes (for N2AE model)

#### LCD Display and Touchscreen

- **Display Type** SVGA TFT LCD
- **Display Size** 8"
- **Max. Resolution** 800 x 600
- **Max. Colors** 65,536 colors
- **Luminance (cd/m<sup>2</sup>)** 250
- **Backlight Life** LED, 30,000 hrs
- **Dimming** Adjustable by touch panel
- **Touchscreen** 4 wire analog resistive

#### Environment


- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)

### Ordering Information

- **WOP-2080T-S2AE** 8" SVGA, 64MB (SDRAM), 8MB (NOR)
- **WOP-2080T-N2AE** 8" SVGA, 64MB (SDRAM), 8MB (NOR) & 128MB (NAND)

## Dimensions

Unit: mm

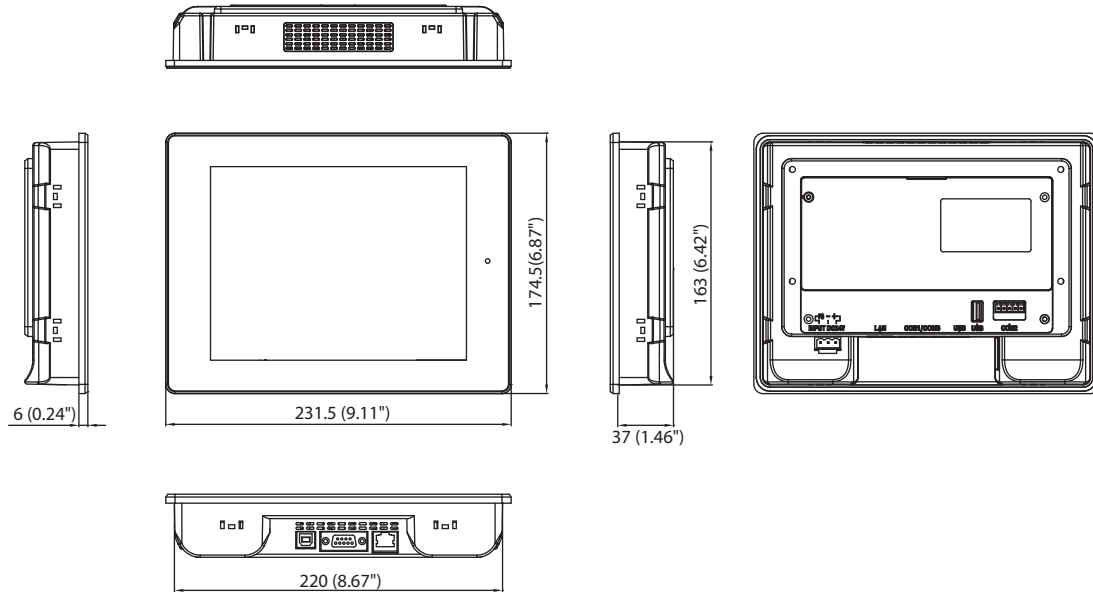


**Panel Cut-out Dimensions: 221 x 164 mm (8.70" x 6.46")**

## Accessories

- **CWOP-P2HFM-AD12E** PC to HMI program download cable, DB9/2m
- **CWOP-P2HAB-ADU2E** PC to HMI program download cable, USB/2m
- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M


## Rear View

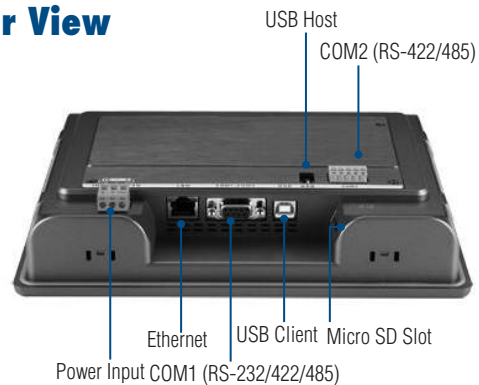


## Communication Links

### Direct Link


#### 1-to-1 Connection



#### 1-to-N Connection



#### N-to-1 Data Sharing Connection




### In-Direct Link


#### 2-to-1 Connection



#### N-to-1 Connection

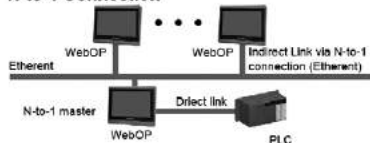

#### 2-to-1 Transparent Connection

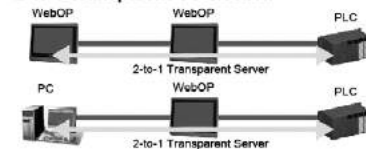

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-2070T

## 7" WVGA Operator Panel with WebOP Designer Software



### Features

- Various LCD sizes (4.3", 5.6", 7", 8", 10.1")
- Supports ARM9-based CPUs with 200MHz and 128MB flash memory
- Supports RTC, battery backup RAM, and Ethernet-based operator panels
- Supports runtime data downloads through Serial, Ethernet, USB
- Supports adjustable brightness controls via touch panel
- Reliable firmware for 24/7 operation
- Supports Windows XP/7/Vista-based WebOP Designer development tool
- Easy to switch one application to different LCD sizes in seconds
- Supports vertical and horizontal application screen rotation
- Supports over 400 PLC industrial communication protocols
- Communicates with up to four types of devices
- Panel mounting for machinery
- Front panel is IP66 compliant

### Introduction

To satisfy the stringent standards required in the automation market, especially packaging, label slitting, and motion-based robot dispensing, Advantech offers the WebOP-2000T series with 200MHz ARM9-based RISC CPU's and 128MB flash memory for application software. The WebOP-2000T series also support a variety of LCD sizes from 4.3" to 10.1" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. The WebOP-2000T series is bundled with WebOP Designer: a software development kit which helps create application solutions for labor-saving, improved efficiency of manufacturing and easy control of every machine in the factory. WebOP Designer offers an outstanding price performance ratio for various markets such as conventional operator panels, HMI + Low mini SCADA systems, and HMI + communication gateways.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 188 x 143.3 x 30 mm (7.4" x 5.64" x 1.18")
- **Cut-out Dimensions** 175 x 132.5 mm (6.89" x 5.21")
- **Front Panel Thickness** 6mm
- **Operating System** HMI RTOS, WebOP Designer
- **Power Supply Voltage** 24V<sub>DC</sub> ±10%
- **Power Consumption** 10W
- **Enclosure Housing** Plastic
- **Mounting** Panel
- **Weight (Net)** 0.6 kg (1.32 lbs)

#### System Hardware

- **CPU** RISC 32 bits, 200 MHz
- **Battery Backup Memory** 128KB
- **Flash Memory** 8MB/ 8MB + 128M NAND flash
- **Power-On LED** Yes
- **Communication LED** No
- **Front USB Access** No

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Female)
- **COM2** RS-422/485 (5-Pin Plug Connector)
- **COM3** RS-232 (Com1: Pin5;7;8)
- **Ethernet (RJ45)** 10/100-BaseT (for N2AE model)
- **I/Os**
  - USB Client Yes
  - USB Host Yes
  - Micro-SD Slot Yes (for N2AE model)

#### LCD Display and Touchscreen

- **Display Type** WVGA TFT LCD
- **Display Size** 7"
- **Max. Resolution** 800 x 480
- **Max. Colors** 65,536 colors
- **Luminance (cd/m<sup>2</sup>)** 300
- **Backlight Life** LED, 20,000 hrs
- **Dimming** Adjustable by touch panel
- **Touchscreen** 4 wire analog resistive

#### Environment

- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)


### Ordering Information

- **WOP-2070T-S2AE** 7" WVGA, 64MB (SDRAM), 8MB (NOR)
- **WOP-2070T-N2AE** 7" WVGA, 64MB (SDRAM), 8MB (NOR) & 128MB (NAND)



## Dimensions

Unit: mm

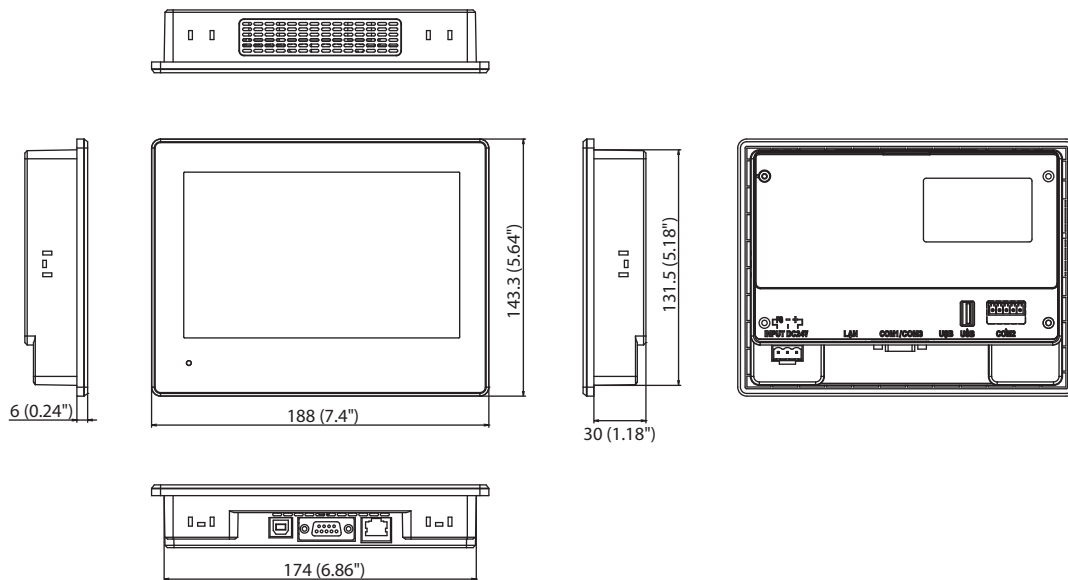


**Panel Cut Out Dimensions: 175 x 132.5mm (6.89" x 5.21")**

## Accessories

- **CWOP-P2HFM-AD12E** PC to HMI program download cable, DB9/2m
- **CWOP-P2HAB-ADU2E** PC to HMI program download cable, USB/2m
- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M


## Rear View

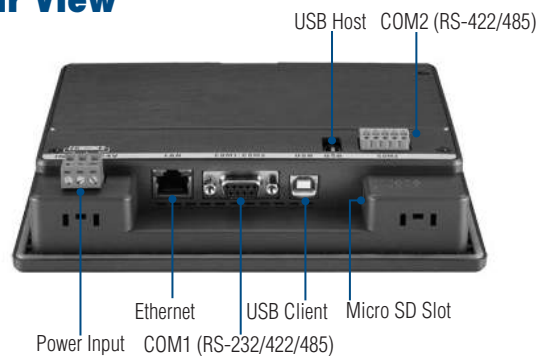


## Communication Links

### Direct Link


#### 1-to-1 Connection



#### 1-to-N Connection



#### N-to-1 Data Sharing Connection




### In-Direct Link


#### 2-to-1 Connection



#### N-to-1 Connection

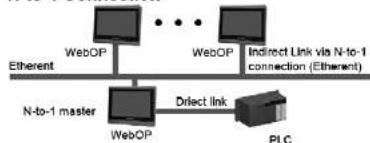

#### 2-to-1 Transparent Connection

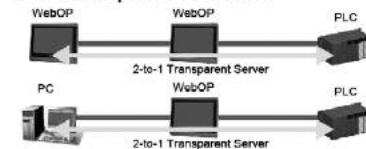

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-2050T

## 5.6" QVGA Operator Panel with WebOP Designer Software



### Features

- Various LCD sizes (4.3", 5.6", 7", 8", 10.1")
- Supports ARM9-based CPUs with 200MHz and 128MB flash memory
- Supports RTC, battery backup RAM, and Ethernet-based operator panels
- Supports runtime data downloads through Serial, Ethernet, USB
- Supports adjustable brightness controls via touch panel
- Reliable firmware for 24/7 operation
- Supports Windows XP/7/Vista-based WebOP Designer development tool
- Easy to switch one application to different LCD sizes in seconds
- Supports vertical and horizontal application screen rotation
- Supports over 400 PLC industrial communication protocols
- Communicates with up to four types of devices
- Panel mounting for machinery
- Front panel is IP66 compliant

### Introduction

To satisfy the stringent standards required in the automation market, especially packaging, label slitting, and motion-based robot dispensing, Advantech offers the WebOP-2000T series with 200MHz ARM9-based RISC CPU's and 128MB flash memory for application software. The WebOP-2000T series also support a variety of LCD sizes from 4.3" to 10.1" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. The WebOP-2000T series is bundled with WebOP Designer: a software development kit which helps create application solutions for labor-saving, improved efficiency of manufacturing and easy control of every machine in the factory. WebOP Designer offers an outstanding price performance ratio for various markets such as conventional operator panels, HMI + Low mini SCADA systems, and HMI + communication gateways.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 188 x 143.3 x 30 mm (7.4" x 5.64" x 1.18")
- **Cut-out Dimensions** 175 x 132.5 mm (6.89" x 5.21")
- **Front Panel Thickness** 6mm
- **Operating System** HMI RTOS, WebOP Designer
- **Power Supply Voltage** 24V<sub>DC</sub> ±10%
- **Power Consumption** 10W
- **Enclosure Housing** Plastic
- **Mounting** Panel
- **Weight (Net)** 0.51 kg (1.12 lbs)

#### System Hardware

- **CPU** RISC 32bits, 200MHz
- **Battery Backup Memory** 128KB
- **Flash Memory** 8MB + 128M NAND flash
- **Power-On LED** Yes
- **Communication LED** No
- **Front USB Access** No

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Female)
- **COM2** RS-422/485 (5-Pin Plug Connector)
- **COM3** RS-232 (Com1: Pin5;7;8)
- **Ethernet (RJ45)** None
- **I/Os**

USB Client	Yes
USB Host	Yes
Micro-SD Slot	Yes

#### LCD Display and Touchscreen

- **Display Type** QVGA TFT LCD
- **Display Size** 5.6"
- **Max. Resolution** 320 x 234
- **Max. Colors** 65,536 colors
- **Luminance (cd/m<sup>2</sup>)** 330
- **Backlight Life** LED, 20,000 hrs
- **Dimming** Adjustable by touch panel
- **Touchscreen** 4 wire analog resistive

#### Environment


- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)

### Ordering Information

- **WOP-2050T-S1AE** 5.6" QVGA, 32 MB (SDRAM), 8MB (NOR) & 128MB (NAND)

## Dimensions

Unit: mm

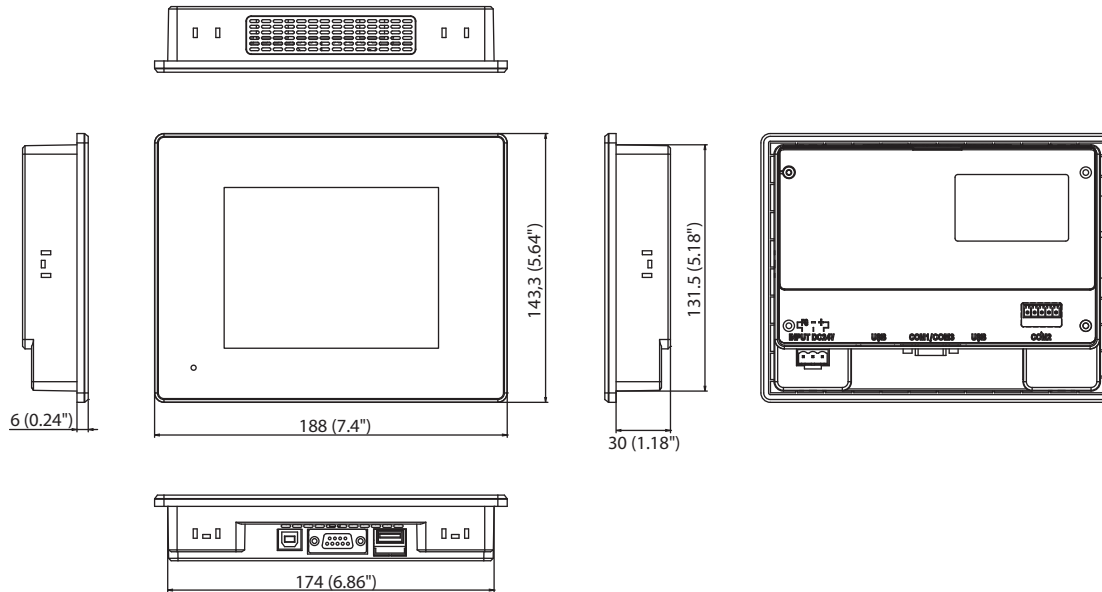


**Panel Cut-out Dimensions: 175 x 132.5mm (6.89" x 5.21")**

## Accessories

- **CWOP-P2HFM-AD12E** PC to HMI program download cable, DB9/2m
- **CWOP-P2HAB-ADU2E** PC to HMI program download cable, USB/2m
- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M


## Rear View

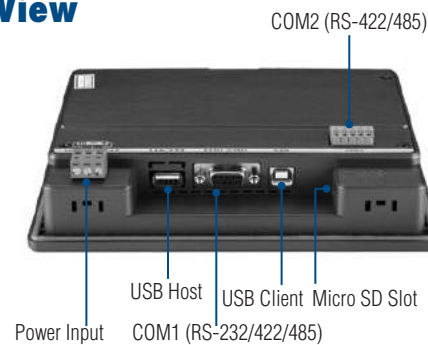


## Communication Links

### Direct Link


#### 1-to-1 Connection



#### 1-to-N Connection



#### N-to-1 Data Sharing Connection

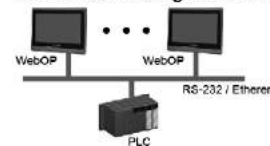


### In-Direct Link


#### 2-to-1 Connection



#### N-to-1 Connection

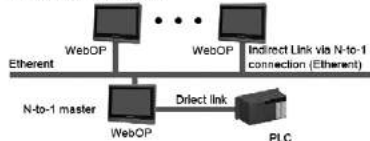

#### 2-to-1 Transparent Connection

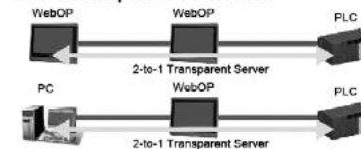

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# WebOP-2040T

## 4.3" WQVGA Operator Panel with WebOP Designer Software



### Features

- Various LCD sizes (4.3", 5.6", 7", 8", 10.1")
- Supports ARM9-based CPUs with 200MHz and 128MB flash memory
- Supports RTC, battery backup RAM, and Ethernet-based operator panels
- Supports runtime data downloads through Serial, Ethernet, USB
- Supports adjustable brightness controls via touch panel
- Reliable firmware for 24/7 operation
- Supports Windows XP/7/Vista-based WebOP Designer development tool
- Easy to switch one application to different LCD sizes in seconds
- Supports vertical and horizontal application screen rotation
- Supports over 400 PLC industrial communication protocols
- Communicates with up to four types of devices
- Panel mounting for machinery
- Front panel is IP66 compliant

### Introduction

To satisfy the stringent standards required in the automation market, especially packaging, label slitting, and motion-based robot dispensing, Advantech offers the WebOP-2000T series with 200MHz ARM9-based RISC CPU's and 128MB flash memory for application software. The WebOP-2000T series also support a variety of LCD sizes from 4.3" to 10.1" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. The WebOP-2000T series is bundled with WebOP Designer: a software development kit which helps create application solutions for labor-saving, improved efficiency of manufacturing and easy control of every machine in the factory. WebOP Designer offers an outstanding price performance ratio for various markets such as conventional operator panels, HMI + Low mini SCADA systems, and HMI + communication gateways.

### Specifications

#### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 130 x 106.2 x 36.4mm (5.11" x 4.18" x 1.43")
- **Cut-out Dimensions** 118.5 x 92.5mm (4.66" x 3.64")
- **Front Panel Thickness** 5mm
- **Operating System** HMI RTOS, WebOP Designer
- **Power Supply Voltage** 24V<sub>DC</sub> ±10%
- **Power Consumption** 5W
- **Enclosure Housing** Plastic
- **Mounting** Panel
- **Weight (Net)** 0.3 kg (0.66 lbs)

#### System Hardware

- **CPU** RISC 32bits, 200MHz
- **Battery Backup Memory** 128KB
- **Flash Memory** 8MB/ 8MB + 128M NAND flash
- **Power-On LED** Yes
- **Communication LED** No
- **Front USB Access** No

#### Communication Interface

- **COM1** RS-232/422/485 (DB9 Female)
- **COM2** RS-422/485 (5-Pin Plug Connector)
- **COM3** RS-232 (Com1: Pin5;7;8)
- **Ethernet (RJ45)** 10/100-BaseT (for N1AE model)
- **I/Os**
  - USB Client Yes
  - USB Host Yes
  - Micro-SD Slot Yes (for N1AE model)

#### LCD Display and Touchscreen

- **Display Type** WQVGA TFT LCD
- **Display Size** 4.3"
- **Max. Resolution** 480 x 272
- **Max. Colors** 65,536 colors
- **Luminance (cd/m<sup>2</sup>)** 400
- **Backlight Life** LED, 20,000 hrs
- **Dimming** Adjustable by touch panel
- **Touchscreen** 4 wire analog resistive

#### Environment


- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)

### Ordering Information

- **WOP-2040T-S1AE** 4.3" WQVGA, 32MB (SDRAM), 8MB (NOR)
- **WOP-2040T-N1AE** 4.3" WQVGA, 32MB (SDRAM), 8MB (NOR) & 128MB (NAND)

## Dimensions

Unit: mm

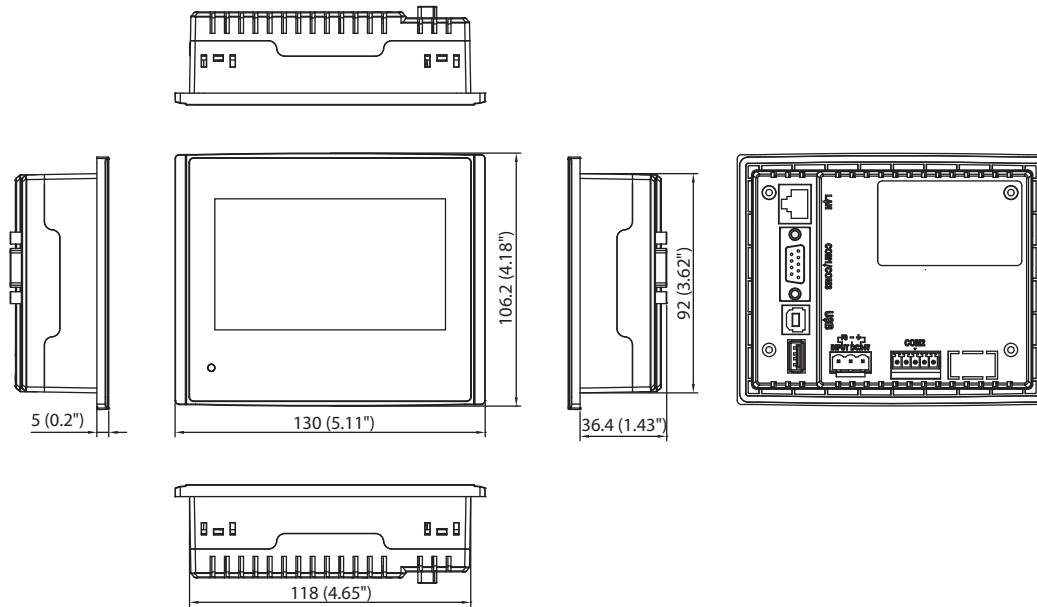


**Panel Cut-out Dimensions: 118.5 x 92.5 mm (4.66" x 3.64")**

## Accessories

- **CWOP-P2HFM-AD12E** PC to HMI program download cable, DB9/2m
- **CWOP-P2HAB-ADU2E** PC to HMI program download cable, USB/2m
- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M


## Rear View

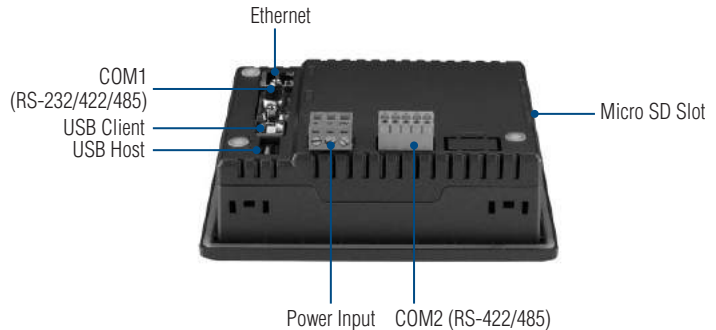


## Communication Links

### Direct Link


#### 1-to-1 Connection



#### 1-to-N Connection



#### N-to-1 Data Sharing Connection




### In-Direct Link


#### 2-to-1 Connection



#### N-to-1 Connection

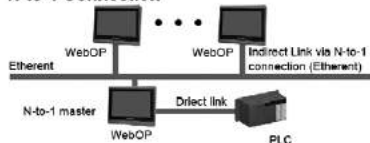

#### 2-to-1 Transparent Connection

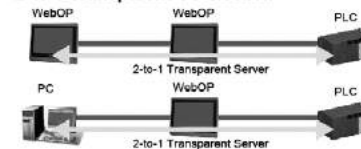

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Supported PLC and Controllers list

## Communication Port

Brand	Model	WOP-2000T	Panel Express	WOP-3000T	Type
A&D Company Ltd.	AD-4401 Weighing Indicator	V	V	V	Direct Link (COM)
ABIDO Automation Co., Ltd.	ACR420 984 Device/Slave (RTU)	V	V	V	Direct Link (COM)
ADLEE POWERTRONIC CO., LTD.	MS/AP/AS Series Inverter (RTU)	V	V	V	Direct Link (COM)
	BL/D305 Series (RTU)	V	V	V	Direct Link (COM)
	Null PLC	V	V	V	Direct Link (COM)
Advantech	ADAM (Modbus RTU)	V	V	V	Direct Link (COM)
	ADAM-4000 (ASCII)	V	V	V	Direct Link (COM)
	ADAM-6000 (Modbus TCP/IP)	V	V	V	Direct Link (Ethernet)
AIGO Technologies Corporation	SE500 Series (Modbus RTU)	V	V	V	Direct Link (COM)
	Micrologix 1000/1500	V	V	V	Direct Link (COM)
	SLC 5/03, 5/04	V	V	V	Direct Link (COM)
	DH-485 (COM)	V	V	N/A	Direct Link (COM)
	PLC-5	V	V	V	Direct Link (COM)
	SLC 5/03, 5/04 (CRC)	V	V	V	Direct Link (COM)
	CompactLogix/ControlLogix Tag	V	V	N/A	Direct Link (COM)
	MicroLogix 1000/1500 via 1761-NET-ENI	V	V	V	Direct Link (Ethernet)
	MicroLogix	V	V	V	Direct Link (Ethernet)
	CompactLogix/ControlLogix Ethernet/IP Tag	V	V	V	Direct Link (Ethernet)
ARICO Technology	FC Type (Modbus)	V	V	V	Direct Link (COM)
	ModBus Master (TCP/IP)	V	V	V	Direct Link (Ethernet)
	ModBus Device/Slave (TCP/IP)	V	V	V	Direct Link (Ethernet)
	Modbus Master (RTU)	V	V	V	Direct Link (COM)
	Modbus Device/Slave (RTU)	V	V	V	Direct Link (COM)
	Modicon Device/Slave (RTU, Quantum)	V	V	V	Direct Link (COM)
	ModBus Master (TCP/IP; Type 2)	V	V	V	Direct Link (Ethernet)
	ModBus Device/Slave (TCP/IP; Type 2)	V	V	V	Direct Link (Ethernet)
	Modbus Master (RTU; Non-volatile slave data)	V	V	V	Direct Link (COM)
Automation Technology Co., Ltd.	BLDC NLV/KLV Series	V	V	V	Direct Link (COM)
Banner Engineering Int'l Inc.	BSP01 Series	V	V	V	Direct Link (COM)
Beckhoff Automation GmbH	TwinCAT 2 ( via Ethernet )	V	V	V	Direct Link (Ethernet)
	TwinCAT 2 ( via DLL )	V	N/A	N/A	Direct Link (Ethernet)
Bosch Rexroth	ModBus Device/Slave (TCP/IP; Type 2)	V	V	V	Direct Link (Ethernet)
CAPAC	TC	V	V	V	Direct Link (COM)
CHINO Corporation	DB1000 Digital Indicating Controller (ASCII)	V	V	V	Direct Link (COM)
	NFO Controllers	V	V	V	Direct Link (COM)
	FCT Controllers	V	V	V	Direct Link (COM)
	SD Drivers	V	V	V	Direct Link (COM)
	SDS Drivers	V	V	V	Direct Link (COM)
	MDM Drivers	V	V	V	Direct Link (COM)
	FCT Controllers (TCP/IP; Type 2)	V	V	V	Direct Link (Ethernet)
Crouzet Ltd.	M3 SLIN/SLOUT Protocol	V	V	V	Direct Link (COM)
CTB Technologies Corporation	IMS Servo Controller	V	N/A	N/A	Direct Link (COM)
Danfoss Group	VLT 2800 Series (FC Protocol)	V	V	V	Direct Link (COM)
	Modbus RTU (COM port)	V	V	V	Direct Link (COM)
DEIF A/S	TCP/IP Modbus (Ethernet port)	V	V	V	Direct Link (Ethernet)
	WSS/WSS-L	V	V	V	Direct Link (COM)
	DVP-ES/SS/EP/EH	V	V	V	Direct Link (COM)
	DVP-ES/SS/EP/EH (No block read)	V	V	V	Direct Link (COM)
	DVP-SV(RTU)	V	V	V	Direct Link (COM)
	VFD-M Inverter (ASCII)	V	V	V	Direct Link (COM)
	VFD-B Inverter (ASCII)	V	V	V	Direct Link (COM)
Della Corporation	DTC1000/2000 Temperature (ASCII)	V	V	V	Direct Link (COM)
	DTA Temperature (ASCII)	V	V	V	Direct Link (COM)
	ASDA-A Servo Controller (ASCII)	V	V	V	Direct Link (COM)
	ASDA-B Servo Controller (ASCII)	V	V	V	Direct Link (COM)
	ASDA-A2 Servo Controller (ASCII)	V	V	V	Direct Link (COM)
Dirise Electric Technology Co., Ltd.	DRS2000 Series Inverter	V	N/A	N/A	Direct Link (COM)
	DRS2800 M Series Inverter	V	V	V	Direct Link (COM)
EasyIO	EasyIO-30 (RTU)	V	V	V	Direct Link (Ethernet)
Emerson Network Power	EC Series (RTU)	V	V	V	Direct Link (COM)
Epson Corporate	EV1000 Series Variable Speed Driver	V	V	V	Direct Link (COM)
	Epson LQ Matrix Printer	V	V	V	Direct Link (COM)
	Eura EF1S/1N	V	V	V	Direct Link (COM)
	Eura EF2N	V	V	V	Direct Link (COM)
	Eura Inverter (Modbus RTU)	V	V	V	Direct Link (COM)
	Eura Inverter ( Modbus ASCII )	V	V	V	Direct Link (COM)
	Eura EF200-CPU202 (Modbus RTU)	V	V	V	Direct Link (COM)
	Eura EF200-CPU202XP/ CPU204 (Modbus RTU)	V	V	V	Direct Link (COM)
	Eura EF200-CPU204XP/ CPU206 (Modbus RTU)	V	V	V	Direct Link (COM)
	Eura EF300-CPU304 (Modbus RTU)	V	V	V	Direct Link (COM)
	Eura EF300-CPU306 (Modbus RTU)	V	V	V	Direct Link (COM)

Brand	Model	WOP-2000T	Panel Express	WOP-3000T	Type
	Eura Servo Drive ( Modbus RTU )	V	V	V	Direct Link (COM)
	Eura Servo Drive ( Modbus ASCII )	V	V	V	Direct Link (COM)
Eura Drivers Electric Corp.	Eura HFR1000 ( Modbus RTU )	V	V	V	Direct Link (COM)
	Eura HFR1000 ( Modbus ASCII )	V	V	V	Direct Link (COM)
	Eura HFR2000 ( Modbus RTU )	V	V	V	Direct Link (COM)
	Eura HFR2000 ( Modbus ASCII )	V	V	V	Direct Link (COM)
Fatek Automation Corp.	FATEK FBS/FBe	V	V	V	Direct Link (COM)
	Fatek FBS/FBe (TCP)	V	V	V	Direct Link (Ethernet)
Festo Corporation	FPC/FEC Series	V	V	V	Direct Link (COM)
	FPC/FEC EasyIP	V	V	V	Direct Link (Ethernet)
	NB Series	V	V	V	Direct Link (COM)
	PXR Series Temperature (RTU)	V	V	V	Direct Link (COM)
Fuji Electric Corporation	FRENIC-VP (RTU)	V	V	V	Direct Link (COM)
	FRENIC5000G11/P11 (Fuji)	V	V	V	Direct Link (COM)
	FRENIC-Mini/Eco/Multi/Mega (RTU)	V	V	V	Direct Link (COM)
	MICREX-SX	V	V	V	Direct Link (Ethernet)
FKV Automation Co., Ltd.	F Series Inverter	V	V	V	Direct Link (COM)
	90 Series SNP	V	V	V	Direct Link (COM)
	VersaMax Series (SNP)	V	V	V	Direct Link (COM)
	90 and RX3i Series (SNP)	V	V	V	Direct Link (COM)
	90 Series CCM	V	V	V	Direct Link (COM)
	SRTP Ethernet	V	V	V	Direct Link (Ethernet)
	SRTP Ethernet (Micro)	V	V	V	Direct Link (Ethernet)
Gigarise Technology Co., Ltd.	SE5000	V	V	V	Direct Link (COM)
	GA400 Temperature (RTU)	V	V	V	Direct Link (COM)
GOFAST Corporation	NC Series	V	V	V	Direct Link (COM)
Haiwell Technology Co., Ltd.	HW Series (RTU)	V	V	V	Direct Link (COM)
Hanbell Precise Machinery Co., Ltd.	Air Screw Compressor	V	V	V	Direct Link (COM)
	SJ200 Inverter	V	V	V	Direct Link (COM)
	EH/EHV Series (Ethernet; TCP)	V	V	N/A	Direct Link (Ethernet)
	EH/EHV Series (Ethernet; UDP)	V	V	N/A	Direct Link (Ethernet)
Hitachi Industrial Equipment Systems Co., Ltd	H/EH Series	V	V	V	Direct Link (COM)
	EHV Series (Procedure 1)	V	V	V	Direct Link (COM)
	H-252C	V	V	V	Direct Link (COM)
	AD Series Servo Drives	V	V	V	Direct Link (COM)
	Computer as Slave (COM)	V	V	V	Direct Link (COM)
	Computer as Master (COM)	V	V	V	Direct Link (COM)
	Computer as Slave V2 (COM)	V	N/A	N/A	Direct Link (COM)
	Computer as Master V2 (COM)	V	V	V	Direct Link (COM)
HOLIP ELECTRONIC TECHNOLOGY CO., LTD	HLP-C-/CP	V	V	V	Direct Link (COM)
HollySys	LE5108 (Modbus RTU)	V	V	N/A	Direct Link (COM)
	BACnet/IP	V	N/A	N/A	Direct Link (Ethernet)
	BACnet/MSTP	V	N/A	N/A	Direct Link (COM)
	BACnet	V	N/A	N/A	Direct Link (COM)
	HW BACnet/IP	V	N/A	N/A	Direct Link (Ethernet)
	Modbus Device/Slave (RTU, 255)	V	V	V	Direct Link (COM)
	Modbus Device/Slave (RTU, 255, NoBlock)	V	V	V	Direct Link (COM)
Hunjoen Electronic Co., Ltd.	H_Tech PID CONTROLLER	V	V	V	Direct Link (COM)
HUST Automation Inc.	CNC Controller	V	V	V	Direct Link (COM)
	New CNC Controller	V	V	V	Direct Link (COM)
Idec Corporation	FC Series	V	V	V	Direct Link (COM)
IECCO	Sinus Penta Inverter (RTU)	V	V	V	Direct Link (COM)
	H2u (CPU Port)	V	V	V	Direct Link (COM)
Inovance Control Technology Co., Ltd.	MD Series Inverter (RTU)	V	V	V	Direct Link (COM)
	MD Series Inverter (RTU-1)	V	V	V	Direct Link (COM)
	IS Servo (RTU)	V	V	V	Direct Link (COM)
Integrated Flow Systems	iPurge Source Controller	V	V	V	Direct Link (COM)
Invt Auto-Control Technology	IVC Series	V	V	V	Direct Link (COM)
	NANO Series	V	V	V	Direct Link (COM)
JETTER	JetControl 24x Series	V	V	V	Direct Link (COM)
	JetControl 24x Series (Ethernet)	V	V	N/A	Direct Link (Ethernet)
	IRIS Series	V	V	V	Direct Link (Ethernet)
Joint Peer Systec Corp.	JUPITER Series	V	V	V	Direct Link (COM)
	PDAN Series	V	V	V	Direct Link (COM)
	PDS Series	V	V	V	Direct Link (COM)
	KV Series	V	V	V	Direct Link (COM)
	KV-1000	V	V	V	Direct Link (COM)
	KV-L20V, KV-NANO	V	V	V	Direct Link (COM)
	KV-L20	V	V	V	Direct Link (COM)
	KV-3000	V	V	V	Direct Link (COM)
	KV-5000	V	V	V	Direct Link (Ethernet)
Kinco Automation Ltd.	Kinco ED Series	V	V	V	Direct Link (COM)
Klockner Moeller Corporation	PS4-201-MM1	V	V	V	Direct Link (COM)
	SUCONET K	V	N/A	N/A	Direct Link (COM)

# Communication Port

Brand	Model	WOP-2000T	Panel Express	WOP-3000T	Type	
Koyo Electric Corp.	K Sequence Series	V	V	V	Direct Link (COM)	
	Direct Logic Series	V	V	V	Direct Link (COM)	
	Direct 06 Series (K Sequence)	V	V	V	Direct Link (COM)	
Lenze Drive Systems GmbH	Direct 06 Series (DirectNET)	V	V	V	Direct Link (COM)	
	93xx Servo Controllers (LECOM A/B)	V	V	V	Direct Link (COM)	
LG Industrial Systems	E94AYCEN GCH(TCP/IP) Protocol	V	V	V	Direct Link (Ethernet)	
	Master-K Series CNet	V	V	V	Direct Link (COM)	
	K120S CPU Port	V	V	V	Direct Link (COM)	
	Master-K Loader	V	V	V	Direct Link (COM)	
	GLOFA GM Series CNet	V	V	V	Direct Link (COM)	
	XBM-DR16S	V	V	V	Direct Link (COM)	
	GLOFA GM Loader	V	V	V	Direct Link (COM)	
	XEC/XGI CNet	V	V	V	Direct Link (COM)	
	XGT/XGK (CPU)	V	V	V	Direct Link (COM)	
	XGL-C22A	V	V	V	Direct Link (COM)	
LG System	XGT/XGK (CPU)	V	V	V	Direct Link (Ethernet)	
	LGA Series(as Slave)	V	V	V	Direct Link (COM)	
Liyan Electric Industrial Ltd.	LGA Series (as Master)	V	V	V	Direct Link (COM)	
	EX Series (CPU Port)	V	V	V	Direct Link (COM)	
Lust Antriebstechnik GmbH	LustBus ServoC/CDE Series	V	V	N/A	Direct Link (COM)	
	LustBus CDD Series	V	V	N/A	Direct Link (COM)	
Maxtech	MC2 PID Controller	V	V	V	Direct Link (COM)	
Maxthermo	MC 5738 (RTU)	V	V	V	Direct Link (COM)	
Mean Well Enterprises Co., Ltd.	PRETA	V	V	V	Direct Link (COM)	
Megmeet	MC Series (RTU)	V	V	V	Direct Link (COM)	
Micro Trend Corporation	UTC Servo Controller	V	V	V	Direct Link (COM)	
MIKOM ELECTRICAL TECHNOLOGY	MX Series PLC	V	V	V	Direct Link (COM)	
Mirle Automation Corporation	Fama SoftPLC Ethernet	V	V	V	Direct Link (Ethernet)	
	ModBus Device/Slave (TCP/IP)	V	V	V	Direct Link (Ethernet)	
Mitsubishi Electric Corp.	nDX Controller	V	V	V	Direct Link (COM)	
	Melsec-FX (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q/QnA (Link Port)	V	V	V	Direct Link (COM)	
	Melsec-Q00/Q01 (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q02H (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q02 (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q02U (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q00J (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-FX2n (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-FX3J (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-FX3U (Link Port)	V	V	V	Direct Link (COM)	
	Melsec-AnN/Ans (Link Port)	V	V	V	Direct Link (COM)	
	Melsec-AnN/Ans Protocol 4	V	V	V	Direct Link (COM)	
	FX2n-10GM/20GM	V	V	V	Direct Link (COM)	
	Melsec-A1S/A2S (CPU Port)	V	V	V	Direct Link (COM)	
	FR-E500 Series (485)	V	V	V	Direct Link (COM)	
	Melsec-A3N/A1SH (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-AnA/AnU (Link Port)	V	V	V	Direct Link (COM)	
	Melsec-AnA/AnU Protocol 4	V	V	V	Direct Link (COM)	
	Servo Amplifier MR-J2S-A	V	V	V	Direct Link (COM)	
	Servo Amplifier MR-J3-A	V	V	V	Direct Link (COM)	
	Servo Amplifier MR-J4-A	V	V	V	Direct Link (COM)	
	Melsec-A2A/A2AS (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q06H (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q12H (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q03U (CPU Port)	V	V	V	Direct Link (COM)	
	Melsec-Q00U (CPU Port)	V	V	V	Direct Link (COM)	
	GOT-F900 Emulator (1:1 Format 1 & 2)	V	V	N/A	Direct Link (COM)	
	Melsec-Q01U (CPU Port)	V	V	V	Direct Link (COM)	
	Q Ethernet	V	V	V	Direct Link (Ethernet)	
	Q/L Ethernet (ASCII Mode)	V	V	V	Direct Link (Ethernet)	
	L Ethernet (Binary Mode)	V	V	V	Direct Link (Ethernet)	
	Melsec-FX3U (MC-Protocol)	V	V	V	Direct Link (Ethernet)	
	Mitutoyo Corporation	EV Linear Gage Counter (ASCII)	V	V	V	Direct Link (COM)
		TSX Premium (Uni-Telway)	V	V	V	Direct Link (COM)
	Schneider Electric-Modicon Corp.	TSX Quantum (Uni-Telway)	V	N/A	N/A	Direct Link (COM)
		Twido (Modbus RTU)	V	V	V	Direct Link (COM)
		ModBus Master (TCP/IP; Type 2)	V	V	V	Direct Link (Ethernet)
		ModBus Device/Slave (TCP/IP; Type 2)	V	V	V	Direct Link (Ethernet)
		Modbus Master (RTU; Non-volatile slave data)	V	V	V	Direct Link (COM)
		Modbus Device/Slave (RTU; 6-digit Addresses)	V	V	N/A	Direct Link (COM)
		Modbus Master (ASCII; Non-volatile slave data)	V	V	V	Direct Link (COM)
		Modbus Master (ASCII; Non-volatile slave data)	V	V	V	Direct Link (COM)
	MOTEC	α Series	V	V	V	Direct Link (COM)
	MTC	MTC96 Controller (Modbus ASCII)	V	V	V	Direct Link (COM)
Muscle Corporation Inc.	Cool Muscle CM1-17L30	V	V	V	Direct Link (COM)	

Brand	Model	WOP-2000T	Panel Express	WOP-3000T	Type
MyTech	VL-CX; Melsec-FX2n (CPU Port)	V	V	V	Direct Link (COM)
	PSTC (Temperature Controller)	V	V	V	Direct Link (COM)
Newtop Co., Ltd.	PSBD (Brushless Driver)	V	V	V	Direct Link (COM)
	PSSD (Stepping Driver)	V	V	V	Direct Link (COM)
	PSMC (Motion Controller)	V	V	V	Direct Link (COM)
	PSNC (Embedded NC)	V	V	V	Direct Link (COM)
	Sysmac C Series Host Link	V	V	V	Direct Link (COM)
Omron Corporation	Sysmac CV Series Host Link	V	V	V	Direct Link (COM)
	Sysmac CS/CJ Series Host Link	V	V	V	Direct Link (COM)
	Sysmac CS/CJ Series (FINS)	V	V	V	Direct Link (COM)
	Sysmac CP Series (FINS)	V	V	V	Direct Link (COM)
	E5CN Temperature (CompoWay/F)	V	V	V	Direct Link (COM)
	E5CN Temperature (Modbus RTU)	V	V	V	Direct Link (COM)
	EJ1 Temperature (CompoWay/F)	V	V	V	Direct Link (COM)
	KM100 (CompoWay/F)	V	V	V	Direct Link (COM)
	3G3MV Inverter (RTU)	V	V	V	Direct Link (COM)
	Sysmac CS/CJ Series FINS/TCP	V	V	V	Direct Link (Ethernet)
	Sysmac NJ Series FINS/TCP	V	V	V	Direct Link (Ethernet)
	E9 Temperature Series	V	V	V	Direct Link (COM)
	E904 Temperature (RTU)	V	V	V	Direct Link (COM)
	HT Series Temperature Controller	V	V	V	Direct Link (COM)
	Pan-Globe Corp.	FP Series Computer Link	V	V	V
FP-X Series		V	V	V	Direct Link (COM)
VFOC Series Inverter		V	V	V	Direct Link (COM)
VF100 Series Inverter		V	V	V	Direct Link (COM)
Panasonic Corporation	FP Series	V	V	V	Direct Link (COM)
	FP Series Computer Link	V	V	V	Direct Link (Ethernet)
	MINAS A4 Series	V	V	V	Direct Link (COM)
PanelMaster	Null PLC	V	V	V	Direct Link (COM)
	N-to-1 Master (COM)	V	V	V	Communication Service (COM)
	Multi-drop Client (COM)	V	V	V	Indirect Link via N-to-1 Connection (COM)
	N-to-1 Master (Ethernet)	V	V	V	Communication Service (Ethernet)
	N-to-1 Slave (Ethernet)	V	V	V	Indirect Link via N-to-1 Connection (Ethernet)
	General Device (COM)	V	V	V	Direct Link (COM)
	2-to-1 Server (COM)	V	V	V	Communication Service (COM)
	2-to-1 Transparent Server (COM)	V	N/A	N/A	Communication Service (COM)
	2-to-1 Transparent Server for Modbus Device/Slave (RTU)	N/A	V	V	Communication Service (COM)
	2-to-1 Transparent Server for Omron Sysmac C Series Host Link	N/A	V	V	Communication Service (COM)
	2-to-1 Transparent Server for Modbus Device/Slave (RTU; 6-digit Addresses)	N/A	V	N/A	Communication Service (COM)
	2-to-1 Client (COM)	V	V	V	Indirect Link via 2-to-1 Connection (COM)
	TCP/IP Gateway Server	V	V	V	Gateway Service (Ethernet)
	Serial Gateway Server	V	V	V	Gateway Service (COM)
	Data Sharer (UDP)	V	V	V	Direct Link (Ethernet)
General Device (TCP/IP Slave)	V	V	V	Direct Link (Ethernet)	
Data Sharer (RS485)	V	N/A	V	Direct Link (COM)	
Ping	V	N/A	N/A	Direct Link (Ethernet)	
Modbus Master (RTU)	V	V	V	Direct Link (COM)	
Modbus Master (RTU; Little Memory)	V	V	V	Direct Link (COM)	
Modbus Master (RTU; Non-volatile slave data)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (RTU)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (RTU, 16Words)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (Word order in big-endian)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (RTU; No block read)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (RTU, 30Words)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (ASCII)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (ASCII; No block read)	V	V	V	Direct Link (COM)	
Modbus Device/Slave (TCP/IP)	V	V	V	Direct Link (Ethernet)	
Internal Memory Server	V	V	V	Gateway Service (Ethernet)	
Internal Memory	V	V	V	Direct Link (Ethernet)	
Barcode Scanner	V	V	V	Direct Link (COM)	
Epson Matrix Printer	V	V	V	Direct Link (COM)	
PC Series PLC Module	V	V	V	Direct Link (COM)	
OPC UA Client Driver	V	V	N/A	OPC Link	
Parker Hannifin	Compax3	V	V	V	Direct Link (COM)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Supported PLC and Controllers list

## Communication Port


Brand	Model	WOP-2000T	Panel Express	WOP-3000T	Type
Parker Hannifin S.p.A.	HID Series (X4 RS232 Port)	V	V	V	Direct Link (COM)
	SLVDN Series (X1 RS422/485 Port)	V	V	V	Direct Link (COM)
	6K Ethernet Protocol	V	N/A	N/A	Direct Link (Ethernet)
PORIS	XC Modbus TCP	V	V	V	Direct Link (Ethernet)
	XC Modbus RTU	V	V	V	Direct Link (COM)
Resson Technologies Co., Ltd.	RD-15S	V	V	V	Direct Link (COM)
RICH Electric Co., LTD.	EI-500 Series (RTU)	V	V	N/A	Direct Link (COM)
	EI-9001 Series (RTU)	V	V	N/A	Direct Link (COM)
RKC Instrument Inc.	MA900/CB900 Series (RTU)	V	V	V	Direct Link (COM)
	CD/CH Series (ASCII)	V	V	V	Direct Link (COM)
	PCD Series (S-Bus PGU)	V	V	V	Direct Link (COM)
Saia Burgess	PCD Series (S-Bus, Data Mode)	V	V	V	Direct Link (COM)
	PCD Series (Ether-S-Bus)	V	V	V	Direct Link (Ethernet)
Samwon Technology	NOVA Series (RTU)	V	V	V	Direct Link (COM)
	NOVA Series	V	V	V	Direct Link (COM)
Modicon Corp. (Schneider Electric)	Modbus Master (TCP/IP)	V	V	V	Direct Link (Ethernet)
	Modbus Device/Slave (TCP/IP)	V	V	V	Direct Link (Ethernet)
	Modicon 984 Master (RTU)	V	V	V	Direct Link (COM)
	Modicon 984 Master (RTU; Little Memory)	V	V	V	Direct Link (COM)
	Modicon 984 Device/Slave (RTU)	V	V	V	Direct Link (COM)
	Modbus Master (ASCII)	V	V	V	Direct Link (COM)
	Modbus Master (ASCII; Little Memory)	V	V	V	Direct Link (COM)
	Modbus Device/Slave (ASCII)	V	V	V	Direct Link (COM)
	Modicon Device/Slave (RTU, Quantum)	V	V	V	Direct Link (COM)
	ATV31 Inverter (RTU)	V	V	V	Direct Link (COM)
	Lexium 23 Servo Controller (ASCII)	V	V	V	Direct Link (COM)
Shenzhen Sine Electric Co., Ltd	JW10/20 Series	V	V	V	Direct Link (COM)
	EM303A	V	V	V	Direct Link (COM)
Shenzhen Step Servo Ltd.	Kinco Servo Controller	V	V	V	Direct Link (COM)
Shenzhen V&T Technologies Co.,Ltd	V5-H	V	V	V	Direct Link (COM)
Shenzhen Xilin Electric Tech. Co., Ltd.	Inverter EH series (RTU)	V	V	V	Direct Link (COM)
Shihlin Electric&Engineering Corp.	SH Inverter	V	V	V	Direct Link (COM)
SHIMAX CO., LTD.	MAC3 Series (RTU)	V	V	V	Direct Link (COM)
Shinko Technos Co., Ltd.	CPT-20A MODBUS DEVICE/SLAVE (ASCII)	V	V	V	Direct Link (COM)
	JCS-33A-R/M (Shinko Protocol)	V	V	V	Direct Link (COM)
	JCS-33A-R/M (Modbus ASCII)	V	V	V	Direct Link (COM)
Siemens AG	Simatic S7-200 (PPI; 1-to-1)	V	N/A	N/A	Direct Link (COM)
	Simatic S7-200 SMART (PPI; 1-to-1)	V	N/A	N/A	Direct Link (COM)
	Simatic S7-200 (PPI; Network)	V	N/A	N/A	Direct Link (COM)
	Simatic S7-300 (MPI Port)	V	N/A	N/A	Direct Link (COM)
	Simatic S5 3964R	V	N/A	N/A	Direct Link (COM)
	Simatic S5	V	N/A	N/A	Direct Link (COM)
	Simatic S7-300 Ethernet Module (CP343)	V	V	V	Direct Link (Ethernet)
	*SIMATIC S7 (Ethernet) (CPU on board ethernet ET200S/S7-300/S7-1200/S7-1500)*	V	V	V	Direct Link (Ethernet)
	SIMATIC S7-200 SMART (Ethernet)	V	V	V	Direct Link (Ethernet)
	SIMATIC S7-200 (Ethernet)	V	V	V	Direct Link (Ethernet)
LOGO (Ethernet)	V	V	V	Direct Link (Ethernet)	
Taian Automation Co.,Ltd.	TP03 Series (Modbus RTU)	V	V	V	Direct Link (COM)
	TP02 Series	V	V	V	Direct Link (COM)
Taiwan Instrument & Control Co., Ltd.	TAIE FY100/900 Series (RTU)	V	V	V	Direct Link (COM)
	TAIE FY100/900 Series (TAIE)	V	V	V	Direct Link (COM)
Teco Electric & Machinery Co.,Ltd.	FY series DIGITAL PID CONTROLLER	V	V	N/A	Direct Link (COM)
	TSDA Series AC Servo	V	V	V	Direct Link (COM)
	TP03 Series (Modbus RTU)	V	V	V	Direct Link (COM)
	TP02 Series	V	V	V	Direct Link (COM)
TSTA Series AC Servo	V	V	V	Direct Link (COM)	
TESHOW ELECTRONIC.	MY90V/MY40V Series (RTU)	V	V	V	Direct Link (COM)
Texas Instruments Incorporated	TI505	V	V	V	Direct Link (COM)
Thinget Electronic Co., Ltd.	XC Series Controller (RTU)	V	V	V	Direct Link (COM)
	IPC-03 Series (RTU)	V	V	V	Direct Link (COM)
	TTX-700 (Modbus RTU)	V	V	V	Direct Link (COM)
TOHO Electronics Inc.	TTM-000 Series (TOHO Protocol)	V	V	V	Direct Link (COM)
	TTM-200 Series (TOHO Protocol)	V	V	N/A	Direct Link (COM)
TOKY ELECTRICAL	DW8-CD18B	V	V	V	Direct Link (COM)
Tokyo Keiso	UCM-04A	V	V	V	Direct Link (COM)
Toshiba Schneider Inverter Corporation	TOSVERT VF Series (Modbus RTU)	V	V	V	Direct Link (COM)
TPM	EPC-1000	V	V	V	Direct Link (Ethernet)

Brand	Model	WOP-2000T	Panel Express	WOP-3000T	Type
Unitronics	Vision 120 Series (Modbus RTU)	V	V	V	Direct Link (COM)
	AX (CPU Port)	V	V	V	Direct Link (COM)
USAT Technologies	AX2N (CPU Port)	V	V	V	Direct Link (COM)
	AX3U (CPU Port)	V	V	V	Direct Link (COM)
Vertex Technology Co., Ltd	VT26/30 Series Controllers (RTU)	V	V	V	Direct Link (COM)
Vigor Corporation	MVB Series	V	V	V	Direct Link (COM)
	VS Series	V	V	N/A	Direct Link (COM)
VIPA GmbH	VIPA 100V/200V MPI Port	V	N/A	N/A	Direct Link (COM)
Vware	Null PLC	V	V	V	Direct Link (COM)
	N-to-1 Master (COM)	V	V	V	Communication Service (COM)
	Multi-drop Client (COM)	V	V	V	Indirect Link via N-to-1 Connection (COM)
	N-to-1 Master (Ethernet)	V	V	V	Communication Service (Ethernet)
	N-to-1 Slave (Ethernet)	V	V	V	Indirect Link via N-to-1 Connection (Ethernet)
	General Device (COM)	V	V	V	Direct Link (COM)
	Data Sharer (RS485)	V	N/A	V	Direct Link (COM)
WAGO Kontakttechnik GmbH & Co. KG	WAGO-I/O-SYSTEM 750	V	V	V	Direct Link (Ethernet)
Wanfeng Electric	WF Series	V	V	V	Direct Link (COM)
YABOS	Hospital System	V	V	V	Direct Link (COM)
	Dentists	V	V	V	Direct Link (COM)
YAMAHA MOTOR CO., LTD.	Single-axis Robot Controller ERCD	V	V	V	Direct Link (COM)
Yamalake Corporation	SDC35/36 Temperature (RTU)	V	V	V	Direct Link (COM)
	SDC35/36 Temperature (ASCII)	V	V	V	Direct Link (COM)
	MA500 FA Controller (ECL Host)	V	V	V	Direct Link (COM)
	DMC10 Controller (RTU)	V	V	V	Direct Link (COM)
	DMC10 Controller (ASCII)	V	V	V	Direct Link (COM)
	MX30	V	V	V	Direct Link (COM)
	MX50	V	V	V	Direct Link (COM)
	Σ-IISGDM/H Series AC Servo	V	V	V	Direct Link (COM)
	MP Series Controller (Memobus)	V	V	V	Direct Link (COM)
	Modbus Device/Slave (TCP/IP)	V	V	V	Direct Link (Ethernet)
	Extended MEMOBUS	V	V	V	Direct Link (Ethernet)
	MP Series Ethernet (Extension)	V	V	N/A	Direct Link (Ethernet)
	V7 inverter (Memobus)	V	V	V	Direct Link (COM)
	NS600 Servo Controller	V	V	V	Direct Link (COM)
YE-LI ELECTRIC & MACHINERY Co., Ltd.	YVP Servo Controller	V	V	V	Direct Link (COM)
	YJD Servo Controller	V	V	V	Direct Link (COM)
Yokogawa Electric Corporation	FA-M3 Series (CPU Port)	V	V	V	Direct Link (COM)
	FA-M3 Series (UDP)	V	V	V	Direct Link (Ethernet)
	FA-M3 Series (TCP)	V	V	V	Direct Link (Ethernet)
Yudian Automation Technology Ltd.	AI-7048 (AiBus)	V	V	V	Direct Link (COM)
Zhuhai Motion Control Motor Co., Ltd.	A1518/708/808/518P/708P/808P Controller (AiBus)	V	V	V	Direct Link (COM)
	BP Series PSDA driver (RTU)	V	V	N/A	Direct Link (COM)



# Automation Panels

<b>Control Panel Computers Selection Guide</b>		<b>6-2</b>
<b>Thin Client Computers Selection Guide</b>		<b>6-3</b>
<b>Stationary Panels and Domain-focus Computers Selection Guide</b>		<b>6-4</b>
<b>Industrial Monitors Selection Guide</b>		<b>6-5</b>
<b>Control Panel Computers</b>		
<b>TPC-1881WP</b>	18.5" HD TFT LED LCD Intel® 4th Generation Core i3/i7 Multi-Touch Panel Computer	<b>6-8</b>
<b>TPC-1581WP</b>	15.6" WXGA TFT LED LCD Intel® 4th Generation Core i3 Multi-Touch Panel Computer	<b>6-10</b>
<b>TPC-1782H</b>	17" SXGA TFT LED LCD Intel® 4th Generation Core i3 Touch Panel Computer	<b>6-12</b>
<b>TPC-1582H</b>	15" XGA TFT LED LCD Intel® 4th Generation Core i3 Touch Panel Computer	<b>6-14</b>
<b>TPC-1282T</b>	12.1" XGA TFT LED LCD Intel® 5th Generation Core i3 Touch Panel Computer	<b>6-16</b>
<b>TPC-1071H</b>	10.4" SVGA TFT LED LCD Intel® Atom™ Dual-Core D525 Touch Panel Computer	<b>6-18</b>
<b>Thin Client Panel Computers</b>		
<b>TPC-1551WP</b>	15.6" WXGA TFT LED LCD Intel® Atom™ Thin Client Terminal	<b>6-20</b>
<b>TPC-1051WP</b>	10.1" WXGA TFT LED LCD Intel® Atom™ Thin Client Terminal	<b>6-22</b>
<b>TPC-1751T</b>	17" SXGA TFT LED LCD Intel® Atom™ Thin Client Terminal	<b>6-24</b>
<b>TPC-1551T</b>	15" XGA TFT LED LCD Intel® Atom™ Thin Client Terminal	<b>6-26</b>
<b>TPC-1251T</b>	12.1" XGA TFT LED LCD Intel® Atom™ Thin Client Terminal	<b>6-28</b>
<b>TPC-651T</b>	5.7" VGA TFT LED LCD Intel® Atom™ Thin Client Terminal	<b>6-30</b>
<b>Stationary Panels and Domain-focus Computers</b>		
<b>SPC-2140WP</b>	21.5" Full HD TFT LED LCD stationary Multi-Touch Panel Computer with AMD dual-core processor	<b>6-32</b>
<b>FPM-6211W</b>	21.5" Semi-industrial Monitor with Projected Capacitive Touchscreen for long-distance / daisy chain applications	<b>6-34</b>
<b>TPC-8100TR</b>	10.4" EN50155 Railway Panel Computer	<b>6-36</b>
<b>IPPC-5211WS</b>	21.5" HD TFT LED LCD Industrial Multi-Touch Panel PC for Food and Beverage application with IP69K	<b>6-38</b>
<b>FPM-8151H</b>	15" XGA TFT LED LCD Industrial Monitor for Hazardous location with C1D2	<b>6-40</b>
<b>IPPC-3152H</b>	15" XGA TFT LED LCD Intel® Core™ i7/Celerons Industrial Touch Panel PC for Hazardous Area with C1D2 and ATEX	<b>6-42</b>
<b>IPPC-3152WH</b>	15.6" HD TFT LED LCD Intel® Core™ i7/Celerons Industrial Multi-Touch Panel PC for Hazardous Area with C1D2 and ATEX	<b>6-44</b>
<b>IPPC-6192A</b>	15" XGA/17" SXGA/19" SXGA TFT LED LCD Intel Core™ i7/i5/i3 Industrial Touch Panel PC with 2 x PCIe Slots	<b>6-46</b>
<b>IPPC-6172A</b>		
<b>IPPC-6152A</b>		
<b>IPPC-9171G</b>	15" XGA/17" SXGA TFT LED LCD Intel® Core™ i7/i5/i3 Celeron® Industrial Touch Panel PC with 1 x PCIe Slot	<b>6-48</b>
<b>IPPC-9151G</b>		
<b>UNO-1172AH</b>	Class I, Division 2 Certified Intel® Atom™ D510 DIN-rail PC with 3 x LAN, 2 x COM, VGA, Mini PCIe	<b>6-50</b>
<b>Robust and Wide Temperature Monitors</b>		
<b>FPM-3191G</b>	9U Rackmount 19" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports	<b>6-52</b>
<b>FPM-3171G</b>	8U Rackmount 17" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports, and Wide Operating Temperature Range	<b>6-54</b>
<b>FPM-3151G</b>	15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI Ports, and Wide Operating Temperature	<b>6-56</b>
<b>FPM-3121G</b>	12.1" SVGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI and Wide Operating Temperature	<b>6-58</b>
<b>Robust with True-flat IP66 Upgraded</b>		
<b>FPM-7211W</b>	21.5" Full HD Industrial Monitor with Projected Capacitive Touchscreen, Direct-VGA and DVI Ports	<b>6-60</b>
<b>FPM-7181W</b>	18.5" WXGA Industrial Monitor with Projected Capacitive Touchscreen, Direct-VGA and DVI Ports	<b>6-62</b>
<b>FPM-7151W</b>	15.6" WXGA Industrial Monitor with Projected Capacitive Touchscreen, Direct-VGA/DVI or VGA/HDMI ports	<b>6-64</b>
<b>FPM-7151T</b>	15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DP and Wide Operating Temperature	<b>6-66</b>
<b>FPM-7121T</b>	12.1" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DP and Wide Operating Temperature	<b>6-68</b>
<b>Regular Level Monitors</b>		
<b>FPM-5191G</b>	15" XGA/17" SXGA/19" SXGA Industrial Monitors with Resistive Touchscreens, Direct-VGA, and DVI Ports	<b>6-70</b>
<b>FPM-5171G</b>		
<b>FPM-5151G</b>		
<b>FPM-2170G</b>	17" SXGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port	<b>6-72</b>
<b>FPM-2150G</b>	15" XGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port	<b>6-74</b>
<b>FPM-2120G</b>	12" SVGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port	<b>6-76</b>
<b>TPC Installation Accessories</b>		
<b>FPM Installation Accessories</b>		
		<b>6-78</b>
		<b>6-79</b>

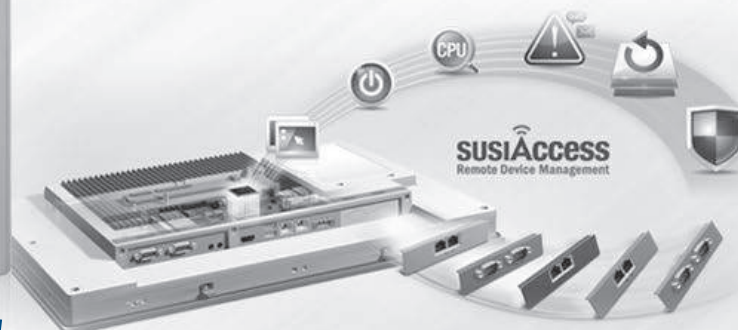

To view all of Advantech's Automation Panel PCs, please visit <http://www.advantech.com/>

# Control Panel Computers Selection Guide

NEW

NEW

NEW

NEW

NEW



Model	TPC-1881WP	TPC-1581WP	TPC-1782H	TPC-1582H	TPC-1282T	TPC-1071H
CPU	4th Gen. Intel® Core™ i7/ i3 Processor	4th Gen. Intel® Core™ i3 Processor	4th Gen. Intel® Core™ i7/ i3 Processor	4th Gen. Intel® Core™ i3 Processor	5th Gen. Intel® Core™ i3 Processor	Intel® Atom™ 1.8 GHz Processor
Memory	4GB DDR3L 1600MHz SO-DIMM SDRAM	4GB DDR3L 1600MHz SO-DIMM SDRAM	4GB DDR3L 1600MHz SO-DIMM SDRAM	4GB DDR3L 1600MHz SO-DIMM SDRAM	4GB DDR3L 1600MHz SO-DIMM SDRAM	4GB SO-DIMM DDR3 SDRAM
Display Type	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD
Display Size	18.5"	15.6"	17"	15"	12.1"	10.4"
Max. Resolution	1366 x 768	1366 x 768	1280 x 1024	1024 x 768	1024 x 768	800x600
Max. Colors	16.7M	16.7M	16.7M	16.2M	16.2M	262 K
Luminance cd/m <sup>2</sup>	300 nits	300 nits	350 nits	400 nits	600 nits	400 nits
VieWING Angle (H/V°)	170/160	170/160	170/160	160/140	160/140	120/100
Backlight MTBF (hrs)	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Touchscreen	Projected capacitive touch	Projected capacitive touch	Resistive	Resistive	Resistive	Resistive
Network (LAN)	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2
I/O Ports	RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio Line out x 1, USB 2.0 x 1 (optional) Audio MIC x 1 (optional)	RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio Line out x 1, USB 2.0 x 1 (optional) Audio MIC x 1 (optional)	RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio Line out x 1, USB 2.0 x 1 (optional) Audio MIC x 1 (optional)	RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio Line out x 1, USB 2.0 x 1 (optional) Audio MIC x 1 (optional)	RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio Line out x 1, USB 2.0 x 1 (optional) Audio MIC x 1 (optional)	RS-232 x 2 (with isolation) RS-422/485 x 1 (with isolation) USB 2.0 x 2 (Host) PS/2 x 1
HDD (Optional)	2.5" SATA HDD	2.5" SATA HDD	2.5" SATA HDD	2.5" SATA HDD	2.5" SATA HDD	2.5" SATA HDD
Intelligent Keys	Quick access through built-in front bezel function and home key button	Quick access through built-in front bezel function and home key button	N/A	N/A	N/A	N/A
CompactFlash Slots	CFast slot x 1	CFast slot x 1	CFast slot x 1	CFast slot x 1	CFast slot x 1	CFast slot x 1
Expansion Slots	Full-size Mini PCI-E	Full-size Mini PCI-E	Full-size Mini PCI-E/ Half-size PCI-E	Full-size Mini PCI-E/ Half-size PCI-E	Full-size Mini PCI-E/ Half-size PCI-E	Full-size Mini PCI-E/ Half-size PCI-E
Digital Input/Output	N/A	N/A	N/A	N/A	N/A	16-channel Digital I/O with isolation
Ingress Protection	Front panel: IP66	Front panel: IP66	Front panel: IP65	Front panel: IP65	Front panel: IP66	Front panel: IP65
DC Power Input (Voltage)	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	10 ~ 29V
Enclosure	Front bezel: Die-cast Aluminum alloy Back housing: PC/ABS Resin	Front bezel: Die-cast Aluminum alloy Back housing: PC/ABS Resin	Front bezel: Die-cast Aluminum alloy Back housing: PC/ABS Resin	Front bezel: Die-cast Aluminum alloy Back housing: PC/ABS Resin	Front bezel: Die-cast Aluminum alloy Back housing: PC/ABS Resin	Front bezel: Die-cast Aluminum alloy Back housing: PC/ABS Resin
Mounting	Panel Mount	Panel Mount	Desktop, Wall or Panel Mount	Desktop, Wall or Panel Mount	Desktop, Wall or Panel Mount	Desktop, Wall or Panel Mount
Weight	6 kg (13.22 lbs)	7kg (15.44 lbs)	6 kg (13.23 lbs)	5.5 kg (12.13 lbs)	3.2 kg (7.02 lbs)	3.5 kg (7.72 lbs)
Operating Temperature	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	0 ~ 55°C (32 ~ 131°F)	0 ~ 55°C (32 ~ 131°F)	0 ~ 55°C (32 ~ 131°F)	0 ~ 55°C (32 ~ 131°F)
Dimensions	419.7 x 269 x 56.7 mm (16.52" x 10.59" x 2.23")	488.1 x 309.1 x 56.7 mm (19.2" x 12.2" x 2.2")	414 x 347.5 x 84 mm (16.3" x 13.68" x 3.31")	383 x 307 x 78.5 mm (15.08" x 12.09" x 3.09")	311.8 x 238 x 77.2 mm (12.28" x 9.38" x 3.04")	287 x 227 x 72.3 mm (11.30" x 8.94" x 2.85")
Certification	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL
Operating System	WIN 7/8/WES7/Linux	WIN 7/8/WES7/Linux	WIN 7/8/WES7/Linux	WIN 7/8/WES7/Linux	WIN 7/8/WES7/Linux	WIN 7/WES7/ WES 2009/XPE/CE 6.0/Linux/ Android
Page	6-8	6-10	6-12	6-14	6-16	6-18

# Thin Client Panel Computers Selection Guide

NEW



NEW



NEW



NEW



NEW



NEW



Model	TPC-1551WP	TPC-1051WP	TPC-1751T	TPC-1551T	TPC-1251T	TPC-651T
CPU	Intel® Atom™ E3827 1.75 GHz Processor	Intel® Atom™ E3827 1.75 GHz Processor	Intel® Atom™ E3827 1.75 GHz Processor	Intel® Atom™ E3827 1.75 GHz Processor	Intel® Atom™ E3827 1.75 GHz Processor	Intel® Atom™ E3827 1.75 GHz Processor
Memory	4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM	4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM	4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM	4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM	4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM	4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
Display Type	WXGA TFT LED LCD	WXGA TFT LED LCD	SXGA TFT LED LCD	XGA TFT LED LCD	XGA TFT LED LCD	VGA TFT LED LCD
Display Size	15.6"	10.1"	17"	15"	12.1"	5.7"
Max. Resolution	1366 x 768	1280 x 800	1280 x 1024	1024 x 768	1024 x 768	640 x 480
Max. Colors	16.2 M	262 K	16.7 M	16.2 M	16.2 M	262 K
Luminance cd/m <sup>2</sup>	300 nits	300 nits	350 nits	400 nits	600 nits	550 nits
VieWING Angle (H/V°)	170/160	170/170	160/140	160/140	160/140	160/140
Backlight MTBF (hrs)	50,000 hrs	25,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Touchscreen	Projected capacitive	Projected capacitive	Resistive	Resistive	Resistive	Resistive
HDD (Optional)	2.5" SATA x 1	2.5" SATA x 1	2.5" SATA x 1	2.5" SATA x 1	2.5" SATA x 1	2.5" SATA x 1
Network (LAN)	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2	10/100/1000 Base-T x 2
I/O Ports	RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1	RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1	RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1	RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1	RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1	RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1
CompactFlash Slots	CFast slot x 1	CFast slot x 1	CFast slot x 1	CFast slot x 1	CFast slot x 1	CFast slot x 1
Expansion Slots	Full-size Mini PCI-E	Full-size Mini PCI-E	Full-size Mini PCI-E	Full-size Mini PCI-E	Full-size Mini PCI-E	Full-size Mini PCI-E
DC Power Input (Voltage)	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%	24 V <sub>DC</sub> ± 20%
Dimensions	419.7 x 269 x 61.9 mm (16.52" x 10.59" x 2.44")	283.1 x 202.3 x 61.4 mm (11.15" x 7.96" x 2.42)	413.7 x 347.2 x 63.8 mm (16.28" x 13.68" x 2.5")	383.20 x 307.30 x 61.10 mm (15.09" x 12.10" x 2.41")	311.80 x 238 x 57.2 mm (12.28" x 9.37" x 2.252")	199 x 152 x 58.9 mm (7.83" x 5.98" x 2.32")
Weight	5.0 KG	2.6 KG	6.0 KG	3.9KG	2.5KG	1.5 KG
Front cover	Front bezel: Die-cast Aluminum alloy	Front bezel: Die-cast Aluminum alloy	Front bezel: Die-cast Aluminum alloy	Front bezel: Die-cast Aluminum alloy	Front bezel: Die-cast Aluminum alloy	Front bezel: Die-cast Aluminum alloy
Operating Temperature	0 ~ 55°C (32 ~ 131°F)	-20 ~ 55°C (-4 ~ 131°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)
Ingress Protection (Front Panel)	IP66	IP66	IP66	IP66	IP66	IP66
Certification	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL
Operating System	WIN 7/8/WES7/WES8/ Linux	WIN 7/8/WES7/WES8/ Linux	WIN 7/8/WES7/WES8/ Linux	WIN 7/8/WES7/WES8/ Linux	WIN 7/8/WES7/WES8/ Linux	WIN 7/8/WES7/WES8/ Linux
Page	6-20	6-22	6-24	6-26	6-28	6-30

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Stationary and Domain-focus Panel Computers Selection Guide

NEW

NEW

NEW

NEW

NEW



Model	SPC-2140WP	FPM-8151H	TPC-8100TR	IPPC-5211WS	UNO-1172AH	IPPC-3152WH
CPU	AMD® G-series T56N 1.6GHz Processor	N/A	Intel® Atom™ 1.6 GHz Processor	Intel® Celeron Processor	Intel® Atom™ 1.66 GHz Processor	Intel® Core™ i7/ Celeron® Processor
Memory	4GB DDR3 SO-DIMM	N/A	4GB DDR3 SO-DIMM	4GB DDR3L SO-DIMM	2 GB DDR2 SDRAM built-in	4GB/8GB DDR3L 1333 MHz
Display Type	TFT LED LCD	XGA TFT LED LCD	SVGA TFT LCD	Full HD TFT LCD	N/A	HD TFT LED LCD
Display Size	21.5"	15"	10.4"	21.5"	N/A	15.6"
Max. Resolution	1920x1080	1024 x 768	800x600	1920 x 1080	N/A	1366 x 768
Max. Colors	16.7M	16.2M	262k	16.7M	N/A	16.7M
Luminance cd/m <sup>2</sup>	300 nits	350 nits	400 nits	300 nits	N/A	300 nits
Viewing Angle (H/V°)	178/178	160/140	160/140	178/178	N/A	170/160
Backlight MTBF (hrs)	50K hrs	50K hrs	50K hrs	50K hrs	N/A	50K hrs
Touchscreen	Projected capacitive touch	Resistive	Resistive	Projected capacitive touch	N/A	Projected capacitive touch
Network (LAN)	10/100/1000Base-T x 2, M12 connector	N/A	2 x 10/100/1000 Mbps (M12 A-coded, 8-pin female)	2 x 10/100/1000 Mbps	3 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps
I/O ports	RS-232 x 1, M12 connector USB 2.0 x 1, M12 connector 24VDC connector, M12 connector	1 x VGA 2 x DVI-D	2 x RS-232 (connection: M12 A-coded, 8-pin male) 2 x 422/485 (with isolation, connection: M12 A-coded, 8-pin male) 2 x USB2.0 (connection: M12 A-coded, 8-pin female) 1 x Audio (with Internal Buzzer, Line out, connection: M12 A-coded, 8-pin female) 1 x Power connector (connection: M12 A-coded, 5-pin male)	1 x RS232 2 x USB(1 x USB2.0, 1 x USB3.0) 1 x i Door (optional) 1 x Antenna(optional)	1 x RS-232 1 x 422/485 4 x USB 2.0	4 x USB Ports (2 x USB 2.0, 2 x USB 3.0) 1 x HDMI 1 x DP
HDD (Optional)	1 x 2.5" SATA	NA	N/A	1 x 2.5" SATA	1 x SSD slot 1 x 2.5" SATA	2 x 2.5" SATA
Optical Drive	N/A	NA	N/A	N/A	N/A	N/A
CompactFlash Slots	N/A	NA	1x 16G Cfast	1 x CFast® (optional)	N/A	1 x CFast
Expansion Slots	Full-size Mini PCI-E	NA	2x full-size mini PCIe	NA	N/A	NA
Power Input	24V DC	Phoenix Jack: 24 VDC input DC Jack: external 57 W power adapter, with 100 ~ 240 VAC input and 12 VDC @ 4.75 A output (Optional)	72V~110V DC 24V DC (Optional)	24V DC	10 ~ 36 V DC	18 ~ 36V DC
Ingress Protection	All around: IP66	Front panel: IP65	All around: IP65	Front panel: IP69k All around: IP69k (Optional)	IP40	Front panel: IP66
Enclosure	Front bezel: Die-cast aluminum alloy Back housing: Die-cast aluminum alloy	Stainless steel	Front bezel: Die-cast Aluminium alloy Back housing: Die-cast Aluminium alloy	Front bezel: Stainless steel Rear cover: Aluminum alloy/Stainless steel(optional)	Aluminum + SECC	Aluminum alloy
Mounting	Desktop, Wall, VESA arm	Panel, wall, desktop, VESA arm	Panel/VESA Mount	VESA and Flange connection adapter for arm and foot system	DIN-rail, Wallmount	Panel, VESA (Optional) mount
Operating Temperature	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-30 ~ 70°C (-22 ~ 158°F)	0 ~ 50°C (32 ~ 122°F)	-10 ~ 60°C (14 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)
Dimensions	558.4 x 349.8 x 65 mm (21.98" x 13.77" x 2.56")	422 x 338 x 68 mm (16.61" x 13.31" x 2.68")	345 x 227 x 85 mm (13.58" x 8.94" x 3.34")	555 x 346.5 x 81 mm (21.85" x 13.64" x 3.19")	85 x 152 x 139 mm (3.4" x 6" x 5.5")	419.7 x 269 x 93 mm (16.5" x 10.59" x 3.66")
Weight	9 kg (19.8 lbs)	8.5 kg (18.74 lbs)	5kg	18kg(39.68 lbs)	1.6 kg	5.8 kg (12.79 lbs)
Certification	BSMI, CCC, CE, FCC Class A, UL	CE, FCC Class A, UL C1D2, CB, BSMI, CCC	CE, FCC, CCC, EN50155, EN45545 Compliance	IP69K, CE, FCC, UL, CB, BSMI, CCC	CE, FCC Class A, UL, CCC	CE, FCC, UL, CCC, BSMI
Operating System	WIN XP/7/8/WES7/WES 2009/CE 6.0/Linux	Windows 2000, XP, Vista, 7, XPe, CE and Linux	WES 7/ WES 2009/ WIN CE 7.0/ Linux	WIN 7 64bit/ 8 64bit/ CE 7.0/ Linux	WES2009, WIN XP/7/CE 5.0/6.0, Linux, QNX	WIN7/8, WES7, WES-2009, Linux
Page	6-32	6-40	6-36	6-38	6-50	6-44

# Stationary and Domain-focus Panel Computers Selection Guide

NEW



IPPC-3152H	IPPC-6192A	IPPC-6172A	IPPC-6152A	IPPC-9171G	IPPC-9151G
Intel® Core™ i7/ Celeron® Processor	Intel® Core™ i7/i5/i3 processor	Intel® Core™ i7/i5/i3 processor	Intel® Core™ i7/i5/i3 processor	Intel® Core™ i7/i5/i3/ Celeron Processor	Intel® Core™ i7/i5/i3/ Celeron Processor
4GB/8GB DDR3L 1333 MHz	Up to 32 GB DDR3 1333/1600 MHz	Up to 32 GB DDR3 1333/1600 MHz	Up to 32 GB DDR3 1333/1600 MHz	Up to 8GB DDR3 SO-DIMM 1333MHz/1066MHz	Up to 8GB DDR3 SO-DIMM 1333MHz/1066MHz
XGA TFT LED LCD	SXGA TFT LED LCD	SXGA TFT LED LCD	XGA TFT LED LCD	SXGA TFT LED LCD	XGA TFT LED LCD
15"	19"	17"	15"	17"	15"
1024 x 768	1280 x 1024	1280 x 1024	1024 x 768	1280 x 1024	1024 x 768
16.2M	16.7M	16.7M	16.2M	16.7M	16.2M
350 nits	350 nits	350 nits	400 nits	380 nits	350 nits
160/140	170/160	170/160	160/140	170/160	160/140
50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs
Resistive	Resistive	Resistive	Resistive	Resistive	Resistive
2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps
4 x USB Ports (2 x USB 2.0, 2 x USB 3.0) 1 x HDMI 1 x DP	4 (3 x RS-232, 1 x RS-232/422/485 ) 1 x GPIO 2 x Reservation ports 5 x USB (1 X USB 2.0 front, 4 x USB 3.0) 2 x GbE LAN 1 x VGA; 1 x DVI; 1 x DP 2 (1 x keyboard and 1 x mouse) 2 (Mic-in, Line-out)	4 (3 x RS-232, 1 x RS-232/422/485 ) 1 x GPIO 2 x Reservation ports 5 x USB (1 X USB 2.0 front, 4 x USB 3.0) 2 x GbE LAN 1 x VGA; 1 x DVI; 1 x DP 2 (1 x keyboard and 1 x mouse) 2 (Mic-in, Line-out)	4 (3 x RS-232, 1 x RS-232/422/485 ) 1 x GPIO 2 x Reservation ports 5 x USB (1 X USB 2.0 front, 4 x USB 3.0) 2 x GbE LAN 1 x VGA; 1 x DVI; 1 x DP 2 (1 x keyboard and 1 x mouse) 2 (Mic-in, Line-out)	4 x RS-232, 1 x VGA, 1 x HDMI 5 x USB 2.0 (one at front), 1 x CFast slot, 1 x keyboard and 1 x mouse, Mic-in, Line-out, Line-in	4 x RS-232, 1 x VGA, 1 x HDMI 5 x USB 2.0 (one at front), 1 x CFast slot, 1 x keyboard and 1 x mouse, Mic-in, Line-out, Line-in
2 x 2.5" SATA	2 x 2.5" SATA	2 x 2.5" SATA	2 x 2.5" SATA	1 x 2.5" SATA	1 x 2.5" SATA
N/A	1 x Slim Type DVD-RW (optional)	1 x Slim Type DVD-RW (optional)	1 x Slim Type DVD-RW (optional)	N/A	N/A
1 x CFast	1 x CFast® (optional)	1 x CFast® (optional)	1 x CFast® (optional)	1 x CFast® 1 x PCIe (x1 or x4, PCI optional)	1 x CFast® 1 x PCIe (x1 or x4, PCI optional)
NA	2 x half-length PCI Slot	2 x half-length PCI Slot	2 x half-length PCI Slot		
18 ~ 36V DC	100 ~ 240V AC	100 ~ 240V AC	100 ~ 240V AC	100 ~ 240V AC	100 ~ 240V AC
Front panel: IP66	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65
Aluminum alloy	Front bezel: Aluminum alloy Back housing: SGCC	Front bezel: Aluminum alloy Back housing: SGCC	Front bezel: Aluminum alloy Back housing: SGCC	Front bezel: Aluminum alloy Back housing: Stainless steel	Front bezel: Aluminum alloy Back housing: Stainless steel
Panel, VESA (Optional) mount	Panel, Rack (Optional) mount	Panel, Rack (Optional) mount	Panel, Rack (Optional) mount	Panel, Rack mount NOTE: it is different from other products of the same series	Panel, Rack (Optional) mount
- 20 ~ 60°C (-4 ~ 140°F)	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)
390.7 x 289.8 x 93 mm (15.38" x 11.41" x 3.66")	481.93 x 384.6 x 135.5 mm (18.97" x 15.14" x 5.33")	481.93 x 355.87 x 132.5 mm (18.97" x 14.01" x 5.22")	449.92 x 315.63 x 126.4 mm (17.71" x 12.43" x 4.98")	482 x 354.8 x 98 mm (19" x 14" x 4")	*28 x 310 x 96.5 mm (16.4" x 12.2" x 3.8")
5.4 kg (11.9 lbs)	16.6 Kg (35.6 lbs)	15 Kg (33.04 lb)	13 Kg (28.6 lbs)	14 Kg (30.86 lbs)	10.52 Kg (23.19 lbs)
CE, FCC, UL, CCC, BSMI	CE, FCC, UL, CCC, BSMI	CE, FCC, UL, CCC, BSMI	CE, FCC, UL, CCC, BSMI	CE, FCC, UL, CCC, BSMI	CE, FCC, UL, CCC, BSMI
WIN7/8, WES7, WES-2009, Linux	WIN XP / 7 / 8	WIN XP / 7 / 8	WIN XP / 7 / 8	WIN 7/XP	WIN 7/XP
6-42	6-46	6-46	6-46	6-48	6-48

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Selection Guide

## Robust and Wide Temperature Monitors



Model		FPM-3191G	FPM-3171G	FPM-3151G	FPM-3121G
Display	Display Type	SXGA	SXGA	XGA	SVGA
	Display Size	19"	17"	15"	12"
	Max.Resolution	1280x1024	1280x1024	1024x768	800x600
	Max.Colors	16.7M	16.7M	16.2M	16.2M
	Luminance cd/m <sup>2</sup>	350	350	350	450
	VieWIng Angle (H/V°)	170/160	160/140	160/140	160/140
	Backlight MTBF (hrs)	50,000	50,000	50,000	50,000
Video Port		VGA/DVI	VGA/DVI	VGA/DVI	VGA/DVI
Touchscreen		Combo	Combo	Combo	Combo
OSD (onscreen display)		On front Panel with lockable function	On front Panel with lockable function	On front Panel with lockable function	On front Panel with lockable function
Power Input Voltage		100~240v (Adapter)	100~240v (Adapter)	100~240v (Adapter)	100~240v (Adapter)
DC Power Input(voltage)		12v & 24v	12v & 24v	12v & 24v	12v & 24v
Operating Temperature		0 ~ 50	-20 ~ 60	-20 ~ 60	-20 ~ 60
Storage Temperature		-20 ~ 60	-30 ~ 80	-30 ~ 80	-30 ~ 80
Dimension		482 x 399 x 67 mm	482 x 354.8 x 63.9 mm	422 x 310 x 70 mm	312 x 224 x 60.5 mm
Cut-out Dimension	Cut-out Dimension	444 x 376.4 mm	447.5 x 329.5 mm	396 x 296 mm	303.5 x 229.5 mm
	Weight	10.65kg	9.25kg	7.73kg	4.07kg
Certification		BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	CE, FCC Class A, BSMI, CCC, UL, Energy Star	CE, FCC Class A, BSMI, CCC, UL, Energy Star
Operating System		WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux
Touch Operation System		Elo Touch	Elo Touch	PenMount 6000	PenMount 6000
Page		6-52	6-54	6-56	6-58

## Robust with True-flat IP66 Upgraded



Model		FPM-7211W	FPM-7181W	FPM-7151W	FPM-7151T	FPM-7121T
Display	Display Type	Full HD	WXGA	WXGA	XGA	XGA
	Display Size	21.5"	18.5"	15.6"	15"	12.1"
	Max.Resolution	1920x1080	1366 x 768	1366 x 768	1024 x 768	1024 x 768
	Max.Colors	16.7M	16.7M	16.7M	16.7M	16.2M
	Luminance cd/m <sup>2</sup>	300	300	400	400	600
	VieWIng Angle (H/V°)	178/178	170/160	170/160	160/140	160/140
	Backlight MTBF (hrs)	50,000	50,000	50,000	50,000	50,000
Video Port		VGA/DVI-D	VGA/DVI-D	VGA/DVI-D	VGA/DP	VGA/DP
Touchscreen		Combo	Combo	Combo	Combo	Combo
OSD (onscreen display)		On rear side with lockable function	On rear side with lockable function	On rear side with lockable function	On rear side with lockable function	On rear side with lockable function
Power Input Voltage		100~240v (Adapter)	100~240v (Adapter)	100~240v (Adapter)	100~240v (Adapter optional)	100~240v (Adapter optional)
DC Power Input(voltage)		12v/24v	12v/24v	12v/24v	24v	24v
Operating Temperature		0 ~ 50	0 ~ 50	0 ~ 50	-20 ~ 60	-20 ~ 60
Storage Temperature		-20~60	-20~60	-20~60	-30 ~ 70	-30 ~ 70
Dimension		558.4 x 349.8 x 47.7 mm	488 x 309 x 47.7 mm	419.7 x 269 x 47.7 mm	383.2 x 307.3 x 48.2 mm	311.8 x 238 x 44.6 mm
Cut-out Dimension	Cut-out Dimension	550.3 x 341.8 mm	479.3 x 300.3 mm	412.4 x 261.7 mm	372.9 x 296.9 mm	301.6 x 227.6 mm
	Weight	8kg	6kg	5kg	4.2kg	2.6kg
Certification		BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL
Operating System		WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux
Touch Operation System		PenMount 6000	PenMount 6000	PenMount 6000	PenMount 6000	PenMount 6000
Page		6-60	6-62	6-64	6-66	6-68

## Regular Level Monitors



Model		FPM-5191G	FPM-5171G	FPM-5151G
Display	Display Type	SXGA	SXGA	XGA
	Display Size	19"	17"	15"
	Max.Resolution	1280 x 1024	1280 x 1024	1024 x 768
	Max.Colors	16.7M	16.7M	16.2M
	Luminance cd/m <sup>2</sup>	350	350	400
	VieWING Angle (H/V°)	170/160	160/140	160/140
	Backlight MTBF (hrs)	50,000	50,000	50,000
Video Port		VGA/DVI	VGA/DVI	VGA/DVI
Touchscreen		Combo	Combo	Combo
OSD (onscreen display)		On rear side with lockable function	On rear side with lockable function	On rear side with lockable function
Power Input Voltage		100~240v (Adapter Optional)	100~240v (Adapter Optional)	100~240v (Adapter Optional)
DC Power Input(voltage)		10-30v	10-30v	10-30v
Operating Temperature		0 ~ 50	0 ~ 50	0 ~ 50
Storage Temperature		-20~60	-20~60	-20~60
Dimension		481.93 x 384.6 x 59 mm	481.9 x 355.9 x 55 mm	449.92 x 315.63 x 50.5 mm
Cut-out Dimension	Cut-out Dimension	454 x 338 mm	454 x 338 mm	424 x 293 mm
	Weight	10kg	8kg	6kg
Certification		BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL
Operating System		WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux
Touch Operation System		PenMount 6000	PenMount 6000	PenMount 6000
Page		6-70	6-70	6-70



Model		FPM-2170G	FPM-2150G	FPM-2120G
Display	Display Type	SXGA	XGA	SVGA
	Display Size	17"	15"	12"
	Max.Resolution	1280x1024	1024x768	800x600
	Max.Colors	16.7M	16.2M	16.2M
	Luminance cd/m <sup>2</sup>	350	400	450
	VieWING Angle (H/V°)	160/140	160/140	160/140
	Backlight MTBF (hrs)	50,000	50,000	50,000
Video Port		VGA	VGA	VGA
Touchscreen		Combo	Combo	Combo
OSD (onscreen display)		On rear side with lockable function	On rear side with lockable function	On rear side with lockable function
Power Input Voltage		100 ~ 240V (Adapter)	100 ~ 240V (Adapter)	100 ~ 240V (Adapter)
DC Power Input(voltage)		12V	12V	12V
Operating Temperature		0 ~ 50	0 ~ 50	0 ~ 50
Storage Temperature		-20 ~ 60	-20 ~ 60	-20 ~ 60
Dimension		413.72 x 347.22 x 52.13 mm	383 x 307 x 48 mm	311 x 237 x 40.63 mm
Cut-out Dimension	Cut-out Dimension	400.92 x 334.42 mm	374.6 x 298.6 mm	303.3 x 229.3 mm
	Weight	5.6kg	4.5kg	4kg
Certification		BSMI, CCC, CE, FCC, UL	BSMI, CCC, CE, FCC, UL	BSMI, CCC, CE, FCC, UL
Operating System		WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux	WIN XP/Vista/7/8/XPE/Linux
Touch Operation System		PenMount 6000	PenMount 6000	PenMount 6000
Page		6-72	6-74	6-76

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1881WP

## 18.5" HD TFT LED LCD 4th. Gen. Intel® Core™ i3/ i7 Multi-Touch Panel Computer

NEW



susiAccess iK ID R3138 CCC CE FCC cULus

### Introduction

With growing up in Multi-Touch technology, the TPC-1881WP features Intel 4<sup>th</sup> Generation Core i3-4010U/ i7-4650U 1.7GHz processor with 4GB/8GB DDR3L SDRAM provides the high computing performance. To enhance reliability and durability, built-in 7H hardness Anti-scratch surface on high resolution 18.5" HD display with Multi-Touch in 16:9 format. Through the Mini-PCIe slot, Advantech iDoor technology can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and Battery-backup MRAM. A 2nd monitor and speaker can be attached via the integrated HDMI and Audio port.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 488 x 309 x 56.7 mm (19.21" x 12.17" x 2.23")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- **Mounting** Panel Mount
- **OS Support** Microsoft® WES7 32bit/64bit Windows 7 32bit/64bit  
Windows Embedded 8.1 Industry Pro 64bit Ubuntu 14.04.2 LTS
- **Power Consumption** 28W Typical, 60W Max. (Without Add-on card)
- **Power Input** 24V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** 7kg (15.44 lbs)

#### System Hardware

- **CPU** Intel 4<sup>th</sup> Generation Core i7-4650U 1.7GHz  
Intel 4<sup>th</sup> Generation Core i3-4010U 1.7GHz
- **Chipset** Lynx Point-LP
- **Memory** 4GB DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2 (one port supports iAMT)
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1
- **I/O** RS-232/422/485 x 1, RS-232 x 1  
USB 3.0 x 2, HDMI 1.4 x 1  
Audio Line out x 1, USB 2.0 x 1 (optional)  
Audio MIC x 1 (optional)

### Features

- Industrial 18.5 HD TFT LCD with 50K Lifetime LED Backlight
- Intel 4<sup>th</sup> Generation Core i3-4010U/ i7-4650U with 4GB/8GB DDR3L SDRAM
- 16:9 Wide Screen with PCT Multi-Touch
- IP66 Approved Front Protection & Panel Mounting
- Built-in Intelligent Home key and i Key for Intuitive UI
- Front LED Indicator to Show Operating Status
- Diverse system IO and Isolated Digital IO by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/WiFi Communication by iDoor Technology
- Supports Battery-backup MRAM by iDoor Technology
- Chassis Grounding Protection
- HDMI and Audio Multimedia Support
- Anti-scratch surface: 7H hardness

#### LCD Display

- **Display Type** HD TFT LED LCD
- **Display Size** 18.5
- **Max. Resolution** 1366 x 768
- **Max. Colors** 16.7M
- **Luminance cd/m2** 300
- **Viewing Angle (H/V°)** 170/160
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 500:1


#### Touchscreen

- **Light Transmission** ≥88%
- **Resolution** 4096 x 4096 dot
- **Type** Projected capacitive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)

### Rear View

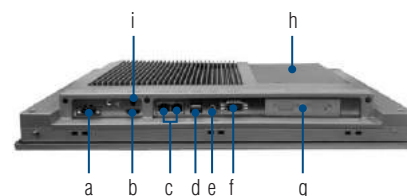


- a. 24V<sub>DC</sub> Power
- b. HDMI
- c. GbE
- d. USB3.0
- e. Audio Line out
- f. COM Port RS-232/422/485, RS-232 x 1
- g. Expansion I/O (iDoor)
- h. 2.5" SATA SSD, CFast and Mini PCIe Slot
- i. SMA Connector for Antenna



## Dimensions

Unit: mm [inch]

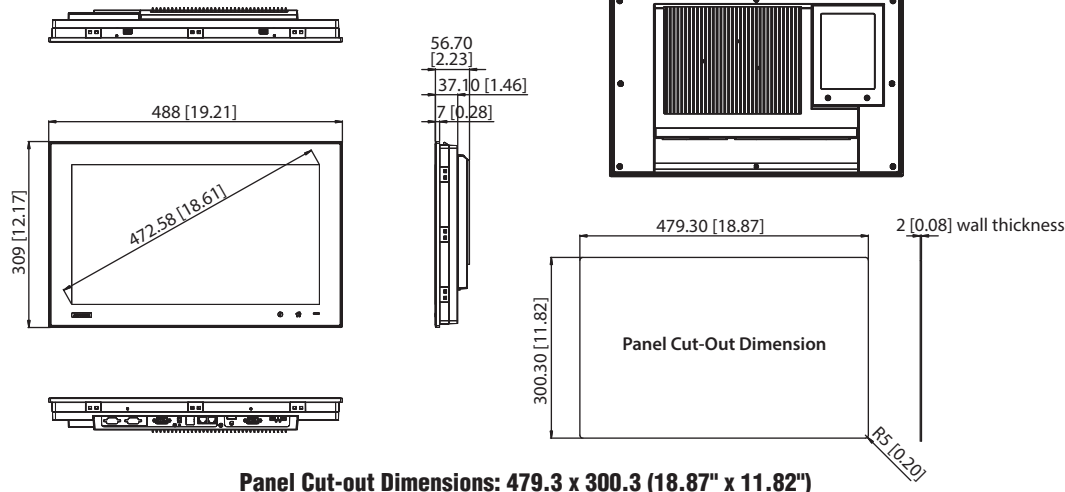

Panel Cut-out Dimensions: 479.3 x 300.3 (18.87" x 11.82")

## Ordering Information

- **TPC-1881WP-433AE** 18.5" HD Multi-Touch Panel PC, Intel i3-4010U, 4GB, iDoor
- **TPC-1881WP-473AE** 18.5" HD Multi-Touch Panel PC, Intel i7-4650U, 4GB, iDoor
- **WA-TPC1881WP** TPC-1881WP-433AE with WebAccess software

## Accessories

- **PWR-248-AE** 150W DC 24V/6.25A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power cable EU Plug 1.8M
- **1702031801** Power cable UK Plug 1.8M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **EWM-W151H01E** 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCle (also need 9656EWMG00E)
- **9656EWMG00E** Half-size miniPCle to Full-size miniPCle bracket set
- **1750000318** EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- **1750003222** 802.11b/g 5dBi Dipole Antenna
- **1750003418** Wireless Antenna AN2400-5901RS R/P SMA.M9dB

## Automation S/W & Embedded O/S

- **2070013487** TPC-xx81WP WS7P x64 MUI Image v4.12 B003
- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle

## iDoor Modules

- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCle, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCle, DB37
- **PCM-26D2CA-AE** 2-Port Isolated CANBus mPCle, CANOpen, DB9
- **PCM-24R1TP-AE** 1-Port Gigabit Ethernet, Intel® 82574L, mPCle, RJ45
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCle, 2-port SMA
- **PCM-26D1DB-MAE** 1-Port Hilscher netX100 FieldBus mPCle, PROFIBUS, DB9, Master
- **PCM-26R2PN-MAE** 2-Port Hilscher netX100 FieldBus mPCle, PROFINET, RJ45, Master
- **PCM-26R2EC-MAE** 2-Port Hilscher netX100 FieldBus mPCle, EtherCAT, RJ45, Master
- **PCM-26R2EI-MAE** 2-Port Hilscher netX100 FieldBus mPCle, EtherNet/IP, RJ45, Master
- **PCM-26R2S3-MAE** 2-Port Hilscher netX100 FieldBus mPCle, Sercos III, RJ45, Master

## Application Software

	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1581WP

## 15.6" WXGA TFT LED LCD 4th. Gen. Intel® Core™ i3 Multi-Touch Panel Computer

**NEW**



### Features

- Industrial 15.6 HD TFT LCD with 50K Lifetime LED Backlight
- Intel 4<sup>th</sup> Generation Core i3-4010U with 4GB DDR3L SDRAM
- 16:9 Wide Screen with PCT Multi-Touch
- IP66 Approved Front Protection & Panel Mounting
- Built-in Intelligent Home key and i Key for Intuitive UI
- Front LED Indicator to Show Operating Status
- Diverse system IO and Isolated Digital IO by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/WiFi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- HDMI and Audio Multimedia Support
- Anti-scratch surface: 7H hardness

### Introduction

With growing up in Multi-Touch technology, the TPC-1581WP features Intel 4<sup>th</sup> Generation Core i3-4010U 1.7GHz processor with 4GB DDR3L SDRAM provides the high computing performance. To enhance reliability and durability, built-in 7H hardness anti-scratch surface on high resolution 15.6" HD display with Multi-Touch in 16:9 format. Through the Mini-PCIe slot, Advantech iDoor technology can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and MRAM. A 2nd monitor and speaker can be attached via the integrated HDMI and Audio port.

### Specifications

#### General

- BIOS**: AMI UEFI
- Certification**: BSMI, CCC, CE, FCC Class A, UL
- Cooling System**: Fanless design
- Dimensions (W x H x D)**: 419.7 x 269 x 56.7 mm (16.52" x 10.59" x 2.23")
- Enclosure**: Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- Mounting**: Panel Mount
- OS Support**: Microsoft® Windows WES7 32bit/64bit /WES8 64bit / Windows 7 32bit/64bit / Windows 8 64bit/Linux Kernel 3.x
- Power Consumption**: 18W Typical, 60W Max. (Without Add-on card)
- Power Input**: 24V<sub>DC</sub> ± 20%
- Watchdog Timer**: 1 ~ 255 sec (system)
- Weight (Net)**: 6 kg (13.22 lbs)

#### System Hardware

- CPU**: Intel 4<sup>th</sup> Generation Core i3-4010U 1.7GHz
- Chipset**: Lynx Point-LP
- Memory**: 4GB DDR3L 1600MHz SO-DIMM SDRAM
- LAN**: 10/100/1000 Base-T x 2
- Expansion Slots**: Full-size Mini PCI-E  
CFast slot x 1  
2.5" SATA SSD slot x 1  
mSATA slot x 1 (via Mini PCIe slot, can't be used simultaneously with iDoor)
- Storage**: RS-232/422/485 x 1, RS-232 x 1  
USB 3.0 x 2, HDMI 1.4 x 1  
Audio Line out x 1, USB 2.0 x 1 (optional)  
Audio MIC x 1 (optional)

#### LCD Display

- Display Type**: WXGA TFT LED LCD
- Display Size**: 15.6
- Max. Resolution**: 1366 x 768
- Max. Colors**: 16.7M
- Luminance cd/m<sup>2</sup>**: 300
- Viewing Angle (H/V°)**: 170/160
- Backlight Life**: 50,000 hrs
- Contrast Ratio**: 500:1


#### Touchscreen

- Light Transmission**: ≥88%
- Resolution**: 2048 x 2048 dot
- Type**: Projected capacitive

#### Environment


- Humidity**: 10 ~ 95% RH @ 40°C, non-condensing
- Ingress Protection**: Front panel: IP66
- Operating Temperature**: 0 ~ 55°C (32 ~ 131°F)
- Storage Temperature**: -20 ~ 60°C (-4 ~ 140°F)
- Vibration Protection**: With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)

### Rear View

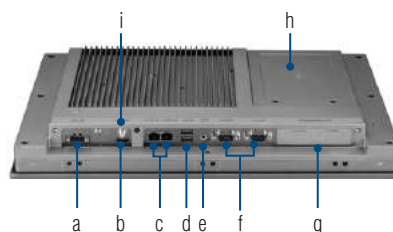

- a. 24V<sub>DC</sub> Power
- b. HDMI
- c. GbE
- d. USB3.0
- e. Audio Line out
- f. COM Port RS-232/422/485, RS-232
- g. Expansion I/O (iDoor)
- h. 2.5" SATA SSD, CFast and Mini PCIe Slot
- i. SMA Connector for Antenna

## Dimensions

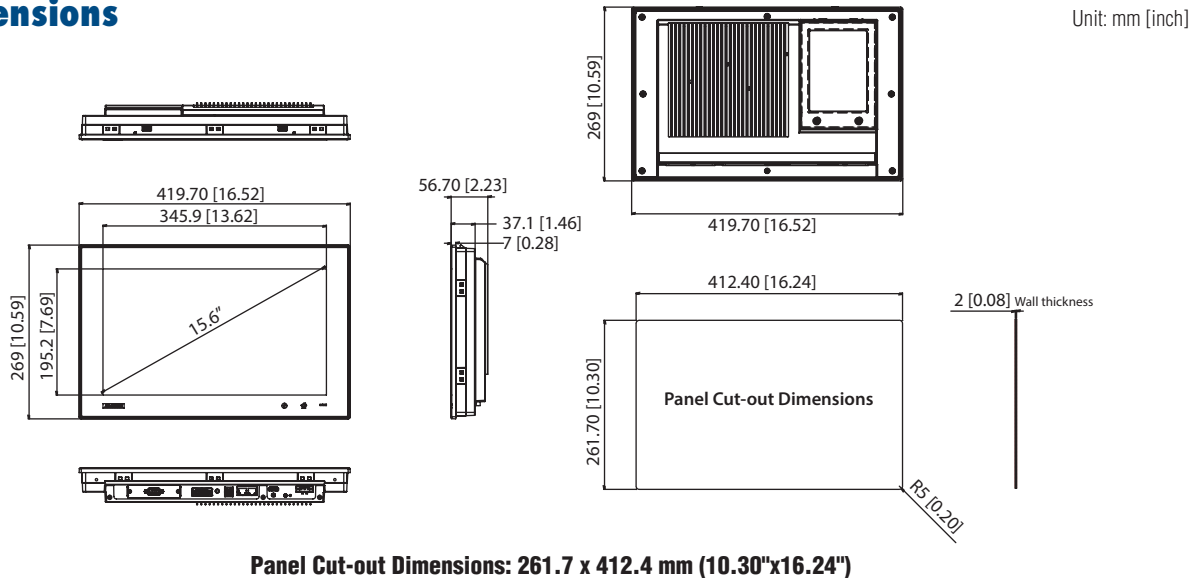

## Ordering Information

- TPC-1581WP-433AE 15.6" HD Multi-Touch Panel PC, Intel i3-4010U, 4GB, iDoor

## Accessories

- PWR-248-AE 150W DC 24V/6.25A Output Power Supply (High power consumption expansion card required, e.g. PoE)
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power cable EU Plug 1.8M
- 1702031801 Power cable UK Plug 1.8M
- 1700000596 Power Cable China/Australia Plug 1.8 M
- EWM-W151H01E 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCIe (also need 9656EWMG00E)
- 9656EWMG00E Half-size miniPCIe to Full-size miniPCIe bracket set
- 1750000318 EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- 1750003222 802.11b/g 5dBi Dipole Antenna
- 1750003418 Wireless Antenna AN2400-5901RS R/P SMA.M9dB

## Automation S/W & Embedded O/S

- 2070013487 TPC-xx81WP WS7P x64 MUI Image v4.12 B003
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB PanelExpress V2.0 S/W USB dongle

## iDoor Modules

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2EC-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- PCM-26R2EI-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- PCM-26R2S3-MAE 2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45, Master

## Application Software

<b>SUSIACCESS</b>	Version: V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
<b>WebAccess</b>	Version: V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
<b>PANEL EXPRESS</b> <small>Designed For: Convenience</small>	Version: V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
<b>WebOP Designer</b>	Version: V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1782H

## 17" SXGA TFT LED LCD 4th. Gen. Intel® Core™ i3 Touch Panel Computer

**NEW**



### Features

- Industrial 17" SXGA TFT LCD with 50K Lifetime LED Backlight
- Intel 4<sup>th</sup> Generation Core i3 1.7GHz with 4GB DDR3L SDRAM
- Compact Fanless Embedded System with AI Alloy Front Bezel
- IP65 Approved Front Protection & Panel Mounting
- More Durable 5-wire Resistive Touch Screen
- PCIe 1x and Mini PCIe Expansion Support
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/WiFi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- Supports Advantech SNMP Subagent
- Supports Advantech SusiAccess Remote Device Management Software

### Introduction

The TPC-1782H touch panel computer with a 17" SXGA LCD, low power embedded Intel 4<sup>th</sup> Generation Core i3 1.7GHz processor and 4GB DDR3L SDRAM provides the high computing performance in a compact fanless system. To enhance its durability, the TPC-1782H is designed with IP65 front protection, die-cast AI Alloy front bezel and 5-wire resistive touch. It also includes PCIe slot and Mini-pcie slots to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology can provide more I/O connectors, Isolated Digital I/O, the Fieldbus Protocol, 3G/GPS/GPRS/Wi-Fi Communication and MRAM. A 2<sup>nd</sup> monitor and speaker can be attached via the integrated HDMI and Audio port.

The pre-loaded SusiAccess is a smart, unique and ready-to-use remote device management software for you to centralize monitoring and managing of remote embedded devices in real-time. You can focus more on your own applications and let SusiAccess do the rest - configure systems, monitor device health, and recover from any system failures. It's cloud-based and provides on-demand software services so you can easily download and upgrade applications when you need.

### Specifications

#### General

- BIOS**: AMI UEFI
- Certification**: BSMI, CCC, CE, FCC Class A, UL
- Cooling System**: Fanless design
- Dimensions (W x H x D)**: 414 x 347.5 x 84 mm (16.3" x 13.68" x 3.31")  
Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- Enclosure**: Desktop, Wall or Panel Mount
- Mounting**: Microsoft® WES7 32bit/64bit Windows 7 32bit/64bit  
Windows Embedded 8.1 Industry Pro 64bit  
Windows 7 32bit/64bit
- OS Support**: 20W Typical, 60W Max. (Without Add-on card)  
24V<sub>DC</sub> ± 20%
- Power Consumption**: 1 ~ 255 sec (system)
- Power Input**: 6 kg (13.23 lbs)
- Watchdog Timer**
- Weight (Net)**

#### System Hardware

- CPU**: Intel 4<sup>th</sup> Generation Core i3-4010U 1.7GHz
- Chipset**: Lynx Point-LP
- Memory**: 4GB DDR3L 1600MHz SO-DIMM SDRAM
- LAN**: 10/100/1000 Base-T x 2 (one port supports iAMT)
- Expansion Slots**: Half-size PCIe 1x and Full-size Mini PCI-E
- Storage**: CFast slot x 1  
2.5" SATA SSD slot x 1
- I/O**: RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 2, HDMI 1.4 x 1  
Audio Line out x 1, USB 2.0 x 1 (optional)  
Audio MIC x 1 (optional)

#### LCD Display

- Display Type**: SXGA TFT LED LCD
- Display Size**: 17"
- Max. Resolution**: 1280 x 1024

- Max. Colors**: 16.7 M
- Luminance cd/m<sup>2</sup>**: 350
- Viewing Angle (H/V°)**: 160/140
- Backlight Life**: 50,000 hrs
- Contrast Ratio**: 800:1


#### Touchscreen

- Lifespan**: 36 million touches at single point
- Light Transmission**: Above 75%
- Resolution**: Linearity
- Type**: 5-wire, analog resistive

#### Environment

- Humidity**: 10 ~ 95% RH @ 40°C, non-condensing
- Ingress Protection**: Front panel: IP65
- Operating Temperature**: 0 ~ 55°C (32 ~ 131°F)
- Storage Temperature**: -20 ~ 60°C (-4 ~ 140°F)
- Vibration Protection**: With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)


### Rear View

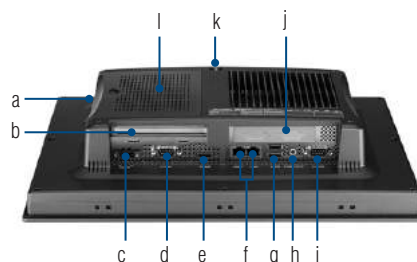

- a. CFast
- b. PCI-E Slot
- c. 24V<sub>DC</sub> Power
- d. COM (RS-232)
- e. HDMI
- f. LAN
- g. USB3.0
- h. Audio Line Out
- i. COM (RS-232/422/485)
- j. iDoor
- k. SMA Connector for Antenna
- l. 2.5" SATA SSD Slot and Mini-PCIe Slot

## Dimensions

Unit: mm

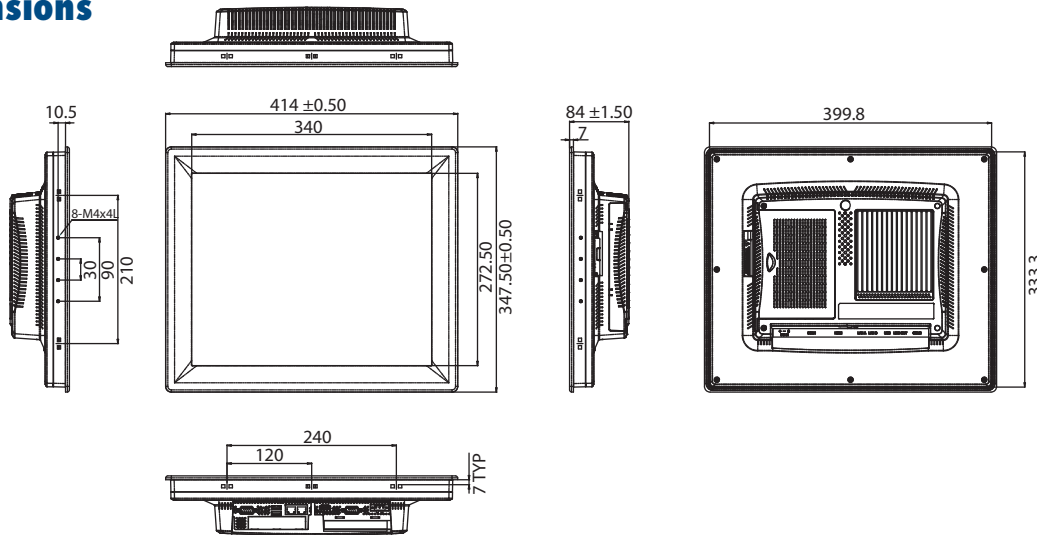

Panel Cut-out Dimensions: 400.8 x 334.3 mm (16.03" x 13.37")

## Ordering Information

- TPC-1782H-433AE 17" SXGA Panel PC, Intel i3-4010U, 4GB, iDoor, PCIe
- TPC-1782H-473AE 17" SXGA Panel PC, Intel i7-4650U, 4GB, iDoor, PCIe
- WA-TPC1782H TPC-1782H-433AE with WebAccess software

## Accessories

- PWR-248-AE 150W DC 24V/6.25A Output Power Supply
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M
- TPC-1000H-WMKE TPC VESA Mounting Kit from 10" to 17" TPC
- TPC-1000H-SMKE TPC Stand kit from 10" to 17" TPC
- EWM-W151H01E 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCIe (also need 9656EWMG00E)
- 9656EWMG00E Half-size miniPCIe to Full-size miniPCIe bracket set
- 1750000318 EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- 1750003222 802.11b/g 5dBi Dipole Antenna
- 1750003418 Wireless Antenna AN2400-5901RS R/P SMA.M9dB

## Automation S/W & Embedded O/S

- 2070013102 TPC-xx82 WS7P x64 MUI Image v4.12 B005
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB PanelExpress V2.0 S/W USB dongle

## iDoor Modules

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2EC-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- PCM-26R2EI-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- PCM-26R2S3-MAE 2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45, Master

## Application Software

<b>SUSIACCESS</b>	Version: V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
<b>WebAccess</b>	Version: V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
<b>PANEL EXPRESS</b> <small>Designed For Convenience</small>	Version: V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
<b>WebOP Designer</b>	Version: V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.
<b>WebAccess/NMS</b>	Visualizing device and platform network connectivity conditions and offering easier firmware and configuration solutions to ensure stable network connections.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1582H

## 15" XGA TFT LED LCD 4th. Gen. Intel® Core™ i3 Touch Panel Computer

**NEW**



### Features

- Industrial 15" XGA TFT LCD with 50K Lifetime LED Backlight
- Intel 4<sup>th</sup> Generation Core i3 1.7GHz with 4GB DDR3L SDRAM
- Compact Fanless Embedded System with AI Alloy Front Bezel
- IP65 Approved Front Protection & Panel Mounting
- More Durable 5-wire Resistive Touch Screen
- PCIe and Mini PCIe Expansion Support
- Diverse system IO and Isolated Digital IO by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/WiFi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- HDMI and Audio Multimedia Support
- Support Advantech SusiAccess Remote Device Management Software

### Introduction

The TPC-1582H touch panel computer with a 15" XGA LCD, low power embedded Intel 4<sup>th</sup> Generation Core i3 1.7GHz processor and 4GB DDR3L SDRAM provides the high computing performance in a compact fanless system. To enhance its durability, the TPC-1582H is designed with IP65 front protection, die-cast AI Alloy front bezel and 5-wire resistive touch. It also includes PCIe slot and Mini-pcie slots to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and MRAM. A 2<sup>nd</sup> monitor and speaker can be attached via the integrated HDMI and Audio port.

The pre-loaded SusiAccess is a smart, unique and ready-to-use remote device management software for you to centralize monitoring and managing of remote embedded devices in real-time. You can focus more on your own applications and let SusiAccess do the rest - configure systems, monitor device health, and recover from any system failures. It's cloud-based and provides on-demand software services so you can easily download and upgrade applications when you need.

### Specifications

#### General

- BIOS**: AMI UEFI
- Certification**: BSMI, CCC, CE, FCC Class A, UL
- Cooling System**: Fanless design
- Dimensions (W x H x D)**: 383 x 307 x 78.5 mm (15.08" x 12.09" x 3.09")
- Enclosure**: Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- Mounting**: Desktop, Wall or Panel Mount
- OS Support**: Microsoft® Windows WES7 32bit/64bit /WES8 64bit / Windows 7 32bit/64bit / Windows 8 64bit Linux Kernel 3.x
- Power Consumption**: 18W Typical, 60W Max. (Without Add-on card)
- Power Input**: 24V<sub>DC</sub> ± 20%
- Watchdog Timer**: 1 ~ 255 sec (system)
- Weight (Net)**: 5.5 kg (12.13 lbs)

#### System Hardware

- CPU**: Intel 4<sup>th</sup> Generation Core i3-4010U 1.7GHz
- Chipset**: Lynx Point-LP
- Memory**: 4GB DDR3L 1600MHz SO-DIMM SDRAM
- LAN**: 10/100/1000 Base-T x 2 (one port supports iAMT)
- Expansion Slots**: Half-size PCI-E and Full-size Mini PCI-E
- Storage**: CFast slot x 1  
2.5" SATA SSD slot x 1  
mSATA slot x 1 (via Mini PCIe)
- I/O**: RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 2, HDMI 1.4 x 1  
Audio Line out x 1, USB 2.0 x 1 (optional)  
Audio MIC x 1 (optional)

#### LCD Display

- Display Type**: XGA TFT LED LCD
- Display Size**: 15"

- Max. Resolution**: 1024 x 768
- Max. Colors**: 16.2 M
- Luminance cd/m<sup>2</sup>**: 400
- Viewing Angle (H/V°)**: 160/140
- Backlight Life**: 50,000 hrs
- Contrast Ratio**: 700:1


#### Touchscreen

- Lifespan**: 36 million touches at single point
- Light Transmission**: Above 75%
- Resolution**: Linearity
- Type**: 5-wire, analog resistive

#### Environment

- Humidity**: 10 ~ 95% RH @ 40°C, non-condensing
- Ingress Protection**: Front panel: IP65
- Operating Temperature**: 0 ~ 55°C (32 ~ 131°F)
- Storage Temperature**: -20 ~ 60°C (-4 ~ 140°F)
- Vibration Protection**: With HDD: 1 Grms (5 ~ 500 Hz) (Operating, random vibration)


### Rear View

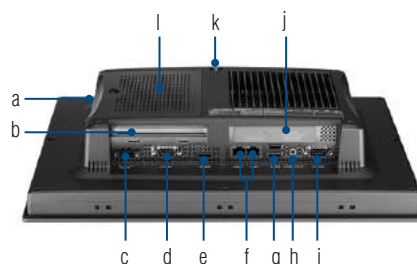

- a. CFast
- b. PCI-E Slot
- c. 24V<sub>DC</sub> Power
- d. COM (RS-232)
- e. HDMI
- f. LAN
- g. USB3.0
- h. Audio Line Out
- i. COM (RS-232/422/485)
- j. iDoor
- k. SMA Connector for Antenna
- l. 2.5" SATA SSD Slot and Mini-PCIe Slot

## Dimensions

Unit: mm

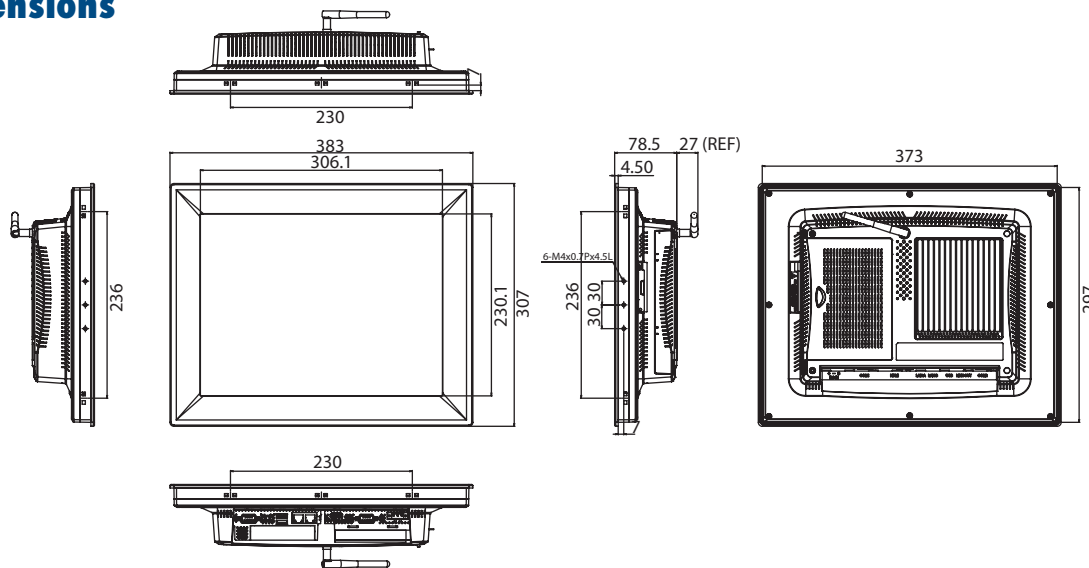

Panel Cut-out Dimensions: 374.5 x 298.5 mm (14.74" x 11.75")

## Ordering Information

- TPC-1582H-433AE 15" XGA Panel PC, Intel i3-4010U, 4GB, iDoor, PCIe
- WA-TPC1582H TPC-1582H-433AE with WebAccess software

## Accessories

- PWR-248-AE 150W DC 24V/6.25A Output Power Supply
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 170000596 Power Cable China/Australia Plug 1.8 M
- TPC-1000H-WMKE TPC VESA Mounting Kit from 10" to 17" TPC
- TPC-1000H-SMKE TPC Stand kit from 10" to 17" TPC
- EWM-W151H01E 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCIe (also need 9656EWMG00E)
- 9656EWMG00E Half-size miniPCIe to Full-size miniPCIe bracket set
- 175000318 EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- 1750003222 802.11b/g 5dBi Dipole Antenna
- 1750003418 Wireless Antenna AN2400-5901RS R/P SMA.M9dB

## Automation S/W & Embedded O/S

- 2070013102 TPC-xx82 WS7P x64 MUI Image v4.12 B005
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB PanelExpress V2.0 S/W USB dongle

## iDoor Modules

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, RJ45, Master
- PCM-26R2EC-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- PCM-26R2EI-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- PCM-26R2S3-MAE 2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45, Master

## Application Software


	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1282T

## 12.1" XGA TFT LED LCD 5th. Gen. Intel® Core™ i3 Touch Panel Computer

NEW

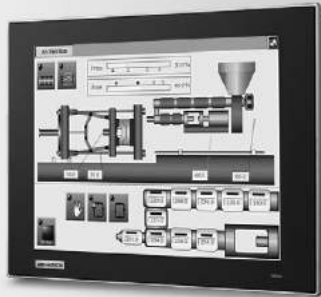

### Features

- Industrial 12.1" XGA TFT LCD with 50K Lifetime LED Backlight
- Intel 5<sup>th</sup> Generation Core Processors with 4GB DDR3L SDRAM
- Compact Fanless Embedded System with Al Alloy Front Bezel
- True-flat with IP66 / non-flat with IP65 certified front panel protection
- More Durable 5-wire Resistive Touch Screen
- PCIe and Mini PCIe Expansion Support
- Diverse system IO and Isolated Digital IO by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/WiFi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- HDMI and Audio Multimedia Support
- Support Advantech SusiAccess Remote Device Management Software

### Introduction

The TPC-1282T touch panel computer with a 12.1" XGA LCD, low power embedded Intel 5<sup>th</sup> Generation Core processor and 4GB DDR3L SDRAM provides the high computing performance in a compact fanless system. To enhance its durability, the TPC-1282T is designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It also includes PCIe slot and Mini-pcie slots to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and MRAM. A 2<sup>nd</sup> monitor and speaker can be attached via the integrated HDMI and Audio port.

The pre-loaded SusiAccess is a smart, unique and ready-to-use remote device management software for you to centralize monitoring and managing of remote embedded devices in real-time. You can focus more on your own applications and let SusiAccess do the rest - configure systems, monitor device health, and recover from any system failures. It's cloud-based and provides on-demand software services so you can easily download and upgrade applications when you need.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 311.8 x 238 x 77.2 mm (12.28" x 9.38" x 3.04")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Microsoft® WES7 32bit/64bit Windows 7 32bit/64bit  
Windows Embedded 8.1 Industry Pro 64bit Ubuntu  
14.04 LTS
- **Power Consumption** 18W Typical, 60W Max. (Without Add-on card)
- **Power Input** 24V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** 3.2 kg (7.02 lbs)

#### System Hardware

- **CPU** Intel 5<sup>th</sup> Generation Core i3-5010U 2.10GHz
- **Chipset** Broadwell PCH-LP
- **Memory** 4GB DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2 (one port supports iAMT)
- **Expansion Slots** Half-size PCI-E and Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1  
mSATA slot x 1 (via Mini PCIe)
- **I/O** RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 2, HDMI 1.4 x 1  
Audio Line out x 1, USB 2.0 x 1 (optional)  
Audio MIC x 1 (optional)

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 12.1"
- **Max. Resolution** 1024 x 768
- **Max. Colors** 16.2 M
- **Luminance cd/m<sup>2</sup>** 600
- **Viewing Angle (H/V°)** 160/140
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 700:1

#### Touchscreen

- **Lifespan** 36 million touches at single point
- **Light Transmission** 81 ± 3%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive


#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)



## Dimensions

Unit: mm

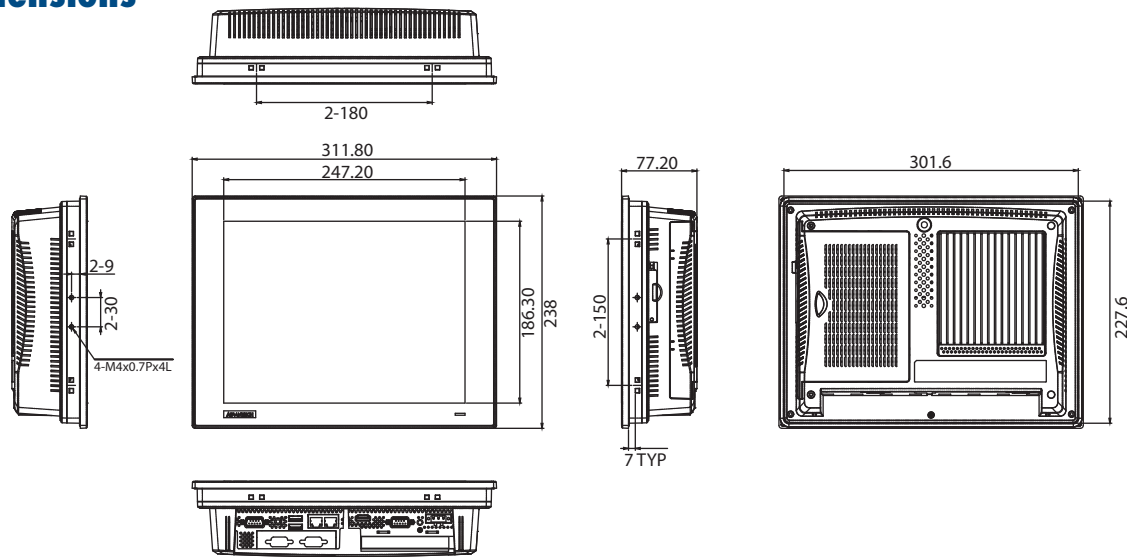

Panel Cut-out Dimensions: 303 x 229 mm (11.93" x 9.16")

## Ordering Information

- TPC-1282T-433AE 12.1" XGA Panel PC, Intel i3-50101U, 4GB, iDoor, PCIe

## Accessories

- PWR-248-AE 150W DC 24V/6.25A Output Power Supply
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M
- TPC-1000H-WMKE TPC VESA Mounting Kit from 10" to 17" TPC
- TPC-1000H-SMKE TPC Stand kit from 10" to 17" TPC
- EWM-W151H01E 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCIe (also need 9656EWMG00E)
- 9656EWMG00E Half-size miniPCIe to Full-size miniPCIe bracket set
- 1750000318 EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- 1750003222 802.11b/g 5dBi Dipole Antenna
- 1750003418 Wireless Antenna AN2400-5901RS R/P SMA.M9dB

## Automation S/W & Embedded O/S

- 2070013102 TPC-xx82 WS7P x64 MUI Image v4.12 B005
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB PanelExpress V2.0 S/W USB dongle

## iDoor Modules

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2EC-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- PCM-26R2EI-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- PCM-26R2S3-MAE 2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45, Master

## Application Software

	Version: V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version: V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version: V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version: V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1071H

## 10.4" SVGA TFT LED LCD Intel® Atom™ Dual-Core D525 Touch Panel Computer



### Features

- Intel® Atom™ D525 1.8 GHz processor
- 10.4" SVGA TFT LED LCD
- Compact design with die-cast Al alloy front bezel
- Fanless cooling system
- IP65 approved front panel
- PCIe and Mini PCIe expansion support
- Supports 4 GB DDR3 SDRAM
- Integrated 16-channel Digital I/O with isolation
- 1 MB Battery-backed SRAM
- Serial port isolation protection
- Supports Microsoft® WES7/XP/WES/WinCE
- Supports external antenna for wireless communication
- Supports field-bus communication for PLC connectivity

### Introduction

The TPC-1071H features a fanless low power consuming Intel® Atom™ Dual Core 1.8GHz processor 4GB DDR3 SDRAM and Resistive touch screen, and multiple I/O ports 2 x RS-232 with isolation, 1 x RS-422/485 with isolation. For data storage the fanless TPC devices also include: 1 x Compact Flash Slot and 1 x 2.5" SATA HDD. To expand function, this model provides PCIe and mini-PCIe expansion slots, an integrated 16-channel Digital I/O with isolation and 1MB Battery-backed SRAM.

### Specifications

#### General

- **BIOS** AMI 8Mbit
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 287.0 x 227.0 x 73.3 mm (11.30" x 8.94" x 2.89)
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: PC/ABS Resin
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Microsoft® Windows 7/WES7/WES 2009/XPE/CE 6.0/  
Linux / Android
- **Power Consumption** 17W
- **Power Input** 10~29 V<sub>DC</sub>
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** TPC-1071H: 3.5 kg (7.72 lbs)

#### System Hardware

- **CPU** Intel® Atom™ D525 1.8 GHz with 1MB cache
- **Chipset** ICH8M
- **Memory** 4GB SO-DIMM DDR3 SDRAM
- **LAN** 10/100/1000Base-T x 2
- **Expansion Slots** Half-size PCI-E or full-size Mini PCI-E
- **Storage** CompactFlash® slot x 1  
2.5" SATA HDD x 1 (Optional)
- **I/O** RS-232 x 2 (COM1, 2) with isolation  
RS-422/485 x 1 (COM3) with isolation and auto data flow control  
USB 2.0 x 2 (Host)  
PS/2 x 1
- **DI/DO & backup SRAM** 8 x DI/DO with isolation and backup 1MB SRAM

#### LCD Display

- **Display Type** SVGA TFT LED LCD
- **Display Size** 10.4"
- **Max. Resolution** 800 x 600
- **Max. Colors** 262 K
- **Luminance cd/m<sup>2</sup>** 400
- **Viewing Angle (H/V°)** 120/100
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 400:1


#### Touchscreen

- **Lifespan** 10 million touches at single point
- **Light Transmission** Above 75%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP65
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)


#### Rear View

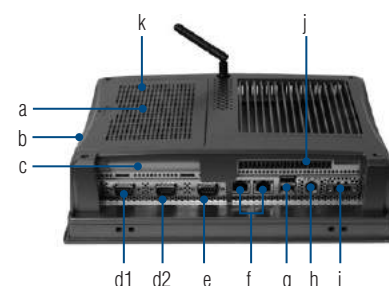

- a. HDD
- b. CompactFlash
- c. PCI-E slot
- d1. COM3 (RS-422/485)
- d2. COM2(RS-232)
- e. COM1(RS-232)
- f. LAN (10/100/1000)
- g. USB 2.0
- h. PS/2
- i. Power Receptor
- j. DI/O ports
- k. Mini PCI-E slot

## Dimensions

Unit: mm

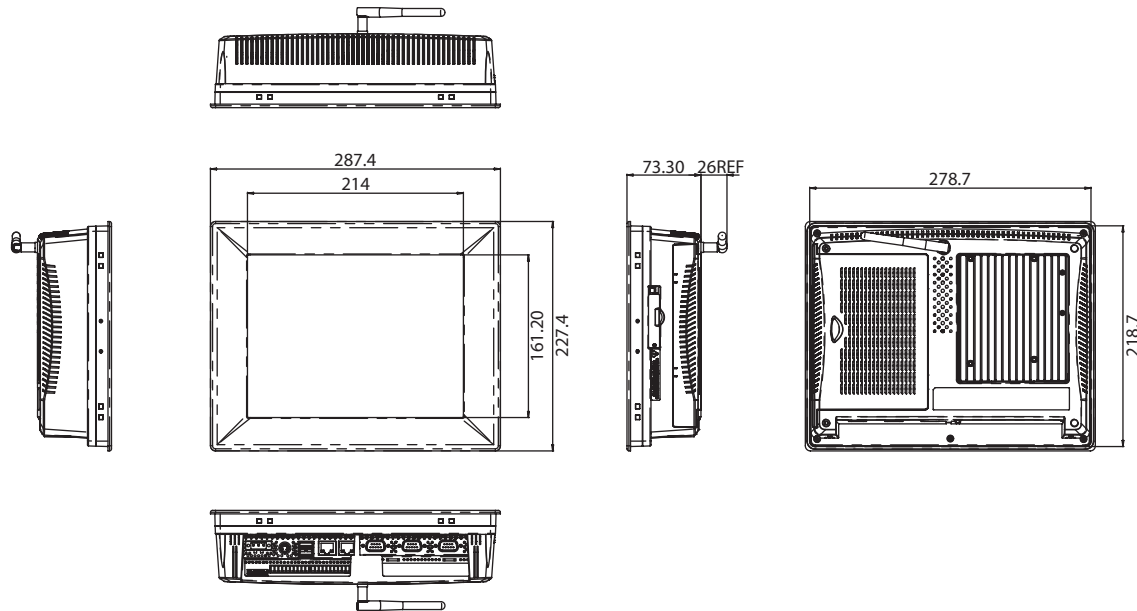

**Panel Cut-out Dimensions: 279.5 x 219.5mm (11.00" x 8.64")**

## Ordering Information

- **TPC-1071H-D3AE** 10.4" SVGA Touch Panel PC, D525 1.8 GHz, 4GB
- **WA-TPC1071** TPC-1071H-D3AE with WebAccess software

## Accessories

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **EWM-W151H01E** 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCle (also need 9656EWMG00E)
- **9656EWMG00E** Half-size miniPCle to Full-size miniPCle bracket set
- **1750000318** EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- **1750003222** 802.11b/g 5dBi Dipole Antenna
- **1750003418** Wireless Antenna AN2400-5901RS R/P SMA.M9dB
- **TPC-1000H-WMKE** TPC VESA Mounting Kit from 10" to 17" TPC
- **TPC-1000H-SMKE** TPC Stand kit from 10" to 17" TPC
- **1750000318** EMI Antenna 2DBI 2.4GHz SMA CONN for ARK-3384
- **1750003222** 802.11b/g 5dBi Dipole Antenna
- **1750003418** Wireless Antenna AN2400-5901RS R/P SMA.M9dB

\* VESA support via a wall mounting kit

## Automation S/W & Embedded O/S

- **2070012784** WES7P MUI. V4.10 B001 X64 for TPC-1071H
- **2070011506** WES 2009 MUI V3.31 B003 for TPC-1071H
- **2070012397** WinCE 6.0 MUI V3.03 B256 for TPC-1071H
- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle

## Application Software

	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail I/PCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1551WP

## 15.6" WXGA TFT LED LCD Intel® Atom™ Thin Client Terminal

**NEW**



### Features

- Industrial 15.6 HD TFT LCD with 50K Lifetime LED Backlight
- Intel® Atom™ E3827 1.75 GHz Processor with 4GB DDR3L SDRAM
- 16:9 Wide Screen with PCT Multi-Touch
- IP66 Approved Front Protection & Panel Mounting
- Built-in Intelligent Home key and i Key for Intuitive UI
- Front LED Indicator to Show Operating Status
- Supports iDoor with optional accessory kit
- Chassis Grounding Protection
- Anti-scratch surface: 7H hardness

### Introduction

The TPC-1551WP thin client terminal with a 15.6" WXGA LCD, low power embedded Intel® Atom™ E3827 1.75 GHz Processor and 4GB DDR3L SDRAM provides adequate computing performance in a compact fanless system. The TPC-1551WP is true-flat touch screen designed with IP66 front protection, die-cast Aluminum Alloy front bezel and Projected capacitive touch. Furthermore, the TPC-1551WP is easy for you to embed to your equipment because of the small yet robust design. In addition, through the Mini-PCIe slot, Advantech iDoor technology (optional) can provide more I/O connectors, Isolated Digital I/O, the Fieldbus Protocol, 3G/GPS/GPRS/Wi-Fi Communication and Battery-backup MRAM to fulfill different kinds of the Industrial automation application.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 419.7 x 269 x 61.9 mm (16.52" x 10.59" x 2.44")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: SECC
- **Mounting** Desktop, Wall, Panel Mount, and VESA mount (with optional kit)
- **OS Support** Microsoft® Windows WES7 32bit/64bit /WE8S 64bit / Microsoft® Windows WES7 32bit/64bit /WE8S 64bit / Windows 7 32bit/64bit / Windows 8 64 bit / Linux Kernel 3.x
- **Power Consumption** TBD
- **Power Input** 24 V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** TBD

#### System Hardware

- **CPU** Intel® Atom™ E3827 1.75 GHz Processor
- **Memory** 4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1 (optional)
- **I/O** RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 1  
USB 2.0 x 1

#### LCD Display

- **Display Type** WXGA TFT LED LCD
- **Display Size** 15.6"
- **Max. Resolution** 1366 x 768
- **Max. Colors** 16.2 M
- **Luminance cd/m2** 300
- **Viewing Angle (H/V°)** 170/160
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 500:1


#### Touchscreen

- **Light Transmission** 90% ± 3%
- **Resolution** 2048 x 2048 dot
- **Type** Projected capacitive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20~60°C (-4~140°F)
- **Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz) (Operating, random vibration)


#### Rear View

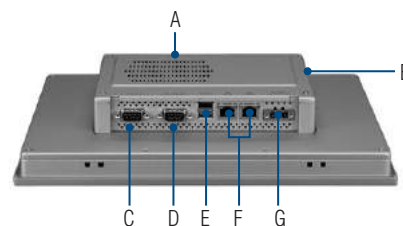

- A. External HDD/iDoor kit (TPC-1251T-EHKE) (Optional)
- B. CFast
- C. RS-232
- D. RS-232/422/485
- E. USB 3.0 & 2.0
- F. LAN (10/100/1000)
- G. Power Receptor

## Dimensions

Unit: mm [inch]

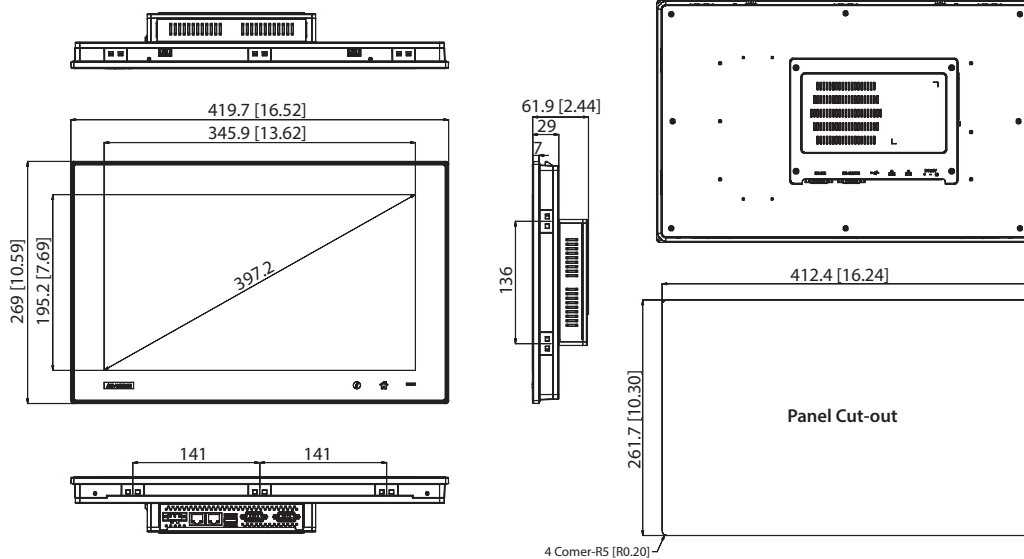

TPC-1551WP Panel Cut-out Dimensions: 412.4 x 261.7 mm

## Ordering Information

- TPC-1551WP-E3AE 15.6" Multi-Touch Panel PC, Intel Atom E3827, 4GB DDR3L pre-installed

## Accessories

- PWR-247-BE 63W DC 24V/2.62A Output Power Supply
- TPC-1251T-EHKE HDD and iDoor extension kit
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M
- TPC-1000H-WMKE TPC VESA Mounting Kit from 10" to 17" TPC
- TPC-1000H-SMKE TPC Stand kit from 10" to 17" TPC

## Automation S/W & Embedded O/S

- 2070013484 TPC-xx51WP WS7P x64 MUI Image v4.13
- 2070013485 TPC-xx51WP WEC7 X64 MUI Image V4.00
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB PanelExpress V2.0 S/W USB dongle

## iDoor Modules (TPC-1251T-EHKE is required for iDoor modules)

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24U2U3-AE 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

## Application Software

	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1051WP

## 10.1" WXGA TFT LED LCD Intel® Atom™ Thin Client Terminal

**NEW**



### Features

- Industrial 10.1 TFT LCD with 25K Lifetime LED Backlight
- Intel® Atom™ E3827 1.75 GHz Processor with 4GB DDR3L SDRAM
- 16:9 Wide Screen with PCT Multi-Touch
- IP66 Approved Front Protection & Panel Mounting
- Built-in Intelligent Home key and i Key for an intuitive user interface
- Front LED Indicator to Show Operating Status
- Supports iDoor with optional accessory kit
- Chassis Grounding Protection
- Anti-scratch surface: 7H hardness

### Introduction

The TPC-1051WP is a thin client terminal with a 10.1" WXGA LCD, low power embedded Intel® Atom™ E3827 1.75 GHz Processor and 4GB DDR3L SDRAM provides adequate computing performance in a compact fanless system. The TPC-1051WP is a true-flat touch screen design with IP66 front protection, die-cast Aluminate Alloy front bezel and Projected capacitive touch. Furthermore, the TPC-1051WP is easy for you to embed into your equipment because of its small yet robust design. In addition, through the Mini-PCIe slot, Advantech iDoor technology (optional) can provide more I/O connectors, Isolated Digital I/O, the Fieldbus Protocol, 3G/GPS/GPRS/Wi-Fi Communication and Battery-backup MRAM to fulfill different kinds of the industrial automation application.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 283.1 x 202.3 x 61.4 mm ( 11.15" x 7.96" x 2.42)
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: SECC
- **Mounting** Desktop, Wall, Panel Mount, and VESA mount (with optional kit)
- **OS Support** Microsoft® Windows WES7 32bit/64bit /WE8S 64bit / Windows 7 32bit/64bit / Windows 8 64 bit / Linux Kernel 3.x
- **Power Consumption** TBD
- **Power Input** 24 V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** TBD

#### System Hardware

- **CPU** Intel® Atom™ E3827 1.75 GHz Processor
- **Memory** 4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1 (optional)
- **I/O** RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 1  
USB 2.0 x 1

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 10.1"
- **Max. Resolution** 1280 x 800
- **Max. Colors** 262k
- **Luminance cd/m<sup>2</sup>** 300
- **Viewing Angle (H/V°)** 170/170
- **Backlight Life** 25,000 hrs
- **Contrast Ratio** 1300:1


#### Touchscreen

- **Light Transmission** 90% ± 3%
- **Resolution** 2048 x 2048 dot
- **Type** Projected capacitive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** -20 ~ 55°C (-4 ~ 131°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz), (Operating, random vibration)


### Rear View

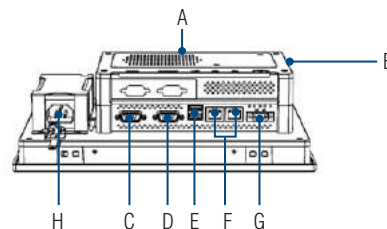

- A. External HDD/iDoor kit (TPC-1251T-EHKE) (Optional)
- B. CFast
- C. RS-232
- D. RS-232/422/485
- E. USB 3.0 & 2.0
- F. LAN (10/100/1000)
- G. Power Receptor
- H.

## Dimensions

Unit: mm [inch]

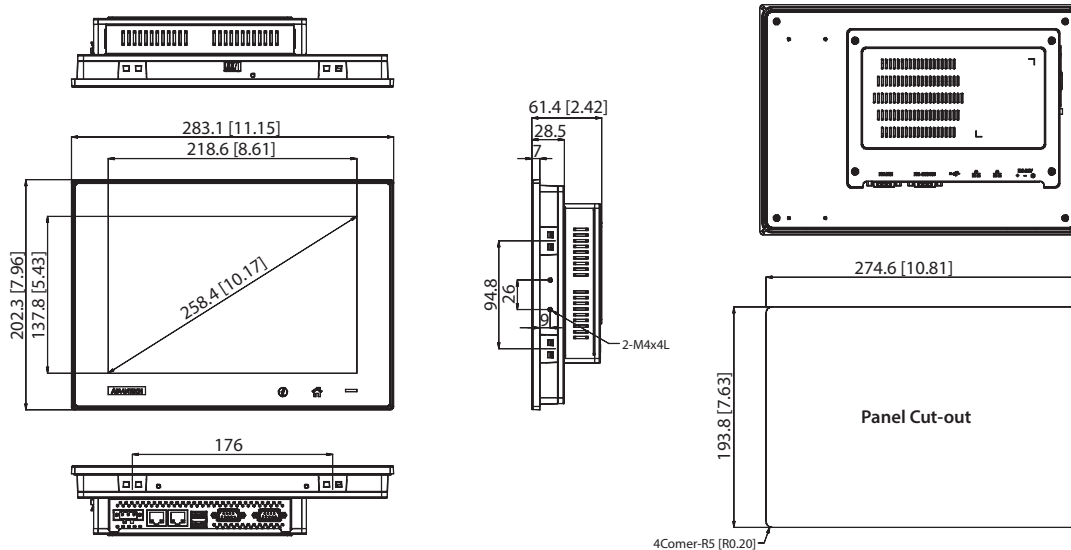

TPC-1051WP Panel Cut-out Dimensions: 274.6 x 193.8 mm

## Ordering Information

- TPC-1051WP-E3AE 10.1" Multi-Touch Panel PC, Intel Atom E3827, 4GB DDR3L pre-installed

## Accessories

- PWR-247-BE 63W DC 24V/2.62A Output Power Supply
- TPC-1251T-EHKE HDD and iDoor extension kit
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M

## Automation S/W & Embedded O/S

- 2070013484 TPC-xx51WP WS7P x64 MUI Image v4.13
- 2070013485 TPC-xx51WP WEC7 X64 MUI Image V4.00
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB PanelExpress V2.0 S/W USB dongle

## iDoor Modules (TPC-1251T-EHKE is required for iDoor modules)

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-26D2CA-AE 2-Port Isolated CANbus mPCIe, CANOpen, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24U2U3-AE 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

## Application Software


	<p>Version: V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1751T

## 17" SXGA TFT LED LCD Intel® Atom™ Thin Client Terminal

**NEW**

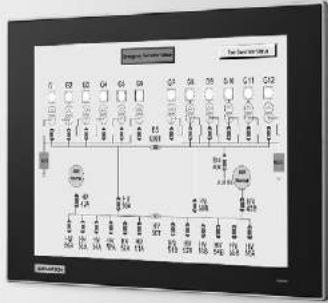

### Features

- Industrial 17" SXGA TFT LCD with 50K Lifetime LED Backlight
- Intel® Atom™ E3827 1.75 GHz Processor with 4GB (8GB optional) DDR3L SDRAM
- Support wide operating temperatures -20~60°C
- Compact Fanless Embedded System with Al Alloy Front Bezel
- True-flat with IP66 / non-flat with IP65 certified front panel protection
- Durable 5-wire Resistive Touch Screen
- Full-size Mini PCIe Expansion Support
- Supports iDoor technology for diverse applications (optional accessory required)
- Chassis Grounding Protection
- Supports USB 3.0

### Introduction

The TPC-1751T thin client terminal with a 17" SXGA LCD, low power embedded Intel® Atom™ E3827 1.75 GHz Processor and 4GB (8GB optional) DDR3L SDRAM provides computing performance in a compact fanless system. To enhance its durability, the TPC-1751T is true-flat touch screen designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It supports wide operating temperatures -20~60°C and includes full size mini-PCIe slot to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology (optional) can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and Battery-backup MRAM.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 413.7 x 347.2 x 63.8 (16.28" x 13.68" x 2.5")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: SECC
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Microsoft® WES7 64bit /WE8S 64bit / Windows 7 32bit/64bit
- **Power Consumption** 30 W (Typical)
- **Power Input** 24 V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** 6 KG

#### System Hardware

- **CPU** Intel® Atom™ E3827 1.75 GHz Processor
- **Memory** 4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFAST slot x 1  
2.5" SATA SSD slot x 1 (optional)  
RS-232 x 1, RS-232/422/485 x 1
- **I/O** USB 3.0 x 1  
USB 2.0 x 1

#### LCD Display

- **Display Type** SXGA TFT LED LCD
- **Display Size** 17"
- **Max. Resolution** 1280 x 1024
- **Max. Colors** 16.7M
- **Luminance cd/m2** 350
- **Viewing Angle (H/V°)** 160/140
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 800:1


#### Touchscreen

- **Lifespan** 36 million touches at single point
- **Light Transmission** Above 75%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Vibration Protection** With CFAST: 2 Grms (5~500 Hz)  
With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)

### Rear View

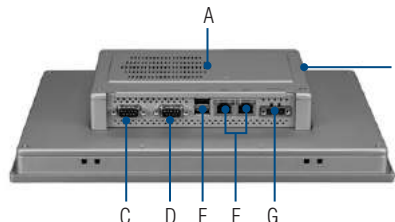


- A. External HDD/iDoor kit (TPC-1251T-EHKE) (Optional)
- B. CFAST Slot
- C. RS-232
- D. RS-232/422/485
- E. USB 3.0 & 2.0
- F. LAN (10/100/1000)
- G. Power Receptor



## Dimensions

Unit: mm

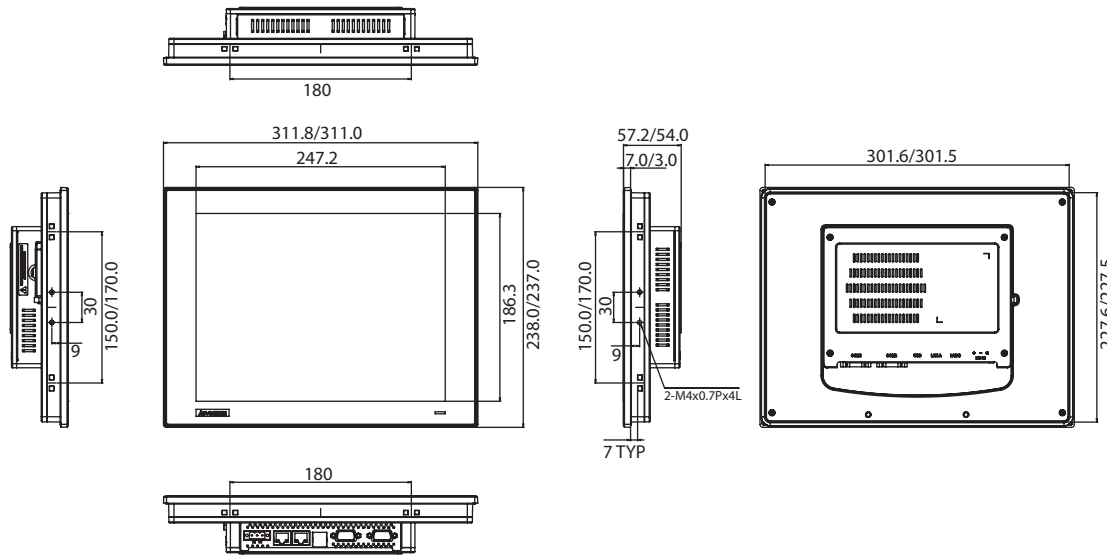

**TPC-1751T Panel Cut-out Dimensions: 303 x 229 mm (11.93" x 9.02")**

## Ordering Information

- **TPC-1751T-E3AE** 17" SXGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (True-flat touch screen)
- **TPC-1751H-E3AE** 17" SXGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (Non-flat touch screen IP65 certified traditional TPC front panel)

## Accessories

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **TPC-1251T-EHKE** HDD/ SSD and iDoor extension kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **TPC-1000H-WMKE** TPC VESA Mounting Kit from 10" to 17" TPC
- **TPC-1000H-SMKE** TPC Stand kit from 10" to 17" TPC

## Automation S/W & Embedded O/S

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle
- **2070013067** WES7P X64 MUI. V4.12 B001
- **2070013359** WEC7 X64 MUI. V4.00 B031

## iDoor Modules (TPC-1251T-EHKE is required for iDoor modules)

- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-26D2CA-AE** 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24R1TP-AE** 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-24U2U3-AE** 2-Port USB 3.0, mPCIe, USB-A type
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

## Application Software


	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1551T

## 15" XGA TFT LED LCD Intel® Atom™ Thin Client Terminal

**NEW**

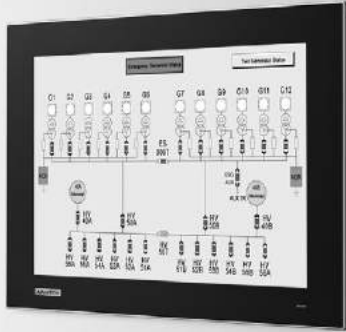

### Features

- Industrial 15" XGA TFT LCD with 50K Lifetime LED Backlight
- Intel® Atom™ E3827 1.75 GHz Processor with 4GB (8GB optional) DDR3L SDRAM
- Support wide operating temperatures -20~60°C
- Compact Fanless Embedded System with Al Alloy Front Bezel
- True-flat with IP66 / non-flat with IP65 certified front panel protection
- Durable 5-wire Resistive Touch Screen
- Full-size Mini PCIe Expansion Support
- Supports iDoor technology for diverse applications (optional accessory required)
- Chassis Grounding Protection
- Support USB 3.0

### Introduction

The TPC-1551T thin client terminal with a 15" XGA LCD, low power embedded Intel® Atom™ E3827 1.75 GHz Processor and 4GB (8GB optional) DDR3L SDRAM provides computing performance in a compact fanless system. To enhance its durability, the TPC-1551T is true-flat touch screen designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It supports wide operating temperatures -20~60°C and includes full size mini-PCIe slot to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology (optional) can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and Battery-backup MRAM.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 383.20 x 307.30 x 61.10 mm (15.09" x 12.10" x 2.41")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: SECC
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Microsoft® WES7 64bit / WE8S 64bit / Windows 7 32bit/64bit / Windows 8 64bit
- **Power Consumption** 40.8 W (typical)
- **Power Input** 24 V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** 3.9 KG

#### System Hardware

- **CPU** Intel® Atom™ E3827 1.75 GHz Processor
- **Memory** 4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1 (optional)
- **I/O** RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 1  
USB 2.0 x 1

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 15"
- **Max. Resolution** 1024 x 768
- **Max. Colors** 16.2 M
- **Luminance cd/m<sup>2</sup>** 400
- **Viewing Angle (H/V°)** 160/140
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 700:1


#### Touchscreen

- **Lifespan** 36 million touches at single point
- **Light Transmission** Above 75%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment


- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Vibration Protection** With CFast: 2 Grms (5~500 Hz)  
With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)

### Rear View

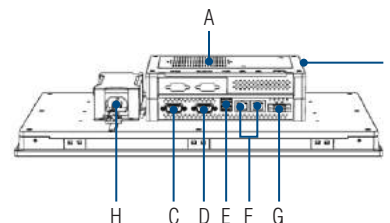

- A. External HDD/iDoor kit (TPC-1251T-EHKE) (Optional)
- B. CFast Slot
- C. RS-232
- D. RS-232/422/485
- E. USB 3.0 & 2.0
- F. LAN (10/100/1000)
- G. Power Receptor
- H.

**Dimensions**

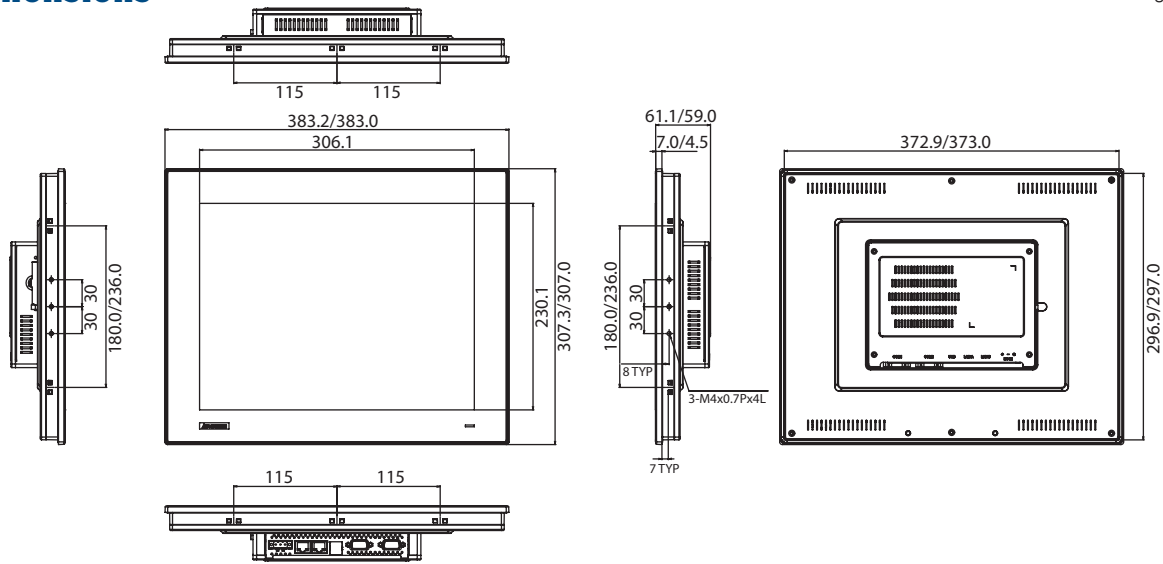

**TPC-1551T Panel Cut-out Dimensions: 374.5 x 298.5 mm (14.74" x 11.75")**

Unit: mm

**Ordering Information**

- **TPC-1551T-E3AE** 15" XGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (True-flat touch screen)
- **TPC-1551H-E3AE** 15" XGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (Non-flat touch screen IP65 certified traditional TPC front panel)
- **PE-TPC1551-CT1400A** TPC-1551T-E3AE w/WES 7Pro Panel Express, 32Gb CFast

**Accessories**

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **TPC-1251T-EHKE** HDD/ SSD and iDoor extension kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

**Automation S/W & Embedded O/S**

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle
- **2070013067** WES7P X64 MUI. V4.12 B001
- **2070013359** WEC7 X64 MUI. V4.00 B031

**iDoor Modules** (TPC-1251T-EHKE is required for iDoor modules)

- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCle, DB9
- **PCM-26D2CA-AE** 2-Port Isolated CANBus mPCle, CANOpen, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCle, DB37
- **PCM-24R1TP-AE** 1-Port Gigabit Ethernet, Intel® 82574L, mPCle, RJ45
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCle, 2-port SMA
- **PCM-24U2U3-AE** 2-Port USB 3.0, mPCle, USB-A type
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCle w/ Redundant SIM Card holder, 2-port SMA

**Application Software**


	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-1251T

## 12.1" XGA TFT LED LCD Intel® Atom™ Thin Client Terminal

**NEW**



### Features

- Industrial 12.1" XGA TFT LCD with 50K Lifetime LED Backlight
- Intel® Atom™ E3827 1.75 GHz Processor with 4GB (8GB optional) DDR3L SDRAM
- Support wide operating temperatures -20~60°C
- Compact Fanless Embedded System with Al Alloy Front Bezel
- True-flat with IP66 / non-flat with IP65 certified front panel protection
- Durable 5-wire Resistive Touch Screen
- Full-size Mini PCIe Expansion Support
- Supports iDoor technology for diverse applications (optional accessory required)
- Chassis Grounding Protection
- Supports USB 3.0

### Introduction

The TPC-1251T thin client terminal with a 12.1" XGA LCD, low power embedded Intel® Atom™ E3827 1.75 GHz Processor and 4GB (8GB optional) DDR3L SDRAM provides computing performance in a compact fanless system. To enhance its durability, the TPC-1251T is true-flat touch screen designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It supports wide operating temperatures -20~60°C and includes full size mini-PCIe slot to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology (optional) can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/Wi-Fi Communication and Battery-backup MRAM.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 311.80 x 238 x 57.2 mm (12.28" x 9.37" x 2.25")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: SECC
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Microsoft® WES7 64bit / WE8S 64bit / Windows 7 32bit/64bit / Windows 8 64 bit
- **Power Consumption** 45.6 W (Typical)
- **Power Input** 24 V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** 2.5 KG

#### System Hardware

- **CPU** Intel® Atom™ E3827 1.75 GHz Processor
- **Memory** 4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1 (optional)
- **I/O** RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 1  
USB 2.0 x 1

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 12.1"
- **Max. Resolution** 1024 x 768
- **Max. Colors** 16.2M
- **Luminance cd/m<sup>2</sup>** 600
- **Viewing Angle (H/V°)** 160/140
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 700:1


#### Touchscreen

- **Lifespan** 36 million touches at single point
- **Light Transmission** Above 75%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Vibration Protection** With CFast: 2 Grms (5~500 Hz)  
With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)


### Rear View

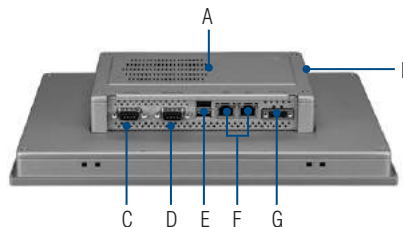

- A. External HDD/iDoor kit (TPC-1251T-EHKE) (Optional)
- B. CFast Slot
- C. RS-232
- D. RS-232/422/485
- E. USB 3.0 & 2.0
- F. LAN (10/100/1000)
- G. Power Receptor

**Dimensions**

Unit: mm

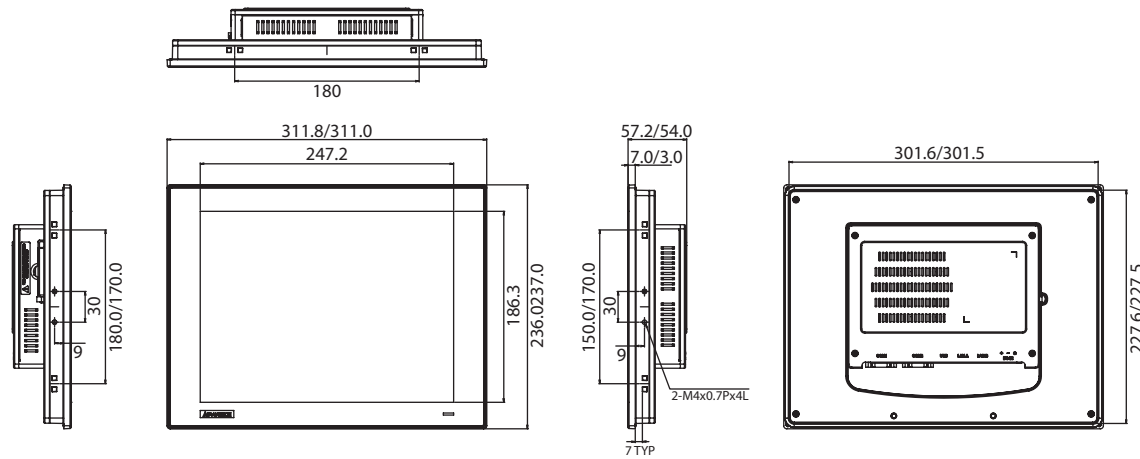

**TPC-1251T Panel Cut-out Dimensions: 303 x 229 mm (11.93" x 9.02")**

**Ordering Information**

- **TPC-1251T-E3AE** 12" XGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (True-flat touch screen)
- **TPC-1251H-E3AE** 12" XGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (Non-flat touch screen IP65 certified traditional TPC front panel)
- **PE-TPC1251-CT1400A** TPC-1251T-E3AE w/WES 7Pro Panel Express, 32Gb CFast

**Accessories**

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **TPC-1251T-EHKE** HDD/SSD and iDoor extension kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **170000596** Power Cable China/Australia Plug 1.8 M
- **TPC-1000H-WMKE** TPC VESA Mounting Kit from 10" to 17" TPC
- **TPC-1000H-SMKE** TPC Stand kit from 10" to 17" TPC

**Automation S/W & Embedded O/S**

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle
- **2070013067** WES7P X64 MUI. V4.12 B001
- **2070013359** WEC7 X64 MUI. V4.00 B031

**iDoor Modules** (TPC-1251T-EHKE is required for iDoor modules)

- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-26D2CA-AE** 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24R1TP-AE** 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-24U2U3-AE** 2-Port USB 3.0, mPCIe, USB-A type
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

**Application Software**

	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-651T

## 5.7" VGA TFT LED LCD Intel® Atom™ Thin Client Terminal

**NEW**



### Features

- Industrial 5.7" VGA TFT LCD with 50K Lifetime LED Backlight
- Intel® Atom™ E3827 1.75 GHz Processor with 4GB (8GB optional) DDR3L SDRAM
- Support wide operating temperatures -20~60°C
- Compact Fanless Embedded System with Al Alloy Front Bezel
- True-flat with IP66 certified front panel protection
- Durable 5-wire Resistive Touch Screen
- Full-size Mini PCIe Expansion Support
- Supports iDoor technology for diverse applications (optional accessory required)
- Chassis Grounding Protection
- Supports USB 3.0

### Introduction

The TPC-651T thin client terminal with a 5.7" VGA LCD, low power embedded Intel® Atom™ E3827 1.75 GHz Processor and 4GB (8GB optional) DDR3L SDRAM provides computing performance in a compact fanless system. To enhance its durability, the TPC-651T is true-flat touch screen designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It supports wide operating temperatures -20~60°C and includes full size mini-PCIe slot to extend the functionality and meet a variety of automation applications needs. Through the Mini-PCIe slot, Advantech iDoor technology (optional) can provide more I/O connectors, Isolated Digital IO, the Fieldbus Protocol, 3G/GPS/GPRS/WiFi Communication and Battery-backup MRAM.

### Specifications

#### General

- **BIOS** AMI UEFI
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 199 x 152 x 58.9 mm (7.83" x 5.98" x 2.32")
- **Enclosure** Front bezel: Die-cast Aluminum alloy  
Back housing: SECC
- **Mounting** Desktop, Wall or Panel Mount
- **OS Support** Microsoft® WES7 64bit /WE8S 64bit / Windows 7 32bit/64bit
- **Power Consumption** 19.2 W (typical)
- **Power Input** 24V<sub>DC</sub> ± 20%
- **Watchdog Timer** 1 ~ 255 sec (system)
- **Weight (Net)** 1.5 KG

#### System Hardware

- **CPU** Intel® Atom™ E3827 1.75 GHz Processor
- **Memory** 4GB (8GB optional) DDR3L 1600MHz SO-DIMM SDRAM
- **LAN** 10/100/1000 Base-T x 2
- **Expansion Slots** Full-size Mini PCI-E
- **Storage** CFast slot x 1  
2.5" SATA SSD slot x 1 (optional)
- **I/O** RS-232 x 1, RS-232/422/485 x 1  
USB 3.0 x 1  
USB 2.0 x 1

#### LCD Display

- **Display Type** VGA TFT LED LCD
- **Display Size** 5.7"
- **Max. Resolution** 640 x 480
- **Max. Colors** 262K
- **Luminance cd/m<sup>2</sup>** 550
- **Viewing Angle (H/V°)** 160/140
- **Backlight Life** 50,000 hrs
- **Contrast Ratio** 800:1


#### Touchscreen

- **Lifespan** 36 million touches at single point
- **Light Transmission** Above 75%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Vibration Protection** With CFast: 2 Grms (5~500 Hz)  
With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)


#### Rear View

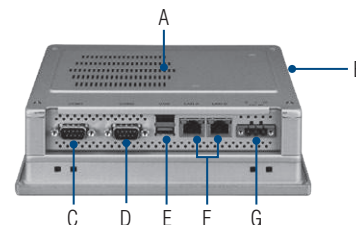

- A. External HDD/iDoor kit (TPC-1251T-EHKE) (Optional)
- B. CFast Slot
- C. RS-232
- D. RS-232/422/485
- E. USB 3.0 & 2.0
- F. LAN (10/100/1000)
- G. Power Receptor

**Dimensions**

Unit: mm

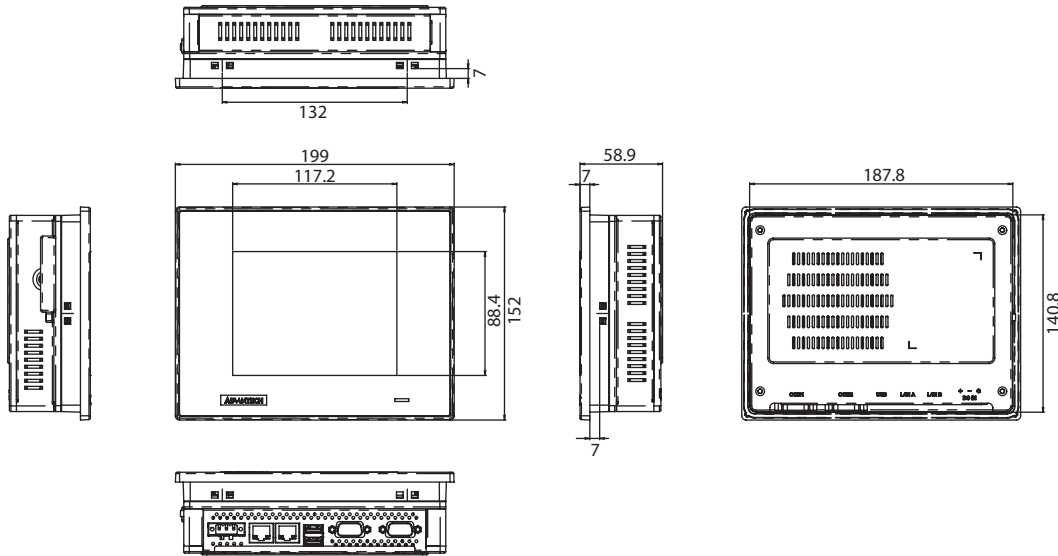

**Panel Cut-out Dimensions: 189.1 x 142.1 mm (7.44" x 5.59")**

**Ordering Information**

- **TPC-651T-E3AE** 5.7" VGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (True-flat touch screen)
- **TPC-651H-E3AE** 5.7" VGA Panel PC, Intel® Atom™ E3827 1.75 GHz Processor, 4GB (Non-flat touch screen IP65 certified traditional TPC front panel)

**Accessories**

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **TPC-1251T-EHKE** HDD and iDoor extension kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

**Automation S/W & Embedded O/S**

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle
- **2070013067** WES7P X64 MUI. V4.12 B001
- **2070013359** WEC7 X64 MUI. V4.00 B031

**iDoor Modules** (TPC-1251T-EHKE is required for iDoor modules)

- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-26D2CA-AE** 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24R1TP-AE** 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-24U2U3-AE** 2-Port USB 3.0, mPCIe, USB-A type
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

**Application Software**

	<p>Version: V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# SPC-2140WP

## 21.5" Full HD TFT LED LCD stationary Multi-Touch Panel Computer



2013

NEW



### Features

- 21.5" Full HD TFT LED LCD display
- AMD dual-core 1.6GHz processor with independent GPU, advanced graphical performance
- 16:9 wide screen with PCT multi-touch
- Built-in function and home key button used for intuitive UI
- Anti-scratch touch surface: 7H hardness
- All around IP65 with waterproof M12 connector
- Support Mini-PCIe expansion slot
- Front LED indicator to show operating status
- Fanless cooling system
- Winner of the 2013 iF product design award

### Introduction

With a brand-new ID design, the SPC-2140WP series provide high resolution 21.5" display and PCT multi-touch in 16:9 wide format. By embedding an AMD T56N 1.6GHz processor with independent GPU, the SPC-2140WP can support advanced graphical performance in more complex applications. Built-in function and home key button for greater user usability and operating safety. The SPC-2140WP also support Mini-PCIe slot for communication function expansion. Moreover, the SPC-2140WP includes an all around IP65 waterproof design with M12 connectors. With this vertical I/O connector, cable routing can be an easy job in stationary / VESA Arm applications.

### Specifications

#### General

- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 558.4 x 349.8 x 65 mm (21.98" x 13.77" x 2.56")
- **Enclosure** Front bezel: Die-cast Aluminium alloy  
Back housing: Die-cast Aluminium alloy
- **Mounting** VESA Arm
- **OS Support** Microsoft® Win7/8/WES7P/XP/WES2009/Linux
- **Power Consumption** 35 W Typical
- **Power Input** 24 V<sub>DC</sub>
- **Weight (Net)** 9 kg (19.8 lbs)

#### System Hardware

- **CPU** AMD G-series T56N 1.6GHz
- **Chipset** AMD A50M FCH
- **Memory** 4GB SO-DIMM DDR3 SDRAM
- **LAN** 10/100/1000Base-T x 2 (connection: M12 A-coded, 8-pin female)
- **Expansion Slots** Full-sized Mini PCIe slot x 1 (optional)
- **Storage** 2.5" SATA HDD bracket x 1
- **I/O** RS-232 x1 (connection: M12 A-coded, 8-pin male)  
USB 2.0 x1 (connection: M12 A-coded, 8-pin female)  
24 V<sub>DC</sub> power input (connection: M12 A-coded, 5-pin male)

#### LCD Display

- **Display Type** Full HD TFT LED LCD
- **Display Size** 21.5"
- **Max. Resolution** 1920 x 1080
- **Max. Colors** 16.7 M
- **Luminance cd/m<sup>2</sup>** 300
- **Viewing Angle (H/V°)** 178/178
- **Backlight Life** 50,000 hrs


#### Touchscreen

- **Light Transmission** ≥88%
- **Resolution** 4096\*4096 dot
- **Type** Projected capacitive

#### Environment

- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing  
**Note:** Tested for 48hrs
- **Ingress Protection** All around IP65
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz)  
(Operating, random vibration)

### Rear View

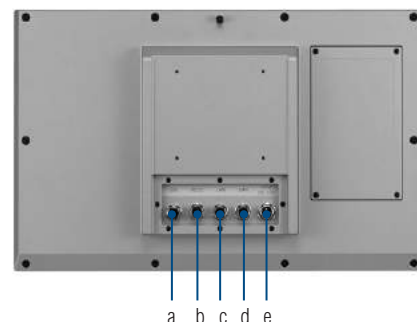


- a. USB 2.0 with M12 connector
- b. COM (RS-232) with M12 connector
- c. LAN 1 with M12 connector
- d. LAN 2 with M12 connector
- e. 24 V<sub>DC</sub> input with M12 connector



## Dimensions

Unit: mm [inch]

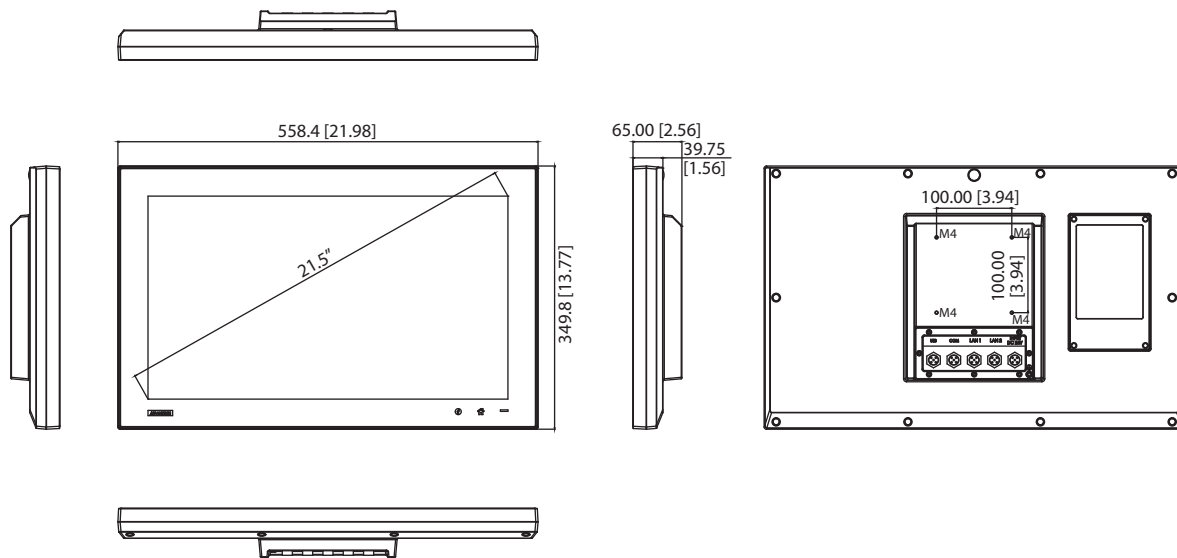

## Ordering Information

- **SPC-2140WP-T3AE** 21.5" full-HD stationary Multi-Touch Panel PC, 4GB
- **WA-SPC2140WP** SPC-2140WP-T3AE with WebAccess software

## Accessories

- **PWR-247-BE** 63W DC 24V/2.62A Output Power Supply
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **EWM-W151H01E** 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCIe (also need 9656EWMG00E)
- **9656EWMG00E** Half-size miniPCIe to Full-size miniPCIe bracket set
- **1750007668-01** Waterproof Wireless Antenna R/P SMA.M2dB L=86.7
- **1750003418** Wireless Antenna AN2400-5901RS R/P SMA.M9dB
- **SPC-1840WP-MCKE** M12 cable accessory kit for SPC series
- **SPC-1840WP-MOKE** M12 Connector accessory kit for SPC series

## Automation Software

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- **968WEXP2USB** PanelExpress V2.0 S/W USB dongle

## Application Software

	<p>Version: V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version: V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version: V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version: V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-6211W

**21.5" Full HD Semi-industrial Monitor with PCT Touch, Direct-HDMI Ports and Support Long-distance / Daisy chain applications**

**NEW**



## Features

- 21.5" Full HD TFT LED LCD backlight LCD
- True-flat design with IP65 compliance
- 16:9 wide screen display, view area increases by 40%
- Supports 5 points multi-touch via USB interface
- Slim type design with thinnest side bars on touch
- Projected Capacitive Touchscreen with reliable 7H hardness glass surface
- iKey for OSD control and remote/local source switch
- Seamless connection with iLink boxes via board to board connector
- Support VESA mounting
- Lockable I/O connectors
- long-distance / daisy chain applications support with optional iLink boxes

## Introduction

With its breakthrough design, the FPM-6211W not only provides a wide screen display size with industrial grade design concept but also provides long-distance and daisy-chain application support. With the iLink solution, the distance between the system and the monitor can be extended to 100 meters long and it can show clone images on up to four monitors, for a total of 400 meters. With the thinnest design in the industry it provides a compact and modern look & feel, ideally suited for VESA mounting. True flat design provides better dust and water resistance, easy for daily maintenances and enhances reliability

## Specifications

### General

- **OSD Controls** Touch OSD control in front bezel
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 519.6 x 314.3 x 26 mm (20.46" x 12.37" x 1.02")
- **Enclosure** Die-cast Aluminum alloy
- **Mounting** Wall, desktop, VESA (MIS,100,C)
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input
- **Power Consumption** 20 W + 20%
- **Video Port** HDMI
- **Weight (Net)** 5 kg

### LCD Display

- **Display Type** FULL HD TFT LED LCD
- **Display Size** 21.5"
- **Max. Resolution** 1920 x 1080
- **Max. Color** 16.7 M
- **Viewing Angle (H/V°)** 170/160
- **Luminance (cd/m<sup>2</sup>)** 250
- **Backlight Life (hrs)** 30,000
- **Contrast Ratio** 1000:1

### Touchscreen

- **Type** Projected capacitive touch
- **Interface** USB
- **Light Transmission** 90% ±2%
- **OS Support** Windows XP, Vista, 7, 8, XPe and Linux
- **Multi Touch** 5 points, USB interface in Win 7/8.
- **Hardness** 7H

### Environment

- **Operation Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)


## Rear View



24V<sub>DC</sub> Power Input with Phoenix Connector      USB Port for T/S  
HDMI Port

## Dimensions

Unit: mm [inch]

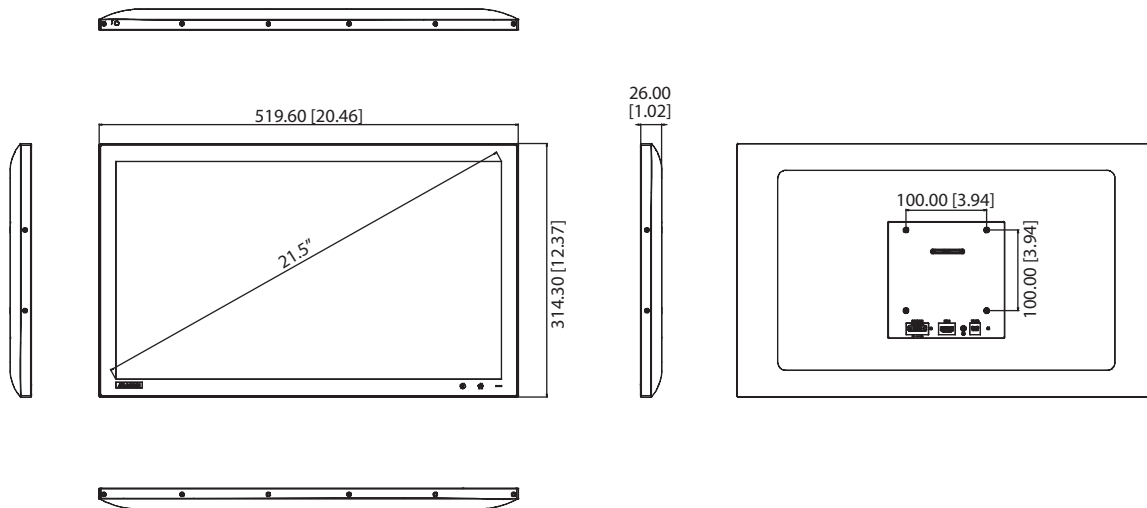

## Ordering Information

- **FPM-6211W-P2AE** 21.5" FULL HD Ind Monitor w/PCT TS (HDMI)


## Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **PWR-247-BE** 100-240V 63W 24V 2.62A Power Supply
- 

## iLink Boxes Ordering Information

- **PCM-28R1CT-AE** iLink Transmitter box
- **PCM-28R1CR-AE** iLink Receiver box
- **PCM-28R2CX-AE** iLink Transmitter/Receiver box

## iLink Topology

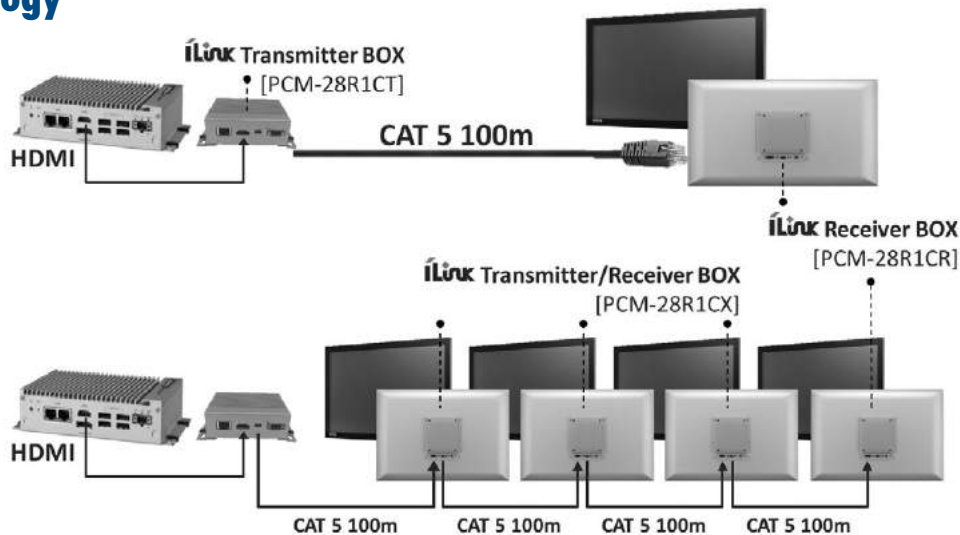

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC-8100TR

## 10.4" EN50155 Railway Panel Computer

NEW



susiAccess   

### Features

- 10.4" XGA 1024x768 with 350 nits LED LCD display
- Fanless with Dual core 1.6 GHz processor
- 5H Hardness resistive touch
- Alternative keypad control in front bezel
- Mother board / Daughter board with coating for weather proof
- All around IP65 with waterproof M12 connector
- Optical bonding for weather proofing
- Ruggedized enclosure with Die-cast Aluminium alloy
- Wide operating temperature: -30 ~ 70°C
- EN50155 & EN45545 Compliance for railway application

### Introduction

Advantech's HMI TPC-8100TR for transportation is used to keep the train driver informed about status of the train's functions. Its design allows it to be deployed in environments with an extended temperature range ( -30 to +70°C) and it also complies with the EMC, shock and vibration test requirements of European standard EN50155 and EN45545 for railway applications.

The TPC-8100TR 10.4" TFT display has a ruggedized touch panel and optical bonding for weather-proofing. All round IP65 and M12 connectors are the perfect choice for Human Machine Interfaces (HMI) in railway environments. The internal boards all have Conformal Coating protection for anti-moisture protection. The TPC-8100TR includes a comprehensive feature set with two Ethernet ports, serial interfaces, USB ports, built-in CFast devices.

Railway power module design support 10 ms interruption (EN50155, S2) , EMI EN55022 CLASS A filter, Over/Short current protection for its railway application.

### Specifications

#### General

- **Certification** CE, FCC, CCC, EN50155 Compliance
- **Cooling System** Fanless design
- **Dimensions (W x H x D)** 345x227x85mm (13.58" x 8.94" x 3.35")
- **Enclosure** Front bezel: Die-cast Aluminium alloy  
Back housing: Die-cast Aluminium alloy
- **Mounting** Panel Mount / VESA Mount
- **OS Support** WES 7 & 8/ WES 2009 / Windows CE 7.0 / Linux
- **Power Consumption** 35 W Typical
- **Power Input** 110 V<sub>DC</sub>, 96 V<sub>DC</sub>, 72 V<sub>DC</sub>,  
48 V<sub>DC</sub> (option), 37.5 V<sub>DC</sub> (option),  
24 V<sub>DC</sub> (option)
- **Weight (Net)** 5 kg (11 lbs)

#### System Hardware


- **CPU** Intel Cedar Trail Dual core processor 1.6G
- **Chipset** Intel Atom N2600
- **Memory** 4GB SO-DIMM DDR3 SDRAM
- **Storage** Built in 64G CFast card
- **I/O** 2 x RS-232 (connection: M12 A-code, 8-pin male)  
2 x 422/485 (with isolation, connection: M12 A-code, 8-pin male)  
2 x USB2.0 (connection: M12 A-code, 8-pin female)  
2 x 100/1000 Base (connection: M12 A-code, 8-pin female)  
1x Audio (with Internal Buzzer, Line out, connection: M12 A-code, 8-pin male)  
1x Power connector (connection: M12 A-code, 5-pin male)  
1x SMA connector for Wi-Fi  
1x SMA connector for GPS

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 10.4"
- **Max. Resolution** 1024x768
- **Max. Colors** 16.2 M
- **Luminance cd/m<sup>2</sup>** 350
- **Viewing Angle (H/V°)** 176/176
- **Backlight Life** 30,000 hrs
- **Contrast Ratio** 1200:1
- **Environment**
  - **Humidity** 10 ~ 95% RH @ 40°C, non-condensing
  - **Ingress Protection** All around IP65
  - **Operating Temperature** -30 ~ 70°C (-22 ~ 158°F)
  - **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
  - **Vibration Protection** IEC 61373 Railway- Shock and Vibration

## Dimensions

Unit: mm [inch]

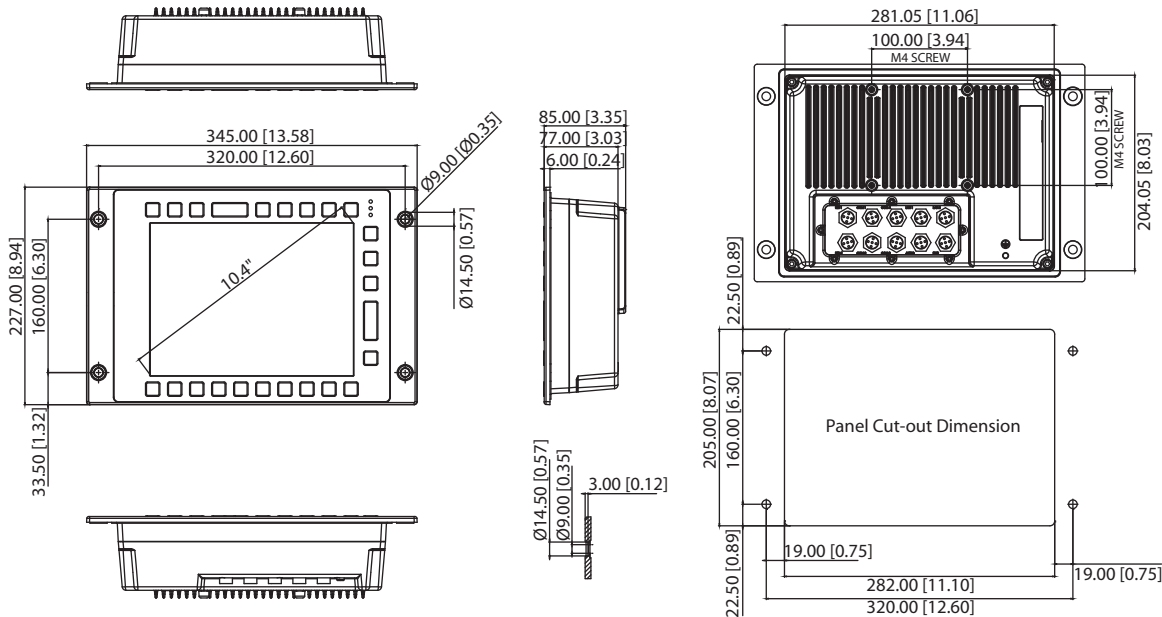


## Ordering Information

- TPC-8100TR-N3AE 10.5" SVGA Touch Panel PC


## Accessories

- PWR-247-BE 63W DC 24V/2.62A Output Power Supply
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M
- EWM-C109F6G1E 6-band HSPA Cellular Module, SIM holder+GPS
- 1750006432 GPS antenna 5000mm AG1575-0250SM-UL
- 1750005865 GSM Antenna L=10.9cm 500hm AN8921F-5701SM
- TPC-8100TR-MOKE (9 x M12 Connectors for TPC-8100TR)
- TPC-8100TR-MCKE (9 x M12 Cables supporting standard I/O connector for TPC-8100TR)

## Front View

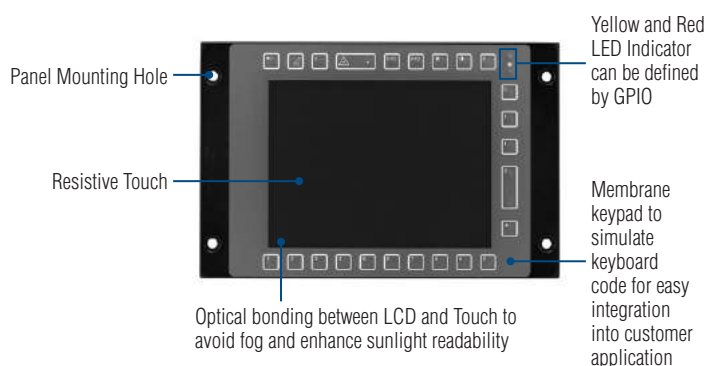

## Rear View

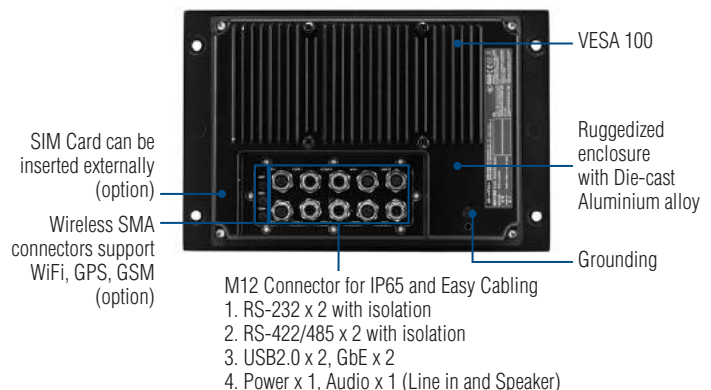

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IPPC-5211WS

21.5" Full HD TFT LED LCD Industrial Multi-Touch Panel PC Stainless Steel chassis with IP69K Rated

NEW



susiAccess iKey iDoor CCC CE FCC cUL US  
LEITZ  
ELECTRONICS  
ETC.

## Features

- Stainless steel chassis with IP69K waterproof rating
- The detachable product portfolio with accessories for various applications.
- Intel® Celeron Processor J1900
- Operating temperature : 0 ~ 50°C
- 21.5" Full HD TFT LED LCD display
- 16:9 widescreen with PCT multi-touch
- Supports iDoor or antenna
- Built-in function and home key button used for intuitive UI
- Fully flat glass front panel with 7H hardness
- Supports 4 GB DDR3L SO-DIMM
- Fanless cooling system
- Front LED indicator to show operating status

## Introduction

The IPPC-5211WS 21.5" fully sealed stainless steel multi-touch panel PC is IP69K rated and has a detachable product portfolio designed for OEMs and process manufacturing. It supports special functions via iDoor, iKey and an antenna, and is designed for HMIs which require better performance and functionality of machine-level interfaces used in Machineto-Machine (M2M), Internet of Things (IoT) etc which require extra protection for hygienic and harsh environments where the intrusion of dust, condensation and water jets is possible. The IPPC-5211WS can also perform a touch shut-down to avoid accidental operation.

## Specifications

### General

- **Certification** IP69k, CE, FCC Class A, UL, CCC, BSMI
- **Dimensions (W x H x D)** 555 x 346.5 x 81 (21.85" x 13.64" x 3.19")
- **Enclosure** Front : Stainless steel  
Back : Aluminum / stainless steel(optional)
- **Mounting** VESA and Flange connection adapter for arm and foot system
- **Power Consumption** 40 W
- **Power Input** 24 V<sub>DC</sub>
- **Weight** 18 Kg
- **OS Support** Windows 7 (64bit), Windows 8 (64bit), Windows CE 7.0, Linux
- **BIOS** AMI UEFI

### System Hardware

- **CPU** Intel® Celeron Processor J1900
- **Memory** 4 GB DDR3L SO-DIMM, up to 8GB
- **LAN** RTL8111E-VL-CG
- **Storage** Cfast (SATA Gen2) with ejector (optional)  
HDD (SATA Gen2) (optional)

### LCD Display

- **Resolution** Full HD 1920 x 1080
- **Contrast** 5,000
- **Luminance (cd/m<sup>2</sup>)** 300
- **Backlight** 12V
- **Max Colors** 16.7 M
- **Lifetime** 50,000 hours

### Touchscreen

- **Type** Projected capacitive touch
- **Interface** USB

### Environment


- **Humidity** 10 ~ 95% RH @ 40°C, non-condensing  
**Note:** Tested for 48hrs
- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)

### I/O Interface

- **LAN** 2 x 10/100/1000 Mbps RJ45
- **Serial Ports** 1 x RS-232  
1 x RS-232/RS-485/RS-422
- **USB** 1 x USB 2.0  
1 x USB 3.0
- **iDoor** 1 x iDoor (optional)
- **Antenna** 1x Waterproof Wireless Antenna (optional)

## Dimensions

Unit: mm [inch]

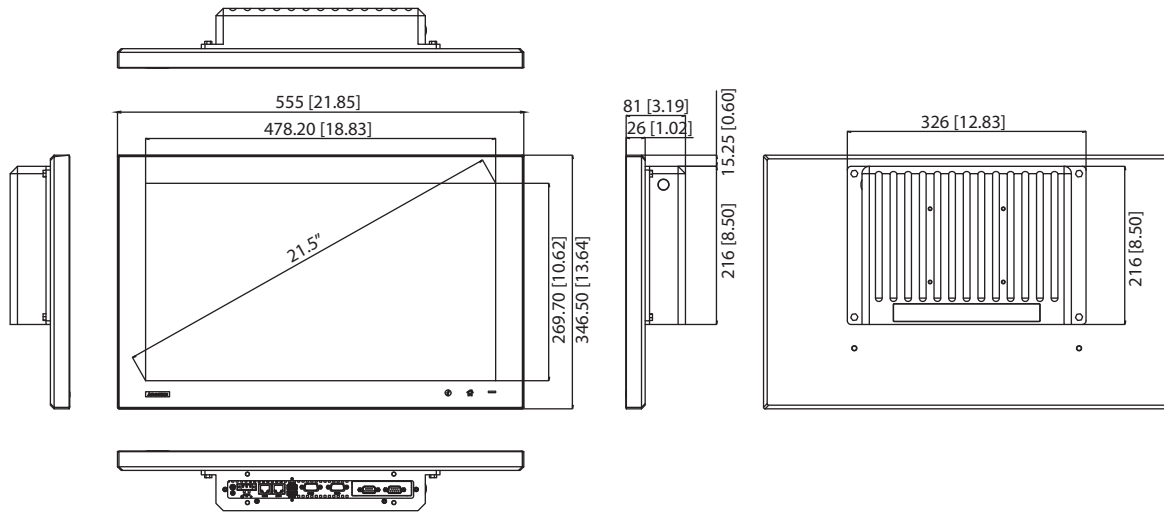

## Ordering Information

- IPPC-5211WS-J3AE 21.5" Full HD 1080 TFT LCD with PCT touch, Intel® Celeron Processor & IP69K rating


## iDoor Modules

- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-24D2R2-AE 2-Port Isolated RS-232 mPCIe, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2PN-SAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26D1DB-SAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave


## Accessories

- IPPC-5211WS-EMKE A detachable unit for connecting to foot and arm flange systems
- 1750007668-01 Waterproof Wireless Antenna R/P SMA.M2dB L=86.7

### IPPC-5211WS-EMKE

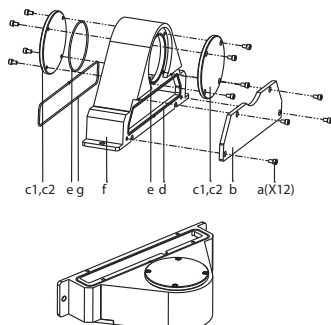

## Rear View

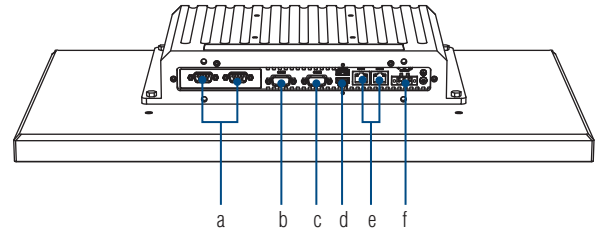


- a. iDoor
- b. COM1 (RS-232)
- c. COM2 (RS232/RS485/RS422)
- d. USB (USB3.0 x 1 / USB2.0 x 1)
- e. 2 x LAN (10/100/1000 Mbps)
- f. Power Receptor (24 V<sub>DC</sub>)

## Product type with IPPC-5211WS-EMKE

### Arm system

### Foot system

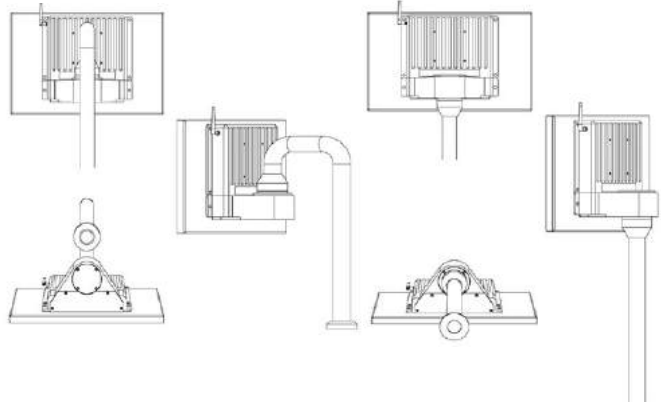

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-8151H

## 15" XGA Industrial Monitor for Hazardous Location, with 316L Stainless Steel Front Panel

NEW



### Features

- 15" XGA TFT LCD with LED backlight
- Stainless steel 316L front panel
- IP65 compliant front panel
- -20 ~ 60°C (-4 ~ 140°F) wide operating temperature range
- Enhanced 5-wire resistive touch panel
- Direct VGA & DVI-D video input interface
- Combo RS-232 & USB interface for touchscreen function
- Supports 24 VDC input and 100~240 VAC input (optional AC adapter)
- OSD control pad with lockable function on front panel
- Certified with UL CID2 for hazardous environments

### Introduction

The FPM-8151H is a particularly rugged and reliable 15" XGA wide temperature industrial monitor for a variety of industry applications. Equipped with a wide operating temperature range of -20 ~ 60°C (-4 ~ 140°F), it can satisfy demands in a wide range of harsh industrial applications. This model also features enhanced 5-wire resistive touch and system isolation to enhance the reliability. Moreover, FPM-8151H is designed to be safely operated in these locations and is Certified with UL Class I Division 2 for hazardous environments.

### Specifications

#### General

- **Button Controls** OSD control pad on front panel with lockable function  
2 user-defined contrast/brightness settings
- **Certification** CE, FCC Class A, UL C1D2, CB, BSMI, CCC
- **Dimensions (W x H x D)** 422 x 338 x 68 mm (16.61" x 13.31" x 2.68")
- **Enclosure** Front panel: 316L Stainless steel  
Rear cover: Stainless steel  
Ground Isolation Protection
- **Mounting** Panel, wall, desktop, VESA arm
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with  
100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output  
(Optional)
- **Power Consumption** 12W
- **Video Port** VGA & DVI-D Port
- **Weight (Net)** 8.5 kg (18.74 lbs)

#### LCD Display

- **Display Type** XGA TFT LCD
- **Backlight Type** LED
- **Display Size** 15"
- **Max. Resolution** 1024 x 768
- **Max. Color** 16.2M (RGB 8-bits)
- **Viewing Angle (H/V°)** 160/140
- **Luminance (cd/m<sup>2</sup>)** 350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700:1

#### Touchscreen

- **Sensor** AMT
- **Driver** Penmount 6000
- **Type** 5-wire resistive with enhanced ITO film
- **Interface** USB & RS-232 (Combo)
- **Lifespan** 36 million with a silicone rubber R8 finger,  
writing rate is by 250g at 2 times/s
- **Light Transmission** > 80%
- **OS Support** Windows 2000, XP, Vista, 7, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity


#### Environment

- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Shock** 11ms, 10G (Non Operating, Half Sine Wave)
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)



## Dimensions

Unit: mm [inch]

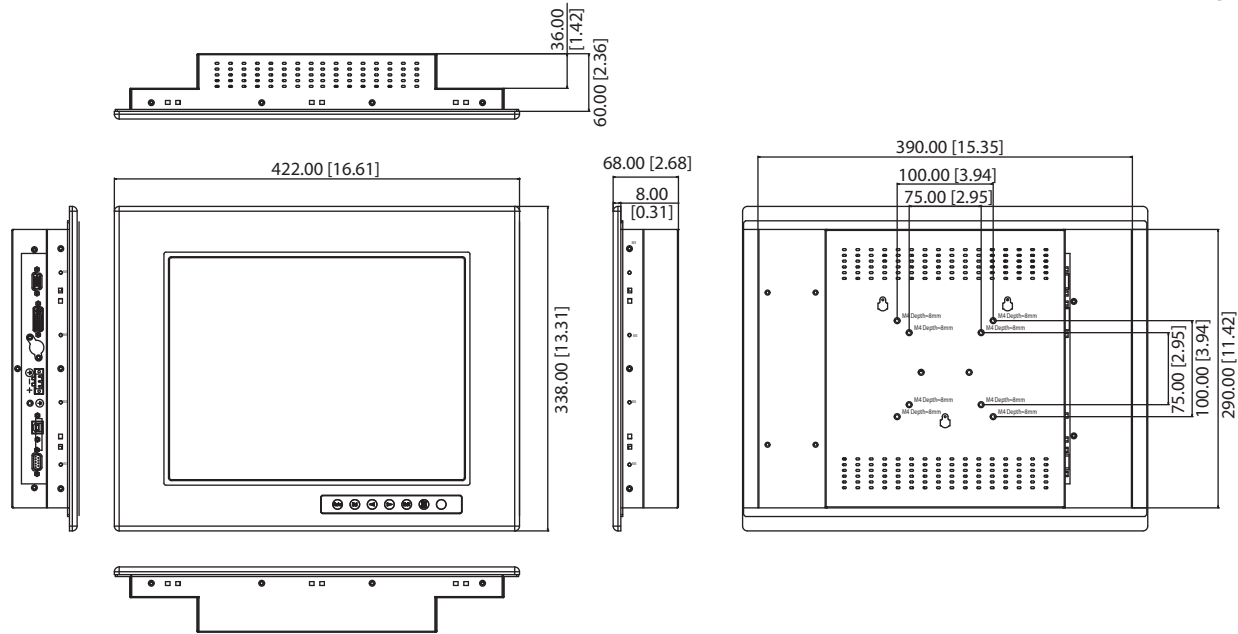

Panel Cut-out Dimensions: 396 x 296 mm (15.59" x 11.65")


## Ordering Information

- **FPM-8151H-R3AE** 15" XGA Ind. Monitor VGA, DVI, Wide Temp

## Accessories

- **FPM-2150G-SMKE** Mounting kit for desktop stand & wall
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702031836** Power Cable China/Australia Plug 1.8 M
- **1757003822** ADAPTER 100-240V57W12V4.75A W/O PFC SPU63-105 L5

## I/O View

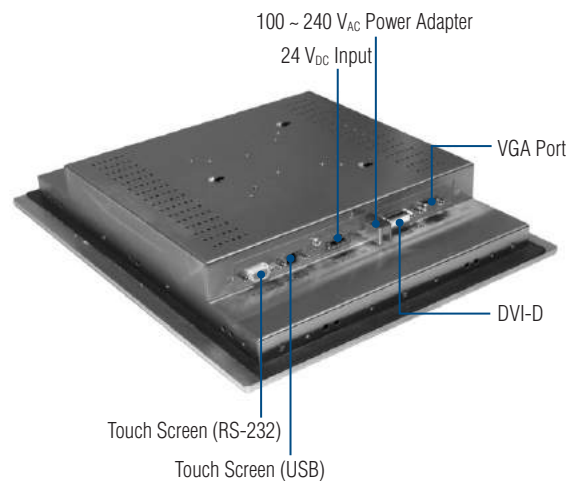

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 **Automation Panels**
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IPPC-3152H

## 15" XGA TFT LED LCD Industrial Touch Panel PC for Hazardous Area with C1D2 and ATEX certified

**NEW**



### Introduction

The IPPC-3152 series offers a domain forecasting automation solution with ATEX and C1D2 certificates for the oil and gas industries, and for machine-level operation in the process industry and hazardous areas: Zone 1, 2, 21, 22.

From the easy back-up maintenance- complete connectivity - Protection Technology with optional UPS (Optional UPS is compatible with the IPPC-3152 series which enhances the quality of input power and secures the data safely). In all applications, it can be utilized for measuring, real-time vision inspection, open- and closed-loop control, machine control, collecting of process and machine data and industrial image processing.

### Specifications

#### General

- Certification** Class I Division 2 Group A,B,C,D T4A  
CE 0539 Ex II 2 D Ex nA(ic) IIC T4 Gc  
CF, FCC, UL, CCC, BSMI
- Dimensions (W x D x H)** 390.7 x 289.8 x 93 mm (15.38"x 11.41"x 3.66")
- Form Factor** Regular Size
- Enclosure** Aluminum Housing
- Mounting** Panel mount, VESA mount
- Weight (Net)** 5.4 kg (11.9 lbs)
- Power Requirements** 18 ~ 36 V<sub>DC</sub>
- Power Consumption** 52 W (Typical)
- OS Support** WIN7/8, WES7, WES-2009, Linux

#### System Hardware

- BIOS** AMI UEFI 128Mbit Flash BIOS
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Processor** Intel® Core™ i7-4650U 1.7GHz Haswell, 4MB L2  
Intel® Celeron 2980U 1.6GHz, 2MB L2  
Integrated Intel 8 Series Chipset
- System Chip** On-board 4GB/8GB DDR3L 1333 MHz
- Memory** Intel® HD graphics 5000
- Graphics Engine** IntelR i210-ITGbE
- Ethernet** LEDs for Power, Battery, Tx/Rx, HDD and reserved x 2
- LED Indicators** 1 x CFast
- Storage** 2 x Built-in 2.5" SATA HDD brackets with support for RAID 0/1
- Expansion** 2 x Full-size mPCIe

#### I/O Interfaces

- Serial Ports** 1 x RS-232/422/485, DB9, auto flow control, 50~115.2kbps
- LAN Ports** 2 x RJ45, 10/100/1000 Mbps
- USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)
- Displays** 1 x HDMI, supports 1920 x 1200 @ 60Hz 24bpp  
1 x DP, supports 3200 x 2000 @ 60Hz 24bpp
- Power Connector** 1 x 3 Pin, Terminal Block

### Features


- 15" TFT LCD, 1024 x 768, with Resistive touch
- 4th Generation Intel® Core™ i7/Celeron Processors with 8GB/4GB DDR3L Memory
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232/RS-422/485, 1 x HDMI, 1 x DP, 2 x PCI/PCIe, 2 x mPCIe (2 x full)
- Hot-Swappable HDD/SSD support for RAID 0/1
- C1D2 & ATEX certified
- Protection Technology of optional UPS is compatible with UNO-3300 series which enhances the quality of input power and secure the data safety
- Able to quickly fit with Advantech FPM series product using accessible docking
- Supports Fieldbus Protocol by iDoor Technology 3G/GPS/GPRS/Wi-Fi
- Communication by iDoor Technology
- Supports MRAM by iDoor Technology

#### LCD Display

- Display Type** TFT LCD, 1024 x 768
- Display Size** 15"
- Luminance cd/m<sup>2</sup>** 350
- Backlight MTBF(hrs)** 50,000


#### Environment

- Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)

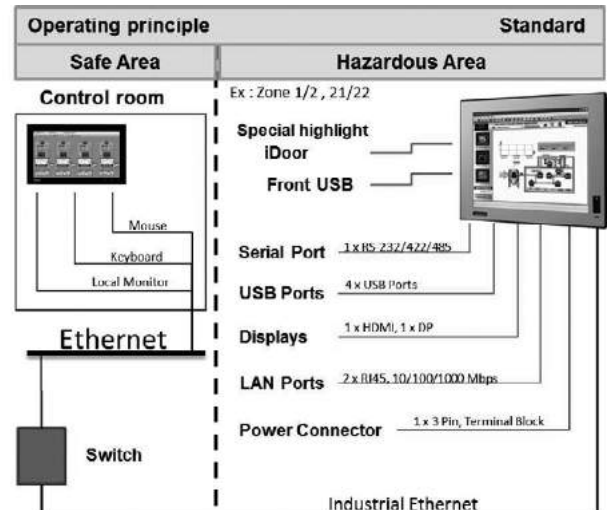

Dimensions

Unit: mm [inch]

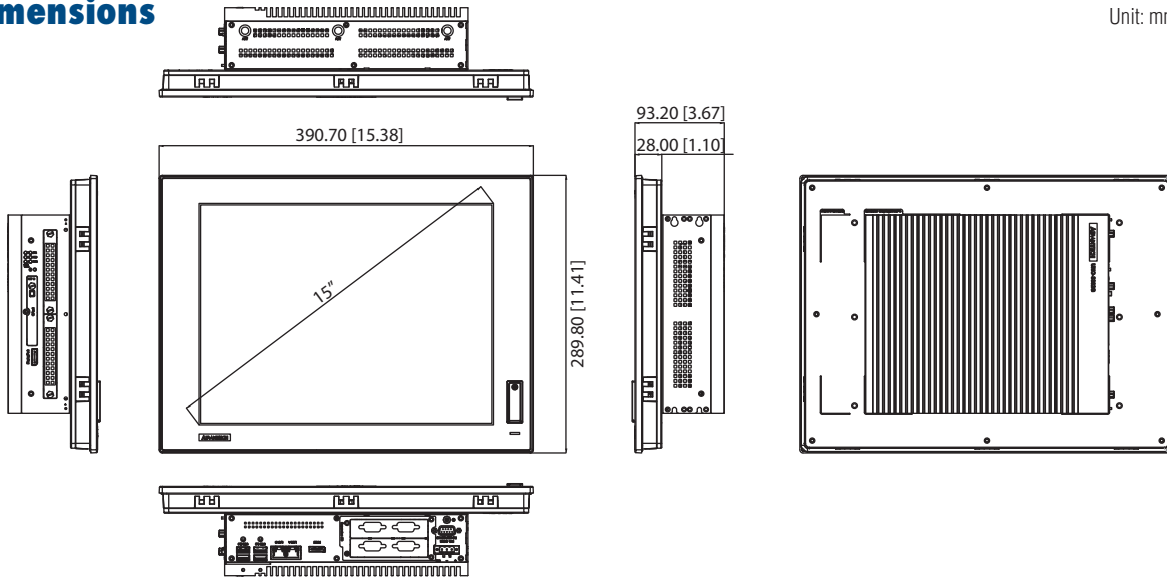

Ordering Information

- IPPC-3152H-474AE Intel® Core™ i7-4650U 1.7GHz, 8GB, 2 x LANs, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP
- IPPC-3152H-4C3AE Intel® Celeron® 2980U 1.6GHz, 4GB, 2 x LANs, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP

iDoor Modules

- PCM-23C1CF-AE 1 CFast Slot with Cover Protection
- PCM-24R2PE-AE 2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45
- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2PN-SAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26D1DB-SAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave


Accessories

- 757002161 150W AC to DC power adapter (Commercial Grade)
- 1700001524 Power cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C Power cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A Power cable 3-pin UK type 1.8 M (Commercial Grade)
- IPPC-3152WH-VMKE Accessory for VESA mounting

Embedded OS & Automation Software

- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license

I/O View

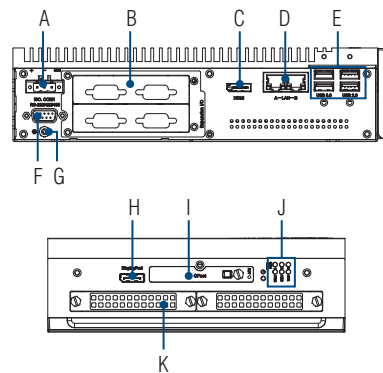

- A. Power Connector
- B. iDoor Expansion Slots
- C. HDMI
- D. RJ45 LAN
- E. USB 2.0/3.0 Ports
- F. RS-232/RS-422/485
- G. Chassis Grounding
- H. Display Port
- I. CFast
- J. HDD & PWR LED lights
- K. Hot-Swappable HDD

Application Software


	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IPPC-3152WH

## 15.6" HD TFT LED LCD Industrial Multi-Touch Panel PC for Hazardous Area with C1D2 and ATEX certified

**NEW**

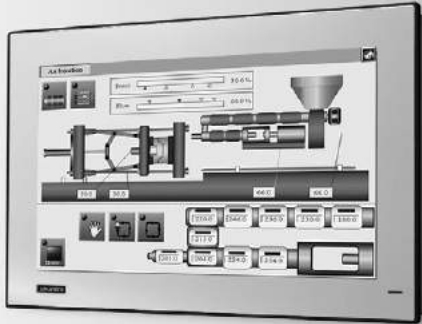

### Introduction

The IPPC-3152 series offers a domain forecasting automation solution with ATEX and C1D2 certificates for the oil and gas industries, and for machine-level operation in the process industry and hazardous areas: Zone 1, 2, 21, 22.

From the easy back-up maintenance- complete connectivity - Protection Technology with optional UPS (Optional UPS is compatible with the IPPC-3152 series which enhances the quality of input power and secures the data safety). In all applications, it can be utilized for measuring, real-time vision inspection, open- and closed-loop control, machine control, collecting of process and machine data and industrial image processing.

### Specifications

#### General

- Certification** Class I Division 2 Group A,B,C,D T4A  
CE 0539 Ex II 2 D Ex nA(ic) IIC T4 Gc  
CF, FCC, UL, CCC, BSMI
- Dimensions ( W x D x H )** 419.7 x 269 x 93 mm (16.5" x 10.59" x 3.66")
- Form Factor** Regular Size
- Enclosure** Aluminum Housing
- Mounting** Panel mount, VESA mount
- Weight (Net)** 5.8 kg (12.79 lbs)
- Power Requirements** 18 ~ 36 V<sub>DC</sub>
- Power Consumption** 52.8 W (Typical)
- OS Support** WIN7/8, WES7, WES-2009, Linux

#### System Hardware

- BIOS** AMI UEFI 128Mbit Flash BIOS
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Processor** Intel® Core™ i7-4650U 1.7GHz Haswell, 4MB L2  
Intel® Celeron 2980U 1.6GHz, 2MB L2  
Integrated Intel 8 Series Chipset
- System Chip** On-board 4GB/8GB DDR3L 1333 MHz
- Memory** Intel® HD graphics 5000
- Graphics Engine** IntelR i210-ITGbE
- Ethernet** LEDs for Power, Battery, Tx/Rx, HDD and reserved x 2
- LED Indicators** 1 x CFast
- Storage** 2 x Built-in 2.5" SATA HDD brackets with support for RAID 0/1
- Expansion** 2 x Full-size mPCIe

#### I/O Interfaces

- Serial Ports** 1 x RS-232/422/485, DB9, auto flow control, 50~115.2kbps
- LAN Ports** 2 x RJ45, 10/100/1000 Mbps
- USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)
- Displays** 1 x HDMI, supports 1920 x 1200 @ 60Hz 24bpp  
1 x DP, supports 3200 x 2000 @ 60Hz 24bpp
- Power Connector** 1 x 3 Pin, Terminal Block

### Features


- 15.6" HD TFT LCD, 1366 x 768, with PCT touch
- 4th Generation Intel® Core™ i7/Celeron Processors with 8GB/4GB DDR3L Memory
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232/RS-422/485, 1 x HDMI,
- 1 x DP, 2 x PCI/PCIe, 2 x mPCIe (2 x full)
- Hot-Swappable HDD/SSD support for RAID 0/1
- C1D2 & ATEX certified
- Protection Technology of optional UPS is compatible with UNO-3300 series which enhances the quality of input power and secure the data safety
- Able to quickly fit with Advantech FPM series product using accessible docking
- Supports Fieldbus Protocol by iDoor Technology 3G/GPS/GPRS/Wi-Fi
- Communication by iDoor Technology
- Supports MRAM by iDoor Technology

#### LCD Display

- Display Type** HD TFT LCD, 1366 x 768
- Display Size** 15.6"
- Luminance cd/m<sup>2</sup>** 300
- Backlight MTBF(hrs)** 50,000


#### Environment

- Operating Temperature** -20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)

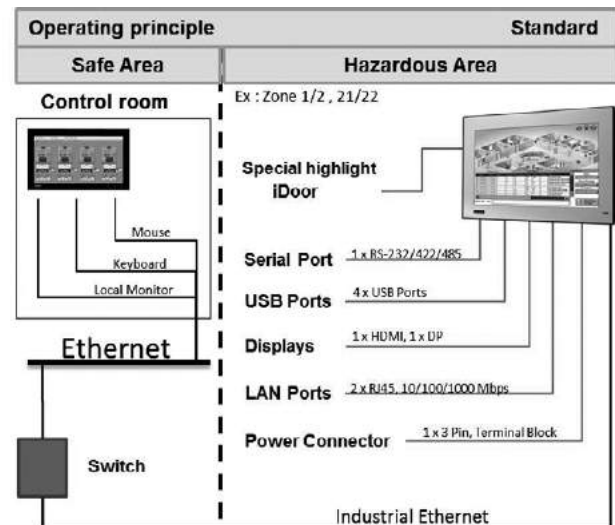

## Dimensions

Unit: mm [inch]

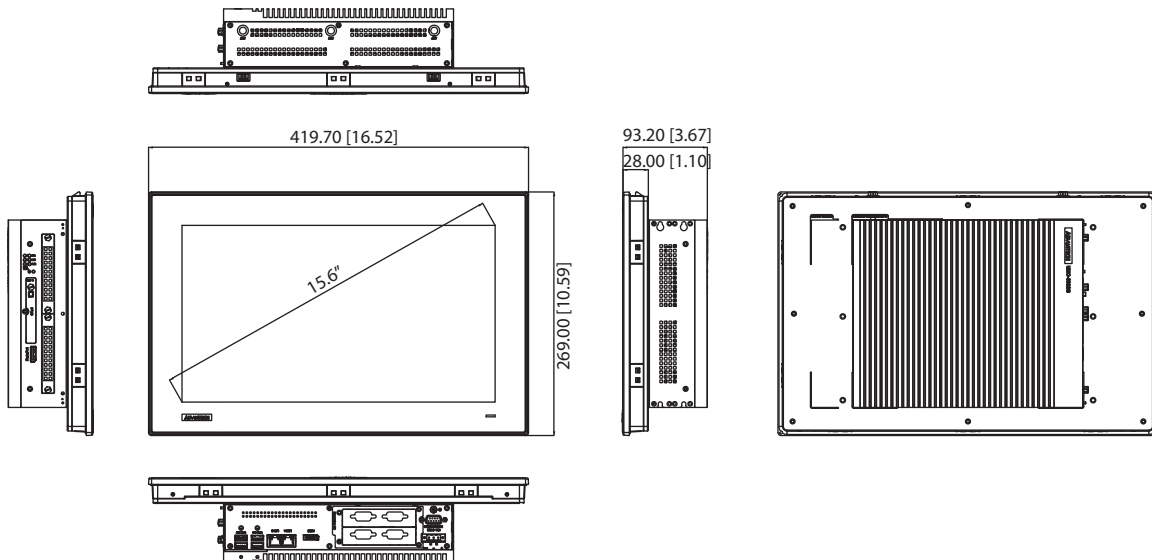

## Ordering Information

- **IPPC-3152WH-474AE** Intel® Core™ i7-4650U 1.7GHz, 8GB, 2 x LANs, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP
- **IPPC-3152WH-4C3AE** Intel® Celeron® 2980U 1.6GHz, 4GB, 2 x LANs, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP

## iDoor Modules

- **PCM-23C1CF-AE** 1 CFast Slot with Cover Protection
- **PCM-24R2PE-AE** 2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45
- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- **PCM-26R2PN-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- **PCM-26R2PN-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- **PCM-26D1DB-MAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- **PCM-26D1DB-SAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave


## Accessories

- **757002161** 150W AC to DC power adapter (Commercial Grade)
- **1700001524** Power cable 3-pin US type 1.8 M (Commercial Grade)
- **170203183C** Power cable 3-pin EU type 1.8 M (Commercial Grade)
- **170203180A** Power cable 3-pin UK type 1.8 M (Commercial Grade)
- **IPPC-3152WH-VMKE** Accessory for VESA mounting

## Embedded OS & Automation Software

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license

## I/O View

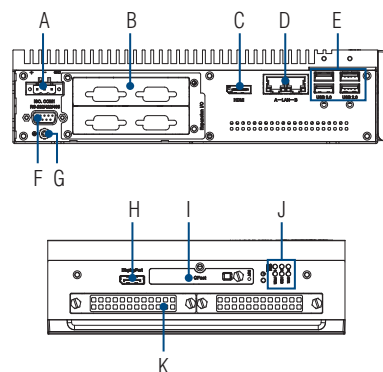

- A. Power Connector
- B. iDoor Expansion Slots
- C. HDMI
- D. RJ45 LAN
- E. USB 2.0/3.0 Ports
- F. RS-232/RS-422/485
- G. Chassis Grounding
- H. Display Port
- I. CFast
- J. HDD & PWR LED lights
- K. Hot-Swappable HDD

## Application Software


<b>SUSIACCESS</b>	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
<b>WebAccess</b>	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
<b>PANEL EXPRESS</b> <small>Designed by. Connected</small>	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
<b>WebOP Designer</b>	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IPPC-6192A IPPC-6172A IPPC-6152A

## 15"XGA/17" SXGA/19" SXGA TFT LED LCD Intel® Core™ i7/i5/i3 Industrial Touch Panel PC with Dual PCIe Slots

NEW

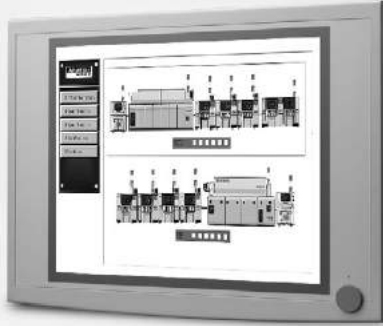

### Features

- 15" XGA/17" SXGA/19" SXGA TFT LCD with touchscreen
- Supports Intel® Core™ i7/i5/i3 processor with Q87 chipset (up to 3.1GHz)
- System supports four DIMM sockets support up to 32 GB DDR3 1333/1600 MHz SDRAM
- Offers multiple expansion slots including two PCI (standard), one PCI + one PCIe x4 (optional), two PCIe x1 (optional)
- SATA 2.0 or SATA 3.0 HDDs and RAID 0,1 compatibility
- Front USB access and system reset function
- Front panel is IP65 compliant
- Supports Intel AMT 9.0 and Intel vPro competent
- Supports Microsoft® Windows® 8 and Windows 7
- Supports SUSIAccess and Embedded Software APIs
- Optional Functionality –CFast ,PCI/ PCIe expansion,DVD-ROM

### Introduction

The IPPC-6000A Series is an Industrial Panel PC with front USB access, supports the powerful 4th Gen Intel Core™ i7/i5/i3, high speed DDR3 memory, up to 32 GB, two expansion slots. The processor and chipset combination form the foundation of vPro, Intel's next generation digital office platform, offering remote out-of-band manageability, improved security, and energy efficient performance. Two SATA hard driver interface with RAID 0,1 support provides data security. Multi function optional –CFast ,PCI/ PCIe expansion,DVD-ROM which offers great flexibility for application specific requirements. Rugged Metal & IP65 Flat-Sealed Front provide excellent durability in harsh environment. With optional mounting accessories, from panels to racks,it can be mounted anywhere.

### Specifications

#### General

- **BIOS** AMI 64 MB Flash BIOS
- **Certification** UL, CE, FCC, CCC, BSMI
- **Enclosure** Die-cast flat-sealed front with SGCC Housing
- **Dimensions (W x H x D)**
  - IPPC-6152A:449.92 x 315.63 x 126.4 mm (17.71" x 12.43" x 4.98")
  - IPPC-6172A: 481.93 x 355.87 x 132.5 mm (18.97" x 14.01" x 5.22")
  - IPPC-6192A: 481.93 x 384.6 x 135.5 mm (18.97" x 15.14" x 5.33")
- **Mounting** Panel, Rack (option)
- **OS Support** Microsoft Windows 7, Windows 8
- **Power Input** 100 ~ 240 V<sub>AC</sub> @ 60 ~ 50 Hz, 7 ~ 3.5 A
- **Power Supply** 350 W

#### System Hardware

- **CPU** Supports Intel® Core™ i7/i5/i3 processor (up to 3.1GHz)
- **Chipset** Intel Q87
- **Memory** System supports four DIMM sockets support up to 32 GB DDR3 1333/1600 MHz SDRAM
- **LAN** 10/100/1000 Base-T Ethernet x 2
- **Expansion** Two half-length PCI (Standard)  
Two PCIe x1 (Optional)  
One PCI + One PCIe x4 (Optional)
- **Storage** Supports 2 x 2.5" SATA 2.0 or SATA 3.0 HDDs and RAID 0,1 compatibility
- **Optical Driver** 1 x Slim Type DVD-RW (optional)  
CFast (optional)
- **I/Os** 4 (3 x RS-232, 1 x RS-232/422/485 to support auto flow control)  
1 x GPIO  
2 x Reservation ports  
5 x USB Host( USB 2.0 front, 4 USB 3.0) 2 x GbE LAN  
VGA x1; DVI x1; DP x1  
2 (1 x keyboard and 1 x mouse)  
2 (Mic-in, Line-out)

#### LCD Display

- **Backlight Life** 50,000 hrs
- **Contrast Ratio**
  - IPPC-6152A: 700:1
  - IPPC-6172A:1000:1
  - IPPC-6192A:1000:1
- **Display Size** 15", 17", 19"
- **Display Type**
  - IPPC-6152A: XGA TFT LCD LED Backlight
  - IPPC-6172A: SXGA TFT LCD LED Backlight
  - IPPC-6192A: SXGA TFT LCD LED Backlight
- **Luminance**
  - IPPC-6152A: 400 cd/m2
  - IPPC-6172A: 350 cd/m2
  - IPPC-6192A: 350 cd/m2
- **Max. Colors**
  - IPPC-6152A:16.2M/262K
  - IPPC-6172A: 16.7M (RGB 6-bit + Hi-FRC data)
  - IPPC-6192A:16.7M (RGB 6-bit + Hi-FRC data)
- **Max. Resolution**
  - IPPC-6152A: 1024 x 768
  - IPPC-6172A: 1280 x 1024
  - IPPC-6192A: 1280 x 1024
- **Viewing Angle (H/V°)**
  - IPPC-6152A:160/140
  - IPPC-6172A: 170/160
  - IPPC-6192A: 170/160

#### Touchscreen


- **Lifespan** 36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- **Light Transmission** > 80%
- **Type** Analog resistive 5-wire

#### Environment

- **Humidity** 5 ~ 85% @ 40°C (non-condensing)
- **Ingress Protection** Front panel: IP65
- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Vibration Protection** 5 ~ 500 Hz, 1 Grms random vibration

## Dimensions

Unit: mm [inch]

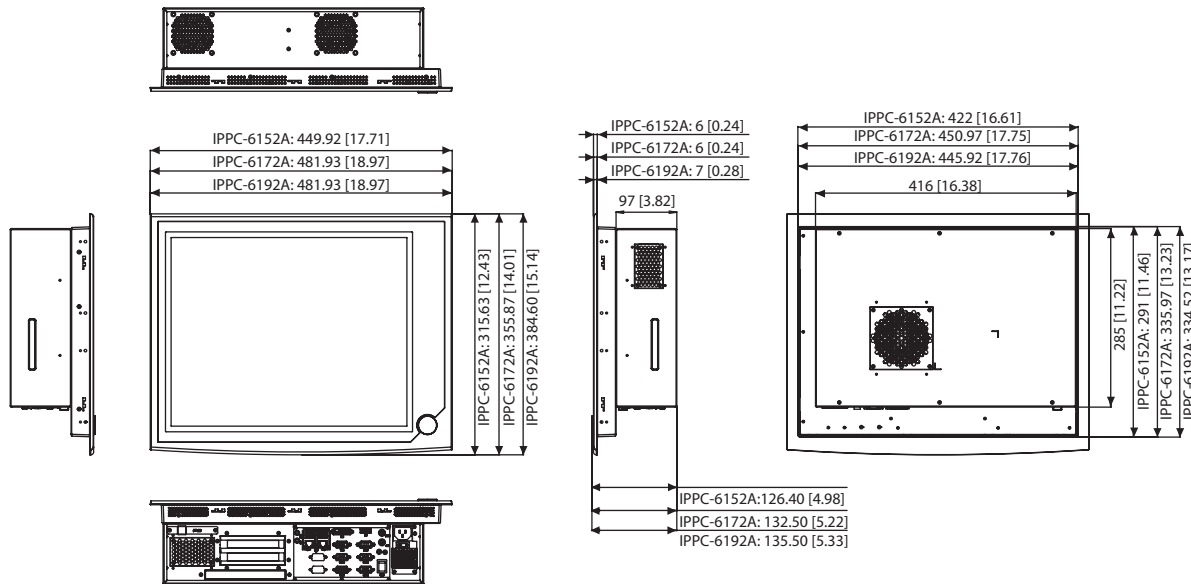

### Panel Cut-out Dimensions:

**IPPC-6152A: 424x293mm (16.69"x11.54")**

**IPPC-6172A: 454x338mm (17.87"x13.31")**

**IPPC-6192A: 454x338mm (17.87"x13.31")**


## Ordering Information

- **IPPC-6152A-R2AE** 15" XGA LED IPPC-61X2-R2 2PCIs w/ TS
- **IPPC-6172A-R2AE** 17" SXGA LED IPPC-61X2-R2 2PCIs w/ TS
- **IPPC-6192A-R2AE** 19" SXGA LED IPPC-61X2-R2 2PCIs w/ TS


## Accessories

- **IPPC-6152A-RMKE** IPPC-6152A Rack mount Kit
- **IPPC-6172A-RMKE** IPPC-6172A Rack mount Kit
- **IPPC-6192A-RMKE** IPPC-6192A Rack mount Kit
- **IPPC-6152-CFASTE** CFast module for IPPC-61X2-R2 Series
- **IPPC-6152-PCIE** PCIe4 & PCI module, IPPC-61X2-R2 Series
- **IPPC-6152-PCIEE** PCIe module for IPPC-61X2-R2 Series
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702031836** Power Cable China/Australia Plug 1.8 M
- **96CB-POWER-B-1.8M1** POWER CORD for China 1.8M

## I/O View

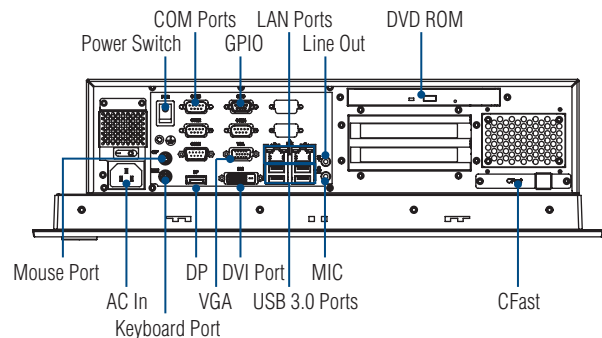

## Front Accessible USB Port

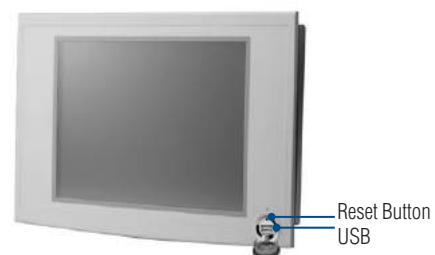

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IPPC-9171G IPPC-9151G

15"XGA/17" SXGA TFT LED LCD Intel® Core™ i7/i5/i3 Celeron® Industrial Touch Panel PC with 1 x PCIe Slot

NEW



## Features

- Intel® Core™ i7/i5/i3 Celeron® μFC-PGA988 processor with Intel® QM67 chipset
- 15" XGA/17" SXGA LED backlight LCD with low power consumption
- Front access USB connector
- Supports 1 x PCIe x1 or 4 (Gen2) (PCI optional)
- Heavy-duty stainless steel chassis with aluminum front panel
- Strengthened glass protects the front panel from shock damage and is IP65 compliant
- Supports dual display of HDMI, LVDS, VGA
- Supports 1 x 2.5" SATA II or SATA III HDD and 1 x CFast
- Hard anodic coating to prevent panel abrasion and acid corrosion
- Supports embedded software APLs and Utilities

## Introduction

IPPC-9151G/IPPC-9171G is a fully functional computer system with front USB access, with Intel® mobile Core i7-2710QE 2.1GHz/Core i5-2510E 2.5 GHz/Core i3-2330E 2.2 GHz/Celeron® B810 1.6 GHz processors up to 6 MB L3 cache and DDR3 SO-DIMM 1066/1333 up to 8 GB and a resolution up to 1024 x 768 to meet the demands of today's high-end industrial software. The IPPC-9151G/IPPC-9171G is a rugged unit with an aluminum panel, 15"/17" TFT LCD with LED backlight, a stainless steel structure and a PCIe slot. The IPPC-9151G/9171G is rugged enough to handle the toughest industrial operating environments. With optional mounting accessories, from panels to racks, it can be mounted anywhere.

## Specifications

### General

- BIOS** AMI EFI 64 Mbit SPI
- Certification** BSMI, CCC, CE, FCC, UL
- Cooling System** 2 x 10.1 CFM fans w/50,000 hrs MTBF
- Dimensions (W x H x D)**  
IPPC-9151G: 428 x 310 x 96.5 mm (16.35" x 12.2" x 3.79")  
IPPC-9171G: 482 x 354.8 x 98 mm (18.98" x 13.97" x 3.86")
- Disk Drive Bay** Supports 1 x 2.5" SATA II or SATA III HDD
- Enclosure** Stainless steel back case, 10 mm aluminum front panel
- Mounting** Panel, rack
- Power Input** 100~240 V<sub>AC</sub> @ 4A 50~60hz
- Power Supply** 180 W, MTBF: 100,000 hrs
- Weight (Gross)** IPPC-9151G: 10.52 Kg (23.19 lbs)  
IPPC-9171G: 14 Kg (30.86 lbs)
- OS Support** Win XP, Win 7

### System Hardware

- CPU** Supports uFC-PGA988 Intel® mobile Core i7-2710QE 2.1 GHz/Core i5-2510E 2.5 GHz/Core i3-2330E 2.2 GHz/Celeron® B810 1.6GHz processor
- Chipset** Intel® 6 series chipset (QM67)
- Audio Ports** Mic-in, Line-out, Line-in
- Expansion Slots** Supports 1 x PCIe x1 or x4 (PCI optional)
- PS/2** 1 x keyboard and 1 x mouse
- LAN** 2 x 10/100/1000 Mbps
- Memory** 2 x 204 pin DDR3 1066/1333 SODIMM sockets supports up to 8GB (2 x 4GB)
- CFast** 1 x CFast slot
- I/Os** 1 x VGA; 1 x HDMI; 5 x USB 2.0 (one at front); 4 x RS-232

### LCD Display

- LCD Display Type** IPPC-9151G: XGA TFT LCD with LED Backlight  
IPPC-9171G: SXGA TFT LCD with LED Backlight
- Display Size** IPPC-9151G: 15"; IPPC-9171G: 17"
- Max. Resolution** IPPC-9151G: 1024 x 768; IPPC-9171G: 1280 x 1024
- Max. Colors** IPPC-9151G: 16.2M or 256K Color  
IPPC-9171G: 16.7M colors (RGB 6-bits +Hi-FRC data)
- Viewing Angle (H/V°)** IPPC-9151G: 160/140; IPPC-9171G: 170/160
- Luminance** IPPC-9151G: 350 cd/m<sup>2</sup>; IPPC-9171G: 380 cd/m<sup>2</sup>
- Backlight Life** 50,000hrs
- Contrast Ratio** IPPC-9151G: 700:1; IPPC-9171G: 400:1

### Touchscreen

- Lifespan** 36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- Light Transmission** > 80%
- Type** Analog resistive (5-wire)


### Environment

- Humidity** 5 ~ 85% @ 40°C (non-condensing)
- Ingress Protection** Front panel: IP65
- Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- Vibration Protection** 5 ~ 500 Hz, 1 G<sub>RMS</sub> random vibration



## Dimensions

Unit: mm [inch]

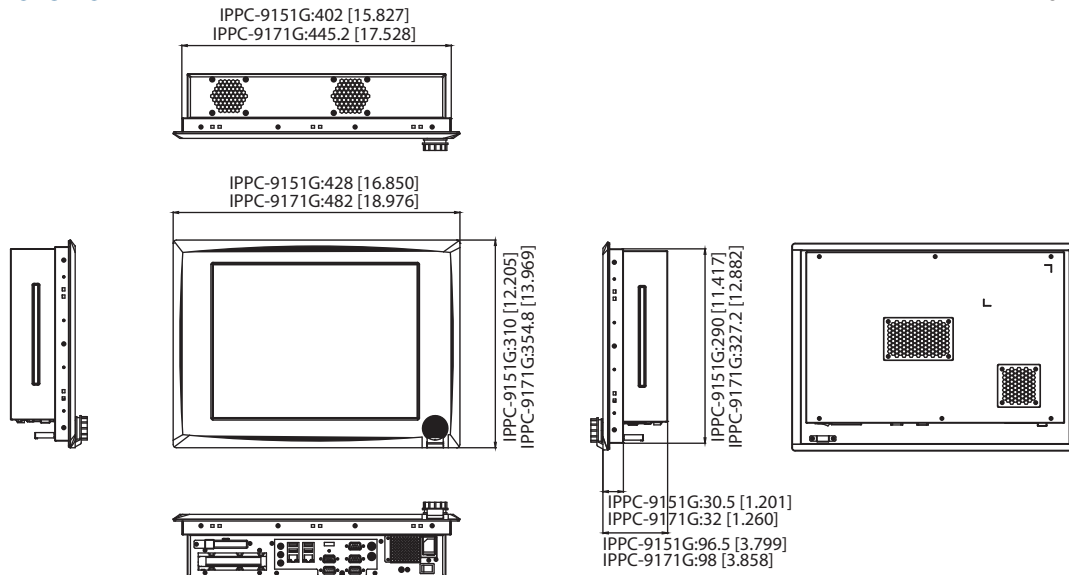

**Panel Cut-out Dimensions: IPPC-9151G: 404 x 292mm (15.90" x 11.49")  
IPPC-9171G: 447.5 x 329.5mm (17.618" x 12.972")**

## Ordering Information

- **IPPC-9151G-R1AE** 15" XGA Intel® Core™ i7/i5/i3 Celeron with TS
- **IPPC-9171G-R1AE** 17" SXGA Intel® Core™ i7/i5/i3 Celeron with TS

## Accessories

- **IPPC-9151G-RMKE** (IPPC-9151G) Mounting Kit for standard 19" industrial rack
- **IPPC-9151G-EPRE** IPPC-9151G/9171G-R1AE PCI Riser card

### Notes:


1. When used in a panel mounted environment, the panel's thickness can not be over 10mm.

<b>1702002600</b>	Power Cable US Plug 1.8 M
<b>1702002605</b>	Power Cable EU Plug 1.8 M
<b>1702031801</b>	Power Cable UK Plug 1.8 M
<b>1702031836</b>	Power Cable China/Australia Plug 1.8 M

2. Dual Display

<b>Primary Display</b>	LCD
<b>Second Display</b>	CRT or HDMI

## I/O Overview

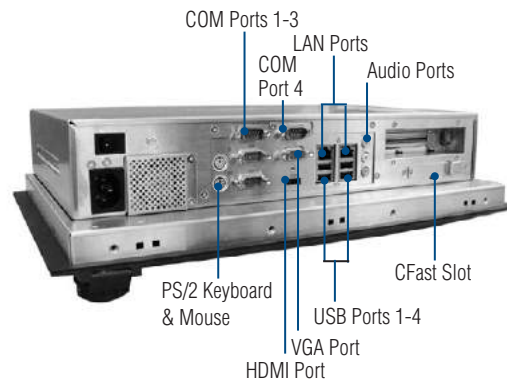

<b>1</b>	WebAccess+ Solutions
<b>2</b>	Motion Control
<b>3</b>	Power & Energy Automation
<b>4</b>	Automation Software
<b>5</b>	Intelligent Operator Panel
<b>6</b>	Automation Panels
<b>7</b>	Panel PCs
<b>8</b>	Industrial Wireless Solutions
<b>9</b>	Industrial Ethernet Solutions
<b>10</b>	Industrial Gateway Solutions
<b>11</b>	Serial communication cards
<b>12</b>	Embedded Automation PCs
<b>13</b>	DIN-Rail IPCs
<b>14</b>	CompactPCI Systems
<b>15</b>	IoT Wireless I/O Modules
<b>16</b>	IoT Ethernet I/O Modules
<b>17</b>	RS-485 I/O Modules
<b>18</b>	Data Acquisition Boards

# UNO-1172AH

Class I, Division 2 Certified Intel® Atom™ D510 DIN-rail PC

NEW



SUSIAccess



## Introduction

In hazardous locations, devices are under potential danger from flammable gases, combustible dust, or ignitable fibers, creating the potential for fire and explosions. The UNO-1172AH is designed to be safely operated in these locations and are UL listed for Hazardous Locations with Class I, Division 2, groups A, B, C, D & T5 certification. The UNO-1172AH is an Intel Atom DIN-rail PC which features an innovative system diagnosis feature for automation applications. It provides alarms for over temperature, over voltage, battery power fail, power status on both system onboard LED and Digital output. These system diagnosis features enable control and monitoring of system status remotely. Three Gigabit Ethernet interfaces with teaming function support allow users to uplink two ports with data transmission fault tolerance and downlink one port to field device.

## Specifications

### General

- Certification** CE, FCC Class A, UL, CCC
- Hazardous Locations** US: ANSI/ISA 12.12.01-2007 cUL: CSA 22.2 No. 213 M1987, Class I, Division 2, Groups A,B,C,D, Hazardous Location, Temperature code: T5, Ambient Temperature Range: -10°C ≤ Tamb ≤ 60°C  
UNO-1172AH: 85 x 152 x 139 mm (3.4" x 6" x 5.5")
- Dimensions (W x H x D)** UNO-1172AH: 85 x 152 x 139 mm (3.4" x 6" x 5.5")
- Enclosure** Aluminum + SECC
- Mounting** DIN-rail, Wallmount
- Power Consumption** 24 W (Typical)
- Power Requirement** 10 ~ 36 V<sub>DC</sub> (e.g. +24 V @ 2 A) (Min. 48 W), AT/ATX power mode by Jumper selection and BIOS AT simulation (support system reboot automatically after power recovery)
- Weight** 1.6 kg
- OS Support** WES Windows XP Embedded, Windows XP & Windows 7, Windows CE 5.0/6.0, Linux, QNX
- System Design** Fanless design with no internal cabling
- Remote Management** Built-in Advantech DiagAnywhere agent on Windows CE / XPe

### System Hardware

- CPU** Intel Atom D510 1.66 GHz
- Memory** 2 GB DDR2 SDRAM built-in
- Battery Backup SRAM** 1 MB
- Indicators** System: LEDs for Power, CF, LAN (Active, Status), Serial (Tx, Rx), Diagnosis /Alarm: over system temperature, over voltage, alarm for battery backup SRAM, alarm for RTC battery, Programmable (while disable Serial Tx&Rx), Buzzer for Diagnosis (programmable)
- Keyboard/Mouse** 1 x PS/2
- Storage** SSD: 1 x internal type I/II CompactFlash slot  
HDD: one 2.5" SATA HDD bracket
- Display** DB15 VGA connector, 1600 x 1200 @ 85 Hz
- Audio** 5.1 channel HD Audio, Mic in, Line in, Line out
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Mini PCIe** 1 x PCI express mini card slot

## Features

- UL listed for Hazardous Locations: Class I, Division 2
- Onboard Intel Atom D510 1.66 GHz
- Onboard 1 MB battery-backup SRAM
- System diagnosis through led and digital output, remote power control through digital input
- 2 x RS-232/422/485 ports with automatic flow control
- 3 x 10/100/1000Base-T RJ-45 ports with teaming function support
- 4 x external USB
- PC/104+ expansion slots option
- 1 x Mini PCIe slot for WLAN card and Fieldbus card
- Windows 7, Windows CE, XP Embedded and Linux support
- Fanless design with no internal cabling
- Isolation between chassis and power ground

### I/O Interface

- Serial Ports** 2 x RS-232/422/485 with DB9 connectors, automatic RS-485 data flow control  
2 x RS-232 (Optional, pin header)
- Serial Port Speed** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 115.2 kbps (Max)
- LAN** 3 x 10/100/1000Base-T RJ-45 ports (supports Wake on LAN and built-in boot ROM)
- USB** 4 x USB, EHCI, Rev. 2.0 compliant
- Digital Input** 2-ch. wet/dry contact, 70 V<sub>DC</sub> over-voltage protection, 0 ~ 50 V<sub>DC</sub> input range and Interrupt handling
- Digital Output** 6-ch DO  
- 200 mA max/channel sink current  
- Keep output status after system hot reset  
- 5 ~ 40 V<sub>DC</sub> output range and 10 kHz speed  
Remote monitoring: over system temperature, over voltage, battery power fail, power status  
Remote control: Power On/Off, Reset
- System Diagnoses**

### Environment

- Ingress Protection** IP40
- Operating Temperature** (IEC 60068-2-2, 100% CPU/ I/O loading)  
-10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- Operating Humidity** 20 ~ 95% (non-condensing)
- Storage Humidity** 0 ~ 95% (non-condensing)
- Shock Protection** IEC 60068-2-27  
CompactFlash: 50 G @ wall mount, half sine, 11 ms  
HDD: 20 G @ wall mount, half sine, 11 ms
- Vibration Protection** IEC 60068-2-64 (Random 1 Oct./min, 1hr/axis.)  
CompactFlash: 2 Grms @ 5 ~ 500 Hz,  
HDD: 1 Grms @ 5 ~ 500 Hz

## Ordering Information

- UNO-1172AH-A33E** CID2 Intel Atom D510 1.66 GHz, 2 GB RAM DIN-rail PC

### Accessories

- UNO-FPM11-BE** UNO-1100 Series VESA Mount Kit
- PCLS-DIAGAW10** Advantech Remote Monitoring & Diagnosis Utility

# Memo

1

WebAccess+ Solutions

2

Motion Control

3

Power & Energy  
Automation

4

Automation Software

5

Intelligent Operator  
Panel

6

Automation Panels

7

Panel PCs

8

Industrial Wireless  
Solutions

9

Industrial Ethernet  
Solutions

10

Industrial Gateway  
Solutions

11

Serial communication  
cards

12

Embedded Automation  
PCs

13

DIN-Rail IPCs

14

CompactPCI Systems

15

IoT Wireless I/O  
Modules

16

IoT Ethernet I/O  
Modules

17

RS-485 I/O Modules

18

Data Acquisition  
Boards

# FPM-3191G

## 9U Rackmount 19" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports



### Features

- 19" SXGA TFT LED LCD with 50,000 backlight life time
- Robust design with stainless steel chassis and aluminum front panel
- Anti-glare screen with tempered glass and IP65 certified front panel
- Lockable OSD control pad on rear cover
- Supports industrial 24 V<sub>DC</sub> power input
- Supports panel, wall, desktop, rack or VESA arm mounting
- Supports 9U pre-drill Rackmount mounting hole

### Introduction

FPM-3191G is a 19" color TFT LCD flat panel monitor specifically designed for industrial applications. With a viewing size as large as 19", it presents an simple display area as well as vivid and sharp images for your HMI. It features direct VGA signal transmission. You can thus upgrade the displays without making changes to the existing system. The onscreen display function also makes it easy to adjust the images on the screen. The whole chassis is designed in stainless steel and the front panel is made of aluminum with front panel IP65 compliance.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on front panel
  - **Certification** BSMI, CCC, CE, FCC Class A, UL
  - **Dimensions (W x H x D)** 482mm x 399mm x 67 mm (18.98" x 15.71" x 2.64")
  - **Enclosure** Front panel: Aluminum with coating  
Rear cover: Stainless steel chassis
- \*Mounting holes on rear cover are designed for PWR-246E DC Source
- **Mounting** Panel, wall, desktop, VESA arm & 19" rackmount
  - **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output

Note: AC power adapter is included.

- **Power Consumption** 35 W + 20%
- **Video Port** VGA & DVI-D port
- **Weight (Net)** 10.65 kg (23.46 lbs)

#### LCD Display

- **Display Type** SXGA TFT LCD with LED backlight
- **Display Size** 19"
- **Max. Resolution** 1280 x 1024
- **Max. Color** 16.7 M
- **Viewing Angle (H/V°)** 170/160
- **Luminance (cd/m<sup>2</sup>)** 350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 1000:1

#### Touchscreen (Optional)


- **Type** 5-wire Resistive
- **Interface** RS-232 and USB
- **Lifespan** 35 million touches at a single point
- **Light Transmission** 80% ±5
- **OS Support** Windows XP, Vista, 7, 8, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

#### Environment

- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

## Dimensions

Unit: mm [inch]

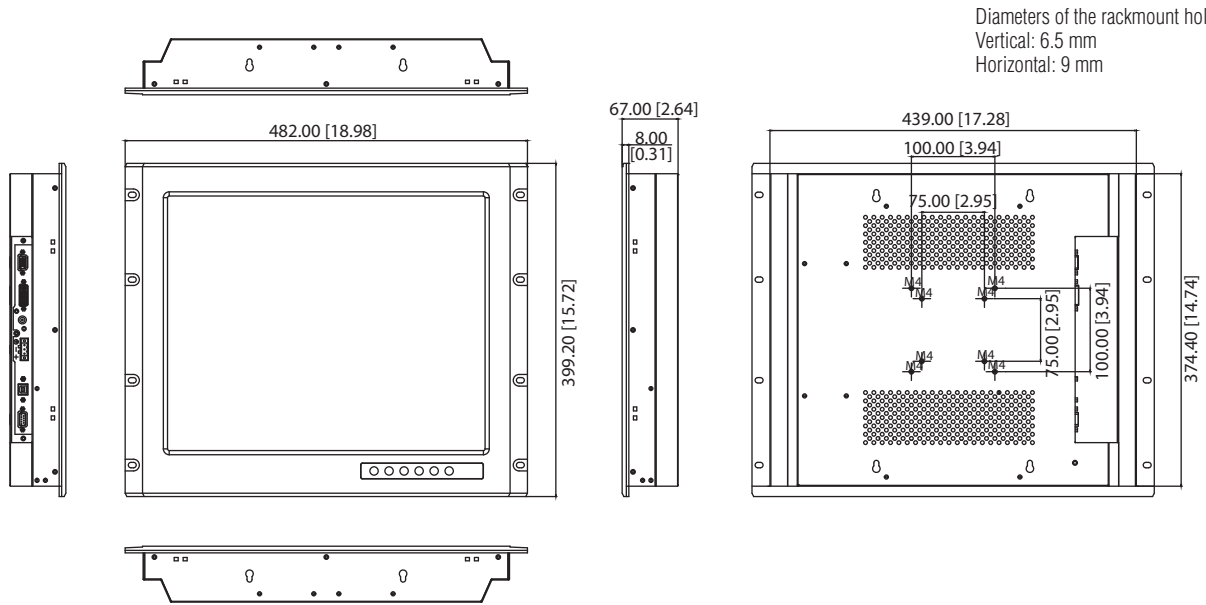

**Panel Cut-out Dimensions: 444 x 376.4 mm (17.48" x 14.82")**


## Ordering Information

- **FPM-3191G-X0AE** 19" SXGA Ind. Monitor with VGA, DVI
- **FPM-3191G-R3AE** 19" SXGA Ind. Monitor w/ Resistive TS (Combo)


## Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M (Direct rack mounting, no need accessory)

## Mounting with DC Source

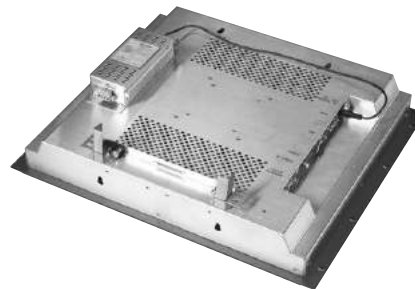

## I/O View

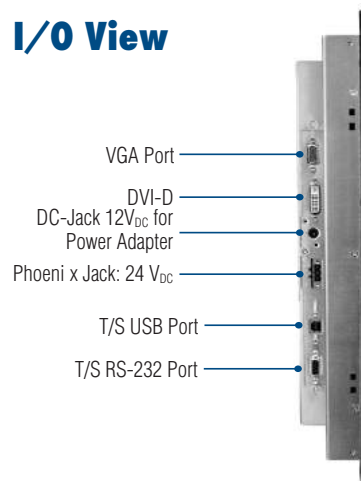

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-3171G

## 8U Rackmount 17" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports, and Wide Operating Temperature Range



### Features

- 17" SXGA TFT LED LCD with 50,000 hours of backlight life
- Robust design with stainless steel chassis and aluminum front panel
- Anti-glare screen with tempered glass and IP65 certified front panel
- Lockable OSD control pad on rear cover
- Supports industrial 24V<sub>DC</sub> power input
- Supports panel, wall, desktop, rack or VESA arm mounting
- Supports 8U pre-drill Rackmount mounting hole

### Introduction

FPM-3171G is a 17" color TFT LCD flat panel monitor specifically designed for industrial applications. With a viewing size as large as 17", it presents a simple display area as well as vivid and sharp images for your HMI. It features direct VGA signal transmission. You can thus upgrade the displays without making changes to the existing system. The onscreen display function also makes it easy to adjust the images on the screen. The whole chassis is designed in stainless steel and the front panel is made of aluminum with front panel IP65 compliance.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on front panel
  - **Certification** BSMI, CCC, CE, FCC Class A, UL
  - **Dimensions (W x H x D)** 482 x 354.8 x 63.9 mm (18.98" x 13.97" x 2.52")
  - **Enclosure**  
Front panel: Aluminum with coating  
Rear cover: Stainless steel chassis
- \*Mounting holes on rear cover are designed for PWR-246E DC Source
- **Mounting** Panel, wall, desktop, VESA arm & 19" rackmount
  - **Power Input**  
Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output

Note: AC power adapter is included.

- **Power Consumption** 35 W + 20%
- **Video Port** VGA & DVI-D port
- **Weight (Net)** 9.25 kg (20.39 lbs)

#### LCD Display

- **Display Type** 17" SXGA TFT LCD with LED backlight
- **Display Size** 17"
- **Max. Resolution** 1280 x 1024
- **Max. Color** 16.7 M
- **Viewing Angle (H/V°)** 160/140
- **Luminance (cd/m<sup>2</sup>)** 350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 1000:1

#### Touchscreen (Optional)


- **Type** 5-wire Resistive
- **Interface** RS-232 and USB
- **Lifespan** 35 million touches at a single point
- **Light Transmission** 80% ±5
- **OS Support** Windows XP, Vista, 7, 8, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

#### Environment

- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 95% @ 60°C, non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

## Dimensions

Unit: mm [inch]

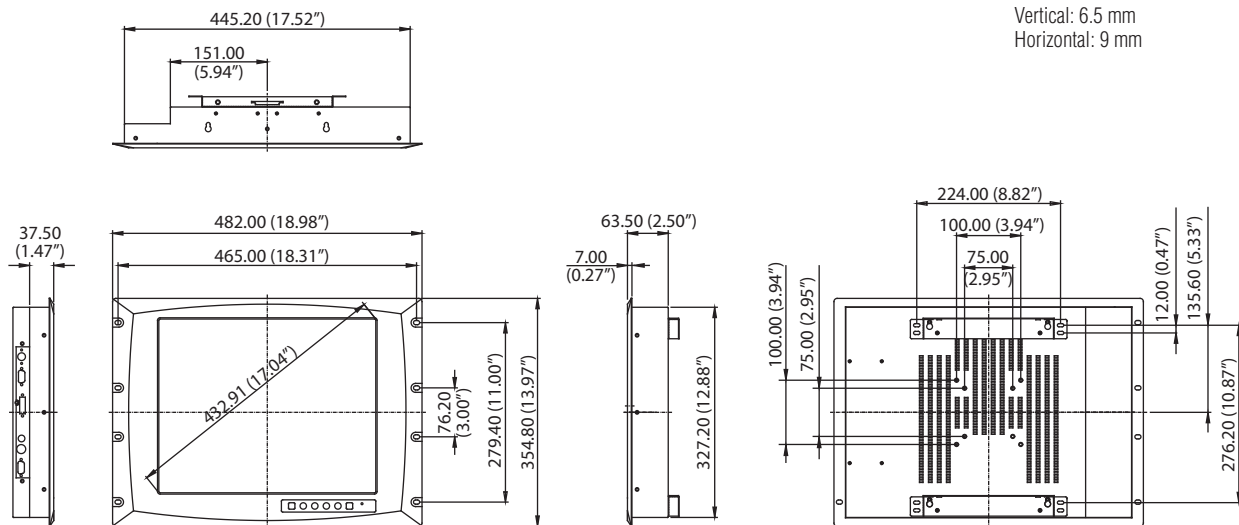

Diameters of the rackmount holes:  
Vertical: 6.5 mm  
Horizontal: 9 mm

**Panel Cut-out Dimensions: FPM-3171G: 447.5 x 329.5 mm (17.62" x 12.97")**


## Ordering Information

- **FPM-3171G-X0AE** 17" SXGA WT Ind. Monitor with VGA, DVI
- **FPM-3171G-R3AE** 17" SVGA WT Ind. Monitor w/Resistive TS (Combo)

## Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M (Direct rack mounting, no need accessory)

## I/O View

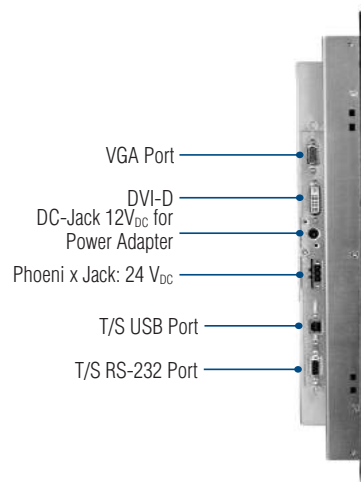

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 **Automation Panels**
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-3151G

## 15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI Ports, and Wide Operating Temperature



### Features

- 15" XGA TFT LED LCD with 50,000 backlight life time
- Robust anodized coated aluminum front bezel and stainless steel rear cover
- Supports wide operating temperatures
- Increase reliability by enhanced 5-wire resistive touch sensor
- Anti-glare screen with tempered glass and IP65 certified front panel
- Full enclosure ground isolation protection
- Supports VGA/DVI input, dual touch interfaces and two power inputs
- Front lockable OSD membrane keys with user-defined brightness setting
- Front panel is IP65 compliant
- Supports panel, VESA, wall and desktop stand mounting

### Introduction

The FPM-3151G is a particularly rugged and reliable 15" XGA wide temperature industrial monitor for a variety of industry applications. Equipped with a hard anodized coating, stainless steel chassis, and -20 to 60°C operating temperature, it can satisfy demands in a wide range of harsh industrial applications. This model also features enhanced 5-wire resistive touch and system ground isolation protection to enhance the reliability. FPM-3151G also provides lockable OSD keys on the front panel with two user-defined contrast/brightness settings.

### Specifications

#### General

- **Button Controls** OSD control pad on front panel with lockable function  
Two user-defined contrast/brightness settings
- **Certification** CE, FCC Class A, BSMI, CCC, UL, Energy Star
- **Dimensions (W x H x D)** 422 x 310 x 70 mm (16.61" x 12.2" x 2.76")
- **Enclosure** Front panel: Aluminum with hard anodizing coating  
Rear cover: Stainless steel  
Ground Isolation Protection
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output
- **Power Consumption** 12W
- **Video Port** VGA & DVI-D Port
- **Weight (Net)** 7.73 kg (17.04 lbs)

#### LCD Display

- **Display Type** XGA TFT LCD
- **Backlight Type** LED
- **Display Size** 15"
- **Max. Resolution** 1024 x 768
- **Max. Color** 16.2M (RGB 8-bit)
- **Viewing Angle (H/V°)** 160/140
- **Luminance (cd/m<sup>2</sup>)** 350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700:1

#### Touchscreen (Optional)

- **Sensor** AMT
- **Driver** Penmount 6000
- **Type** 5-wire resistive with enhanced ITO film
- **Interface** USB & RS-232 (Combo)
- **Lifespan** 36 million with a silicone rubber R8 finger, writing rate is by 250g at 2 times/s  
> 80%
- **Light Transmission** > 80%
- **OS Support** Windows XP, Vista, 7, 8, XPe, CE and Linu x
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

#### Environment

- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Shock** 11ms, 10G (Non Operating, Half Sine Wave)
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)


### Ordering Information

- **FPM-3151G-X0AE** 15" XGA Ind. Monitor with Wide Temp
- **FPM-3151G-R3AE** 15" XGA Ind. Monitor w/ Wide Temp, Resistive TS
- **FPM-3151SR-R3AE** 15" XGA Ind. Monitor w/ Sunlight Readable Display



**Dimensions**

Unit: mm [inch]

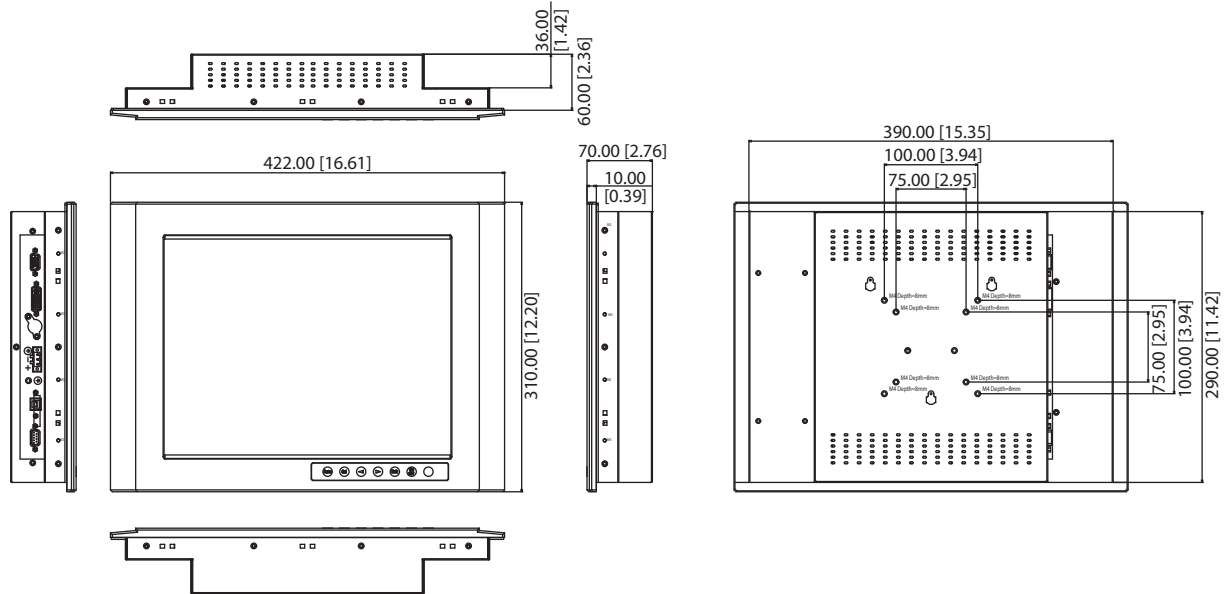

**Panel Cut-out Dimensions: 396 x 296 mm (15.59" x 11.65")**


**Accessories**

- **FPM-3151G-RMKE** Mounting kit for 19" industrial rack
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **FPM-2120G-SMKE** FPM-2120G/2150G/2170G Stand Kit

**Rack Mount (FPM-3151G-RMKE)**



**I/O View**

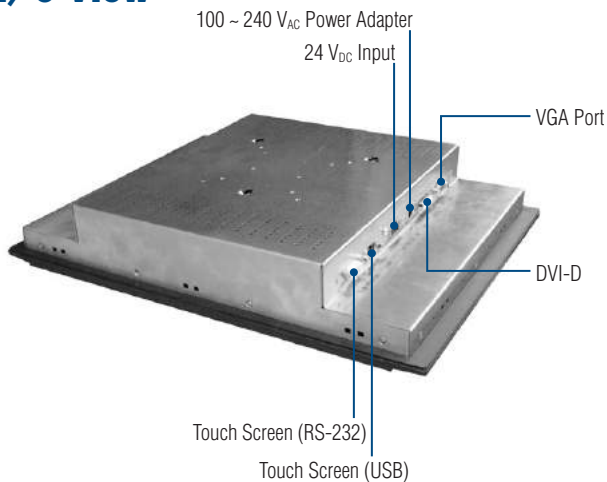

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 **Automation Panels**
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-3121G

## 12.1" SVGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI and Wide Operating Temperature



### Features

- 12.1" SVGA TFT LED LCD with 50,000 backlight life time
- Robust anodized coated aluminum front bezel and stainless steel rear cover
- Supports wide operating temperatures
- Increase reliability by enhanced 5-wire resistive touch sensor
- Anti-glare screen with tempered glass and IP65 certified front panel
- Full enclosure ground isolation protection
- Supports VGA/DVI input, dual touch interfaces and two power inputs
- Front lockable OSD membrane keys with user-defined brightness setting
- Energy Star certification
- Front panel is IP65 compliant
- Supports panel, VESA, wall and desktop stand mounting

### Introduction

The FPM-3121G is a particularly rugged and reliable 12.1" SVGA wide temperature industrial monitor for a variety of industry applications. Equipped with a hard anodized coating, stainless steel chassis, and -20 to 60°C operating temperature, it can satisfy demands in a wide range of harsh industrial applications. This model also features enhanced 5-wire resistive touch and system ground isolation protection to enhance the reliability. Lockable OSD keys on front panel with 2 user-defined contrast/brightness settings.

### Specifications

#### General

- **Button Controls** OSD control pad on front side with lockable function  
Two user-defined contrast/brightness settings
- **Certification** CE, FCC Class A, BSMI, CCC, UL, Energy Star
- **Dimensions (W x H x D)** 312 x 224 x 60 mm (12.28" x 8.82" x 2.36")
- **Enclosure** Front panel: Aluminum with hard anodized coating  
Rear cover: Stainless steel chassis  
Ground Isolation Protection
- **Mounting** Panel, VESA arm, or wall & desktop mount with optional mounting kit
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and +12 V<sub>DC</sub> @ 4.75 A output
- **Power Consumption** 9 W
- **Video Port** VGA & DVI-D Port
- **Weight (Net)** 4.07 kg (8.975 lbs)

#### LCD Display

- **Display Type** SVGA TFT LCD
- **Backlight Type** LED
- **Display Size** 12.1"
- **Max. Resolution** 800 x 600
- **Max. Color** 16.2M (RGB 8-bit)
- **Viewing Angle (H/V°)** 160 / 140
- **Luminance (cd/m<sup>2</sup>)** 450
- **Operation Life (hrs)** 50,000
- **Contrast Ratio** 700:1

#### Touchscreen (Optional)


- **Sensor** AMT
- **Driver** Penmount 6000
- **Type** 5-wire Resistive with enhanced ITO film
- **Interface** USB & RS-232 (Combo)
- **Lifespan** 36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- **Light Transmission** > 80%
- **OS Support** Windows XP, Vista, 7, 8, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

#### Environment

- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Shock** 11ms, 10G (Non Operating, Half Sine Wave)
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

## Dimensions

Unit: mm [inch]

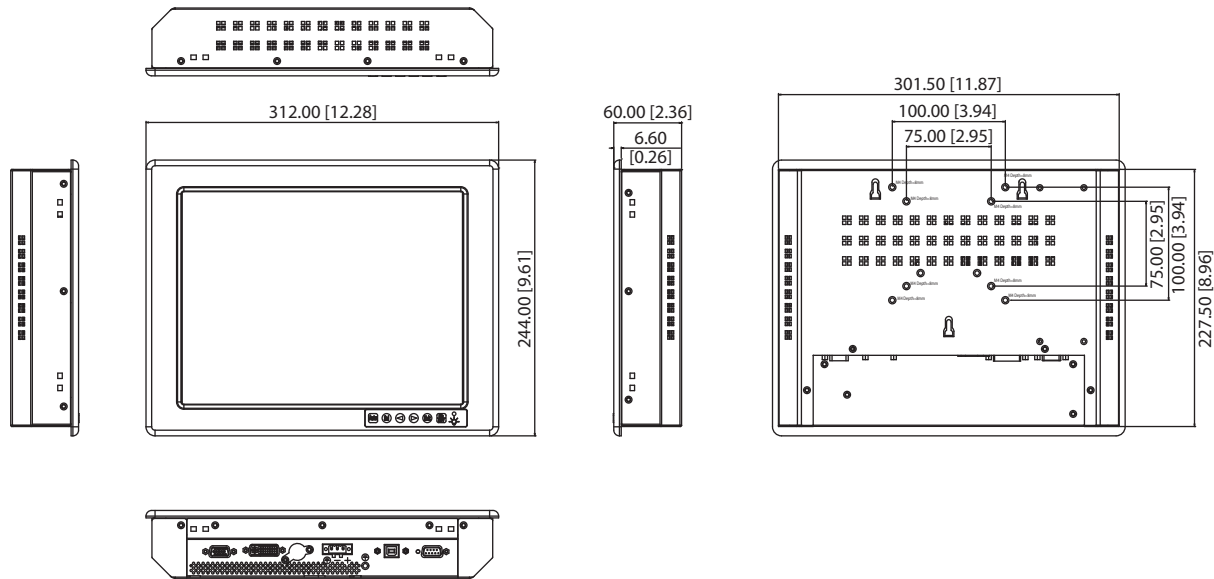

**Panel Cut-out Dimensions: 303.5 x 229.5 mm (11.95" x 9.04")**


## Ordering Information

- **FPM-3121G-X0AE** 12.1" SVGA Ind. Monitor with Wide Temp
- **FPM-3121G-R3AE** 12.1" SVGA Ind. Monitor w/ Wide Temp, Resistive TS


## Accessories

- **FPM-2150G-SMKE** Mounting kit for desktop stand & wall
- **1702002600** Power Cable US Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

## I/O View

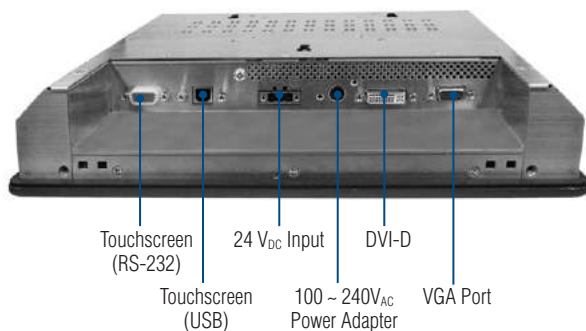

## Mounting Method

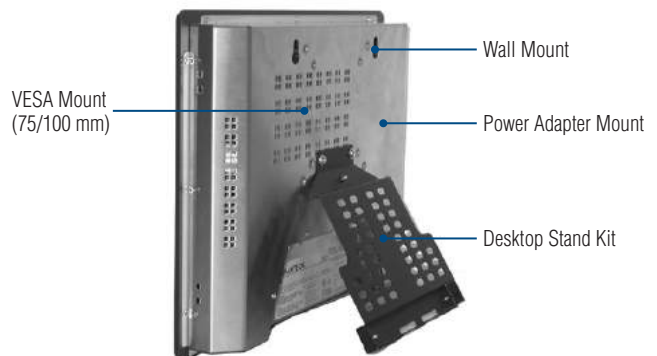

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-7211W

## 21.5" Full HD Industrial Monitor with PCT Touch, Direct-VGA and DVI Ports

NEW



### Features

- 21.5" Full HD TFT LED LCD wide screen display
- 16:9 wide screen display, view area increases by 40%
- Supports 10 points multi-touch via USB interface in Windows 7/8
- Slim type design for Panel mount / Wall mount easy installation
- Various mounting options: panel, wall, desktop and VESA arm mounting
- Projected Capacitive Touchscreen with reliable glass surface
- Robust design with SECC chassis and Magnesium alloy front panel with IP66 compliance
- OSD control pad on rear cover
- Lockable I/O connectors

### Introduction

With its brand new design, the FPM-7211W provides a new wide screen display size with industrial grade design concept. By truly-flat touch screen, the front bezel meets IP66 testing criteria. FPM-7211W projected capacitive touch can support 5-points touch application. New easy installation design can help you with one person for panel mounting. FPM-7211W monitor with slim enclosure is ideally suited to being either panel or wall mounted.

### Specifications

#### General

- **OSD Controls** OSD control in rear cover
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 558.4 x 349.8 x 47.7 mm (21.98" x 13.77" x 1.88")
- **Enclosure** Front panel: Die-cast Magnesium alloy  
Rear cover: SECC
- **Mounting** Panel, wall, desktop, VESA (MIS,100,C)
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output

Note: AC power adapter is included.

- **Power Consumption** 25 W + 20%
- **Video Port** VGA & DVI-D port
- **Weight (Net)** 8kg (17.6lbs)

#### LCD Display

- **Display Type** Full HD TFT LED LCD
- **Display Size** 21.5"
- **Max. Resolution** 1920 x 1080
- **Max. Color** 16.7 M
- **Viewing Angle (H/V°)** 178/178
- **Luminance (cd/m<sup>2</sup>)** 300
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 5000:1

#### Touchscreen

- **Type** Projected Capacitive touch
- **Interface** RS-232 and USB
- **Light Transmission** Above 75%
- **OS Support** Windows XP, Vista, 7, 8, XPe and Linux
- **Multi Touch** 10 points, USB interface in Win 7/8.
- **Hardness** >6H

#### Environment

- **Operation Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP66 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information


- **FPM-7211W-P3AE** 21.5" Full HD Ind Monitor w/PCT TS (RS-232, USB)

### Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **FPM-7181W-SMKE** FPM-7211W Mounting kit for desktop & wall

## Dimensions


Unit: mm [inch]

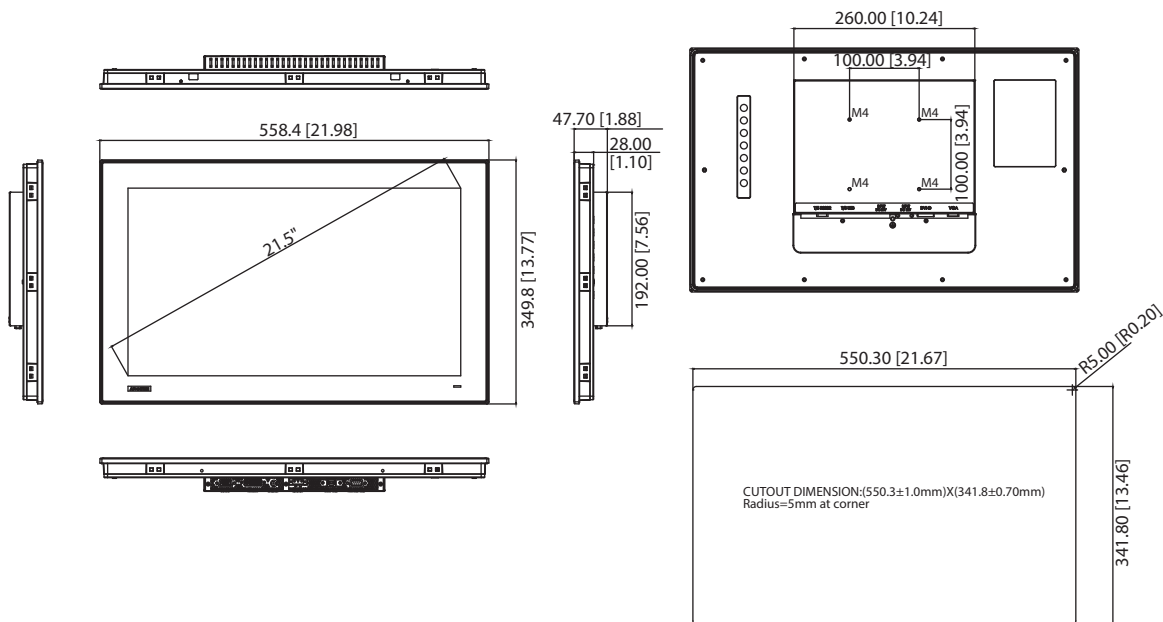

**Panel Cut-out Dimensions: 550.30 x 341.8 mm (21.67" x 13.46")**


## Easy Installation

### Snap hook in rear cover




Screw to set up the snap hook out of upper side

### Stopper Screw in rear cover

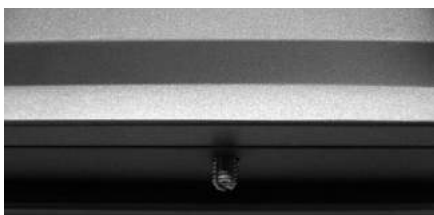

Screw for the stopper screw out of down side

## Rear View

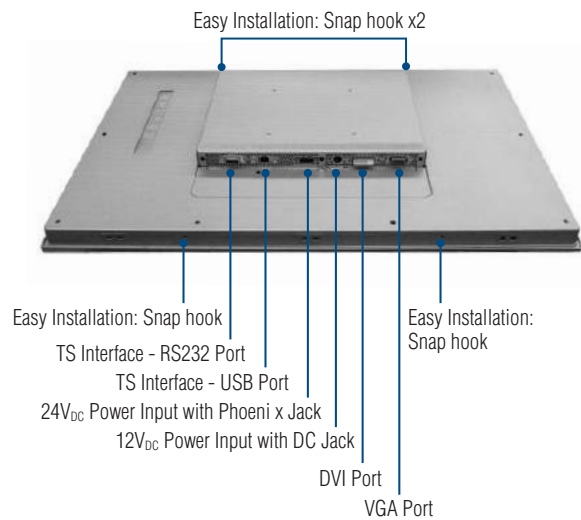

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 **Automation Panels**
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-7181W

## 18.5" WXGA Industrial Monitor with PCT Touch, Direct-VGA and DVI Ports

NEW



### Features

- 18.5" WXGA TFT LED LCD wide screen display
- 16:9 wide screen display, view area increases by 40%
- Supports 10 points multi-touch via USB interface in Windows 7/8
- Slim type design for Panel mount / Wall mount easy installation
- Various mounting options: panel, wall, desktop and VESA arm mounting
- Projected Capacitive Touchscreen with reliable glass surface
- Robust design with SECC chassis and Magnesium alloy front panel with IP66 compliance
- OSD control pad on rear cover
- Lockable I/O connectors

### Introduction

With its brand new design, the FPM-7181W provides a new wide screen display size with industrial grade design concept. By truly-flat touch screen, the front bezel meets IP66 testing criteria. FPM-7181W projected capacitive touch can support 10-points touch application. New easy installation design can help you with one person for panel mounting. FPM-7181W monitor with slim enclosure is ideally suited to being either panel or wall mounted.

### Specifications

#### General

- **OSD Controls** OSD control in rear cover
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 488 x 309 x 47.7 mm (19.21" x 12.17" x 1.88")
- **Enclosure** Front panel: Die-cast Magnesium alloy  
Rear cover: SECC
- **Mounting** Panel, wall, desktop, VESA (MIS,100,C)
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output

Note: AC power adapter is included.

- **Power Consumption** 20 W + 20%
- **Video Port** VGA & DVI-D port
- **Weight (Net)** 6kg (13.2lbs)

#### LCD Display

- **Display Type** WXGA TFT LED LCD
- **Display Size** 18.5"
- **Max. Resolution** 1366 x 768
- **Max. Color** 16.7M
- **Viewing Angle (H/V°)** 170/160
- **Luminance (cd/m<sup>2</sup>)** 300
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 1000:1

#### Touchscreen

- **Type** Projected capacitive touch
- **Interface** RS-232 and USB
- **Light Transmission** Above 75%
- **OS Support** Windows XP, Vista, 7, 8, XPe and Linux
- **Multi Touch** 10 points, USB interface in Win 7/8.
- **Hardness** 7H

#### Environment

- **Operation Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP66 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information


- **FPM-7181W-P3AE** 18.5" WXGA Ind Monitor w/PCT TS (RS-232, USB)

### Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **FPM-7181W-SMKE** FPM-7181W Mounting kit for desktop & wall

## Dimensions


Unit: mm [inch]

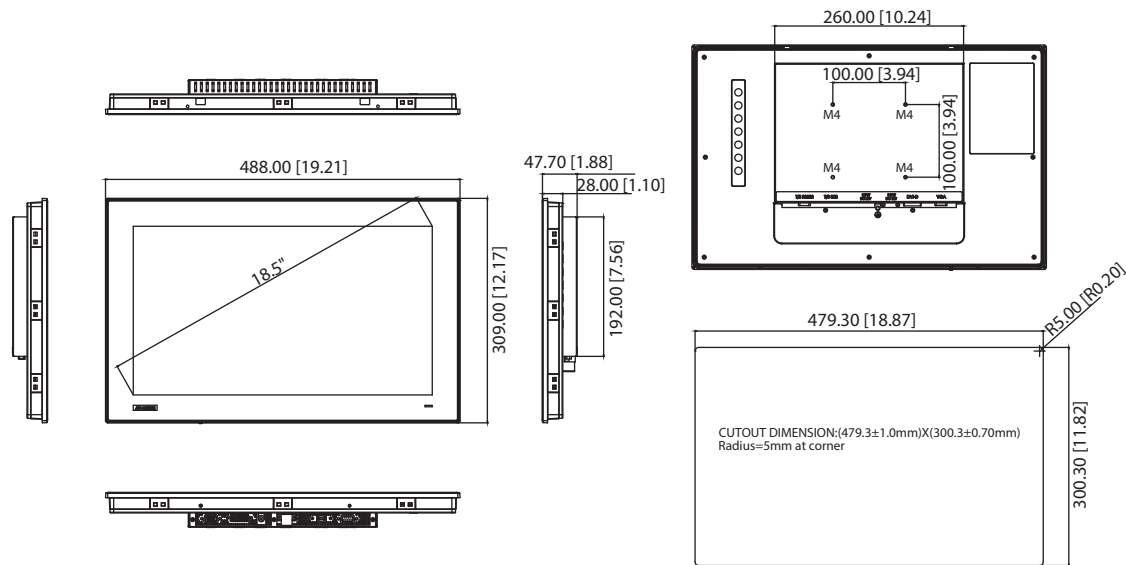

**Panel Cut-out Dimensions: 479.30 x 300.30 mm (18.87" x 11.82")**

## Easy Installation

### Snap hook in rear cover

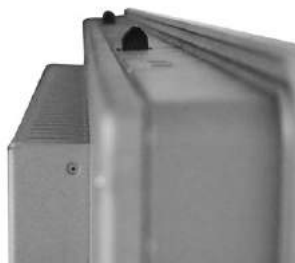


Screw to set up the snap hook out of upper side

### Stopper Screw in rear cover



Screw for the stopper screw out of down side

## Rear View

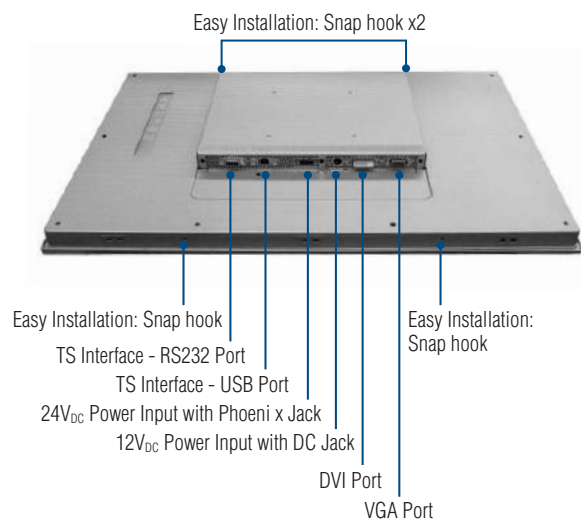

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-7151W

## 15.6" WXGA Industrial Monitor with PCT Touch, Direct-VGA/DVI or VGA/HDMI ports

NEW



### Features

- 15.6" WXGA TFT LED LCD backlight LCD with truly-flat multi-touch screen
- 16:9 wide screen display, view area increases by 40%
- Supports 10 points multi-touch via USB interface in Windows 7/8
- Slim type design for Panel mount / Wall mount easy installation
- Various mounting options: panel, wall, desktop and VESA arm mounting
- Projected Capacitive Touchscreen with reliable glass surface
- Robust design with SECC chassis and Magnesium alloy front panel with IP66 compliance
- OSD control pad on rear cover
- Lockable I/O connectors
- Two types of video port selections- VGA/DVI or VGA/HDMI

### Introduction

With its brand new design, the FPM-7151W provides a new wide screen display size with industrial grade design concept. By truly-flat touch screen, the front bezel meets IP66 testing criteria. FPM-7151W projected capacitive touch can support 10 points (via USB interface in Windows 7/8) touch application. New easy installation design can help you with one person for panel mounting. FPM-7151W monitor with slim enclosure is ideally suited to being either panel or wall mounted.

### Specifications

#### General

- **OSD Controls** OSD control in rear cover
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 419.7 x 269 x 47.7 mm (16.52" x 10.59" x 1.88")
- **Enclosure** Front panel: Die-cast Magnesium alloy  
Rear cover: SECC
- **Mounting** Panel, wall, desktop, VESA (MIS,100,C)
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input  
DC Jack: external 57 W power adapter, with 100 ~ 240 V<sub>AC</sub> input and 12 V<sub>DC</sub> @ 4.75 A output

Note: AC power adapter is included.

- **Power Consumption** 20 W + 20%
- **Video Port** VGA & DVI-D or VGA & HDMI
- **Weight (Net)** 5kg (11lbs)

#### LCD Display

- **Display Type** WXGA TFT LED LCD
- **Display Size** 15.6"
- **Max. Resolution** 1366 x 768
- **Max. Color** 16.7 M
- **Viewing Angle (H/V°)** 170/160
- **Luminance (cd/m<sup>2</sup>)** 300
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 500:1

#### Touchscreen

- **Type** Projected capacitive touch
- **Interface** RS-232 and USB
- **Light Transmission** Above 75%
- **OS Support** Windows XP, Vista, 7, 8, XPe and Linux
- **Multi Touch** 10 points, USB interface in Win 7/8.
- **Hardness** 7H

#### Environment

- **Operation Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP66 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-7151W-P3AE** 15.6" WXGA Ind Monitor w/PCT TS (VGA/DVI)
- **FPM-7155W-P3AE** 15.6" WXGA Ind Monitor w/PCT TS (VGA/HDMI)


### Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **FPM-7181W-SMKE** FPM-7181W Mounting kit for desktop & wall



## Dimensions

Unit: mm [inch]

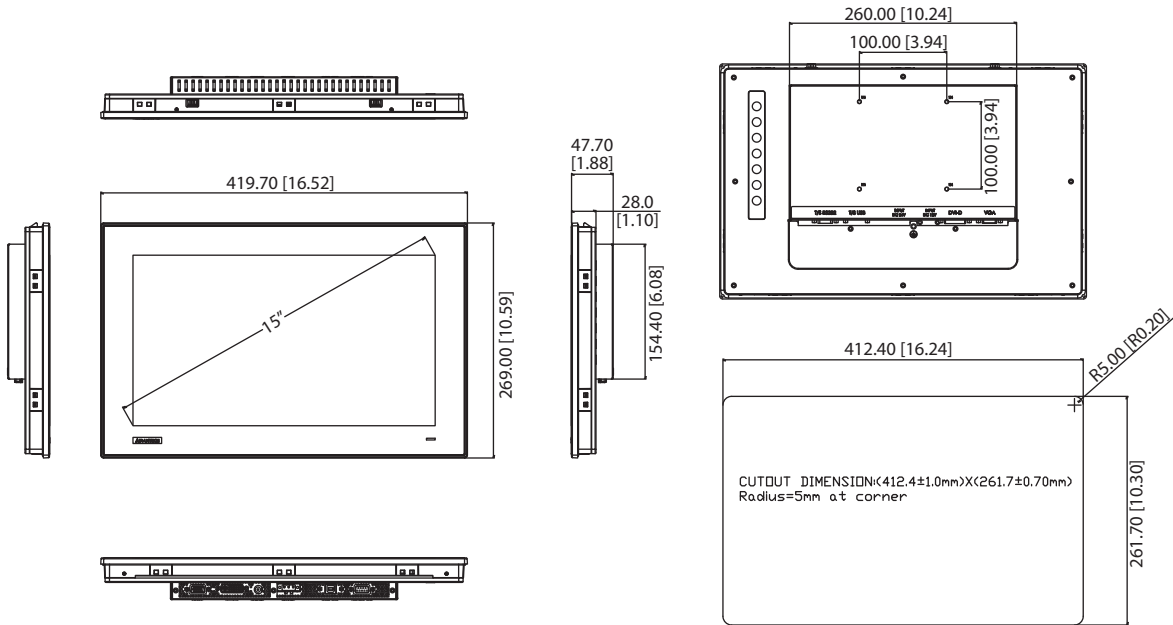

**Panel Cut-out Dimensions: 412.40 x 261.70 mm (16.24" x 10.30")**

## Easy Installation

### Snap hook in rear cover




Screw to set up the snap hook out of upper side

### Stopper Screw in rear cover



Screw for the stopper screw out of down side

## Rear View

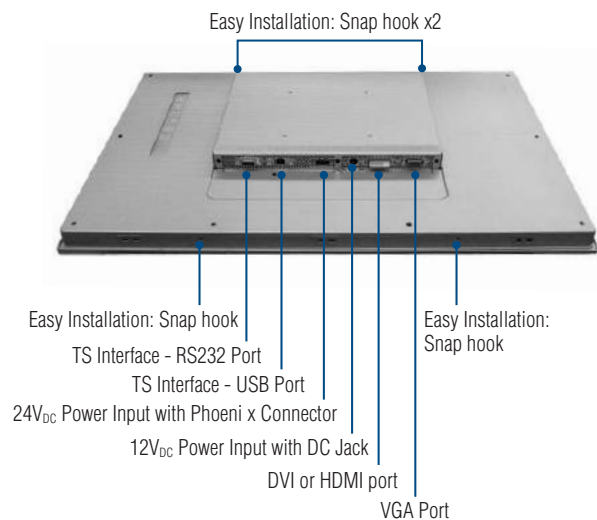

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-7151T

## 15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA/DP and Wide Operating Temperature Range

NEW



### Features

- 15" XGA TFT LED LCD with 50,000 backlight life time
- Robust design with IP66 compliance aluminum front panel
- Wide operating temperature support -20~60°C
- Anti-glare screen with tempered glass
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function
- OSD control pad on rear cover
- Lockable I/O connectors

### Introduction

FPM-7000T series is the first true-flat design in 4:3 industrial grade monitor. To enhance its durability, the FPM-7000T series is true-flat touch screen designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It supports wide operating temperatures -20~60°C for a variety of user environments. Designed with various mounting methods for users to apply into the system or adopt to the environment easily.

### Specifications

#### General

- **OSD Controls** OSD control in rear cover
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 383.2 x 307.3 x 48.2 mm (15.09" x 12.10" x 1.90")
- **Enclosure** Front panel: Die-cast Magnesium alloy  
Rear cover: SECC
- **Mounting** Stand, Wall, Panel or Rack mount
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input
- **Power Consumption** 12 W + 20%
- **Video Port** VGA & DP
- **Weight (Net)** 4.2kg (9.26lbs)

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 15"
- **Max. Resolution** 1024 x 768
- **Max. Color** 16.7M
- **Viewing Angle (H/V°)** 160/140
- **Luminance (cd/m<sup>2</sup>)** 400
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700 :1


#### Touchscreen

- **Type** 5-wire, analog resistive
- **Interface** RS-232 and USB
- **Light Transmission** Above 75%
- **OS Support** Windows XP, Vista, 7, 8, XPe and Linu x

#### Environment


- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP66 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### I/O View

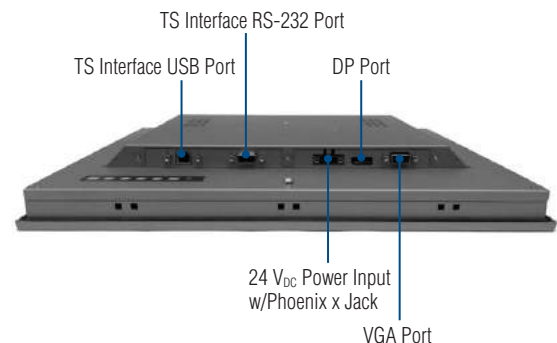

## Dimensions

Unit: mm

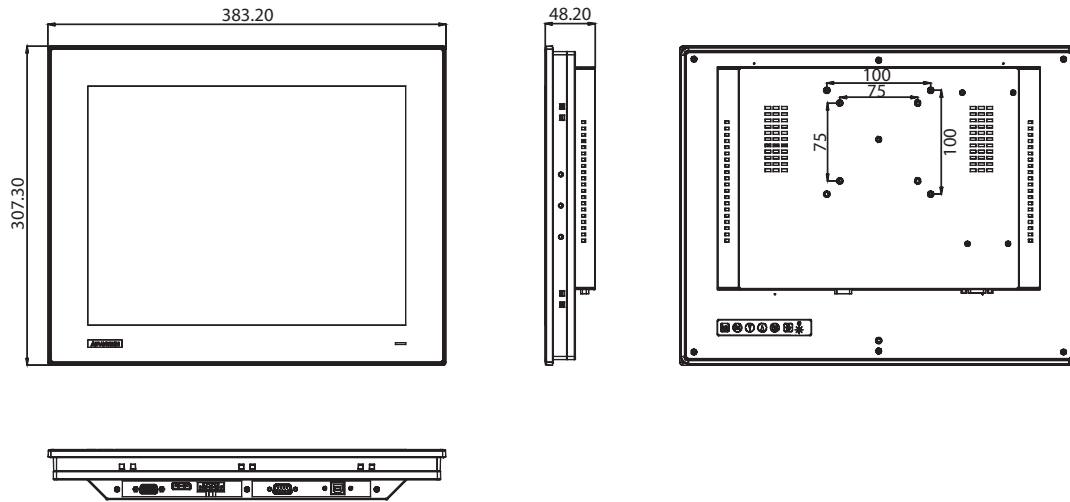

**Panel Cut-out Dimensions: 372.9 x 296.9 mm (14.68" x 11.69")**

## Ordering Information

- **FPM-7151T-R3AE** 15" XGA Ind Monitor w/Resistive TS (VGA/DP)

### Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **1757003934** ADAPTER 100-240V 60W 12V 5A W/O PFC  
DPS-60PB A A
- **FPM-2150G-RMKE** Rack-Mount Kit

## Front View



Power Indicator  
Blue: Power on  
Orange: Power off


## Side View

O-ring for dust & water protection while panel mounting

Panel mounting design  
(Clampers & screw included)



## Rear View

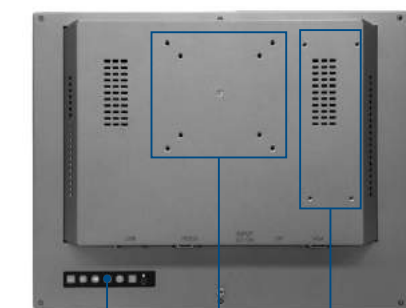

LCD OSD Control Keys

Adapter Mounting Area  
(Bracket included)

VESA Mount, Wall Mount  
& Desk Mount

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-7121T

## 12.1" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA/DP and Wide Operating Temperature Range

NEW



### Features

- 12.1" XGA TFT LED LCD with 50,000 backlight life time
- Robust design with IP66 compliance aluminum front panel
- Wide operating temperature support -20~60°C
- Anti-glare screen with tempered glass
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function
- OSD control pad on rear cover
- Lockable I/O connectors

### Introduction

FPM-7000T series is the first true-flat design in 4:3 industrial grade monitor. To enhance its durability, the FPM-7000T series is true-flat touch screen designed with IP66 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. It supports wide operating temperatures -20~60°C for a variety of user environments. Designed with various mounting methods for users to apply into the system or adopt to the environment easily.

### Specifications

#### General

- **OSD Controls** OSD control in rear cover
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 311.8 x 238 x 44.6 mm (12.28" x 9.37" x 1.76")
- **Enclosure** Front panel: Die-cast Magnesium alloy  
Rear cover: SECC
- **Mounting** Stand, Wall, Panel or Rack mount
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input
- **Power Consumption** 12 W + 20%
- **Video Port** VGA & DP
- **Weight (Net)** 2.6kg (5.73lbs)

#### LCD Display

- **Display Type** XGA TFT LED LCD
- **Display Size** 12.1"
- **Max. Resolution** 1024 x 768
- **Max. Color** 16.2M
- **Viewing Angle (H/V°)** 160/140
- **Luminance (cd/m<sup>2</sup>)** 600
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700 :1


#### Touchscreen

- **Type** 5-wire, analog resistive
- **Interface** RS-232 and USB
- **Light Transmission** Above 75%
- **OS Support** Windows XP, Vista, 7, 8, XPe and Linu x

#### Environment


- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP66 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### I/O View

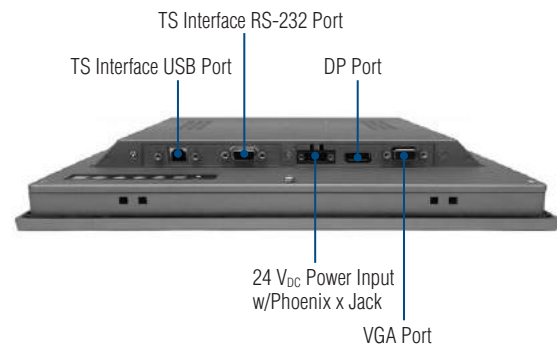

## Dimensions

Unit: mm

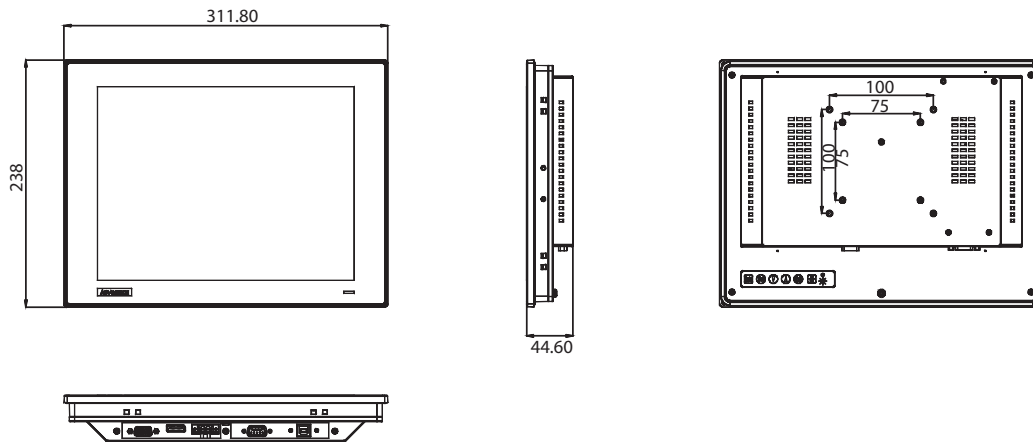

**Panel Cut-out Dimensions: 301.6 x 227.6 mm (11.87" x 8.96")**


## Ordering Information

- **FPM-7121T-R3AE** 12.1" XGA Ind Monitor w/Resistive TS (VGA/DP)

### Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **1757003934** ADAPTER 100-240V 60W 12V 5A W/O PFC  
DPS-60PB A A
- **FPM-2120G-RMKE** Rack-Mount Kit

## Front View

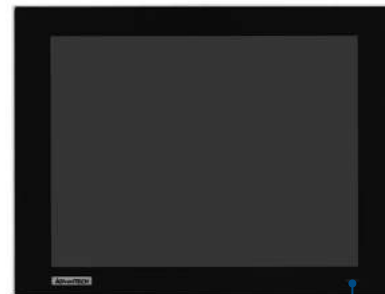


Power Indicator  
Blue: Power on  
Orange: Power off


## Side View

O-ring for dust & water protection while panel mounting

Panel mounting design  
(Clampers & screw included)

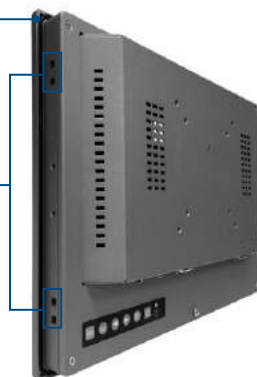

## Rear View

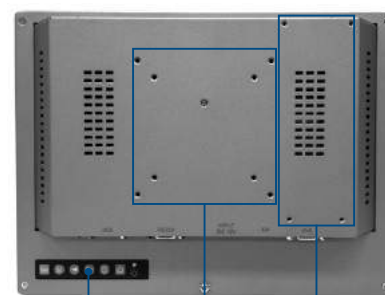

LCD OSD Control Keys

Adapter Mounting Area  
(Bracket included)

VESA Mount, Wall Mount  
& Desk Mount

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-5191G FPM-5171G FPM-5151G

## 15" XGA/17" SXGA/19" SXGA Industrial Monitors with Resistive Touchscreens, Direct-VGA, and DVI Ports



### Features

- 15" XGA or 17" / 19" SXGA TFT LED LCD with 50,000 backlight life time
- Direct VGA & DVI-D input interface
- Lockable OSD keys with 2 user-defined contrast/brightness settings
- Flat-sealed and IP65 certified front panel
- Robust design with anti-rust chassis and aluminum die-cast front panel
- Front accessible USB connector
- Combo RS-232 & USB interface for touchscreen function (optional)
- Supports industrial 10-30 V<sub>DC</sub> power input with Phoenix jack
- Supports panel, wall, desktop, rack or VESA arm mounting

### Introduction

The FPM-5000G series provides 15", 17" and 19" color TFT LCD with LED backlight flat panel monitors specifically designed for industrial applications. With a viewing size from 15" to 19", they present ample display areas as well as vivid and sharp images. It features Direct-VGA & DVI-D signal transmission, which allows VGA control cards to be used in your system. The onscreen display allows users to adjust the images on the screen with two user-defined settings. The front access USB connector provides easy access to the controller, and the industrial 10-30 V<sub>DC</sub> wide range power support makes this product an excellent option for Factory and Machine Automation display solutions.

### Specifications

#### General

- **Button Controls** OSD control pad on rear side with lockable function
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)**
  - 5151G: 449.92 x 315.63 x 50.5 mm (17.71" x 12.43" x 1.99")
  - 5171G: 481.9 x 355.9 x 55 mm (18.97" x 14.01" x 2.17")
  - 5191G: 481.93 x 384.6 x 59 mm (18.97" x 15.14" x 2.32")
- **Enclosure** Front panel: Aluminum and flat-sealed  
Rear cover: Anti-rust coating
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount
- **Power Input** Phoenix Jack - 10 ~ 30 V<sub>DC</sub> input  
Optional external 57 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 4.7A output
- **Power Consumption** 18 W + 20%/31 W + 20%/32 W + 20%
- **USB** Front USB access for extension
- **Video Port** VGA & DVI-D
- **Weight (Net)** 6 kg (13.22 lbs)/8 kg (17.63 lbs)/10 kg (22.04 lbs)

#### LCD Display

- **Display Type** XGA/SXGA/SXGA TFT LCDs
- **Display Size** 15"/17"/19"
- **Max. Resolution** 1024 x 768/1280 x 1024/1280 x 1024
- **Max. Color** 16.2M / 16.7M / 16.7M
- **Viewing Angle (H/V°)** 160/140, 170/160, 170/160
- **Luminance (cd/m<sup>2</sup>)** 400/350/350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700:1 / 1000:1 / 1000:1

#### Touchscreen (Optional)

- **Sensor** AMT
- **Driver** Penmount 6000
- **Type** 5-wire Resistive
- **Interface** RS-232 & USB
- **Lifespan** 10/10/36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- **Light Transmission** > 80%
- **OS Support** Windows XP, Vista, 7, 8, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

#### Environment


- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-5191G-X0BE** 19" SXGA Ind. Monitor
- **FPM-5191G-R3BE** 19" SXGA Ind. Monitor w/Resistive TS(RS-232,USB)
- **FPM-5171G-X0BE** 17" SXGA Ind. Monitor
- **FPM-5171G-R3BE** 17" SXGA Ind. Monitor w/Resistive TS(RS-232,USB)
- **FPM-5151G-X0BE** 15" XGA Ind. Monitor
- **FPM-5151G-R3BE** 15" XGA Ind. Monitor w/Resistive TS(RS-232,USB)

## Dimensions

Unit: mm [inch]

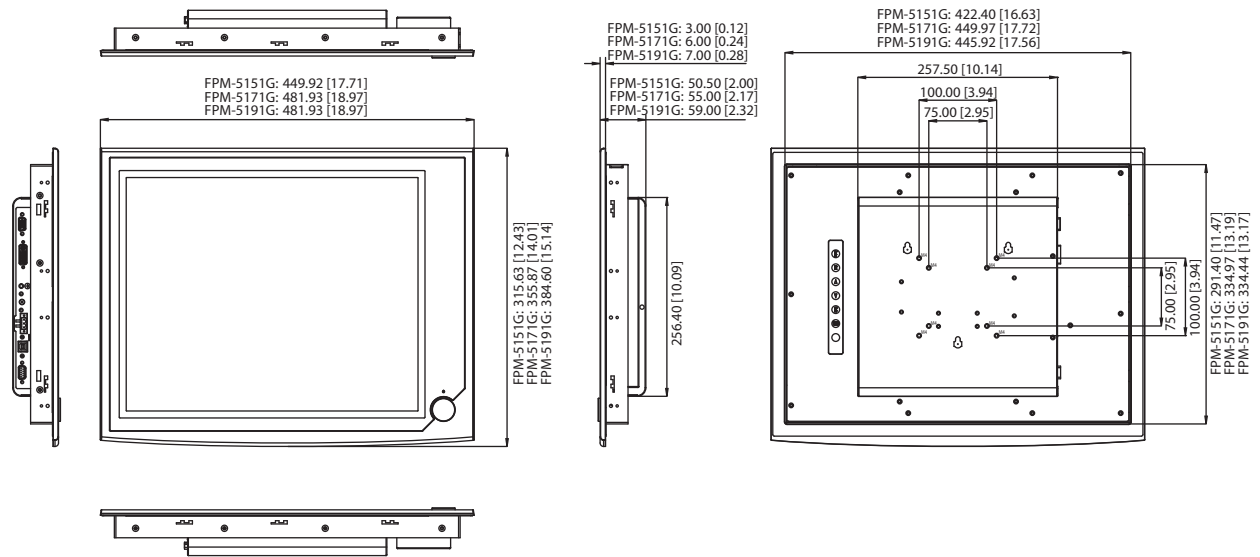

**Panel Cut-out Dimensions:** **FPM-5151G: 424 x 293 mm (16.69" x 11.54")**  
**FPM-5171G: 454 x 338 mm (17.87" x 13.31")**  
**FPM-5191G: 454 x 338 mm (17.87" x 13.31")**

## Accessories


- **FPM-5151G-SMKE** FPM-5151G/5171G Stand Kit
- **FPM-5191G-SMKE** FPM-5191G Stand Kit
- **IPPC-6152A-RMKE** IPPC-6152A/FPM-5151G Rack Mount Kit
- **IPPC-6172A-RMKE** IPPC-6172A/FPM-5171G Rack Mount Kit
- **IPPC-6192A-RMKE** IPPC-6192A/FPM-5191G Rack Mount Kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **1757003822** ADAPTER 100-240V57W12V4.75A W/O PFC SPU63-105 L5

Note: VESA mounting screw length: M4 x 6mm


## Front Accessible USB Port



## I/O View

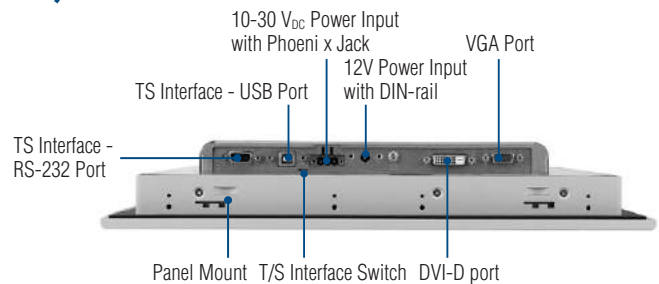

## Back View

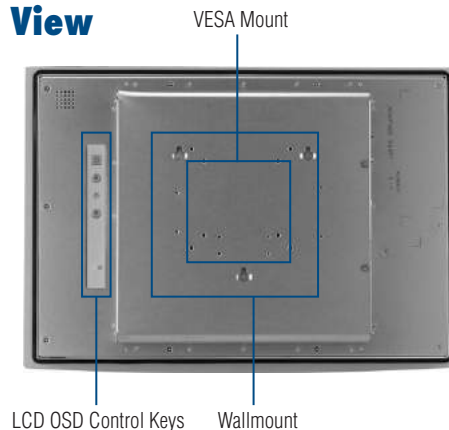

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-2170G

## 17" SXGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

NEW



### Features

- 17" SXGA TFT LED LCD with 50,000 backlight life time
- Robust design with aluminum front panel
- Anti-glare screen with tempered glass
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function

### Introduction

The FPM-2170G is an industrial-grade 17" TFT LCD with LED backlight flat panel monitor with an Al-Mg front panel, a modern appearance, and one of the most competitive prices for 17" LCD with LED backlight monitor on the market. The FPM-2170G are also extremely light and thin, and provides many industrial-grade features such as a stainless steel chassis, VESA mounting flexibility, and more. The FPM-2170G are especially suitable for industrial PCs such as IPC-610 or IPC-6806. This combination leads to an extremely reliable and tough system, ready to operate in a wide variety of industrial applications.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on rear cover
- **Certification** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 413.72 x 347.22 x 52.13 mm (16.29" x 13.67" x 2.05")
- **Enclosure** Front panel: Aluminum, Rear cover: SECC chassis
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** External 60 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 5 A output (included)
- **Video Port** VGA
- **Weight (Net)** 5.60 kg (12.34 lbs)

#### LCD Display

- **Display Type** SXGA TFT LCD with LED Backlight
- **Display Size** 17"
- **Max. Resolution** 1280 x 1024
- **Max. Color** 16.7M
- **Viewing Angle (H/V)°** 170°(V), 160°(H)
- **Luminance (cd/m<sup>2</sup>)** 350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 1000:1

#### Touchscreen (Optional)

- **Interface** Combo RS-232 & USB interface
- **Lifespan** 36 millions times with a silicone rubber of R8 finger, hitting rate is calculated as being 250g at 2 times per second
- **OS Support** Windows® XP, Vista, 7, 8, XPe, CE and Linux

#### Environment

- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front Panel IP65 Compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)


### Ordering Information

- **FPM-2170G-X0AE** 17" SXGA Industrial LED Monitor
- **FPM-2170G-R3AE** 17" SXGA Industrial LED Monitor w/Resistive TS (RS-232 and USB interfaces)



### Dimensions

Unit: mm [inch]

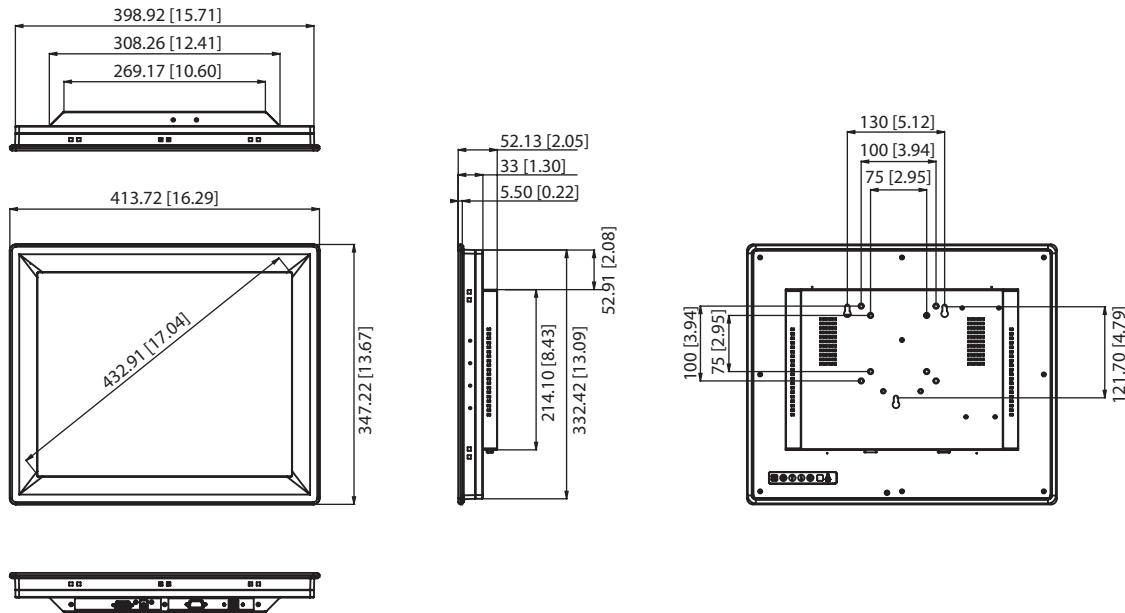

Panel Cut-out Dimensions: 400.92 x 334.42 mm (15.78" x 13.17")

### Accessories

- **FPM-2170G-RMKE** FPM-2170G Rack-Mount Kit
- **FPM-2120G-SMKE** FPM-2120G/2150G/2170G Stand Kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

### I/O View




- Touch Screen (USB)
- Touch Screen (RS-232)
- VGA Port
- DC Jack 12V<sub>DC</sub> (100-240V<sub>AC</sub> adapter included)

### Front View



### Rear View

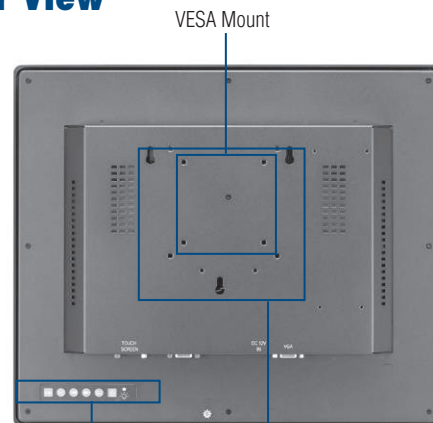

- VESA Mount
- OSD Control Keys
- Wallmount

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-2150G

## 15" XGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

NEW



### Features

- 15" XGA TFT LED LCD with 50,000 hours of backlight life
- Robust design with aluminum front panel
- Lockable OSD control pad on rear cover
- Anti-glare screen with tempered glass and IP65 certified front panel
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function

### Introduction

FPM-2150G is an industrial-grade 15" TFT LED LCD flat panel monitor with an Al-Mg front panel, a modern appearance, and one of the most competitive prices for 15" LCD monitors on the market. The FPM-2150G is also extremely light and thin, and provides many industrial-grade features such as a stainless steel chassis, VESA mounting flexibility, and more. The FPM-2150G is especially suitable for industrial PCs. This combination leads to an extremely reliable and tough system, ready to operate in a wide variety of industrial applications.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on rear cover
- **Certification** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 383 x 307 x 48.13 mm (15.08" x 12.09" x 1.89")
- **Enclosure** Front panel: Aluminum with coating, Rear cover: SECC coating chassis
- **Mounting** Panel, wall, desktop, VESA arm, or rackmount with optional mounting kit
- **Power Input** External 60 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 5 A output (included)
- **Video Port** VGA
- **Weight (Net)** 4.5 kg (9.9 lbs)

#### LCD Display

- **Display Type** XGA TFT LCD with LED backlight
- **Display Size** 15"
- **Max. Resolution** 1024 x 768
- **Max. Color** 16.2M
- **Viewing Angle (H/V)°** 160, 140
- **Luminance (cd/m<sup>2</sup>)** 400
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700:1

#### Touchscreen (Optional)

- **Interface** Combo RS-232 & USB interface
- **Lifespan** 36 millions times with a silicone rubber of R8 finger, hitting rate is calculated as being 250g at 2 times per second
- **OS Support** Windows® XP, Vista, 7, 8, XPe, CE and Linux

#### Environment


- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front Panel IP65
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-2150G-X0AE** 15" XGA Industrial LED Monitor
- **FPM-2150G-R3AE** 15" XGA Industrial LED Backlight Monitor w/Resistive TS (RS-232 and USB interfaces)

## Dimensions

Unit: mm [inch]

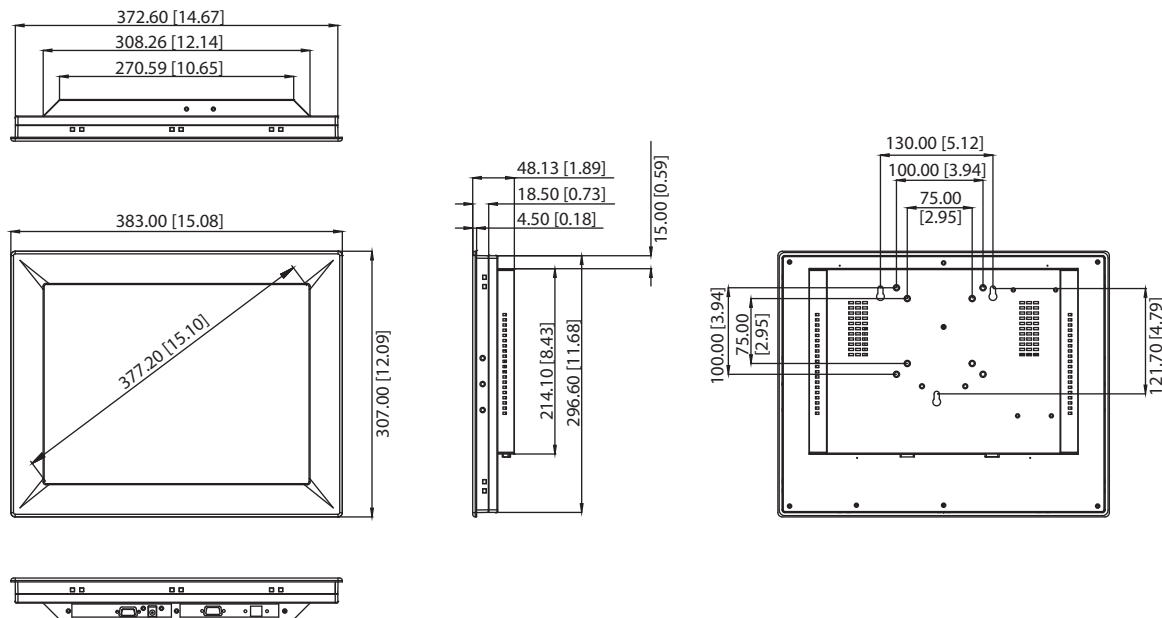


**Panel Cut-out Dimensions: 374.6 x 298.6 mm (14.75" x 11.76")**

## Accessories

- **FPM-2150G-R1MKE** FPM-2150G Rack-Mount Kit
- **FPM-2120G-SMKE** FPM-2120G/2150G/2170G Stand Kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

## I/O View

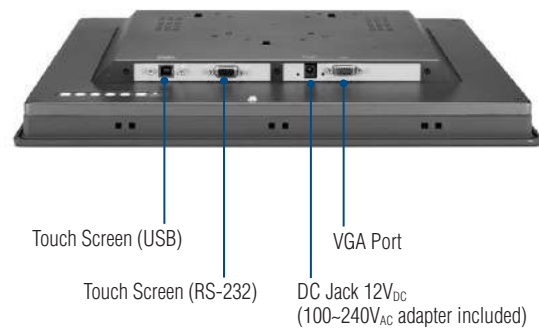

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# FPM-2120G

## 12" SVGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

NEW



### Features

- 12" SVGA TFT LED LCD with 50,000 backlight life time
- Robust design with aluminum front panel
- Anti-glare screen with tempered glass
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function

### Introduction

The FPM-2120G is an industrial-grade 12" TFT LCD with LED backlight flat panel monitor with an Al-Mg front panel, a modern appearance, and one of the most competitive prices for 12" LCD with LED backlight monitor on the market. The FPM-2120G are also extremely light and thin, and provides many industrial-grade features such as a stainless steel chassis, VESA mounting flexibility, and more. The FPM-2120G are especially suitable for industrial PCs such as IPC-610 or IPC-6806. This combination leads to an extremely reliable and tough system, ready to operate in a wide variety of industrial applications.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on rear cover
- **Certification** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 311 x 237 x 40.63 mm (12.24" x 9.33" x 1.60")
- **Enclosure** Front panel: Aluminum, Rear cover: SECC chassis
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** External 60 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 5 A output (included)
- **Video Port** VGA
- **Weight (Net)** 4kg (8.82 lbs)

#### LCD Display

- **Display Type** SVGA TFT LCD with LED backlight
- **Display Size** 12"
- **Max. Resolution** 800 x 600
- **Max. Color** 16.2M
- **Viewing Angle (H/V)°** 160°(V), 140°(H)
- **Luminance (cd/m<sup>2</sup>)** 450
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700:1

#### Touchscreen (Optional)

- **Interface** Combo RS-232 & USB interface
- **Lifespan** 36 millions times with a silicone rubber of R8 finger, hitting rate is calculated as being 250g at 2 times per second
- **OS Support** Windows® XP, Vista, 7, 8, XPe, CE and Linux

#### Environment


- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front Panel IP65 Compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-2120G-X0AE** 12" SVGA Industrial LED Monitor
- **FPM-2120G-R3AE** 12" SVGA Industrial LED Monitor w/Resistive TS (RS-232 and USB interfaces)

## Dimensions

Unit: mm [inch]

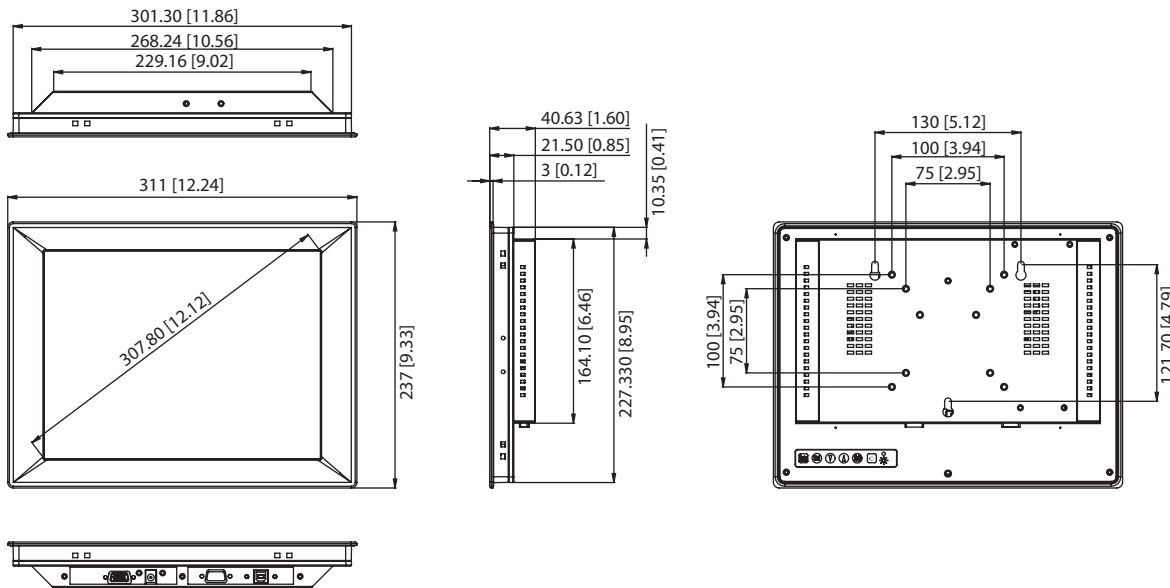

**Panel Cut-out Dimensions: 303.3 x 229.3 mm (11.94" x 9.03")**

## Accessories

- **FPM-2120G-SMKE** FPM-2120G/2150G/2170G Stand Kit
- **FPM-2120G-RMKE** FPM-2120G Rack-Mount Kit
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M
- **1702002600** Power Cable US Plug 1.8 M

## I/O View




- Touch Screen (USB)
- Touch Screen (RS-232)
- DC Jack 12V<sub>DC</sub>  
(100-240V<sub>AC</sub> adapter included)
- VGA Port

## Front View



## Rear View

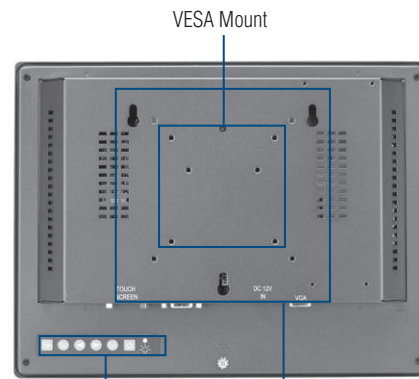

- VESA Mount
- OSD Control Keys
- Wallmount

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# TPC Installation Accessories

## TPC VESA Mounting Kit

### TPC-1000H-WMKE

#### Features


- Support VESA 75/100
- Adjustable design for 10" ~ 17" TPC
- Support any mounting with VESA

#### Ordering Information

- TPC-1000H-WMKE

#### Supported Models

- TPC-1250H, TPC-1550H, TPC-1750H
- TPC-1251H, TPC-1551H
- TPC-1071H, TPC-1271H, TPC-1571H, TPC-1771H
- TPC-1282T, TPC-1582H, TPC-1782H
- TPC-1251T, TPC-1551T, TPC-1751T

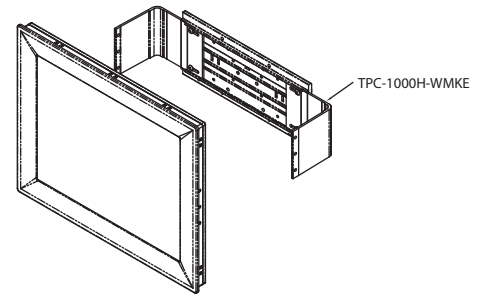

## TPC-Stand Kit

### TPC-1000H-SMKE

#### Features


- Adjustable design for 10" ~ 17" TPC
- Adjustable view angle from 10° ~ 30°
- Can be fixed stood on the horizontal plane

#### Ordering Information

- TPC-1000H-SMKE

#### Supported Models


- TPC-1250H, TPC-1550H, TPC-1750H
- TPC-1251H, TPC-1551H
- TPC-1071H, TPC-1271H, TPC-1571H, TPC-1771H
- TPC-1282T, TPC-1582H, TPC-1782H
- TPC-1251T, TPC-1551T, TPC-1751T

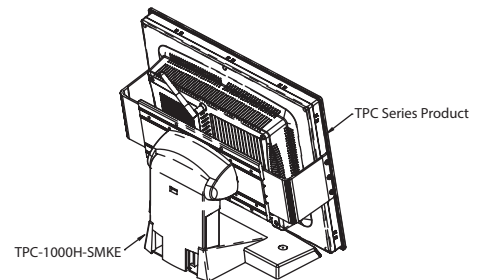

## TPC HDD Extension Kit

### Ordering Information & Supported Models

- TPC-651H-EHKE (HDD extension kit for TPC-1250H, TPC-1550H, TPC-1750H, TPC-1251H, TPC-1551H)
- TPC-1251T-EHKE (HDD and iDoor extension kit for TPC-1051WP, TPC-1251T, TPC-1551T, TPC-1551WP, TPC-1751T)

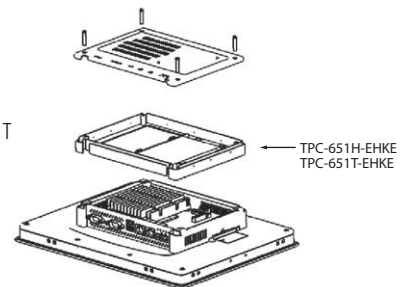

## SPC M12 connector Kit

### Ordering Information & Supported Models

- SPC-1840WP-MOKE (5 x M12 Connectors for SPC-1840WP/2140WP)
- SPC-1840WP-MCKE (5 x M12 Cables supporting standard I/O connector for SPC-1840WP/2140WP)
- TPC-8100TR-MOKE (9 x M12 Connectors for TPC-8100TR)
- TPC-8100TR-MCKE (9 x M12 Cables supporting standard I/O connector for TPC-8100TR)



## AC to DC Power Adapter



#### Features

- Input Voltage: 100-240V<sub>AC</sub>, 47Hz-63Hz
- Output Voltage: 24V<sub>DC</sub>

#### Supported Models

- TPC-50H-N series TPC-51H-Z series
- TPC-51T-E & TPC-51H-E series

#### Ordering Information

- PWR-247-BE

#### Features

- Input Voltage: 100-240V<sub>AC</sub>, 47Hz-63Hz
- Output Voltage: 24V<sub>DC</sub>









#### Supported Models

- TPC-1582H/1782H
- TPC-1581WP/TPC-1881WP

#### Ordering Information

- PWR-248-AE

#### Cable

Model Name	Part Number	Description
 	1702002600	Power Cable US Plug 1.8 M
 	1702002605	Power Cable EU Plug 1.8 M
 	1702031801	Power Cable UK Plug 1.8 M
 	1700000596	Power Cable China/Australia Plug 1.8 M

# FPM Accessories



Panel Mount

Desktop Stand

Arm Mount

Rack Mount

VESA Mount

## Panel Mount

(\* Included in accessory box)

Model Name	Part Number	Description
All FPM Series	1962055040*	CLAMPER PPC-55 M1632611 A2
	1935042520	Screw M4*25L R/S D=8.3 H=2.5 + ST BZn

## Rack Mount

Model Name	Part Number	Description
FPM-2120G	FPM-2120G-RMKE	FPM-2120G Rack-Mount Kit
FPM-2150G	FPM-2150G-R1MKE	FPM-2150G Rack-Mount Kit
FPM-2170G	FPM-2170G-RMKE	FPM-2170G Rack-Mount Kit
FPM-3121G	Not support	
FPM-3151G	FPM-3151G-RMKE	Mounting kit for 19" industrial rack
FPM-3171G FPM-3171S		Direct rack mounting, no need accessory
FPM-3191G FPM-3191S		Direct rack mounting, no need accessory
FPM-5000 series	IPPC-6152A-RMKE	IPPC-6152A/FPM-5151G Rack Mount Kit
	IPPC-6172A-RMKE	IPPC-6172A/FPM-5171G Rack Mount Kit
	IPPC-6192A-RMKE	IPPC-6192A/FPM-5191G Rack Mount Kit
FPM-7000 W series	Not support	
FPM-7121T	FPM-2120G-RMKE	
FPM-7151T	FPM-2150G-RMKE	





## Stand/Wall Mount

Model Name	Part Number	Description
FPM-2000 Series	FPM-2120G-SMKE	FPM-2120G/2150G/2170G Stand Kit
FPM-3121G	FPM-2150G-SMKE	Mounting kit for desktop stand & wall
FPM-3151G	FPM-2120G-SMKE	FPM-2120G/2150G/2170G Stand Kit
FPM-3171G FPM-3171S	1962317070*	FIX BRACKET (FOR FPM-3175TV) A1
	1962317080*	MOUNT BRACKET (R) (FOR FPM-3175TV) A1
	1962317090*	MOUNT BRACKET (L) (FOR FPM-3175TV) A1
FPM-3191G FPM-3191S	1962317070*	FIX BRACKET (FOR FPM-3175TV) A1
	19623190A0*	MOUNT BRACKET (L) (FOR FPM-3190TV) A1
	19623190B0*	MOUNT BRACKET (R) (FOR FPM-3190TV) A1
FPM-5000 series	FPM-5151G-SMKE	FPM-5151G/5171G Stand Kit
	FPM-5191G-SMKE	FPM-5191G Stand Kit
FPM-7000 series	FPM-7181W-SMKE	FPM-7181W Mounting kit for desktop & wall

## Adapter

Model Name	Part Number	Description
FPM-2000 series	1757003934*	ADAPTER 100-240V 60W 12V 5A W/O PFC DPS-60PB A A
FPM-3000 series	1757003822*	ADAPTER 100-240V57W12V4.75A W/O PFC SPU63-105 L5
FPM-5151/5171/5191G	1757003822	ADAPTER 100-240V57W12V4.75A W/O PFC SPU63-105 L5
FPM-5152/5172/5192G	1757002321	ADAPTER 100-240V 63W 24V 2.62A IPU63-108 SINPRO
FPM-7000 series	1757003934*	ADAPTER 100-240V 60W 12V 5A W/O PFC DPS-60PB A A

## Cable

Model Name	Part Number	Description
	1702002600	Power Cable US Plug 1.8 M
	1702002605	Power Cable EU Plug 1.8 M
	1702031801	Power Cable UK Plug 1.8 M
	1700000596	Power Cable China/Australia Plug 1.8 M
	1700000243	DVI CABLE 200cm FOR PDC-170
	1700019762	M CABLE DVI 24+1P(M)/DVI 24+1P(M) 300cm FPM-3121

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards





## Panel PCs

<b>Regular Panel PC selection guide</b>	<b>7-2</b>
<b>Performance Panel PC selection guide</b>	<b>7-3</b>
<b>Regular Panel PCs</b>	
<b>PPC-3190</b>	19" Fanless Panel PC with Intel Atom Quad-Core Processor <b>7-4</b>
<b>PPC-3170</b>	17" Fanless Panel PC with Intel Atom Quad-Core Processor <b>7-6</b>
<b>PPC-3150</b>	15" Fanless Panel PC with Intel Atom Quad-Core Processor <b>7-8</b>
<b>PPC-3120</b>	12.1" Fanless Panel PC with Intel® Atom™ D2550 Processor <b>7-10</b>
<b>PPC-3100</b>	10.4" Fanless Panel PC with Intel® Atom™ D2550 Processor <b>7-12</b>
<b>Performance Panel PCs</b>	
<b>PPC-4211W</b>	21.5" Fanless Wide Screen Panel PC with Intel Core i5 / Celeron Processor <b>7-14</b>
<b>PPC-4151W</b>	15.6" Fanless Wide Screen Panel PC with Intel Core i5 / Celeron Processor <b>7-16</b>
<b>PPC-6170</b>	17" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor <b>7-18</b>
<b>PPC-6150</b>	15" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor <b>7-20</b>
<b>PPC-6120</b>	12" Panel PC Supporting 4th Generation Intel® Core™ i / Celeron® Processors <b>7-22</b>
<b>PPC-8170</b>	17" Panel PC with Intel® Core™ i3 / i5 Processor <b>7-24</b>
<b>PPC-8150</b>	15" Panel PC with Intel® Core™ i3 / i5 Processor <b>7-26</b>
<b>Installation Accessories</b>	<b>7-28</b>

To view all of Advantech's Automation Panel PCs, please visit [www.advantech.com/products](http://www.advantech.com/products).

A Wide Portfolio of PPC  
Made to Fit Your needs

 **Advantech**

 **Economic**

Performance

 **Core i**



PPC-6000

**Core i**  
Industrial Features



PPC-8000

**Core i**  
Cost Effective



PPC-4000W

**Core i**  
Fanless



PPC-3000

**Atom**  
Full Functions



PPC-1000

**Atom**  
Simple I/O

Regular

 **Atom**

 **Core i**  
Pursue most updated performance

 **C/P!**  
High C/P and low TCO

 **Rich I/O**  
Ease for integration

 **Powerful but Compact and fanless**

# Regular Panel PC Selection Guide

NEW



NEW



NEW



NEW



Model	PPC-3190	PPC-3170	PPC-3150	PPC-3120	PPC-3100	PPC-L62T
CPU	Intel® Atom™ 1.91 GHz Processor	Intel® Atom™ 1.91 GHz Processor	Intel® Atom™ 1.91 GHz Processor	Intel® Atom™ 1.86 GHz Processor	Intel® Atom™ 1.86 GHz Processor	Intel® Atom™ 1.66 GHz Processor
Memory	1 x 204-pin SODIMM DDR3L support up to 8GB	1 x 204-pin SODIMM DDR3L support up to 8GB	1 x 204-pin SODIMM DDR3L support up to 8GB	1 x 204-pin SODIMM, DDR3/ DDRL (1066MHz), supports up to 4 GB	1 x 204-pin SODIMM, DDR3/ DDRL (1066MHz), supports up to 4 GB	1 x SO-DIMM DDR3 667 support up to 2GB
Display Type	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD
Display Size	19"	17"	15"	12.1"	10.4"	6.5"
Max. Resolution	1280 x 1024	1280 x 1024	1024 x 768	1024 x 768	800 x 600	640 x 480
Max. Colors	16.7M	16.7M	16.7M	262K	16.2 M	262K
Luminance cd/m <sup>2</sup>	350 nits	350 nits	400 nits	600 nits	400 nits	700 nits
Viewing Angle (H/V°)	85 (left), 85 (right), 80 (up), 80 (down)	80 (left), 80 (right), 60 (up), 80 (down)	80 (left), 80 (right), 70 (up), 70 (down)	80 (left), 80 (right), 70 (up), 70 (down)	80 (left), 80 (right), 70 (up), 70 (down)	80 (left), 80 (right), 70 (up), 70 (down)
Backlight MTBF (hrs)	50K hrs	50K hrs	50K hrs	50K hrs	30K hrs	50K hrs
Touchscreen	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire
Network (LAN)	2 x GbE (Intel I210)	2 x GbE (Intel I210)	2 x GbE (Intel I210)	2 x 10/100/1000 Mbps Ethernet	2 x 10/100/1000 Mbps Ethernet	2 x 10/100/1000 Mbps Ethernet
I/O Ports	1 x isolated RS-422/485 (terminal block) 4 x RS-232, two external and two by internal pin header (need optional module) 1 x GPIO (8 channels, TTL level) by internal pin header (need optional module) 1 x USB3.0 + 3 x USB2.0 2 x Gigabit Ethernet 1 x D-SUB VGA port 1 x DP1.1a 1 x Line-out, 1 x Mic-in, 2 x 1W speaker	1 x isolated RS-422/485 (terminal block) 4 x RS-232, two external and two by internal pin header (need optional module) 1 x GPIO (8 channels, TTL level) by internal pin header (need optional module) 1 x USB3.0 + 3 x USB2.0 2 x Gigabit Ethernet 1 x D-SUB VGA port 1 x DP1.1a 1 x Line-out, 1 x Mic-in, 2 x 1W speaker	1 x isolated RS-422/485 (terminal block) 4 x RS-232, two external and two by internal pin header (need optional module) 1 x GPIO (8 channels, TTL level) by internal pin header (need optional module) 1 x USB3.0 + 3 x USB2.0 2 x Gigabit Ethernet 1 x D-SUB VGA port 1 x DP1.1a 1 x Line-out, 1 x Mic-in, 2 x 1W speaker	4 x Serial ports: 3 x RS-232, 1x RS-232/422/485 (Adjustable through BIOS) 4 x USB 2.0 ports 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x DB9 GPIO port (8 pin programmable)	4 x Serial ports: 3 x RS-232, 1x RS-232/422/485 (Adjustable through BIOS) 4 x USB 2.0 ports 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x DB9 GPIO port (8 pin programmable)	2 x Serial ports: RS-232 x 1; RS-232/422/485 x 1; 4 x USB; 1 x Line-out
HDD (Optional)	2.5" SATA HDD/1 x Full size mSATA	2.5" SATA HDD/1 x Full size mSATA	2.5" SATA HDD/1 x Full size mSATA	1 x 2.5" SATA HDD Bay 1 x Full size mSATA	1 x 2.5" SATA HDD Bay 1 x Full size mSATA	1 x 2.5" SATA HDD Bay
Expansion Slots	One PCI (standard) One PCIe x 1 (in the accessory box)	One PCI (standard) One PCIe x 1 (in the accessory box)	One PCI (standard) One PCIe x 1 (in the accessory box)	1 x PCI/ 1 x PCI-e through riser (Optional)	-	-
Additional Expansion	1 x Full-size Mini PCIe	1 x Full-size Mini PCIe	1 x Full-size Mini PCIe	1x MINI PCI-e (Standard)	1x MINI PCI-e (Standard)	1x MINI PCI-e (Standard)
Power Input (Voltage)	9 ~ 32 V <sub>cc</sub>	9 ~ 32 V <sub>cc</sub>	9 ~ 32 V <sub>cc</sub>	12 ~ 30 V <sub>cc</sub>	12 ~ 30 V <sub>cc</sub>	15 ~ 24 V <sub>cc</sub>
Ingress Protection	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65
Mounting	PanMount, VESA 75/100, wall mount, stand, ARM	PanMount, VESA 75/100, wall mount, stand, ARM	PanMount, VESA 75/100, wall mount, stand, ARM	PanMount, VESA 75, wall mount, stand, ARM	PanMount, VESA 75, wall mount, stand, ARM	PanMount, VESA 75, wall mount, stand, ARM
Operating Temperature	0 ~ 50°C (32 ~ 122°F) with 2.5" SATA HDD -20 ~ 60°C (-4 ~ 140°F) with (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD	0 ~ 50°C (32 ~ 122°F) with 2.5" SATA HDD -20 ~ 60°C (-4 ~ 140°F) with (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD	0 ~ 50°C (32 ~ 122°F) with 2.5" SATA HDD -20 ~ 60°C (-4 ~ 140°F) with (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)	0 ~ 50°C (32 ~ 122°F)
Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)
Dimensions	458.2 x 384 x 67.3 mm (18" x 15" x 2.6")	442.0 x 362.0 x 69.5 mm (17.4" x 14.3" x 2.74")	396.5 x 317.6 x 65.3 mm (15.6" x 12.5" x 2.57")	325 x 253.8 x 58.4 mm (12.79" x 10" x 2.3")	275 x 220 x 64.3 mm (10.83" x 8.74" x 2.53")	202 x 148 x 49 mm (7.9" x 5.82" x 1.92")
Weight	7.9 Kg	6.3 Kg	5.3 Kg	3.3 Kg	2.5 Kg	1.5 Kg
Certification	BSMI, CE, FCC Class A CB, CCC, BSMI, UL	BSMI, CE, FCC Class A CB, CCC, BSMI, UL	BSMI, CE, FCC Class A CB, CCC, BSMI, UL	BSMI, CE, FCC Class B, CB, CCC, BSMI, UL	BSMI, CE, FCC Class B, CB, CCC, BSMI, UL	BSMI, CE, FCC Class B, CB, CCC, BSMI, UL
Operating System	WES7/ WIN 7/ WIN 8 32, 64 bit	WES7/ WIN 7/ WIN 8 32, 64 bit	WES7/ WIN 7/ WIN 8 32, 64 bit	WIN XPE/ XP Pro/ 7/ WES7 / CE 7.0	WIN XPE/ XP Pro/ 7/ WES7 / CE 7.0	WIN XPE/ XP Pro/ WES7/ CE 6.0
Page	7-4	7-6	7-8	7-10	7-12	Online

# Performance Panel PC selection guide

NEW



NEW



NEW



NEW



NEW



NEW



NEW



Model	PPC-4211W	PPC-4151W	PPC-6170	PPC-6150	PPC-6120	PPC-8170	PPC-8150
CPU	4th Gen. Intel® Core™ i5/ Celeron® Processor	4th Gen. Intel® Core™ i5/ Celeron® Processor	3rd Gen. Intel® Core™ i5/ i3/ Celeron Processor	3rd Gen. Intel® Core™ i5/ i3/ Celeron Processor	4th Gen. Intel® Core™ i5/ Celeron® Processor	3rd Gen. Intel® Core™ i5/ i3 Processor	3rd Gen. Intel® Core™ i5/ i3 Processor
Memory	SO-DIMM x 1, DDR3L1333/1600, Max 8GB	SO-DIMM x 1, DDR3L1333/1600, Max 8GB	1 x 204-pin SODIMM, DDR3 (1600 MHz)/ DDRL (1333 MHz), supports up to 8 GB	1 x 204-pin SODIMM, DDR3 (1600 MHz)/ DDRL (1333 MHz), supports up to 8 GB	2 x 204-pin SODIMM DDR3/DDR3L (1600 MHz) total up to 16G	2 x 204 PIN DDR3 SO-DIMM, DDR3 1066/ 1333/ 1600MHz SDRAM, up to 8 GB/ 4 GB per SO-DIMM	2 x 204 PIN DDR3 SO-DIMM, DDR3 1066/ 1333/ 1600MHz SDRAM, up to 8 GB/ 4 GB per SO-DIMM
Display Type	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD	TFT LED LCD
Display Size	21.5"	15.6"	17"	15"	12.1"	17"	15"
Max. Resolution	1920 x 1080	1366 x 768	1280 x 1024	1024 x 768	1024 x 768	1280 x 1024	1024 x 768
Max. Colors	16.7 M	16.7 M	262 K	262K	262K	16.7 M	262 K
Luminance cd/m <sup>2</sup>	300 nits	300 nits	350 nits	350 nits	600 nits	350 nits	400 nits
Viewing Angle (H/V°)	178°/ 178°	160°/ 170°	85 (left), 85 (right), 80 (up), 80 (down)	80 (left), 80 (right), 70 (up), 70 (down)	80 (left), 80 (right), 70 (up), 70 (down)	80 (left), 80 (right), 60 (up), 80 (down)	80 (left), 80 (right), 70 (up), 70 (down)
Backlight MTBF (hrs)	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs
Touchscreen	PCT Multi Touch or Analog Resistive 5-wire	PCT Multi Touch or Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire	Analog Resistive 5-wire
Network (LAN)	2 x 10/100/1000 Mbps Ethernet, Intel I211-AT, Intel I218LM	2 x 10/100/1000 Mbps Ethernet, Intel I211-AT, Intel I218LM	2 x GbE, supports Intel AMT9.0	2 x GbE, supports Intel AMT9.0	2 x GbE, supports Intel AMT9.0	2 x GbE connectors (RTL8111E)	2 x GbE connectors (RTL8111E)
I/O Ports	5 x Serial ports: 4 x RS-232, 1 x RS-422/485 with isolation 1K V <sub>oc</sub> 4 x USB 3.0 ports in rear side, 1 x USB 2.0 in right side 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x Display Port (1.2)	5 x Serial ports: 4 x RS-232, 1 x RS-422/485 with isolation 1K V <sub>oc</sub> 4 x USB 3.0 ports in rear side, 1 x USB 2.0 in right side 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x Display Port (1.2)	4 x COM ports, 1 x isolated RS-232/422/485, 3 x RS-232 1 x GPIO/RS-232 (8 channels, TTL level); by pin header 3 x USB3.0 + 2 x USB2.0 ports	4 x COM ports, 1 x isolated RS-232/422/485, 3 x RS-232 1 x GPIO/RS-232 (8 channels, TTL level); by pin header 3 x USB3.0 + 2 x USB2.0 ports	4 x USB3.0 (Ext.), 2 x USB2.0 (Int. pin head) 4 x RS-232 Serial ports, 1 x Isolated RS422/485 (1KVDC) 1 x Display Port 1.2 1 x DB15 VGA out 1 x Mic in, 1 x Line out	6 COMs, 1 x RS-232/422/485, 5 x RS-232, 6 x USB2.0 1 x VGA, 1 x DVI 1 x GPIO 8 bits (Internal pin header) 1 x Mic-in, 1 x Line-out 1 x PS/2 2 x 1.5W speaker	6 COMs, 1 x RS-232/422/485, 5 x RS-232, 6 x USB2.0 1 x VGA, 1 x DVI 1 x GPIO 8 bits (Internal pin header) 1 x Mic-in, 1 x Line-out 1 x PS/2 2 x 1.5W speaker
HDD (Optional)	2.5" SATA HDD	2.5" SATA HDD	1 x 2.5" SATA bay/ Second 2.5" SATA bay (Intel RAID supported, optional)	1 x 2.5" SATA bay/ Second 2.5" SATA bay (Intel RAID supported, optional)	2.5" SATA HDD bay x1 mSATA x1	2.5" SATA HDD	2.5" SATA HDD
Expansion Slots	1 x PCIe x1 (standard) 1 x PCI (in the accessory box)	1 x PCIe x1 (standard) 1 x PCI (in the accessory box)	one PCI + one PCIe x1 (standard) one x PCIe x4 (in the accessory box)	one PCI + one PCIe x1 (standard) one x PCIe x4 (in the accessory box)	1 x PCIe by 1/ 1 x PCI through riser (Optional)	One PCIe x4 (pre-installed) One PCI (in the accessory box)	One PCIe x4 (pre-installed) One PCI (in the accessory box)
Additional Expansion	1 x Mini PCIe slot 1 x mSATA card slot	1 x Mini PCIe slot 1 x mSATA card slot	1 x full-size mini PCIe (Supports mSATA) 1 x half-size mini PCIe	1 x full-size mini PCIe (Supports mSATA) 1 x half-size mini PCIe	1 x MiniPCIe (Standard)	1 x Mini PCIe	1 x Mini PCIe
Power Input (Voltage)	9 ~ 32 V <sub>dc</sub>	9 ~ 32 V <sub>dc</sub>	100 - 240 V <sub>ac</sub>	100 - 240 V <sub>ac</sub>	12 ~ 30 V <sub>dc</sub>	100 - 240 V <sub>ac</sub>	100 - 240 V <sub>ac</sub>
Ingress Protection	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65	Front panel: IP65
Mounting	Panel Mount, VESA 75/100, wall mount, stand, ARM	Panel Mount, VESA 75/100, wall mount, stand, ARM	Panel Mount, VESA 75/100, wall mount, stand, ARM	Panel Mount, VESA 75/100, wall mount, stand, ARM	Panel Mount, VESA 75/100, wall mount, stand, ARM	Panel Mount, VESA 75/100, wall mount, stand, ARM	Panel Mount, VESA 75/100, wall mount, stand, ARM
Operating Temperature	0 ~ 50° C (32 ~ 122° F) for SSD, 0~45° C for HDD	0 ~ 50° C (32 ~ 122° F) for SSD, 0~45° C for HDD	0 ~ 50° C (32 ~ 122° F)	0 ~ 50° C (32 ~ 122° F)	0 ~ 50° C (32 ~ 122° F)	0 ~ 50° C (32 ~ 122° F)	0 ~ 50° C (32 ~ 122° F)
Storage Temperature	- 20 ~ 60° C (-4 ~ 140° F)	- 20 ~ 60° C (-4 ~ 140° F)	-20 ~ 60° C (-4 ~ 140° F)	-20 ~ 60° C (-4 ~ 140° F)	- 20 ~ 60° C (-4 ~ 140° F)	- 20 ~ 60° C (-4 ~ 140° F)	- 20 ~ 60° C (-4 ~ 140° F)
Dimensions	419.7 x 269 x 59 mm (16.52" x 10.59" x 2.32")	419.7 x 269 x 59 mm (16.52" x 10.59" x 2.32")	442.0 x 362.0 x 113.5 mm (17.4" x 14.25" x 4.47")	395.5 x 316.8 x 105.5 mm (15.6" x 12.5" x 4.15")	325.00 x 253.80 x 73.80 mm (12.80" x 9.99" x 2.91")	442.0 x 362.0 x 113.5 mm (17.4" x 14.25" x 4.47")	395.5 x 316.8 x 110.5 mm (15.6" x 12.5" x 4.35")
Weight	7.8 Kg	5.69 Kg	7.5 Kg	6.5 Kg	3.8 Kg	9.2 Kg	6.98 Kg
Certification	BSMI, CCC, CE, FCC Class B, UL	BSMI, CCC, CE, FCC Class B, UL	BSMI, CE, FCC Class A CB, CCC, BSMI, UL	BSMI, CE, FCC Class A CB, CCC, BSMI, UL	BSMI, CE, FCC Class A, CB, CCC, BSMI, UL	BSMI, CCC, CE, FCC Class A, UL	BSMI, CCC, CE, FCC Class A, UL
Operating System	WIN 7/8 /Linux	WIN 7/8 /Linux	WIN XPE/ XP Pro/ WES7 32, 64 bit/ 7 32, 64 bit	WIN XPE/ XP Pro/ WES7 32, 64 bit/ 7 32, 64 bit	WIN 7 32, 64bit/ 8 32, 64bit/ Linux	WIN XP Pro/ 7 32, 64 bit	WIN XP Pro/ 7 32, 64 bit
Page	7-14	7-16	7-18	7-20	7-22	7-24	7-26

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# PPC-3190

## 19" Fanless Panel PC with Intel Atom Quad-Core Processor

**NEW**



### Features

- 19" TFT SXGA LCD with resistive touchscreen
- Embedded Intel Atom Quad-Core E3845 1.91G
- Fanless and Slim design
- Supports one internal 2.5" SATA HDD, one mSATA socket
- Built-in one PCI or one PCIe x1 expansion slot
- Wide operating temp. range from -20~60°C
- Wide range power input for 9~32V<sub>DC</sub>
- One isolated RS-422/485 with Autoflow, Dual Intel GbE
- One optional GPIO (8 channels, TTL level)

### Introduction


The PPC-3190 is a 19" fanless panel PC that doesn't only deliver high performance with an Intel quad-core Atom processor but also supports a wide operating temp. (-20~60°C) and wide range of power input (9~32V<sub>DC</sub>). It consolidates performance and reliability in one system. With multiple I/Os such as 4 x COM, 1 x USB3.0, 1x isolated RS-422/485 and dual Intel Gigabit Ethernet make it easier to connect to devices and be integrated into machine building industry. The PCI/PCIe expansion is allowed to add on field bus or proprietary card makes more application possibility.

### Specifications

<b>Processor system</b>	CPU	Intel ATOM E3845
	Frequency	1.91 GHz
	L3 Cache	2M
	Chipset	Intel Bay-Trial I
	Memory	1 x 204-pin SODIMM DDR3L support up to 8GB
	Storage 1	1 x 2.5" SATA bay
	Optional Storage & I/O	Either: <ul style="list-style-type: none"> <li>▪ 1 x Full size mSATA</li> <li>▪ CFast card (optional module)</li> <li>▪ CF card (optional module)</li> <li>▪ Internal USB connector for USB dongle (optional module)</li> <li>▪ 2 x DB9 for two RS-232 or one RS-232 and one GPIO (optional module)</li> </ul>
	Network (LAN)	2 x Gigabit Ethernet, (Intel I210)
<b>Physical Characteristics</b>	I/O Ports	<ul style="list-style-type: none"> <li>▪ 1 x isolated RS-422/485 (terminal block)</li> <li>▪ 4 x RS-232, two external and two by internal pin header (need optional module)</li> <li>▪ 1 x GPIO (8 channels, TTL level) by internal pin header (need optional module)</li> <li>▪ 1 x USB3.0 + 3 x USB2.0</li> <li>▪ 2 x Gigabit Ethernet</li> <li>▪ 1 x D-SUB VGA port</li> <li>▪ 1 x DP1.1a</li> <li>▪ 1 x Line-out, 1 x Mic-in, 2 x 1W speaker,</li> </ul>
	Expansion slots	Either <ul style="list-style-type: none"> <li>▪ One PCI (standard)</li> <li>▪ One PCIe x 1 (in the accessory box)</li> </ul>
	Other Expansion	1 x Full-size Mini PCIe
	Dimensions	458.2 x 384 x 67.3(mm)(18" x 15" x 2.6")
<b>OS support</b>	Weight	7.9kg (17.3lb)
	OS Support	WES7 32&64bit / Windows 7 32&64bit/ Windows 8 32&64bit
<b>Power supply</b>	Input Voltage	9-32 V <sub>DC</sub>
	Power Consumption	27W (Burn-In test 7.0 in windows 7 32bits)
<b>LCD Display</b>	Display Type	19" TFT LCD (LED Backlight)
	Max. Resolution	1280 x 1024
	Colors	16.7M
	Viewing Angle	85 (left), 85 (right), 80 (up), 80 (down)
	Luminance(cd/m2)	350
	Contrast Ratio	1000
Backlight Lifetime	50,000 hrs (typ.)	

**Dimensions**

Unit: mm

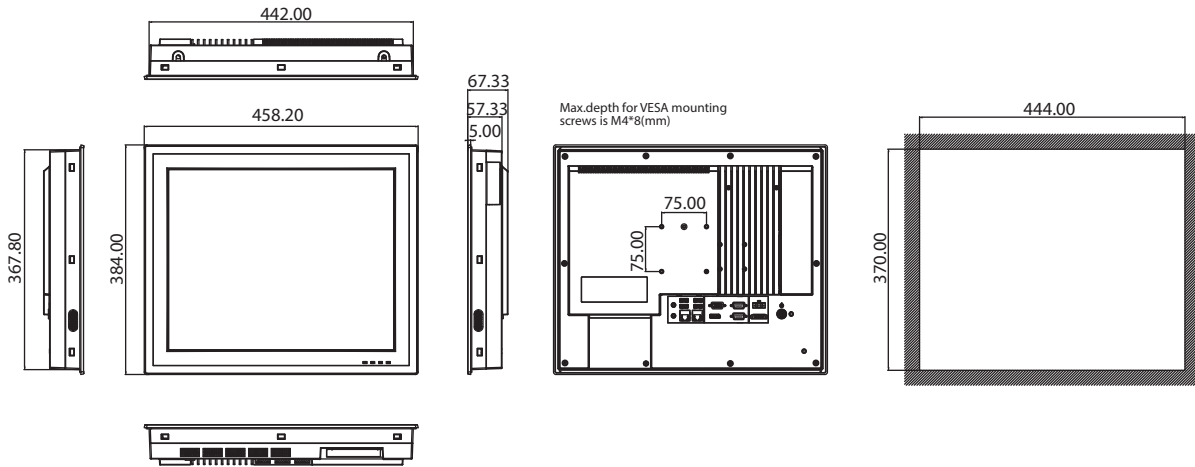


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Light Transmission	81% ± 3 %
	Controller	USB interface
	Software Driver Supports	Windows 7 / Windows 8
	Durability (Touches)	36 million
<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F) with 2.5" SATA HDD -20 ~ 60°C (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class A
	Safety	CB, CCC, BSMI, UL
	Front Panel Protection	IP65 compliant

**Ordering Information**

Part NO	Description
PPC-3190-RE4AE	Intel Atom E3845(1.91G), 19" SXGA LED&T/S, W/O RAM
PPC-WLAN-A2E	WiFi Module with Antenna Cable 40cm for PPC
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
PPC-3190-COME	Module to install either two additional RS-232 port or one additional RS-232 and one GPIO for PPC-3190
PPC-3150-USB	Module to install internal USB dongle for PPC-3150/ PPC-3170
PS-DC19-L157E	19V DC power adapter module for fanless PPC series
1700001524	Power cord 3P UL 10A 125V 1.8M
170203183C	Power cord 3P Europe (WS-010+083) 183cm
1700008921	Power cord 3P/3P 1.8M PSE
2070013015	Image WES7P 32-bit Multi V4.12 for PPC-3150/3170
2070013321	Image WES7P 64-bit Multi V4.12 for PPC-3150/3170
PPC-STAND-A1E	Stand For PPC Series (single acting hinge)
PPC-174 Stand	Stand for PPC Series (double acting hinges)

**I/O Appearance**

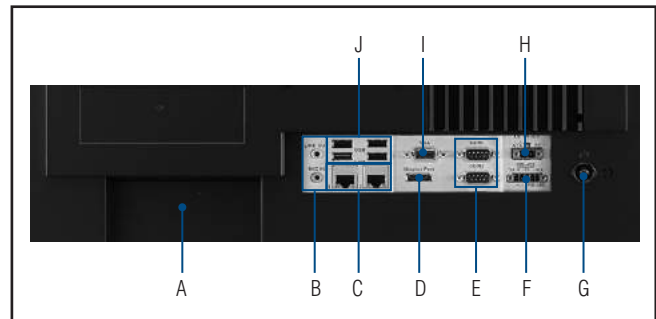

- A. Expansion slot x 1 (PCI or PCIe x1)
- B. Line out/ Mic in
- C. Intel Gigabit Ethernet x 2
- D. DisplayPort x 1
- E. RS-232 x 2
- F. Isolated RS-422/485 x 1
- G. Power Button
- H. DC inlet and AT/ATX switch
- I. VGA x1
- J. USB3.0 x 1 + USB2.0 x 3

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-3170

## 17" Fanless Panel PC with Intel Atom Quad-Core Processor

**NEW**



susiAccess       us

### Features

- 17" TFT SXGA LCD with resistive touchscreen
- Embedded Intel Atom Quad-Core E3845 1.91G
- Fanless and Slim design
- Supports one internal 2.5" SATA HDD, one mSATA socket
- Built-in one PCI or one PCIe x1 expansion slot
- Wide operating temp. range from -20~60°C
- Wide range power input for 9~32V<sub>DC</sub>
- One isolated RS-422/485 with Autoflow, Dual Intel GbE
- One optional GPIO (8 channels, TTL level)

### Introduction


The PPC-3170 is a 17" fanless panel PC that doesn't only deliver high performance with an Intel quad-core Atom processor but also supports a wide operating temp. (-20~60°C) and wide range of power input (9~32V<sub>DC</sub>). It consolidates performance and reliability in one system. With multiple I/Os such as 4 x COM, 1 x USB3.0, 1x isolated RS-422/485 and dual Intel Gigabit Ethernet make it easier to connect to devices and be integrated into machine building industry. The PCI/PCIe expansion is allowed to add on field bus or proprietary card makes more application possibility.

### Specifications

<b>Processor system</b>	CPU	Intel ATOM E3845
	Frequency	1.91 GHz
	L3 Cache	2M
	Chipset	Intel Bay-Trial I
	Memory	1 x 204-pin SODIMM DDR3L support up to 8GB
	Storage 1	1 x 2.5" SATA bay
	Optional Storage & I/O	Either: <ul style="list-style-type: none"> <li>▪ 1 x Full size mSATA</li> <li>▪ CFast card (optional module)</li> <li>▪ CF card (optional module)</li> <li>▪ Internal USB connector for USB dongle (optional module)</li> <li>▪ 2 x DB9 for two RS-232 or one RS-232 and one GPIO (optional module)</li> </ul>
	Network (LAN)	2 x Gigabit Ethernet, (Intel I210)
<b>Physical Characteristics</b>	I/O Ports	<ul style="list-style-type: none"> <li>▪ 1 x isolated RS-422/485 (terminal block)</li> <li>▪ 4 x RS-232, two external and two by internal pin header (need optional module)</li> <li>▪ 1 x GPIO (8 channels, TTL level) by internal pin header (need optional module)</li> <li>▪ 1 x USB3.0 + 3 x USB2.0</li> <li>▪ 2 x Gigabit Ethernet</li> <li>▪ 1 x D-SUB VGA port</li> <li>▪ 1 x DP1.1a</li> <li>▪ 1 x Line-out, 1 x Mic-in, 2 x 1W speaker,</li> </ul>
	Expansion slots	Either <ul style="list-style-type: none"> <li>▪ One PCI (standard)</li> <li>▪ One PCIe x 1 (in the accessory box)</li> </ul>
	Other Expansion	1 x Full-size Mini PCIe
	Dimensions	442.0 x 362.0 x 69.5 (mm) (17.4" x 14.3" x2.74")
<b>OS support</b>	Weight	6.3 Kg (13.89lb)
	OS Support	WES7 32&64bit / Windows 7 32&64bit/ Windows 8 32&64bit
<b>Power supply</b>	Input Voltage	9-32 V <sub>DC</sub>
	Power Consumption	34W (Burn-In test 7.0 in windows 7 32bits)
<b>LCD Display</b>	Display Type	17" TFT LCD (LED Backlight)
	Max. Resolution	1280 x 1024
	Colors	16.7M
	Viewing Angle	80 (left), 80 (right), 60 (up), 80 (down)
	Luminance(cd/m2)	350
	Conrast Ratio	800
	Backlight Lifetime	50,000 hrs(typ.)

**Dimensions**

Unit: mm

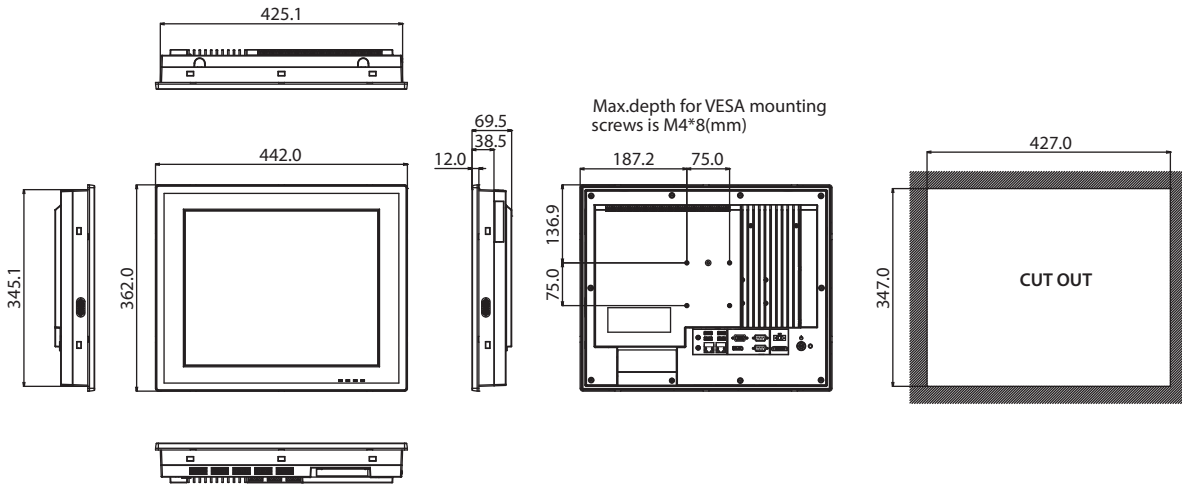


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	80% ± 3 %.
	Controller	USB interface
	Software Driver Supports	Windows 7 / Windows 8
	Durability (Touches)	36 million
<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F) with 2.5" SATA HDD -20 ~ 60°C (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class A
	Safety	CB, CCC, BSMI, UL
	Front Panel Protection	IP65 compliant

**Ordering Information**

Part NO	Description
PPC-3170-RE4AE	Intel Atom E3845 (1.91G) Panel PC with 17" SXGA panel, 5-wire resistive T/S, w/o memory
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-174 Stand	Stand for PPC Series (double acting hinges)
PPC-ARM-A03	PPC ARM VESA Standard
PPC-3150-CFE	Module to install CF card for PPC-3150/PPC-3170
PPC-3150-CFASTE	Module to install CFast card for PPC-3150/PPC-3170
PPC-3150-COME	Module to install either two additional RS-232 port or one additional RS-232 and one GPIO for PPC-3150/PPC-3170
PPC-3150-USBE	Module to install internal USB dongle for PPC-3150/PPC-3170
PS-DC19-L157E	19V DC power adapter module for fanless PPC series
1700001524	Power cord 3P UL 10A 125V 1.8M
170203183C	Power cord 3P Europe (WS-010+083) 183cm
1700008921	Power cord 3P/3P 1.8M PSE
2070013015	Image WES7P 32-bit Multi V4.12 for PPC-3150/3170
PPC-175 RACK-MT	19" Rack Mounting kit for PPC-175
2070013321	Image WES7P 64-bit Multi V4.12 for PPC-3150/3170
PPC-STAND-A1E	Stand For PPC Series (single acting hinge)

**I/O Appearance**

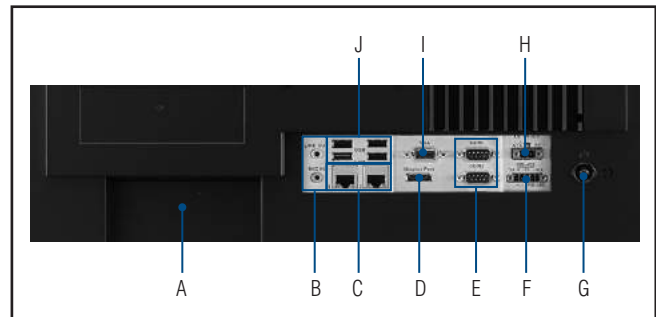

- A. Expansion slot x 1 (PCI or PCIe x1)
- B. Line out/ Mic in
- C. Intel Gigabit Ethernet x 2
- D. DisplayPort x 1
- E. RS-232 x 2
- F. Isolated RS-422/485 x 1
- G. Power Button
- H. DC inlet and AT/ATX switch
- I. VGA x1
- J. USB3.0 x 1 + USB2.0 x 3

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-3150

## 15" Fanless Panel PC with Intel Atom Quad-Core Processor

**NEW**



susiAccess      

### Features

- 15" TFT XGA LCD with resistive touchscreen
- Embedded Intel Atom Quad-Core E3845 1.91G
- Fanless and Slim design
- Supports one internal 2.5" SATA HDD, one mSATA socket
- Built-in one PCI or one PCIe x1 expansion slot
- Wide operating temp. range from -20~60°C
- Wide range power input for 9~32V<sub>DC</sub>
- One isolated RS-422/485 with Autoflow, Dual Intel GbE
- One optional GPIO (8 channels, TTL level)

### Introduction

The PPC-3150 is a 15" fanless panel PC that doesn't only deliver high performance with an Intel quad-core Atom processor but also supports a wide operating temp. (-20~60°C) and wide range of power input (9~32V<sub>DC</sub>). It consolidates performance and reliability in one system. With multiple I/Os such as 4 x COM, 1 x USB3.0, 1x isolated RS-422/485 and dual Intel Gigabit Ethernet make it easier to connect to devices and be integrated into machine building industry. The PCI/PCIe expansion is allowed to add on field bus or proprietary card makes more application possibility.


### Specifications

<b>Processor system</b>	CPU	Intel ATOM E3845
	Frequency	1.91GHz
	L3 Cache	2M
	Chipset	Intel Bay-Trial I
	Memory	1 x 204-pin SODIMM DDR3L support up to 8GB
	Storage 1	1 x 2.5" SATA bay
	Optional Storage & I/O	Either: <ul style="list-style-type: none"> <li>▪ 1 x Full size mSATA</li> <li>▪ CFast card (optional module)</li> <li>▪ CF card (optional module)</li> <li>▪ Internal USB connector for USB dongle (optional module)</li> <li>▪ 2 x DB9 for two RS-232 or one RS-232 and one GPIO (optional module)</li> </ul>
<b>Physical Characteristics</b>	Network (LAN)	2 x Gigabit Ethernet, (Intel I210)
	I/O Ports	<ul style="list-style-type: none"> <li>▪ 1 x isolated RS-422/485 (terminal block)</li> <li>▪ 4 x RS-232, two external and two by internal pin header (need optional module)</li> <li>▪ 1 x GPIO (8 channels, TTL level) by internal pin header (need optional module)</li> <li>▪ 1 x USB3.0 + 3 x USB2.0</li> <li>▪ 2 x Gigabit Ethernet</li> <li>▪ 1 x D-SUB VGA port</li> <li>▪ 1 x DP1.1a</li> <li>▪ 1 x Line-out, 1 x Mic-in, 2 x 1W speaker,</li> </ul>
	Expansion slots	Either <ul style="list-style-type: none"> <li>▪ One PCI (standard)</li> <li>▪ One PCIe x 1 (in the accessory box)</li> </ul>
	Other Expansion	1 x Full-size Mini PCIe
<b>OS support</b>	Dimensions	396.5 x 317.6 x 65.3 (15.6" x 12.5" x 2.57")
	Weight	5.3 Kg (11.68 lb)
<b>Power supply</b>	OS Support	WES7 32&64bit / Windows 7 32&64bit/ Windows 8 32&64bit
	Input Voltage	9-32 V <sub>DC</sub>
<b>LCD Display</b>	Power Consumption	30W (Burn-In test 7.0 in windows 7 32bits)
	Display Type	15" TFT LCD (LED Backlight)
	Max. Resolution	1024 x 768
	Colors	16.7M
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)
	Luminance(cd/m2)	400
	Contrast Ratio	700
Backlight Lifetime	50, 000 hrs(typ.)	



Dimensions

Unit: mm

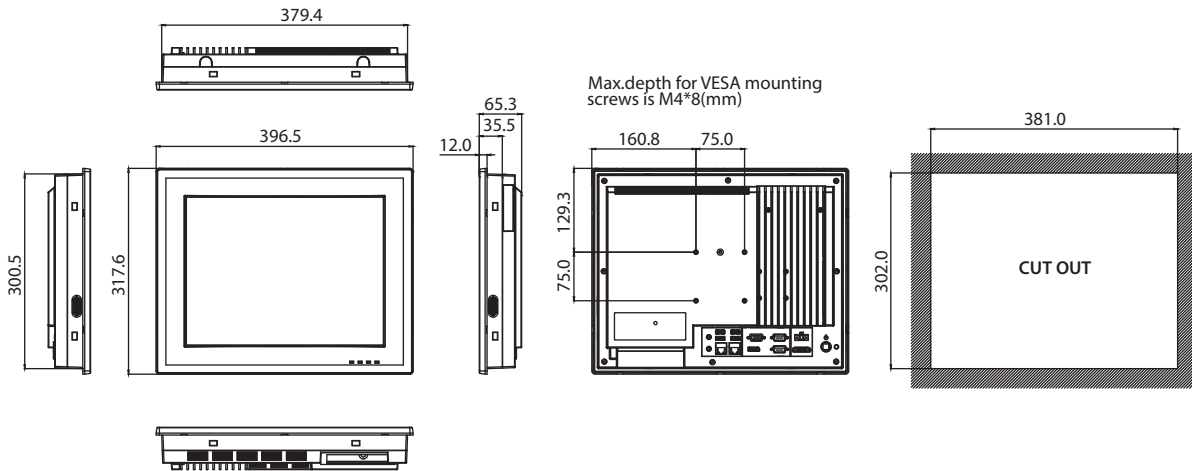


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	80% ± 3 %
	Controller	USB interface
	Software Driver Supports	Windows7 / Windows 8
	Durability (Touches)	36 million
<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F) with 2.5" SATA HDD -20 ~ 60°C (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class A
	Safety	CB, CCC, BSMI, UL
	Front Panel Protection	IP65 compliant

Ordering Information

Part NO	Description
PPC-3150-RE4AE	Intel Atom E3845 (1.91G) Panel PC with 15" XGA panel, 5-wire resistive T/S, w/o memory
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
PPC-3150-CFE	Module to install CF card for PPC-3150/PPC-3170
PPC-3150-CFASTE	Module to install CFast card for PPC-3150/PPC-3170
PPC-3150-COME	Module to install either two additional RS-232 port or one additional RS-232 and one GPIO for PPC-3150/PPC-3170
PPC-3150-USBE	Module to install internal USB dongle for PPC-3150/PPC-3170
PS-DC19-L157E	19V DC power adapter module for fanless PPC series
1700001524	Power cord 3P UL 10A 125V 1.8M
170203183C	Power cord 3P Europe (WS-010+083) 183cm
1700008921	Power cord 3P/3P 1.8M PSE
2070013015	Image WES7P 32-bit Multi V4.12 for PPC-3150/3170
2070013321	Image WES7P 64-bit Multi V4.12 for PPC-3150/3170
PPC-174 Stand	Stand for PPC Series (double acting hinges)
PPC-STAND-A1E	Stand For PPC Series (single acting hinge)

I/O Appearance

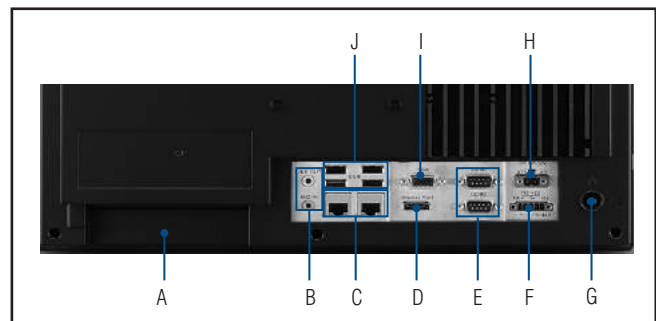

- A. Expansion slot x 1 (PCI or PCIe x1)
- B. Line out/ Mic in
- C. Intel Gigabit Ethernet x 2
- D. DisplayPort x 1
- E. RS-232 x 2
- F. Isolated RS-422/485 x 1
- G. Power Button
- H. DC inlet and AT/ATX switch
- I. VGA x1
- J. USB3.0 x 1 + USB2.0 x 3

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-3120

## 12.1" Fanless Panel PC with Intel® Atom™ D2550 Processor

**NEW**



### Features

- 12.1" TFT XGA LED Panel with resistive touchscreen
- Embedded Intel® Atom™ processor D2550 1.86 GHz
- System memory up to 4 GB DDR3 1066 SDRAM
- Supports one internal SATA 2.5" HDD and 1 x mSATA socket
- Optional PCI/PCIe x1 expansion kit
- Fanless design and low power consumption
- Automatic data flow control over RS-485
- Adjust RS-232/422/485 through BIOS
- COM1/COM2 pin9 RI/5V/12V adjustable through BIOS
- Auto dimming LED backlight

### Introduction


The PPC-3120 is a new 12.1" Panel PC equipped with an Intel Atom processor D2550. Meeting high demands of harsh environments, the fanless design makes PPC-3120 more reliable in different kinds of applications for the machine building industry. In addition, the dual GbE LAN, 4 x serial ports, 4 x USB ports, and GPIO connector make it easier to connect to devices and be integrated into specific solutions. With a user friendly design it comes with an LED indicator on the front panel for power on/off, storage access, and LAN active status.

### Specifications

<b>Processor System</b>	CPU	Intel Atom D2550 1.86 GHz 10W Dual Core CPU on board
	Memory	SODIMM x 1, DDR3 1066, Max 4 GB
	2nd Cache Memory	1 MB
	Chipset	Intel NM10
	Storage	mSATA*1
	HDD	1 x 2.5" SATA HDD Bay (Internal)
	I/O Ports	4 x Serial ports: 3 x RS-232, 1x RS-232/422/485 (Adjustable through BIOS) 4 x USB 2.0 ports 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x DB9 GPIO port (8 pin programmable)
	Bus Expansion	1x MINI PCI-e (Standard), 1 x PCI / 1 x PCI-e through riser (Optional)
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet
	Speaker	2 x 1W speakers
	Watchdog Timer	255 timer levels; setup by software
	Dimensions (W x H x D)	325 x 253.8 x 58.4 mm (12.79" x 10" x 2.3")
Weight	3.3 kg (7.27 lb)	
<b>OS Support</b>	OS Support	Win XPE, Win XP Pro, WES7 32 bit, Win CE 7.0, Win 7
<b>Power Supply</b>	Input Voltage	DC 12 ~ 30 V
<b>LCD Display</b>	Display Type	12.1" TFT LCD (LED Backlight)
	Max. Resolution	1024 x 768
	Colors	16.2M
	Dot Size (mm)	0.24 x 0.24
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)
	Luminance (cd/m <sup>2</sup> )	600
	Brightness Control	Yes
	Backlight Lifetime	50,000 hrs (typical)
<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	81+/-3%
	Controller	RS-232 interface
	Software Driver Support	Windows 7, XP, CE
	Durability (Touches)	36 million

**Dimensions**

Unit: mm

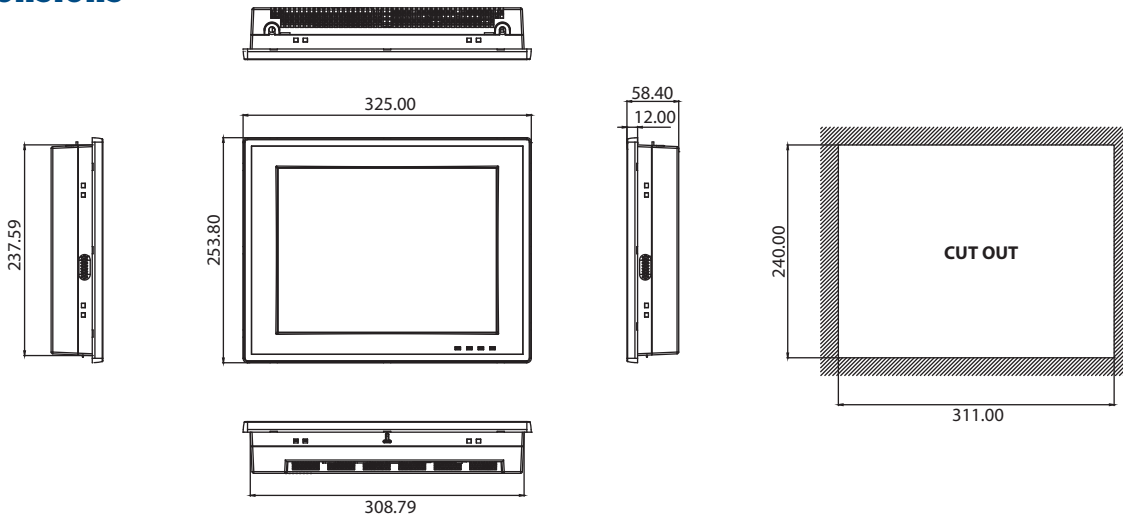


<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class B
	Safety	CB, CCC, BSMI, UL
Front Panel Protection	IP65 compliant	

**Ordering Information**

Part No.	Description
PPC-3120-RAE	Atom D2550 Fanless PPC with 12.1" XGA LED backlight, touch, without memory
PS-DC19-L157E	19V power adapter module
1700001524	Power cord 3P UL 10A 125V 1.8m
170203183C	Power cord 3P Europe (WS-010+083)183cm
1700008921	Power cord 3P/3P Power supply 1.8M PSE
* PPC-174T-WL-MTE	Wall mount kit for PPC series
* PPC-ARM-A03	PPC ARM VESA Standard
* PPC-STAND-A1E	Stand For PPC Series (single acting hinge)
PPC-3100-VESAE	PPC-3100 VESA bracket module
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
PPC-3120-EXPE	Add-on box for PCI or PCIe expansion (include PCI / PCIe riser card)
PPC-3120-USBE	Kit to install internal USB dongle for PPC-3120
2070012891	Image WES7P 32-bit Multi V4.12 PPC-3120/3100
2070011967	Image windows XPE WES2009 PPC-3120 V4.3 MUI SA
2070012979	Image WEC7 PPC-3120 V4.00 Eng

\* If you order Wall mount kit / ARM / Desktop stand, please also order PPC-3100-VESAE at the same time.

**I/O**

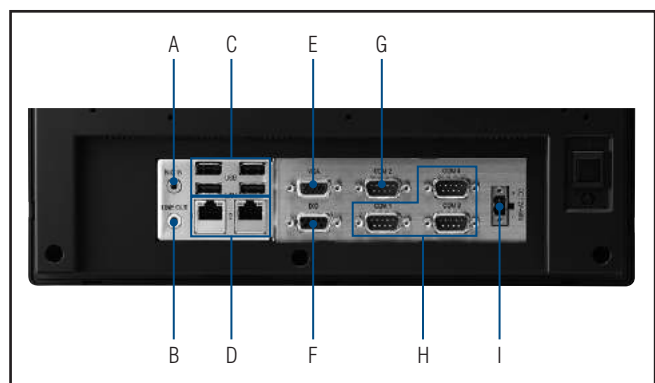

- A. MIC in
- B. Line Out
- C. USB 2.0 x 4
- D. 10/100/1000 Mbps Ethernet x 2
- E. VGA Port
- F. DIO Port
- G. RS-232/422/485 x 1
- H. RS-232 x 3
- I. DC Inlet

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-3100

## 10.4" Fanless Panel PC with Intel® Atom™ D2550 Processor



### Features

- 10.4" TFT SVGA LED Panel with resistive touchscreen
- Embedded Intel® Atom™ processor D2550 1.86 GHz
- System memory up to 4 GB DDR3 1066 SDRAM
- Supports one internal SATA 2.5" HDD and 1 x mSATA socket
- Fanless design and low power consumption
- Automatic data flow control over RS-485
- Adjust RS-232/422/485 through BIOS
- COM1/COM2 pin9 RI/5V/12V adjustable through BIOS
- LED backlight Auto dimming

### Introduction


PPC-3100 is a new 10.4" Panel PC equipped with an Intel Atom processor D2550. Meeting high demands of harsh environments, the fanless design makes PPC-3100 more reliable in different kinds of applications for the machine building industry. In addition, the dual GbE LAN, 4 x serial ports, 4 x USB ports, and GPIO connector make it easier to connect to devices and be integrated into specific solutions. With a user friendly design it comes with an LED indicator on the front panel for power on/off, storage access, and LAN active status.

### Specifications

<b>Processor System</b>	CPU	Intel Atom D2550 1.86 GHz 10W Dual Core CPU on board
	Memory	SODIMM x 1, DDR3 1066, Max 4 GB
	2nd Cache Memory	1 MB
	Chipset	Intel NM10
	Storage	mSATA*1
	HDD	1 x 2.5" SATA HDD Bay (Internal)
	I/O Ports	4 x Serial ports: 3 x RS-232, 1x RS-232/422/485 (Adjustable through BIOS) 4 x USB 2.0 ports 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x DB9 GPIO port (8 pin programmable)
	Bus Expansion	1x MINI PCIe
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet
	Speaker	2 x 1W speakers
	Watchdog Timer	255 timer levels; setup by software
	Dimensions (W x H x D)	275 x 220 x 64.3 mm (10.83" x 8.74" x 2.53")
Weight	2.5 kg (5.51 lb)	
<b>OS Support</b>	OS Support	Win XPE, Win XP Pro, WES7 32 bit, Win CE 7.0, Win 7
<b>Power Supply</b>	Input Voltage	DC 12 ~ 30 V
<b>LCD Display</b>	Display Type	10.4" TFT LCD (LED Backlight)
	Max. Resolution	800 x 600
	Colors	16.2 M
	Dot Size (mm)	0.264 x 0.264
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)
	Luminance(cd/m2)	400
	Brightness Control	Yes
Backlight Lifetime	30,000 hrs (typical)	
<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	81+/-3%
	Controller	RS-232 interface
	Software Driver Support	Windows 7, XP, CE
Durability (Touches)	36 million	

**Dimensions**

Unit: mm

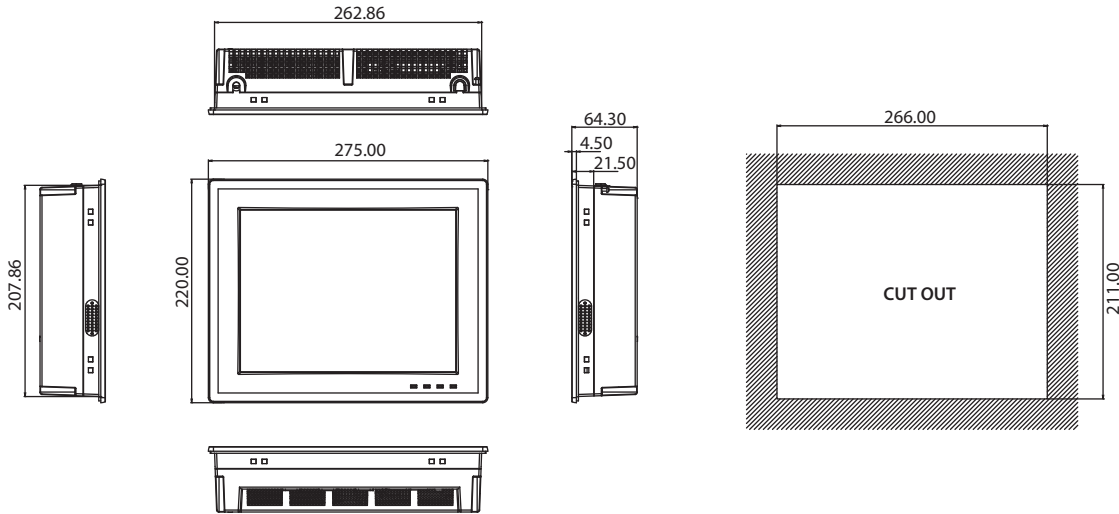


<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class B
	Safety	CB, CCC, BSMI, UL
Front Panel Protection	IP65 compliant	

**Ordering Information**

Part No.	Description
PPC-3100-RAE	Atom D2550 Fanless Panel PC with 10.4" SVGA LED backlight, touch, without memory
PS-DC19-L157E	19V power adapter module
1700001524	Power cord 3P UL 10A 125V 1.8m
170203183C	Power cord 3P Europe (WS-010+083)183cm
1700008921	Power cord 3P/3P Power supply 1.8M PSE
* PPC-174T-WL-MTE	Wall mount kit for PPC series
* PPC-ARM-A03	PPC ARM VESA Standard
PPC-3100-VESAE	PPC-3100 VESA bracket
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
2070011747	Image XPE WES2009 PPC-3100 V4.3.1 24 multi-languages with SUSI Access
2070012891	Image WES7P 32-bit Multi V4.12 PPC-3120/3100
2070012470	Image WEC7 PPC-3100 V1.0 Eng
* PPC-STAND-A1E	Stand For PPC Series (single acting hinge)

\* if you order the Wall mount kit / ARM / Desktop stand , please also order PPC-3100-VESAE at the same time.

**I/O**

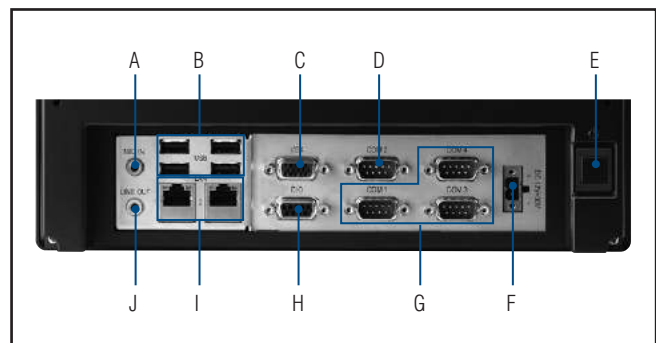

- A. MIC in
- B. 4 x USB
- C. VGA
- D. RS-232/422/485
- E. Power S/W
- F. DC-in
- G. 3 x RS-232
- H. GPIO
- I. 2 x GbE
- J. LINE out

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-4211W

## 21.5" Fanless Wide Screen Panel PC with Intel Core i5 Celeron Processor

**NEW**



### Features

- 21.5" Full HD entirely flat panel with Projected capacitive touchscreen
- High performance Intel Core i CPU with Fanless design
- Supports 2 x 2.5" HDD Bay (supports Intel RAID)
- PCIe x4 / x1 or PCI expansion support
- Automatic data flow control over RS-485
- Wide Range DC 12-32 V support
- Dual Gigabit Ethernet, support IEEE1588
- 3 x Independent display

### Introduction


The PPC-4211W is a new generation Panel PC with Full HD (1920 x 1080) screen. The large panel help you to display more yet important information in one screen. The most important, system equips with high performance Intel Core i CPU but the heat can be dispatched easily by high efficiency fanless thermal design. This makes HMI a big step forward to consolidate performance and reliability in one system. Besides, with rich I/O as 5 x COM, 5 x USB and dual Gigabit Ethernet make it easier to connect to devices and be integrated into machine building industry. Moreover, with PCIe x4 expansion to add on field bus or proprietary card makes more application possibility. The last but not least, the multi touch screen makes the HMI more intuitive, brings you the best operate experience.

### Specifications

<b>Processor system</b>	CPU	Intel 4th Generation Core i CPU i5-4300U, 2C, 3M, up to 2.9GHz Celeron 2980U, 2C, 2M, 1.6GHz
	Memory	SO-DIMM x1, DDR3L1333/1600, Max 8GB
	2nd Cache Memory	3 MB / 2 MB
	Storage	mSATA*1
	HDD	2 x 2.5" SATA HDD Bay (supports Intel RAID)
	I/O Ports	5 x Serial ports: 4 x RS-232, 1 x RS-422/485 with isolation 1K V <sub>oc</sub> 4 x USB 3.0 ports in rear side, 1 x USB 2.0 in right side 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x Display Port (1.2)
	Bus Expansion	1 x MINI PCIe, 1 x PCIe x4 (support x1) or 1 x PCI (either one)
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet, Intel I211-AT, Intel I218LM
	Speaker	2 x 1W
	Watchdog Timer	255 timer levels; setup by software
Dimensions	557.77 x 349.17 x 63.6 mm	
Weight	7.8 Kg	
<b>OS support</b>	OS Support	Win 7/Win 8/Win 8.1/Linux
<b>Power supply</b>	Input Voltage	DC 12-32V
<b>Power Consumption</b>	i5-4300U	66W
	Celeron 2980U	58W (8G DDR3L, USB x 4, COM x 4, USB mouse, 2.5" HDD 500G x 2, Win7 64bit, Burn-in 7.0)
<b>LCD Display</b>	Display Type	21.5" TFT LCD (LED Backlight)
	Max. Resolution	1920 x 1080
	Colors	16.7M
	Viewing Angle	178 Horizontal, 178 Vertical
	Luminance(cd/m2)	300
	Brightness Control	Yes (by BIOS)
	Backlight Lifetime	50,000 hrs(typ.)
<b>Touchscreen</b>	Touch Type	Projected Capacitive multi touch 10 point
	Resolution	2048 x 2048
	Light Transmission	88 % ± 2 %
	Controller	USB interface
<b>Environment</b>	Operating Temperature	0 ~ 50° C (32 ~ 122° F)
	Storage Temperature	-20 ~ 60° C (-4 ~ 140° F)
	Relative Humidity	10 ~ 95% @ 40° C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class B
	Safety	CB, CCC, BSMI, UL
Front Panel Protection	IP65 compliant	

### Dimensions


Unit: mm

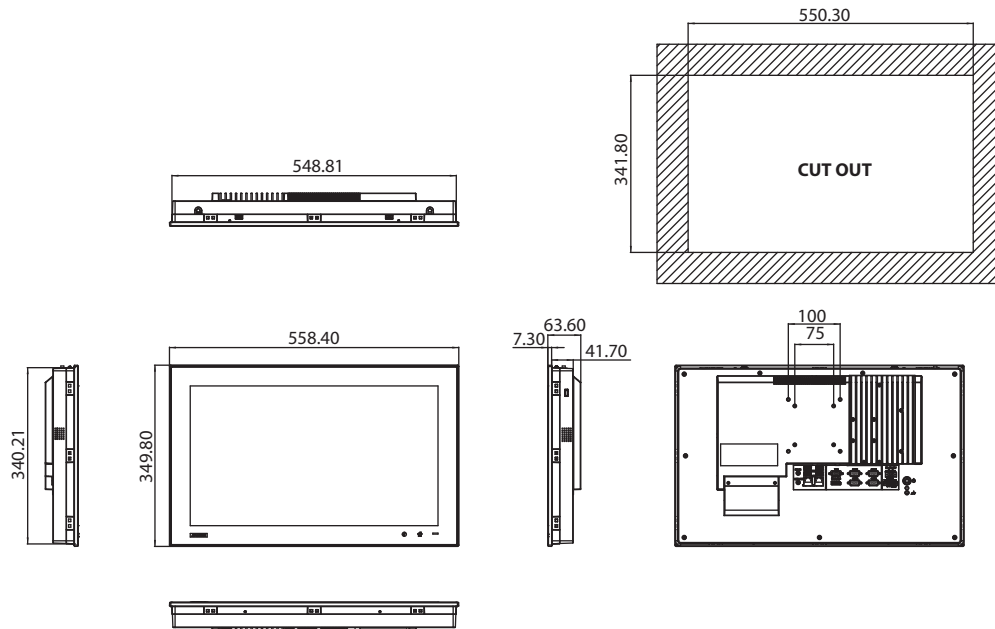

### Ordering Information

Part No	Description
PPC-4211W-P5AE	21.5 Wide screen PPC with PCT Multi-touch, Intel Core i5-4300U up to 2.9GHz
PPC-4211W-PCAE	21.5 Wide screen PPC with PCT Multi-touch, Intel Celeron 2980U 1.6GHz
1702002600	Power Cable UL/CSA (USA) 180D 125V10A 1.83M
1702002605	Power Cable 90D 220V EUROPEAN 250V/6A 1.8M
PS-DC19-150AE	19V DC 150W Power Adapter Module For PPC Product
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
PPC-WLAN-A2E	Wi-Fi Module
PPC-174 Stand	Stand for PPC series (double acting hinges)
PPC-STAND-A1E	Stand for PPC Series (single acting hinge)
2070012905	Image WES7P 32-bit Multi V4.12 PPC-4151W/4211W-P
2070013051	Image WES7P 64-bit Multi V4.12 PPC-4151W/4211W-P
PPC-FUSB-A1E	Front USB Module

### I/O Appearance

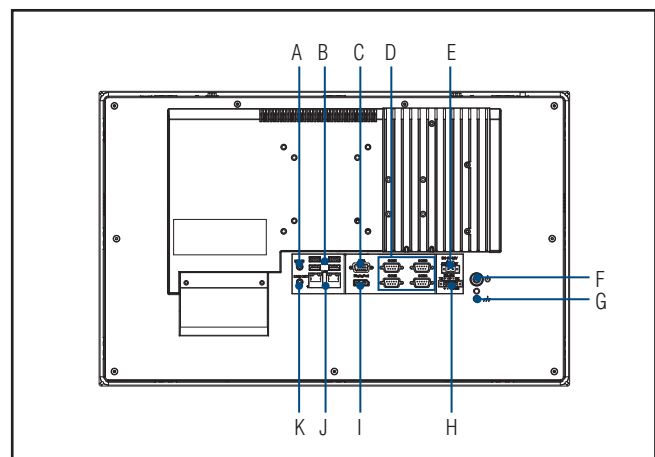

- A. Mic-in
- B. 4 x USB 3.0
- C. VGA Port
- D. 4 x RS-232
- E. DC Inlet
- F. Power Button
- G. Ground Line
- H. 1 x RS-422/485
- I. Display Port
- J. 2 x 10/100/1000 Mbps Ethernet
- K. Line Out

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-4151W

## 15.6" Fanless Wide Screen Panel PC with Intel Core i5/i3/Celeron Processor

**NEW**



### Features

- 15.6" WXGA entirely flat panel with Projected capacitive touchscreen
- High performance Intel Core i CPU with Fanless design
- PCIe x1 or PCI expansion support
- Automatic data flow control over RS-485
- Wide Range DC 9-32V support
- Dual Gigabit Ethernet, support IEEE1588
- 3 x Independent display

### Introduction

The PPC-4151W is a new generation Panel PC with WXGA (1366 x 768) screen. The most important, system equips with high performance Intel Core i CPU but the heat can be dispatched easily by high efficiency fanless thermal design. This makes HMI a big step forward to consolidate performance and reliability in one system. Besides, with rich I/O as 5 x COM, 5 x USB and dual Gigabit ethernet make it easier to connect to devices and be integrated into machine building industry. In addition, PCIe/PCI expansion to add on field bus or proprietary card makes more application possibility. The last but not least, the multi touch screen makes the HMI more intuitive, brings you the best operate experience.


### Specifications

		PPC-4151W-P5AE PPC-4151W-PCAEE	PPC-4151W-R3AE
<b>Processor system</b>	CPU	Intel 4th Generation Core i CPU i5-4300U, 2C, 3M, up to 2.9GHz Celeron 2980U, 2C, 2M, 1.6GHz	Intel 4th Generation Core i CPU i3-4010U, 2C, 3M
	Memory	SO-DIMM x 1, DDR3L1333/1600, Max 8GB	
	2nd Cache Memory	3 MB / 2 MB	
	Storage	mSATA*1	
	HDD	1 x 2.5" SATA HDD Bay	
	I/O Ports	5 x Serial ports: 4 x RS-232, 1 x RS-422/485 with isolation 1K V <sub>oc</sub> 4 x USB 3.0 ports in rear side, 1 x USB 2.0 in right side 1 x Line-out, 1x MIC-in 1 x DB15 VGA 1 x Display Port (1.2)	
	Bus Expansion	1 x MINI PCIe, 1 x PCIe x1 or 1 x PCI(either one)	
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet, Intel I211-AT, Intel I218LM	
	Speaker	2 x 1W	
	Watchdog Timer	255 timer levels; setup by software	
Dimensions	419.7 x 269 x 59 mm		
Weight	5.8 Kg		
<b>OS support</b>	OS Support	Win 7/Win 8/Win 8.1/Linux	
<b>Power supply</b>	Input Voltage	DC 9-32V	
	Power consumption	i5-4300U: 56W, i3-4010U:56W Celeron 2980U: 45W (8G DDR3L, USB x 4, COM x 4, USB mouse, 2.5" HDD 500G, Win7 64bit, Burn-in 7.0)	
<b>LCD Display</b>	Display Type	15.6" TFT LCD (LED Backlight)	
	Max. Resolution	1366 x 768	
	Colors	16.7M	
	Viewing Angle	85 (left), 85 (right), 85 (up), 85 (down)	
	Luminance(cd/m2)	300	
	Brightness Control	Yes (by BIOS)	
<b>Touchscreen</b>	Backlight Lifetime	50,000 hrs (typ.)	
	Touch Type	Projected Capacitive multi touch 10 point	Resistive single touch
<b>Environment</b>	Light Transmission	88 % ± 2 %	
	Controller	USB interface	
	Operating Temperature	0 ~ 50° C (32 ~ 122° F) for SSD, 0~45° C for HDD	
	Storage Temperature	-20 ~ 60° C (-4 ~ 140° F)	
	Relative Humidity	10 ~ 95% @ 40° C (non-condensing)	
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27	
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follow IEC 60068-2-64	
	EMC	BSMI, CE, FCC Class B	
	Safety	CB, CCC, BSMI, UL	
Front Panel Protection	IP65 compliant		



**Dimensions**


Unit: mm

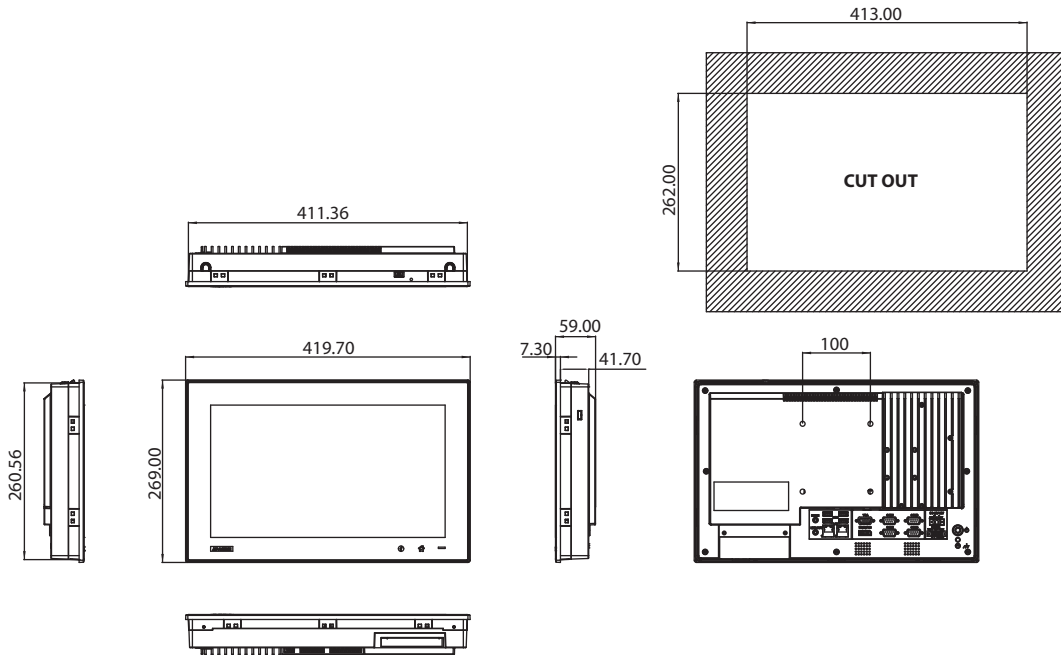

**Ordering Information**

Part NO	Description
PPC-4151W-P5AE	15.6 Wide screen PPC with PCT Multi-touch, Intel Core i5-4300U up to 2.9GHz
PPC-4151W-PCAE	15.6 Wide screen PPC with PCT Multi-touch, Intel Celeron 2980U 1.6GHz
PPC-4151W-R3AE	15.6 Wide screen PPC with Resistive-touch, Intel Core i3-4010U up to 1.7GHz
PS-DC19-L157E	19V DC power Adapter Module
1700001524	POWER Cord 3P UL 10A 125V 180cm
170203183C	POWER Code 3P Europe (WS-010+083)183cm
1700008921	POWER CORD 3P/3P POWER SUPPLY 1.8M PSE
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series (single acting hinge)
PPC-174 Stand	Stand for PPC Series (double acting hinges)
PPC-ARM-A03	PPC ARM VESA Standard
PPC-WLAN-A1E	Wi-Fi Module
2070012905	Image WES7P 32-bit Multi PPC-4151W/4211W-P
2070013051	Image WES7P 64-bit Multi PPC-4151W/4211W-P
PPC-FUSB-A1E	Front USB Module

**I/O Appearance**

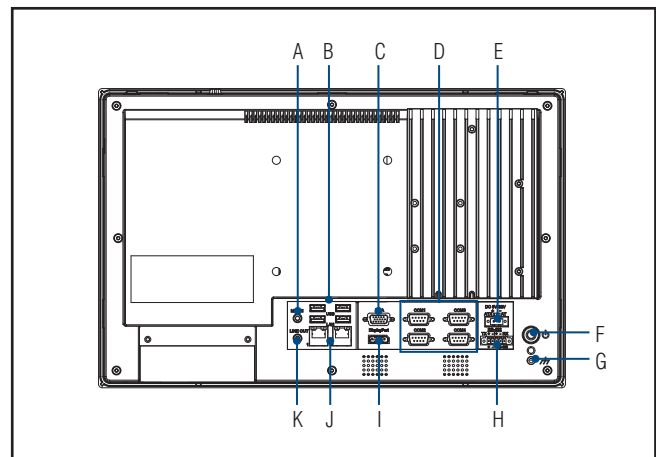

- A. Mic-in
- B. 4 x USB 3.0
- C. VGA Port
- D. 4 x RS-232
- E. DC Inlet
- F. Power Button
- G. Ground Line
- H. 1 x RS-422/485
- I. Display Port
- J. 2 x 10/100/1000 Mbps Ethernet
- K. Line Out

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-6170

## 17" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor

**NEW**



### Features

- Intel® Core™ i3, i5, Celeron 1020E + Intel QM77 PCH
- 1X DDR3/DDR3L SODIMM support to 8 GB
- Multiple expansion slots including one PCIe x4, one PCI + one PCIe x1, two PCI (optional) and two PCIe x1 (optional)
- Optional second HDD, supports Intel RAID
- One isolated RS-232/422/485 port; (selectable in by BIOS)
- One GPIO/RS-232 (8 channels, TTL level); (by swapping pin header)
- Dual GbE, supports Intel AMT8.0
- Supports iManager, SUSIAccess and Embedded Software APIs

### Introduction


The PPC-6170 is a Panel PC with an Intel Core i3/i5 or Celeron processor, and a 17" color TFT LCD panel. It features extremely high computing power, modular design, excellent connectivity, and can support virtually any application. In addition, its user-friendly interface makes it a great host for information appliances. Two expansion slots, dual hard drives supporting Intel RAID, and one isolated RS-232/422/485 port make the PPC-6170 highly reliable, and provide a great solution for a wide range of applications.

### Specifications

	Intel	Core i5-3610ME	Core i3-3120ME	Celeron 1020E
	Frequency	2.7 GHz	2.4 GHz	2.2 GHz
	L3 Cache	4M	3M	2M
	Chipset	Intel QM77		
	Memory	1 x 204-pin SODIMM, DDR3 (1600 MHz) / DDR3L (1333 MHz), supports up to 8 GB		
	Storage 1	1 x 2.5" SATA bay		
<b>Processor System</b>	Storage 2	Either one <ul style="list-style-type: none"> <li>▪ Second 2.5" SATA bay (Intel RAID supported, optional)</li> <li>▪ Slim type 8X or above DVD +/- RW (optional)</li> </ul>		
	Network (LAN)	2 x Gigabit Ethernet connectors, Intel AMT supported (GbE1- Intel 82579LM, GbE2 - Intel 82583V)		
	I/O ports	<ul style="list-style-type: none"> <li>▪ 4 x COM ports, 1 x isolated RS-232/422/485, 3 x RS-232</li> <li>▪ 1 x GPIO/RS-232 (8 channels, TTL level); by pin header</li> <li>▪ 3 x USB3.0 + 2 x USB2.0 ports</li> </ul>		
	Expansion Slots	Either: <ul style="list-style-type: none"> <li>▪ One PCI + one PCIe x1 (standard)</li> <li>▪ One x PCIe x4 (in the accessory box)</li> </ul>		
	Additional Expansion	1 x Full-size mini PCIe (Supports mSATA) 1 x half-size mini PCIe		
	Fan	Two 12V 60 x 60 x 13 (mm) with smart fan control, (70,000 hours continuous test @ 40° C)		
		Dimensions	442.0 x 362.0 x 113.5 (mm) (17.4" x 14.25" x 4.47")	
<b>Physical Characteristics</b>	Weight	7.5Kg (16.52lb)		
<b>OS Support</b>	OS Support	Win XPE / Win XP Pro / WES7 32 & 64 bit / Windows 7 32 & 64 bit		
<b>Power Supply</b>	Output Rating	150 W (max.)		
	Input Voltage	100 - 240V <sub>AC</sub> , 50/60Hz, 4-2A		
	Power Consumption	With Core i5-3610ME is 65W With Core i3-3120ME is 55W With Celeron 847E is 53W (Burn-in test 7.0 in Windows 7 32-bit)		
<b>LCD Display</b>	Display Type	17" TFT LCD (LED Backlight)		
	Max. Resolution	1280 x 1024		
	Colors	262K		
	Dot Size (mm)	0.264 x 0.264		
	Viewing Angle	85 (left), 85 (right), 80 (up), 80 (down)		
	Luminance(cd/m <sup>2</sup> )	350		
	Contrast Ratio	1,000		
Backlight Lifetime	50,000 hrs (typical)			

Dimensions

Unit: mm

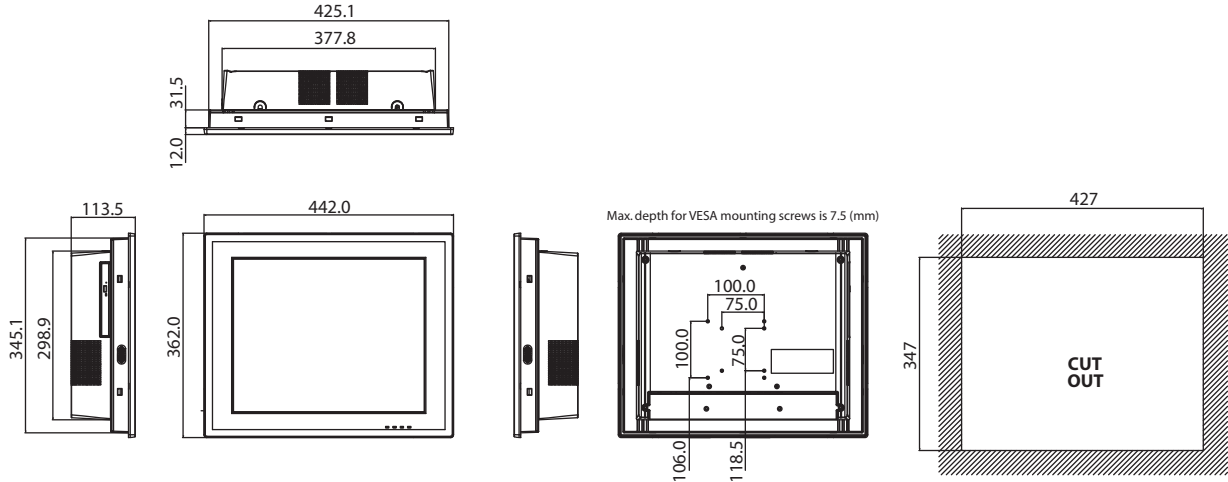


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	81+/-3%
	Controller	RS-232 interface (COM5), USB interface is available as an option
	Software Driver Support	Windows 7, XP
<b>Environment</b>	Durability (Touches)	36 million
	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms, follows IEC 60068-2-64
	EMC	BSMI, CE, FCC Class A
	Safety	CB, CCC, BSMI, UL
	Front Panel Protection	IP65 compliant

Ordering Information

Part No.	Description
PPC-6170-Ri5AE	Intel Core i5-3610ME (2.7G) Panel PC with 17" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-6170-Ri3AE	Intel Core i3-3120ME (2.4G) Panel PC with 17" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-6170-RC10AE	Intel Celeron 1020E (2.2G) Panel PC with 17" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
PPC-6150-PCIE	Riser card supports two PCI slots for PPC-6150/PPC-6170
PPC-6150-PCIEE	Riser card supports two PCIe x1 slots for PPC-6150/PPC-6170
PPC-6150-HDDE	Kit to install the second 2.5" SATA HDD for PPC-6150/PPC-6170, w/o HDD
PPC-6150-DVDE	Module with 8X SATA DVD-RW for PPC-6150/PPC-6170
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-175 RACK-MT	19" Rack Mounting kit for PPC-175
PPC-ARM-A03	PPC ARM VESA Standard
PPC-174 Stand	Stand for PPC Series (double acting hinges)
1702002605	Power cord 90D 220V EUROPEAN 250V/6A, 1.8M
1702002600	Power cord UL/CSA(USA) 180D 125V/10A 1.83M
1700019336	Cable for an external 25-pin LPT port
2070013299	WES7P PPC-6150/70 32-bits V5.1.6 10multi-languages with SUSI Access
2070013328	WES7P PPC-6150/70 64-bits V5.6.6 10multi-languages with SUSI Access

I/O Placement

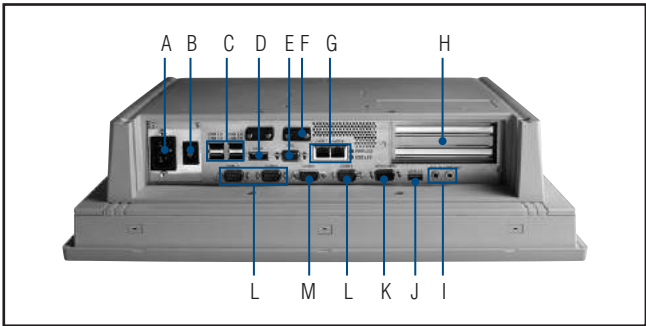

- A: AC Inlet
- B: Power Switch
- C: USB 3.0 x 2, USB 2.0 x 2
- D: HDMI
- E: VGA
- F: Cable clip x 2
- G: Gigabit Ethernet x 2
- H: 2 Expansion slots
- I: Line out / Mic in
- J: USB 3.0 x 1
- K: GPIO / RS-232 (by swapping pin header)
- L: RS232 x 3
- M: Isolated RS-232/422/485 (selecting by BIOS)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-6150

## 15" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor

**NEW**



### Features

- Intel® Core™ i3, i5, Celeron 1020E + Intel QM77 PCH
- 1X DDR3/DDR3L SODIMM supports to 8 GB
- Multiple expansion slots including one PCIe x4, one PCI + one PCIe x1, two PCI (optional) and two PCIe x1 (optional)
- Optional second HDD, supports Intel RAID
- One isolated RS-232/422/485 port; (selectable in by BIOS)
- One GPIO/RS-232 (8 channels, TTL level); (by swapping pin header)
- Dual GbE, supports Intel AMT8.0
- Supports iManager, SUSIAccess and Embedded Software APIs

### Introduction


The PPC-6150 is a Panel PC with an Intel Core i3/i5 or Celeron processor, and a 15" color TFT LCD panel. It features extremely high computing power, modular design, excellent connectivity, and can support virtually any application. In addition, its user-friendly interface makes it a great host for information appliances. Two expansion slots, dual hard drives supporting Intel RAID, and one isolated RS-232/422/485 port make the PPC-6150 highly reliable, and provide a great solution for a wide range of applications.

### Specifications

	Intel	Core i5-3610ME	Core i3-3120ME	Celeron 1020E
<b>Processor System</b>	Frequency	2.7 GHz	2.4 GHz	2.2 GHz
	L3 Cache	4M	3M	2M
	Chipset	Intel QM77		
	Memory	1 x 204-pin SODIMM, DDR3 (1600 MHz) / DDRL (1333 MHz), supports up to 8 GB		
	Storage 1	1 x 2.5" SATA bay		
	Storage 2	Either one <ul style="list-style-type: none"> <li>▪ Second 2.5" SATA bay (Intel RAID supported, optional)</li> <li>▪ Slim type 8X or above DVD +/- RW (optional)</li> </ul>		
	Network (LAN)	2 x Gigabit Ethernet connectors, Intel AMT supported (GbE1- Intel 82579LM, GbE2 – Intel 82583V)		
	I/O ports	<ul style="list-style-type: none"> <li>▪ 4 x COM ports, 1 x isolated RS-232/422/485, 3 x RS-232</li> <li>▪ 1 x GPIO/RS-232 (8 channels, TTL level); by pin header</li> <li>▪ 3 x USB3.0 + 2 x USB2.0 ports</li> </ul>		
	Expansion Slots	Either: <ul style="list-style-type: none"> <li>▪ One PCI + one PCIe x1 (standard)</li> <li>▪ One x PCIe x4 (in the accessory box)</li> </ul>		
	Additional Expansion	1 x full-size mini PCIe (Supports mSATA) 1 x half-size mini PCIe		
Fan	Two 12V 60 x 60 x 13 (mm) with smart fan control, (70,000 hours continuous test @ 40° C)			
<b>Physical Characteristics</b>	Dimensions	395.5 x 316.8 x 105.5 (mm) (15.6" x 12.5" x 4.15")		
	Weight	6.5 Kg (14.32lb)		
<b>OS Support</b>	OS Support	Win XPE / Win XP Pro / WES7 32 & 64 bit / Windows 7 32 & 64 bit		
<b>Power Supply</b>	Output Rating	150 W (max.)		
	Input Voltage	100 - 240V <sub>ac</sub> , 50/60Hz, 4-2A		
	Power Consumption	With Core i5-3610ME is 61W With Core i3-3120ME is 50W With Celeron 847E is 48W (Burn-in test 7.0 in Windows 7 32-bit)		
<b>LCD Display</b>	Display Type	15" TFT LCD (LED Backlight)		
	Max. Resolution	1024 x 768		
	Colors	262K		
	Dot Size (mm)	0.297 x 0.297		
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)		
	Luminance(cd/m <sup>2</sup> )	350		
	Contrast Ratio	700		
Backlight Lifetime	50,000 hrs (typical)			

**Dimensions**

Unit: mm

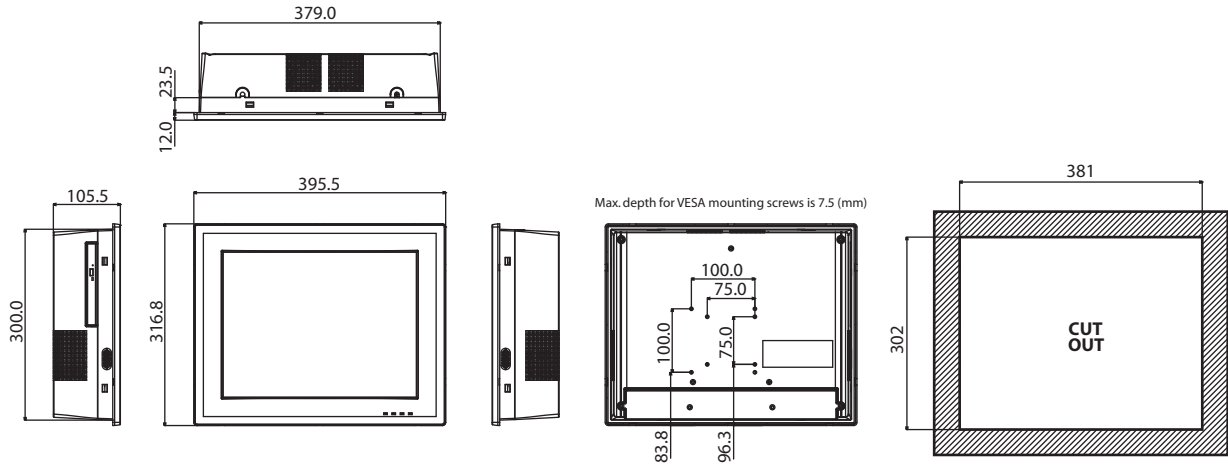


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	81+/-3%
	Controller	RS-232 interface (COM5), USB interface is available as an option
	Software Driver Support	Windows 7, XP
<b>Environment</b>	Durability (Touches)	36 million
	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms, follows IEC 60068-2-64
	EMC	BSMI, CE, FCC Class A
	Safety	CB, CCC, BSMI, UL
Front Panel Protection	IP65 compliant	

**Ordering Information**

Part No.	Description
PPC-6150-Ri5AE	Intel Core i5-3610ME (2.7G) Panel PC with 15" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-6150-Ri3AE	Intel Core i3-3120ME (2.4G) Panel PC with 15" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-6150-RC10AE	Intel Celeron 1020E (2.2G) Panel PC with 15" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
PPC-6150-PCIE	Riser card supports two PCI slots for PPC-6150/PPC-6170
PPC-6150-PCIIE	Riser card supports two PCIe x1 slots for PPC-6150/PPC-6170
PPC-6150-HDDE	Kit to install the second 2.5" SATA HDD for PPC-6150/PPC-6170, w/o HDD
PPC-6150-DVDE	Module with 8X SATA DVD-RW for PPC-6150/PPC-6170
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
PPC-174 Stand	Stand for PPC Series (double acting hinges)
1702002605	Power cord 90D 220V EUROPEAN 250V/6A, 1.8M
1702002600	Power cord UL/CSA(USA) 180D 125V/10A 1.83M
1700019336	Cable for an external 25-pin LPT port
2070013299	WES7P PPC-6150/70 32-bits V5.1.6 10multi-languages with SUSI Access
2070013328	WES7P PPC-6150/70 64-bits V5.6.6 10multi-languages with SUSI Access

**I/O Placement**

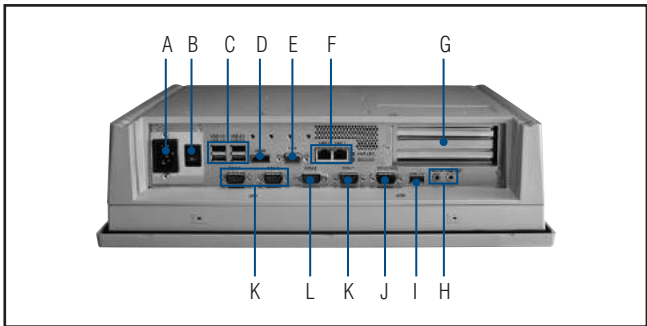

- A: AC Inlet
- B: Power Switch
- C: USB 3.0 x 2, USB 2.0 x 2
- D: HDMI
- E: VGA
- F: Gigabit Ethernet x 2
- G: 2 Expansion slots
- H: Line out/ Mic in
- I: USB 3.0 x 1
- J: GPIO / RS-232 (by swapping pin header)
- K: RS-232 x 3
- L: Isolated RS-232/422/485 (selecting by BIOS)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-6120

## 12" Panel PC Supporting 4th Generation Intel® Core™ i / Celeron® Processors

**NEW**



### Features

- 12.1" TFT XGA LED Panel with resistive touchscreen
- Supports 4th Generation Intel® Core™ i / Celeron® Processor (Thermal Design Power: 35W/45W)
- System memory supports 2 x 204-pin SODIMM DDR3/DDR3L total up to 16G
- Supports 2 x Mini PCIe sockets, one is included mSATA function.
- Optional one PCI/PCIe x1 expansion kit
- Supports one isolated RS422/485 (terminal block)
- 1 x VGA and 1 x Display port
- Dual GbE, supports Intel AMT9.0
- LED backlight Auto dimming



### Introduction


The PPC-6120 is a 12" color TFT LCD Panel PC which supports 4th Generation Intel® Core™ i / Celeron® Processors. It features extremely high computing power, various connectors, and can be installed in virtually any application. In addition, its user-friendly interface makes it a great host for information appliances. Four RS-232, one isolated RS422/485 and Dual Gb Ethernet connectors support Intel AMT, one expansion slot make PPC-6120 highly reliable, and provides a great solution for versatile applications.

### Specifications

<b>Processor System</b>	CPU	4th Generation Intel® Core™ i / Celeron® Processor (Thermal Design Power: 35W/45W)
	Chipset	Intel Q87
	Memory	Supports 2 x 204-pin SODIMM DDR3/DDR3L total up to 16G
	Storage	2.5" SATA HDD bay x1 mSATA x1
	Bus Expansion	1 x MiniPCIe (Standard) 1 x PCIe by 1 / 1 x PCI through riser (Optional)
	Network (LAN)	2 x GbE, supports Intel AMT9.0
	I/O	4 x USB3.0 (Ext.), 2 x USB2.0 (Int. pin head) 4 x RS-232 Serial ports, 1 x Isolated RS422/485 (1KV <sub>oc</sub> ) 1 x Display Port 1.2 1 x DB15 VGA out 1 x Mic in, 1 x Line out
	Speaker	2 x 1W speakers
	Watchdog Timer	255 timer levels; setup by software
	Dimensions (W x H x D)	325 x 253.8 x 73.8
Weight	3.4KG	
<b>OS Support</b>	OS Support	Win7(32bit and 64bit), Win8 (32bit and 64bit), Linux
<b>Power Supply</b>	Input Voltage	DC 12 ~ 30 V
<b>LCD Display</b>	Display Type	12.1" TFT LCD (LED Backlight)
	Max. Resolution	1024 x 768
	Colors	262K
	Dot Size (mm)	0.24 x 0.24
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)
	Luminance (cd/m <sup>2</sup> )	600
	Brightness Control	Yes
<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	80+/-3%
	Controller	RS-232 interface
	Software Driver Support	Win7, Win8, Linux
	Durability (Touches)	36 million

Dimensions

Unit: mm

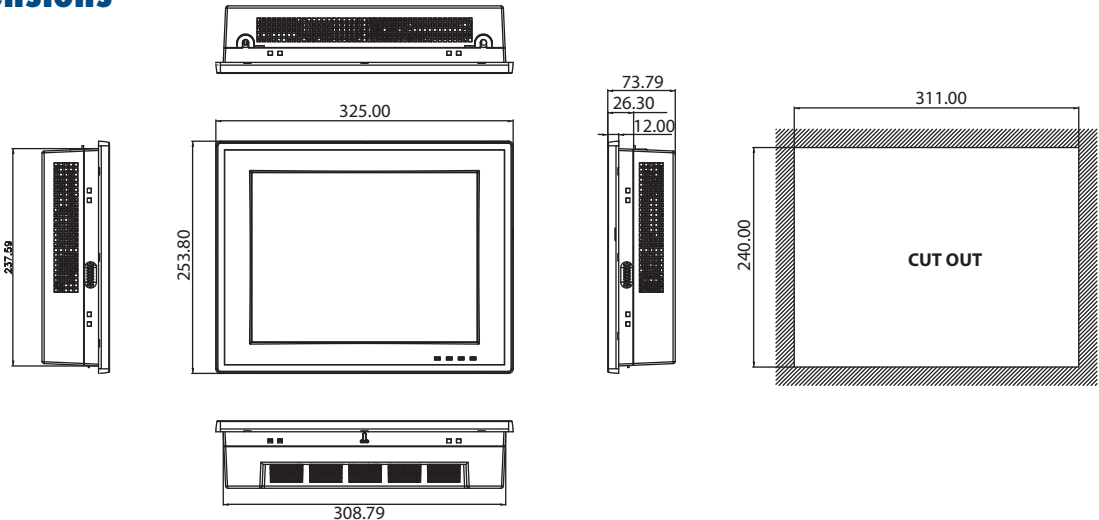

Environment	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class A
	Safety	CB, CCC, BSMI, UL
	Front Panel Protection	IP65 compliant

Ordering Information


Part No.	Description
PPC-6120-RAE	12.1" 4th Generation Intel® Core™ i / Celeron Panel PC with Resi. T/S
1702002600	Power Cable UL/CSA (USA) 180D 125V/10A 1.83M
1702002605	Power Cable 90D 220V EUROPEAN 250V/6A 1.8M
* PPC-174T-WL-MTE	Wall mount kit for PPC series
* PPC-ARM-A03	PPC ARM VESA Standard
* PPC-STAND-A1E	Stand For PPC Series (single acting hinge)
PPC-3100-VESAE	PPC-3100 VESA bracket module
PPC-WLAN-A1E	WiFi Module with Antenna Cable 28cm for PPC
PPC-6120-EXPE	Add-on box for PCI or PCIe expansion (include PCI / PCIe riser card)
PS-DC19-150AE	19V DC 150W Power Adapter Module For PPC Product
2070012966	Image WES7P 32-bit Multi V4.12 PPC-6120
2070013226	Image WES7P 64-bit Multi V4.12 PPC-6120

\* if you order Wall mount kit / ARM / Desktop stand, please also order PPC-3100-VESAE at the same time.

Supported CPUs

CPU	4th Generation Intel® Core™ i / Celeron® Processor (Thermal Design Power: 35W/45W)			
	Type	Frequency	Cache	TDP
	I7-4770TE	2.3GHz	8M	45W
	I5-4570TE	2.7GHz	4M	35W
	I3-4330TE	2.4GHz	4M	35W
	PENTIUM-G3320TE	2.3GHz	3M	35W
	Celeron-1820TE	2.2GHz	2M	35W
	I5-4590T	2.0GHz	6M	35W
	I3-4350T	3.1GHz	4M	35W
	I3-4340TE	2.6GHz	4M	35W

I/O

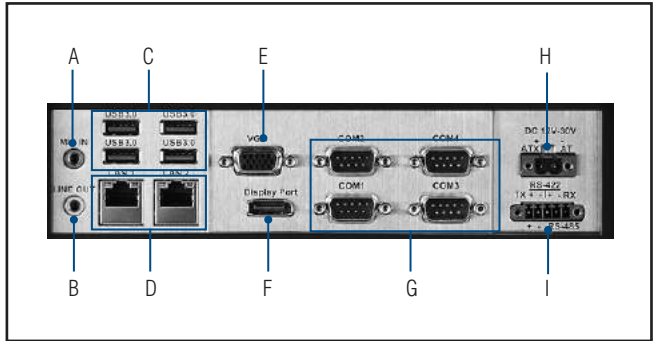

- A. MIC in
- B. Line Out
- C. USB 3.0 x 4
- D. 10/100/1000 Mbps Ethernet x 2
- E. VGA Port
- F. Display Port
- G. COM RS-232 x 4
- H. DC Inlet
- I. COM RS-422/485

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-8170

## 17" Panel PC with Intel® Core™ i3 / i5 Processor

**NEW**



### Features

- 17" TFT LED Panel, resolution up to 1280 x 1024
- Built-in Intel® Core™ i3, i5 desktop processor (LGA) with Intel H61 chipset
- Two 204 PIN DDR3 SO-DIMM, DDR3 1066/1333/1600MHz SDRAM, up to 8 GB/4 GB per SO-DIMM
- Support one expansion PCIe x 4 slot installed. (Replaceable with PCI riser accessory)
- Supports 6 USB, 6 COMs, 1 x GPIO, 8 bits (Internal pin header)
- Support 1 x 2.5" SATA bay
- Support AC 100-240V input
- Supports iManager, SUSIAccess and Embedded Software APIs



### Introduction

PPC-8170 is a Panel PC with an Intel Core i3/i5 desktop processor, and a 17" color TFT LCD panel. It features extremely high computing power and performance, excellent connectivity, and good expansion ability. In addition, its rich variety of IO support makes it easy to operate for information applications, and provide a great solution for a wide-range of industrial applications.


### Specifications

<b>Processor System</b>	CPU	Core i3-3220	Core i5-3550S
	Frequency	3.3GHz	3.7 GHz
	L3 Cache	3 MB	6 MB
	Chipset	H61	
	Memory	2 x 204 PIN DDR3 SO-DIMM, DDR3 1066/1333/1600MHz SDRAM, up to 8 GB/4 GB per SO-DIMM	
	Storage	1 x 2.5" SATA bay	
	Network (LAN)	2 x Gigabit Ethernet connectors (RTL8111E)	
	I/O ports	<ul style="list-style-type: none"> <li>▪ 6 COMs, 1 x RS-232/422/485, 5 x RS-232</li> <li>▪ 6 x USB2.0</li> <li>▪ 1 x VGA, 1 x DVI</li> <li>▪ 1 x GPIO, 8 bits (Internal pin header)</li> <li>▪ 2 x Ethernet</li> <li>▪ 1 x Mic-in, 1 x Line-out</li> <li>▪ 1 x PS/2</li> <li>▪ 2 x 1.5W speaker</li> </ul>	
	Expansion slot	<ul style="list-style-type: none"> <li>▪ One PCIe x 4 (pre-installed)</li> <li>▪ One PCI (in the accessory box)</li> </ul>	
	Additional Expansion	1 x Mini PCIe	
Fan	1 x 12V 80 x 80 x 15 mm		
<b>Physical Characteristics</b>	Dimensions	442.0 x 362.0 x 113.5 (mm) (17.4" x 14.25" x 4.47")	
	Weight	9.2 KG	
<b>Supported Operating Systems</b>	OS's	Win XP Pro / Windows 7 32 & 64 bit	
	Output Rating	180 W	
<b>Power Supply</b>	Input Voltage	100 - 240 V <sub>AC</sub>	
	Power consumption	With Core i3-3220 is 81W With Core i5-3550s is 96W (Burn-in test 7.0 in Windows 7 32-bit)	
	Display Type	17" TFT LED Panel	
<b>LCD Display</b>	Max. Resolution	1280 x 1024	
	Colors	16.7 M	
	Dot Size (mm)	0.264 (H) x 0.264 (W)	
	Viewing Angle	80 (left), 80 (right), 60 (up), 80 (down)	
	Luminance	350	
	Contrast Ratio	800	
	Backlight Lifetime	50,000 hrs	



**Dimensions**

Unit: mm

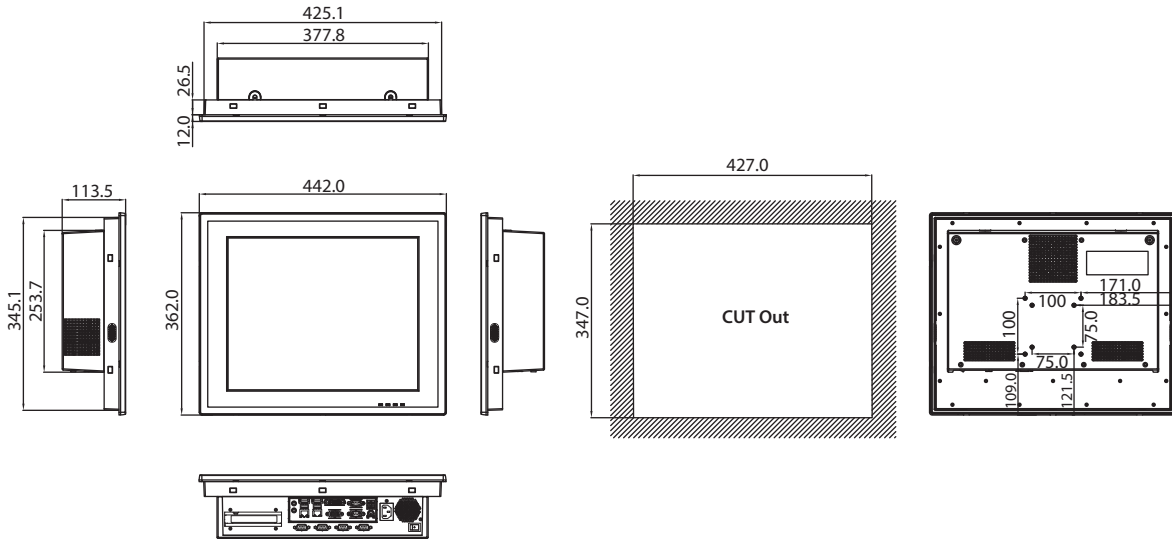


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	81% +/- 3%
	Controller	USB Interface
	Software Driver Support	Windows 7, XP
	Durability (Touches)	36 Million
<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	- 20 ~ 60°C (-4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follows IEC 60068-2-64
	EMC	CE, FCC Class A, BSMI
	Safety	CB, UL, CCC, BSMI
	Front Panel Protection	IP65 Compliant

**Ordering Information**

Part No	Description
PPC-8170-R13AE	17" SVGA Panel PC w/Intel Corei3-3220, 5-Wire Touch, 6 COM, 6 USB, 2 LAN, 1 x PCIe or 1 x PCI expansion
PPC-8170-R15AE	17" SVGA Panel PC w/Intel Core i5-3550S, 5-Wire Touch, 6 COM, 6 USB, 2 LAN, 1 x PCIe or 1 x PCI expansion
PPC-WLAN-A2E	Wi-Fi Module with Antenna Cable 40cm for PPC
PPC-174T-WL-MTE	Wall mount kits for PPC series
PPC-ARM-A03	PPC ARM VESA stand
PPC-174 Stand	Stand kit for PPC-174
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D

**I/O Placement**

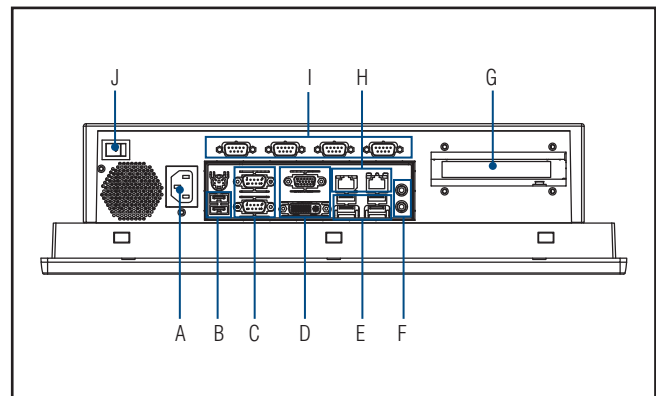

- A. AC Power Input
- B. USB ports
- C. COM Ports
- D. VGA and DVI Ports
- E. USB Ports
- F. Audio Line-out/MIC
- G. Riser Card Expansion
- H. LAN Ports
- I. COM Ports
- J. Power Switch

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PPC-8150

## 15" Panel PC with Intel® Core™ i3 / i5 Processor

**NEW**



### Features

- 15" TFT LED Panel, resolution up to 1024 x 768
- Built-in Intel® Core™ i3, i5 desktop processor (LGA) with Intel H61 chipset
- Two 204 PIN DDR3 SO-DIMM, DDR3 1066/1333/1600MHz SDRAM, up to 8 GB/4 GB per SO-DIMM
- Support one expansion PCIe x 4 slot installed Replaceable with PCI riser accessory
- Supports 6 USB, 6 COMs, 1 x GPIO, 8 bits (Internal pin header)
- Support 1 x 2.5" SATA bay
- Support AC 100-240V input
- Supports iManager, SUSIAccess and Embedded Software APIs



### Introduction


PPC-8150 is a Panel PC with an Intel® Core™ i3, i5 desktop processor, and a 15" color TFT LCD panel. It features extremely high computing power and performance, excellent connectivity, and good expansion ability. In addition, its rich variety of IO support makes it easy to operate for information applications, and provide a great solution for a wide-range of industrial applications.

### Specifications

<b>Processor System</b>	CPU	Core i3-3220	Core i5-3550S
	Frequency	3.3GHz	3.7 GHz
	L3 Cache	3 MB	6 MB
	Chipset	H61	
	Memory	2 x 204 PIN DDR3 SO-DIMM, DDR3 1066/1333/1600MHz SDRAM, up to 8 GB/4 GB per SO-DIMM	
	Storage	1 x 2.5" SATA bay	
	Network (LAN)	2 x Gigabit Ethernet connectors (RTL8111E)	
	I/O ports	<ul style="list-style-type: none"> <li>▪ 6 COMs, 1 x RS-232/422/485, 5 x RS-232</li> <li>▪ 6 x USB2.0</li> <li>▪ 1 x VGA, 1 x DVI</li> <li>▪ 1 x GPIO, 8 bits (Internal pin header)</li> <li>▪ 2 x Ethernet</li> <li>▪ 1 x Mic-in, 1 x Line-out</li> <li>▪ 1 x PS/2</li> <li>▪ 2 x 1.5W speaker</li> </ul>	
	Expansion slot	<ul style="list-style-type: none"> <li>▪ One PCIe x 4 (pre-installed)</li> <li>▪ One PCI (in the accessory box)</li> </ul>	
	Additional Expansion	1 x Mini PCIe	
Fan	1 x 12V 80 x 80 x 15 mm		
<b>Physical Characteristics</b>	Dimensions	395.5 x 316.8 x 110.5 (mm) (15.6" x 12.5" x 4.35")	
	Weight	6.98 KG	
<b>Supported Operating Systems</b>	OS's	Win XP Pro / Windows 7 32 & 64 bit	
	Output Rating	180 W	
<b>Power Supply</b>	Input Voltage	100 - 240 V <sub>AC</sub>	
	Power consumption	With Core i3-3220 is 71W With Core i5-3550s is 86W (Burn-in test 7.0 in Windows 7 32-bit)	
	Display Type	15" TFT LED Panel	
<b>LCD Display</b>	Max. Resolution	1024 x 768	
	Colors	262 K	
	Dot Size (mm)	0.297(H) x 0.297(W)	
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)	
	Luminance	400	
	Contrast Ratio	700	
	Backlight Lifetime	50,000 hrs	

**Dimensions**

Unit: mm

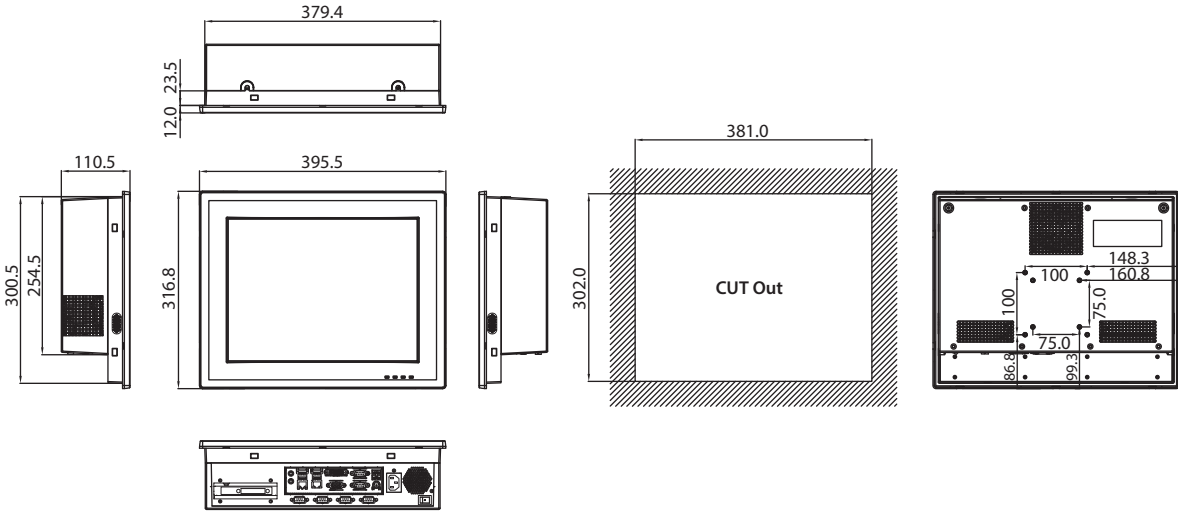


<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Resolution	2048 x 2048
	Light Transmission	80% +/- 3%
	Controller	USB Interface
	Software Driver Support	Windows 7, XP
<b>Environment</b>	Durability (Touches)	36 Million
	Operating Temperature	0 ~ 50°C ( 32 ~ 122°F)
	Storage Temperature	- 20 ~ 60°C ( -4 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5-500Hz, 1Grms, follows IEC 60068-2-64
	EMC	CE, FCC Class A, BSMI
	Safety	CB, UL, CCC, BSMI
Front Panel Protection	IP65 Compliant	

**Ordering Information**

Part No	Description
PPC-8150-RI3AE	15" XGA Panel PC w/Intel Core i i3-3220, 5-Wire Touch, 6 COM, 6 USB, 2 LAN, 1 x PCIe or 1 x PCI expansion
PPC-8150-RI5AE	15" XGA Panel PC w/Intel Core i i5-3550S, 5-Wire Touch, 6 COM, 6 USB, 2 LAN, 1 x PCIe or 1 x PCI expansion
PPC-WLAN-A2E	Wi-Fi Module with Antenna Cable 40cm for PPC
PPC-174T-WL-MTE	Wall mount kits for PPC series
PPC-ARM-A03	PPC ARM VESA stand
PPC-174 Stand	Stand kit for PPC-174 series
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D

**I/O Placement**

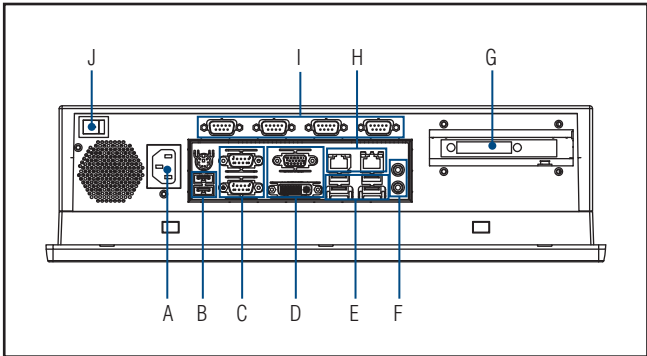

- A. AC Power Input
- B. USB ports
- C. COM Ports
- D. VGA and DVI Ports
- E. USB Ports
- F. Audio Line-out/MIC
- G. Riser Card Expansion
- H. LAN Ports
- I. COM Ports
- J. Power Switch


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Installation Accessories

## PPC-STAND-A1E

Dimension


Unit:mm

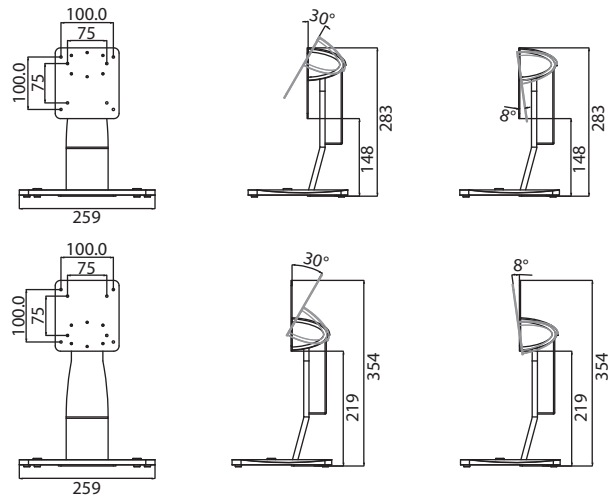

## PPC-ARM-A03

Dimension



Unit:mm

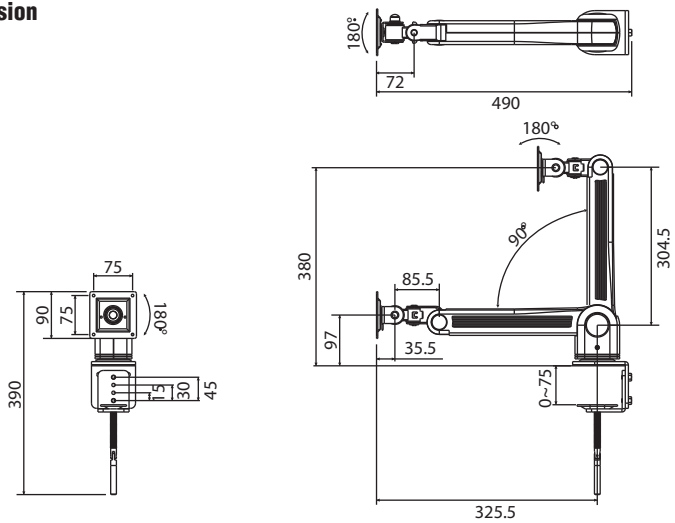

## PPC-174T-WL-MTE

Dimension

Unit:mm

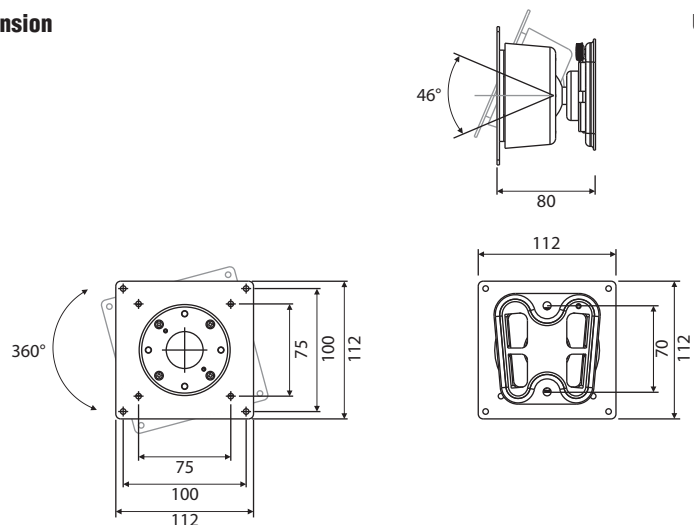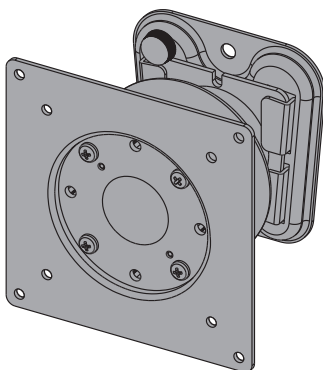

## Industrial Wireless Solutions

<b>Industrial Wireless Product Selection Guide</b>		<b>8-2</b>
<b>Introduction</b>		<b>8-4</b>
<b>Cellular IP Router/Gateway</b>		
<b>EKI-1321</b>	1-port RS-232/422/485 to GPRS IP Gateway	<b>8-6</b>
<b>EKI-1322</b>	2-port RS-232/422/485 to GPRS IP Gateway	
<b>EKI-1334</b>	Industrial Ethernet/Serial Router	<b>8-7</b>
<b>Wireless Access Points</b>		
<b>EKI-6340 Series</b>	IEEE 802.11 a/b/g/n Outdoor Wi-Fi Mesh AP	<b>8-8</b>
<b>EKI-6351-A</b>	IEEE 802.11 a/b/g/n Wi-Fi Mesh AP/Client	<b>8-9</b>
<b>EKI-6331AN</b>	IEEE 802.11 a/n Wi-Fi AP/Client	<b>8-10</b>
<b>EKI-6311GN</b>	IEEE 802.11 b/g/n Wi-Fi AP/Client	<b>8-11</b>
<b>EKI-6310GN</b>	IEEE 802.11 b/g/n Wi-Fi AP/Client	<b>8-12</b>
<b>Accessories</b>		<b>8-13</b>

To view all of Advantech's Industrial Ethernet Solutions, please visit [www.advantech.com/products](http://www.advantech.com/products).



# Industrial Wireless Product Selection Guide

## Cellular IP Router/Gateway



Model Name		EKI-1321	EKI-1322	EKI-1331	EKI-1334
Description		1-Port RS-232/422/485 to GPRS IP Gateway	2-Port RS-232/422/485 to GPRS IP Gateway	1-Port RS-232/485 & Ethernet to GPRS/HSPA+ IP Gateway	4-Port HSPA+ IP Router
Cellular Interface	Standard	GSM/GPRS	GSM/GPRS	GS/GPRS/UMTS/HSPA+	GS/GPRS/UMTS/HSPA+
	Band Option	850/900/1800/1900 MHz	850/900/1800/1900 MHz	850/900/1800/1900/2100 MHz	850/900/1800/1900/2100 MHz
	Connector	SMA female	SMA female	SMA female	SMA female
SIM	No.	2	2	1	1
	Control	3V	3V	3V	3V
Ethernet WAN	No.	-	-	-	1
	Connector	-	-	-	RJ45
	Speed	-	-	-	10/100 Mbps
	Protection	-	-	-	1.5 KV built-in magnetic isolation protection
Ethernet LAN	No.	1	1	1	4
	Connector	RJ45	RJ45	RJ45	RJ45
	Speed	10/100 Mbps	10/100 Mbps	10/100 Mbps	10/100 Mbps
	Protection	1.5 KV built-in magnetic isolation protection	1.5 KV built-in magnetic isolation protection	1.5 KV built-in magnetic isolation protection	1.5 KV built-in magnetic isolation protection
Serial Communication	Type	RS-232/422/485	RS-232/422/485	RS-232/485	RS-232
	Baud Rate	50 bps ~ 921.6 kbps, any baud rate setting	50 bps ~ 921.6 kbps, any baud rate setting	9600 bps ~ 232.4 kbps	9600 bps ~ 232.4 kbps
	No. of Ports	1	2	1	1
	Port Connector	DB9 Male	DB9 Male	Terminal Block	DB9 Male
	Protection	15 KV ESD for all signals	15 KV ESD for all signals	15 KV ESD for all signals	15 KV ESD for all signals
Software	Gateway/Router	Gateway	Gateway	Gateway	Router
	Configuration	Windows utility, Telnet console, Web Browser	Windows utility, Telnet console, Web Browser	Telnet console, Web Browser	Telnet console, Web Browser
	Operation mode	VCOM, RVCOM, TCP Server/Client, UDP Server/Client, SMS Tunnel	VCOM, RVCOM, TCP Server/Client, UDP Server/Client, SMS Tunnel	TCP Server/Client, UDP Server/Client, Modbus RTU to Modbus TCP	TCP Server/Client, UDP Server/Client, Modbus RTU to Modbus TCP
Power	Power Input Range	12 - 48 V <sub>DC</sub>	12 - 48 V <sub>DC</sub>	12 - 24 V <sub>DC</sub>	12 - 24 V <sub>DC</sub>
	Redundant DC Power Input	V	V	-	-
Mechanism	DIN-Rail Mount	V	V	V	V
	Wall Mount	V	V	V	V
	IP Grade	IP30	IP30	IP30	IP30
Operating Temperature	-30 ~ 65°C (-22 ~ 149°F)	V	V	-	-
	-20 ~ 70°C (-5 ~ 160°F)	-	-	V	V
Certification	CE	V	V	V	V
	FCC	V	V	V	V
	GCF	-	-	V	-
	PCTRB	-	-	V	-
Page		8-6	8-6	online	8-7

# Industrial Wireless Product Selection Guide

## Wireless Access Point/Client



Model Name		EKI-6310GN	EKI-6311GN	EKI-6331AN	EKI-6340-1	EKI-6340-2	EKI-6340-3	EKI-6351-A
Description		IEEE802.11 b/g/n WiFi AP/Client	IEEE 802.11 b/g/n Wi-Fi AP/Client	IEEE 802.11 a/n Wi-Fi AP/Client	IEEE 802.11 a/b/g/n Outdoor Single-Radio Wi-Fi AP	IEEE 802.11 a/b/g/n Outdoor Dual-Radio Wi-Fi AP	IEEE 802.11 a/b/g/n Outdoor Triple-Radio Wi-Fi AP	IEEE 802.11 a/b/g/n Wi-F AP/Client
Interface	IEEE Standard	802.11b/g/n	802.11b/g/n	802.11a/n	802.11 a/b/g/n	802.11 a/b/g/n	802.11 a/b/g/n	802.11 a/b/g/n
	100Base-TX	v	v	v	v	v	v	v
	1000Base-TX	-	-	-	v	v	v	v
	Radio Number	1	1	1	1	2	3	1
RF	MIMO	1T1R	1T1R	2T2R	2T2R	2T2R	2T2R	2T2R
	Transmit Output Power	*	*	*	*	*	*	*
	Receive Sensitivity	*	*	*	*	*	*	*
Operating Mode	Multi-Hopping	-	-	-	v	v	v	v
	AP/CPE	v	v	v	v	v	v	v
Power	PoE	802.3af	Passive 12 V	Passive 15 V	802.3at	802.3at	802.3at	802.3at
	Power Input Voltage	-	12 V <sub>DC</sub>	15 V <sub>DC</sub>	12 ~ 48 V <sub>DC</sub>			
	Redundant DC Power Input	-	-	-	v	v	v	v
Mechanism	DIN-rail Mount	v	-	-	-	-	-	v
	Wall Mount	-	-	-	v	v	v	v
	VESA Mount	-	-	-	v	v	v	-
	Pole Mount	v	v	v	v	v	v	-
IP Grade	IP66	IP55	IP55	IP67	IP67	IP67	IP30	
Operating Temperature	-20 ~ 70°C (-4 ~ 158°F)	v	v	v	-	-	-	-
	-35 ~ 75°C (-31 ~ 167°F)	-	-	-	v	v	v	v
Certification	FCC	v	v	v	v	v	v	v
	CE	v	v	v	v	v	v	v
	EN50155	-	-	-	v	v	v	v
Page		8-12	8-11	8-10	8-8	8-8	8-8	8-9

\*Note: Transmit Output Power & Receive Sensitivity are specified on data sheet.


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Introduction



## Introduction to Industrial IEEE 802.11 Wireless


In the past, Wireless deployment has been limited by security concerns, the cost of deployment, inadequate management solutions, lack of standards, and availability of innovative solutions. Rapid advances in wireless local area network (WLAN) technology in recent years, along with the widespread adoption of the technology in the industrial and enterprise space, have eliminated many of these roadblocks. WLAN is not a wholesale replacement for broadband, but it is a fast and cost-effective way to construct backhaul broadband transmissions. Wireless communication provides an easier way to connect devices, particularly those in dispersed locations or harsh environments. Today, a new wave of opportunity exists for industrial industries to improve margins through the use of wireless technology.

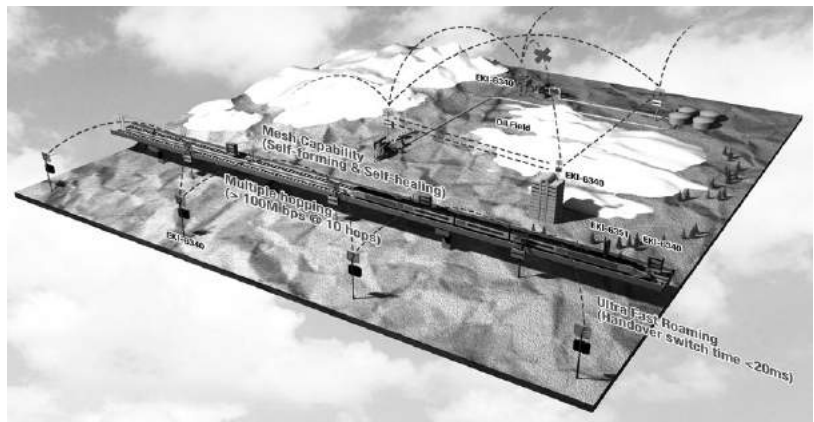

### 802.11 Standard Evolution

The IEEE 802.11 standard specifies a way to use radio frequency (RF) technology to send Ethernet packets over the air. Wireless LAN is based on the IEEE 802.11 standard and is referred to as Wi-Fi. The 802.11b standard, which operates in the 2.4 GHz frequency band at 11 Mbps, was the first commercially successful WLAN technology.

As wireless technology evolved, a higher transmission rate of 54 Mbps was achieved with 802.11g, which uses the 2.4 GHz band, and 802.11a, which uses the 5 GHz frequency band with same transmission rate of 54 Mbps. To extend the wireless communication distance and bandwidth, IEEE 802.11n has added more specifications in the MIMO standard and dual-band support. The transmission rate of 802.11n is up to 600Mbps. 802.11n offers a suite of advanced new features that increase effective data throughput, extended wireless coverage, and creates more reliable networks. Choosing the right WLAN technology is an important factor in determining the performance of your wireless network and overall return on investment.

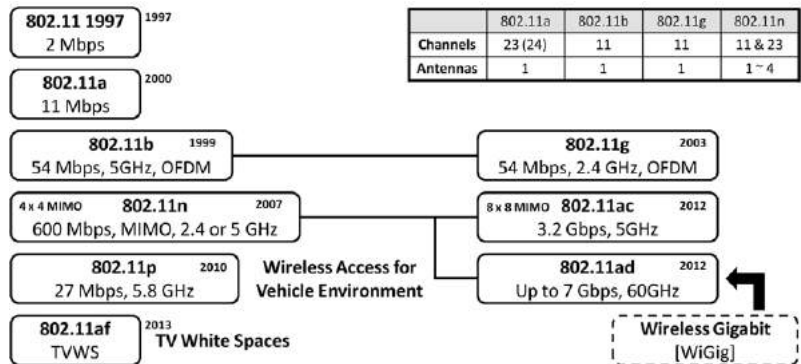



## Wireless Architecture

### AP-Client mode

The EKI-6300 series of products can perform as Access Points (AP) or Clients. When it's used as an AP, it's connected to a wired network via the Ethernet port and accepted connections from wireless clients and passes data upwards to a network wirelessly. In Client mode, it receives a wireless signal over last mile application, helping WISPs deliver wireless broadband Internet service to residents and business customers. In Client mode, it does not accept wireless associations from wireless clients.



### WDS mode

A Wireless Distribution System (WDS) provides an easy way for APs to communicate wirelessly with each other. In this mode, it can support single or multiple WDS links and no wireless clients can be associated with it.



### AP-Repeater mode

EKI-6300 series products can be used as Clients to receive wireless signals over the last mile, helping WISPs deliver wireless broadband Internet service to new residential and business customers. And it can be used as an AP to accept wireless connections from client devices in this mode.



## Cellular IP Gateway Technologies


### RVCOM

iGateway series supports Advantech patented RVCOM function that allows user use the virtual com port as usual, even the device gets a private IP address.




### DDNS Support

DDNS support helps user to locate the exactly current IP address of device easily. Device will automatically update current IP address to DDNS server. When using DDNS with VCOM or RVCOM, users don't need to do the lookup manually after setup. The connection will handle VCOM or RVCOM automatically.

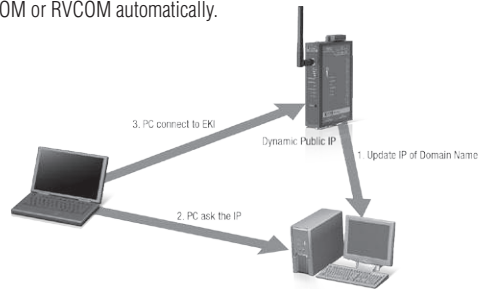


### OpenVPN Support

iGateway series supports standard OpenVPN protocol that provide trustable data communication. Users can setup private OpenVPN server easily without an extra software license fee.

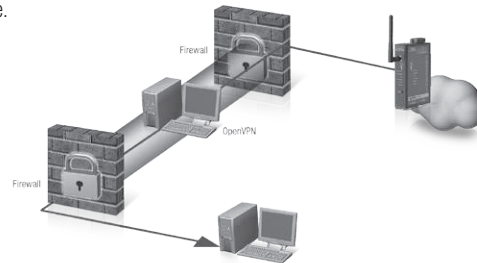


### IPv6 and IPv4 Dual Stack Support

IPv6 is becoming more popular and the iGateway series supports IPv6 and IPv4 dual protocol stack that helps user to overcome the impact of Ethernet architecture transition smoothly and easily.

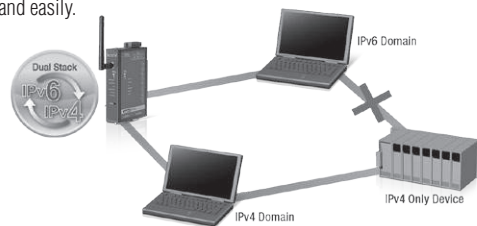

## iGateway Application for Solar Power

Advantech's GPRS/3G Serial Device Servers are a perfect fit for wireless data transmission systems due to their great performance, reliability and ruggedness. The GPRS/3G Serial Device Servers collect data from solar panels & inverters, pyranometers, and relative sensors. This information is transmitted through cellular data network to the telecom control center. Service providers and users are able to easily access real-time information anywhere, anytime. The GPRS/3G Serial Device Servers provide dual SIM slots for telecom carrier redundancy and one SD slot for serial data buffering.

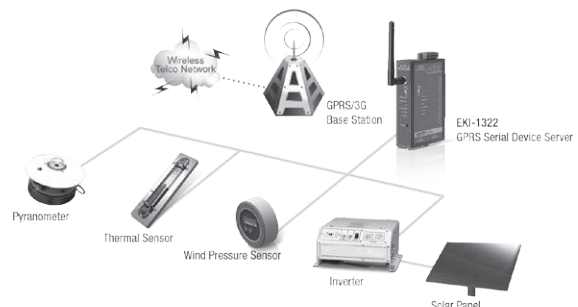

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-1321

# EKI-1322

## 1-port RS-232/422/485 to GPRS IP Gateway

## 2-port RS-232/422/485 to GPRS IP Gateway



### Features

- Universal quad-band GSM/GPRS 850/900/1800/1900 MHz
- Dual SIM for telecom redundancy
- Supports SDHC SD Card for Data Buffering
- Connects Ethernet and Serial Devices over VPN
- Various operation modes: COM port redirector, RVCOM, TCP, UDP, SMS tunnel, and pair connection
- Any baud rate setting for easy configuration
- Built-in 15 KV ESD protection for all serial signals
- 1.5 KV isolation protection (EKI-1321)
- 2 digital inputs (EKI-1321)
- Multiple configuration methods: Windows utility, Telnet, and Web console

### Introduction

EKI-1321 and EKI-1322 cellular gateways can transparently bring RS-232/422/485 or Ethernet devices to a cellular network. They allow nearly any device with serial or Ethernet ports to connect and share a cellular network with easy and simple configuration. EKI-1321 and EKI-1322 GPRS IP Gateway's are compact, and can be DIN-rail or wall mounted and with both front panel and side panel LED displays for easy identification. They come with dual DC power input from 12 to 48 V<sub>DC</sub> and have 2 KV EFT/Surge protection to prevent damage from various type of power resources. The serial ports are also protected by 15 KV ESD line protection to keep your system safe from unexpected electrical discharges. Both models support dual SIM slots to support GPRS signal redundancy to switch to an available channel automatically while the existing one is disconnected, and SD card slot for data buffering to prevent loss of serial data while the communication is interrupted.

### Specifications

#### LAN Interface

- **Ethernet** 10/100 Mbps, auto MDI/MDIX
- **Connector** RJ45
- **Protection** 1.5 KV built-in magnetic isolation protection

#### Cellular Interface

- **Standards** GSM/GPRS
- **Band Option** Quad-band 850/900 and 1800/1900 MHz
- **GPRS Multi-Slot** Class 10
- **GPRS Terminal Device** Class B
- **GPRS Coding Schemes** CS1 – CS4
- **Tx Power** 1 W for GSM 1800/1900, 2 W for EGSM 850/900
- **No. of SIM** 2
- **SIM Control** 3 V

#### Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** EKI-1321: 1, 2 KV isolation protection  
EKI-1322: 2
- **Port Connector** DB9 male
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Baud Rates** 75 bps to 921.6 kbps, any baud rate setting
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND  
RS-422: TxD+, TxD-, RxD+, RxD-, GND  
RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals

#### Relay Output

- **Channel** 1
- **Contact Rating** 0.5 A @ 120 V<sub>AC</sub>  
0.25 A @ 240 V<sub>AC</sub>; 2 A @ 30 V<sub>DC</sub>
- **Relay off Time(Typ.)** 4 ms
- **Relay on Time(Typ.)** 3 ms

#### Digital Input (EKI-1321)

- **Channel** 2
- **Input Level** Logic level 0: 1 V Maximum  
Logic level 1: 3 ~ 30 V

#### General

- **LED Indicators** System: Power, Status  
GPRS: Quality, ready  
Serial: Tx, Rx  
Ethernet: Speed, Link/Active  
Built-in WDT (watchdog timer)
- **Reboot Trigger**

#### Software

- **Driver Support** 32-bit/64-bit Windows XP/Vista/7/8, Windows Server 2003/2008/2008 R2/2012, Windows CE 5.0, and Linux
- **Utility Software** Advantech EKI Device Configuration Utility
- **Operating Modes** Virtual COM, Reverse Virtual COM, TCP/UDP server mode, TCP/UDP client mode, Pair connection mode (Serial Tunnel), RFC2217, SMS Tunnel, IP Gateway w/ VPN
- **Configuration** Windows utility, Telnet console, Web Browser
- **Protocols** ARP, ICMP, IPv4, IPv6, TCP, UDP, BOOTP, DHCP Client, Auto IP, Telnet, DNS, SNMP, HTTP, HTTPS, SMTP, SNMP, SSL
- **Router/Firewall** NAT, port forwarding

#### Mechanics

- **Dimensions (W x H x D)** 27 x 120 x 85 mm (1.06" x 4.72" x 3.35")
- **Enclosure** Metal with solid mounting hardware
- **Mounting** DIN-rail, Wall
- **Weight** 0.49 Kg

#### Power Requirements

- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Power Connector** Terminal block
- **Power Consumption** EKI-1321: 8W, EKI-1322: 8.5W
- **Power EFT/Surge Prot.** 2 KV

#### Environment

- **Operating Temperature** -30 ~ 65°C (-22 ~ 149°F)
- **Storage Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Operating Humidity** 5 ~ 95% RH

#### Regulatory Approvals

- **EMC** CE: EN55022/EN55024, Class A  
FCC: FCC part 15 subpart B, Class A
- **RF** FCC Part22H/Part24E, EN301 489-1, EN301 489-7, EN301 511

### Ordering Information

- **EKI-1321** 1-port GPRS IP Gateway
- **EKI-1322** 2-port GPRS IP Gateway
- **OPT1-DB9** D-Sub 9 to Terminal Converter

# EKI-1334

## Industrial Ethernet/Serial Router

NEW



### Features

- Universal five-band UMTS/HSPA+ 850/900/1800/1900/2100 MHz
- Universal quad-band GSM/GPRS 850/900/1800/1900 MHz
- Connect Ethernet and Serial Devices over VPN
- Dual WAN (Ethernet WAN and Cellular WAN) for redundancy
- Built-in 15 KV ESD protection for all serial signals
- Multiple configuration methods: Serial console, Telnet, and Web console

### Introduction

The EKI-1334 is a compact designed industrial cellular routers which can help users quickly access high-speed Internet and support secure and reliable data transmission. The products combine together with the functions of switch, serial device server, 3G Router, IP modem and Advanced VPN client and provide with high cost-effective solution for applications in industrial automation and control, fleet monitoring, video surveillance, advertising media, and outlets networking. They allow nearly any device with serial or Ethernet ports to connect and share a cellular network with easy and simple configuration through the browser without connection to the router by cable. EKI-1334 HSPA+ IP Router is compact, and can be DIN-rail or wall mounted for easy identification. They come with dual DC power input from 9 to 26 V<sub>DC</sub> and have 2 KV EFT/Surge protection to prevent damage from various type of power resources. The serial/Ethernet ports are also protected by 15 KV ESD line protection to keep your system safe from unexpected electrical discharges and enable the capability to work under harsh conditions.

### Specifications

#### LAN Interface

- **Ethernet** 10/100 Mbps, auto MDI/MDIX
- **Connector** RJ45
- **Protection** 1.5 KV built-in magnetic isolation protection
- **No. of Port** 4

#### Cellular Interface

- **Standards** HSPA+/UMTS/GPRS/GSM
- **Band Option** Quad-band 850/900 and 1800/1900/2100 MHz
- **No. of SIM** 1
- **SIM Control** 3 V
- **SMA Connector** SMA Female with inner pin

#### Ethernet WAN Interface

- **Ethernet** 10/100 Mbps, auto MDI/MDIX
- **Connector** RJ45
- **Protection** 1.5 KV built-in magnetic isolation protection
- **No. of Port** 1

#### Serial Communications

- **Port Type** RS-232/485
- **No. of Ports** 1
- **Port Connector** 5-pin Terminal block
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Baud Rates** 9600 bps to 232.4 kbps
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND  
RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals

#### General

- **LED Indicators** System: Power, Status, Warn, Error  
Cellular: Three Levels of Cellular Signal Strength  
Ethernet: Speed, Link/Active
- **Reboot Trigger** Built-in WDT (watchdog timer)

#### Software

- **Operating Modes** TCP/UDP server mode, TCP/UDP client mode, IP Router w/ VPN
- **Configuration** Telnet console, Web Browser
- **Protocols** ARP, ICMP, PPP, IPv4, TCP, UDP, BOOTP, DHCP Client, DHCP Server, Auto IP, SNMP, Sntp, SMTP, Ping, Trace, DNS Relay, DDNS, Telnet, HTTP, HTTPS, SSH, VRRP, VPN (IPSec/SSL/PPTP/L2TP/GRE/VPN)
- **Network Security** SPI, DDoS protection, Stateless Packet Inspection, Filtering Multicast/Ping package, Access Control List (ACL), NAT, DMZ, Port mapping, NAT, PAT,

#### Mechanics

- **Dimensions (W x H x D)** 113 x 45 x 133 mm (4.45" x 1.8" x 5.24")
- **Enclosure** Metal with solid mounting hardware
- **Mounting** DIN-rail, Wall
- **Weight** 0.34 Kg

#### Power Requirements

- **Power Input** 9 ~ 26 V<sub>DC</sub>
- **Power Connector** Terminal block
- **Power Consumption** 3.48W
- **Power EFT/Surge Prot.** 2 KV

#### Environment

- **Operating Temperature** -20 ~ 70°C (-5 ~ 160°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% RH

#### Regulatory Approvals

- **EMC** EN61000-4-2, level 2; EN61000-4-3, level 2  
EN61000-4-4, level 2; EN61000-4-5, level 2  
EN61000-4-6, level 2; EN61000-4-12, level 2
- **Shock** IEC60068-2-27
- **Free Fall** IEC60068-2-32
- **Vibration** IEC60068-2-6

### Ordering Information

- **EKI-1334** Industrial HSPA+ IP Router

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-6340 Series

## IEEE 802.11 a/b/g/n Outdoor Wi-Fi AP



### Features

- High throughput multiple hopping ( $\geq 100$  Mbps @10 hops)
- Ease of use installation utilities: antenna alignment, distance calculation and site survey tools
- Compliant with IEEE 802.11 a/b/g/n
- Up to 3 radios for Mesh back haul and Access Point
- MIMO 2 x 2, up to 300 Mbps data rate
- Dual 12 ~ 48 V redundant DC input power
- 802.3 at PoE input
- Gigabit Ethernet support
- WEP, WPA, WPA2-PSK/EAP (IEEE 802.1X/RADIUS, TKIP and AES)
- IP67 enclosure, wide operating temperature range
- EN50155 compliant

### Introduction

The EKI-6340 series are perfect wireless APs for outdoor deployment. With self-healing & self-forming capabilities, the wireless network is free from interruption even part of Mesh nodes failed. It's especially critical for infrastructures where wired solutions are hard to deploy. The low latency and high throughput multiple hopping features greatly enables the extension of network coverage. This high throughput network perfectly covers the growing number of data demands such as video security, surveillance and entertainment. Comprehensive security features prevent system from intrusion. IP67 sturdy waterproof enclosure with wide-temperature design enables excellent performances under all harsh outdoor environments.

### Specifications

#### Standard Support

- **Wireless** IEEE 802.11a/b/g/n compliant
- **Ethernet** IEEE 802.11i, IEEE 802.3/802.3u/802.3ab, IEEE 802.3at PoE, 802.1d, 802.1w, 802.1q, 802.1p
- **Data Rates** IEEE 802.11b: 1, 2, 5.5, 11 Mbps  
IEEE 802.11a, g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
IEEE 802.11n: @ 800ns (400ns) GI  
20 MHz BW  
1 Nss: 65 (72.2) Mbps maximal  
2 Nss: 130 (144.4) Mbps maximal  
40 MHz BW  
1 Nss: 135 (150) Mbps maximal  
2 Nss: 270 (300) Mbps maximal

#### Physical Specifications

- **Power** Dual redundant 12 ~ 48 V<sub>DC</sub>  
IEEE 802.3at PoE
- **Power Consumption** Normal operation:  
EKI-6340-1 Max. 17 W  
EKI-6340-2 Max. 21W  
EKI-6340-3 Max. 25 W  
Cold start:  
EKI-6340-1 Max. 13W  
EKI-6340-2/3 Max. 25 W
- **Dimensions (W x H x D)** 225 x 242 x 65 (8.86" x 9.53" x 2.56")
- **Weight** 2.25 Kg
- **Enclosure** Metal, IP67 protection
- **Mounting** Pole, Wall, VESA

#### Environment

- **Operating Temperature** -35 ~ 75°C (-31 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity** 5% ~ 100% (non-condensing)

#### Interface

- **Antenna** N-type female connector  
EKI-6340-1: 2 connectors  
EKI-6340-2: 4 connectors  
EKI-6340-3: 6 connectors
- **Power** M12 D-code connector
- **LAN** M25 cable gland

#### System Operation Mode

- Bridge/ Router

#### Other Features

- DHCP Client/Server, Statistic routing table, RIP v1&v2, WMM, Multi-SSID (up to 16x ESSID for each radio), traffic limitation, IEEE 802.11h DFS, Syslog, L2 management utility, HTTP (s), Telnet, SSH, CLI, SNMP, installation utilities.

#### Modulation Techniques

- **IEEE 802.11a/n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
- **IEEE 802.11b** DSSS (DBPSK, DQPSK, CCK)
- **IEEE 802.11g/n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

#### Frequency Range

- **USA** 2.400 ~ 2.483 GHz, 5.725 ~ 5.825 GHz
- **Europe** 2.400 ~ 2.483 GHz, 5.15 ~ 5.35 GHz, 5.47 ~ 5.725 GHz
- **China** 2.400 ~ 2.483 GHz, 5.725 ~ 5.85 GHz

Note: radio is capable to be operated within FCC DFS2 band or ETSI/EC DFS band, or other countries which is regulating or is planning to regulate mid -5 GHz band. The usage of mid -5 GHz band is subject to the regulatory approval status.

#### Certificates

- **EMC** US FCC Part 15 Class B & C & E, Europe ETSI 301 489-1&17
- **Radio** ETSI 300 328, ETSI 301 893, FCC 15.247
- **Rail Traffic** EN50155, EN50121-1/-4
- **Safety** EN 60950

### Ordering Information

- **EKI-6340-1A** 802.11 a/b/g/n Outdoor Single Radio AP
- **EKI-6340-2A** 802.11 a/b/g/n Outdoor Dual Radio AP
- **EKI-6340-3A** 802.11 a/b/g/n Outdoor Triple Radio AP
- **EKI-6340-1U** 802.11 a/b/g/n Outdoor Single Radio AP (EU)
- **EKI-6340-2U** 802.11 a/b/g/n Outdoor Dual Radio AP (EU)
- **EKI-6340-3U** 802.11 a/b/g/n Outdoor Triple Radio AP (EU)

# EKI-6351-A

## IEEE 802.11 a/b/g/n Wi-Fi AP/Client



### Features

Unique features of EKI-6351-A

- Highly secured self-healing & self-forming Mesh capability

Common features:

- Ease of use installation utilities: antenna alignment, distance calculation and site survey tools
- Compliant with IEEE 802.11a/b/g/n
- MIMO 2 x 2 11n, up to 300 Mbps data rate
- Dual 12 ~ 48 V redundant DC input power
- 802.3at PoE input
- Gigabit Ethernet support
- WEP, WPA, WPA2-PSK/EAP (IEEE 802.1X/RADIUS, TKIP and AES)
- Wide operating temperature range from -35 to 75°C
- EN50155 compliant

### Introduction

The EKI-6351-A are perfect wireless AP/Clients for deployment in many locations. This high throughput network covers the increasing data demands of applications such as video security, surveillance and entertainment. Comprehensive security features prevent the system from intrusion whilst the wide operating temperature range enables excellent performances in harsh environments.

### Specifications

#### Standard Support

- **Wireless** IEEE 802.11a/b/g/n compliant
- **Ethernet** IEEE 802.11i, IEEE 802.3/802.3u/802.3ab, IEEE 802.3at PoE, 802.1d, 802.1w, 802.1q, 802.1p
- **Data Rates**
  - 802.11b: 1, 2, 5.5, 11 Mbps
  - 802.11a, g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
  - Passive 15 V PoE, max. distance: 20 meters
  - IEEE 802.11n: @ 800ns (400ns) GI
  - 20 MHz BW
  - 1 Nss: maximal
  - 2 Nss: 130 (144.4) Mbps maximal
  - 40 MHz BW
  - 1 Nss: 135 (150) Mbps maximal
  - 2 Nss: 270 (300) Mbps maximal

#### Physical Specifications

- **Power** Dual redundant 12 ~ 48 V<sub>DC</sub>  
IEEE 802.3at PoE
- **Power Consumption** Normal operation: Max. 17 W  
Cold start: Max. 13 W
- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- **Weight** 0.63 Kg
- **Enclosure** Metal, IP30 protection
- **Mounting** DIN-rail, Wall

#### Environment

- **Operating Temperature** -35 ~ 75°C (-31 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity** 5% ~ 100% (non-condensing)

#### Interface

- **Antenna** 2 x RSMA connector
- **Power** Terminal block
- **LAN** RJ45

#### System Operation Mode

- EKI-6351-A - Bridge/Router/Mesh

#### Other Features

- DHCP Client/Server\*, Statistic routing table\*, RIP v1&v2\*, WMM, Multi-SSID (up to 16x ESSID for each radio), traffic limitation, IEEE 802.11h DFS, Syslog, L2 management utility, HTTP (s), Telnet, SSH, CLI, SNMP, installation utilities.

#### Modulation Techniques

- **IEEE 802.11a/n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
- **IEEE 802.11b** DSSS (DBPSK, DQPSK, CCK)
- **IEEE 802.11g/n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

#### Frequency Range

- **USA** 2.400 ~ 2.483 GHz, 5.15 ~ 5.25GHz, 5.725 ~ 5.825 GHz
- **Europe** 2.400 ~ 2.483 GHz, 5.15 ~ 5.35 GHz, 5.47 ~ 5.725 GHz
- **China** 2.400 ~ 2.483 GHz, 5.725 ~ 5.85 GHz

Note: radio is capable to be operated within FCC DFS2 band or ETSI/EC DFS band, or other countries which is regulating or is planning to regulate mid-5 GHz band. The usage of mid-5 GHz band is subject to the regulatory approval status.

#### Certificates

- **EMC** US FCC Part 15 Class B & C & E,  
Europe ETSI 301 489-1&17
- **Radio** ETSI 300 328, ETSI 301 893, FCC 15.247
- **Rail Traffic** EN50155, EN50121-1/-4
- **Safety** EN 60950

### Ordering Information

- **EKI-6351-A** 802.11 a/b/g/n Wi-Fi AP/Client
- **EKI-6351-U** 802.11 a/b/g/n Wi-Fi AP/Client (EU)

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-6331AN

## IEEE 802.11 a/n Wi-Fi AP/Client



### Features

- Compliant with IEEE 802.11 a/n
- IP55 waterproof certification
- MIMO 2 x 2 11n
- Embedded 16 dBi dual-polarity directional antenna with external R-SMA connector for optional antenna
- High output power 24 dBm
- Passive 15 V PoE
- Supports distances up to 10 km
- WEP/WPA/WPA2/ IEEE 802.1 x authentication support
- IGMP snooping protocol support

### Introduction

The EKI-6331AN is a feature rich wireless AP/Client which provides a reliable 5GHz wireless connectivity for industrial environments. The PoE injector enhances flexibility in deployment of this AP/Client even where the DC power supply is hard to fulfill. As an 802.11n compliant device, EKI-6331AN provides 3 times higher data rates than legacy 802.11a devices. With MIMO 2 x 2 technology, EKI-6331AN provides both robust wireless connectivity as well as high throughput rate in wireless transmission. With the support of WMM and IGMP snooping protocols, EKI-6331AN effectively improves the reliability of wireless connectivity, especially in applications that need high reliability and high throughput data transmission. To secure wireless connections, EKI-6331AN implements the latest encryption technologies including WPA2/WPA/802.1x for powerful security authentication.

### Specifications

#### Standard Support

- **Wireless** IEEE 802.11 a/n
- **Ethernet** IEEE 802.3u MDI / MDIX 10/100 Fast Ethernet
- **LAN** IEEE 802.11a wireless LAN interface  
IEEE 802.11n wireless LAN standard  
Passive 15 V PoE
- **Certification** US FCC Part 15  
ETSI 301 489-1&17,  
EN 60950 compliant and CE Mark  
EN 301 893 (5470-5725MHz DFS)  
EN 302 502 (5725-5850 MHz DFS)
- **Data Rates** IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps, auto-fallback  
IEEE 802.11n: 6 M, 6.5 M, 13 M, 13.5 M, 19.5 M, 26 M, 27 M, 39 M, 40.5 M, 53 M, 54 M, 58.5 M, 65 M, 78 M, 81 M, 104 M, 108 M, 117 M, 121.5 M, 130 M, 135 M, 150 Mbps, up to 300 Mbps

#### Physical Specifications

- **Power** 15 V<sub>DC</sub> @ 0.8A; AC Adapter 100 V ~ 240 V
- **Dimensions (W x H x D)** 111 x 256 x 48 mm (4.37" x 10.08" x 1.89")
- **Mounting** Wall, Pole
- **Weight** 0.5 Kg

#### Environment

- **Operating Temp.** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity** 5% ~ 95% non-condensing

#### Interface Operation Modes

- Access Point (AP) / Client

#### Antenna

- Antenna Configuration 2 x 2 (2T2R)
- Default embedded 14~16 dBi (Dual-polarity)
- Reverse SMA Connectors (configured by software)

#### Other Features

- **Management** Telnet, FTP, SNMP, Web UI
- **Security** Open System, Shared Key, 802.1X only, WPA, WPA2, WPA-PSK (TKIP)
- **Wireless** Radio on/off, WMM/Regatta Mode, Output Power Control, Fragmentation Length, Beacon Interval, RTS/CTS threshold, DTIM Interval

#### Modulation Techniques

- **IEEE 802.11n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
- **IEEE 802.11a** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

#### Channel Support

- **FCC** 5725-5850 MHz
- **CE** 5470-5725 MHz, 5725-5850 MHz

#### Wireless Transmission Rates

- **IEEE 802.11a** 6-24 Mbps: 24 dBm  
54 Mbps: 21 dBm
- **IEEE 802.11n** HT20 - MCS0: 23 dBm  
MCS15: 20 dBm  
HT40 - MCS0: 23 dBm  
MCS15: 19 dBm
- Note: bandedge exclusive (Controllable for different country regulations)

#### Receiver Sensitivity

- **IEEE 802.11a** 54 Mbps: -76 dBm
- **IEEE 802.11n** HT20 - MCS15: -70 dBm  
HT40 - MCS15: -66 dBm

### Ordering Information

- **EKI-6331AN** IEEE 802.11 a/n Wireless AP/Client
- **EKI-6331AN-EU** IEEE 802.11 a/n Wireless AP/Client (EU)

# EKI-6311GN

## IEEE 802.11 b/g/n Wi-Fi AP/Client



### Features

- Compliant with IEEE 802.11 b/g/n
- IP55 waterproof certification
- Embedded 8 dBi directional antenna with external N-type connector for optional antenna
- High output power 26 dBm
- MIMO 1 x 1 11n
- Passive 15 V PoE
- Supports distances up to 5 km
- WPA/WPA2-Enterprise encryption for a highly secure wireless network
- WEP/WPA/WPA2/ IEEE 802.1x authentication support
- Spanning Tree and IGMP snooping protocol support

### Introduction

The EKI-6311GN is a feature rich wireless AP/Client which provides a reliable wireless connectivity for industrial environments. The PoE injector enhances flexibility in deployment of this AP/Client even where the DC power supply is hard to fulfill. As an 802.11n compliant device, EKI-6311GN provides 3 times higher data rates than legacy 802.11g devices. With the support of STP, WMM and IGMP snooping protocols, EKI-6311GN effectively improves the reliability of wireless connectivity, especially in applications that need high reliability and high throughput data transmission. To secure wireless connections, EKI-6311GN implements the latest encryption technologies including WPA2/WPA/802.1x for powerful security authentication.

### Specifications

#### Standard Support

- Wireless** IEEE 802.11b/g/n
- Ethernet** IEEE 802.3u MDI / MDIX 10/100 Fast Ethernet
- LAN** IEEE 802.11b/g wireless LAN interface  
IEEE 802.11n wireless LAN standard  
Passive 15 V PoE, max. distance: 20 meters  
US FCC Part 15 Class B & C & E  
Europe ETSI 300 328, ETSI 301 489-1&17,  
EN 60950 compliant and CE Mark
- Certification**
- Data Rates** 802.11b 11, 5.5, 2, 1 Mbps, auto-fallback,  
802.11g 54, 48, 36, 24, 18, 12, 9, 6 Mbps,  
auto-fallback
- IEEE 802.11n:** 6 M, 6.5 M, 13 M, 13.5 M, 19.5 M, 26 M, 27 M, 39 M,  
40.5 M, 53 M, 54 M, 58.5 M, 65 M, 78 M, 81 M,  
104 M, 108 M, 117 M, 121.5 M, 130 M, 135 M,  
150 Mbps

#### Physical Specifications

- Power** DC 15 V / 0.8A; AC Adapter 100 V ~ 240 V
- Dimensions (W x H x D)** 60 x 165 x 34 mm (2.36" x 6.50" x 1.34")
- Mounting** Wall, Pole
- Weight** 0.5 Kg

#### Environment

- Operating Temperature** Non Heater : -20 ~ 70°C (-4 ~ 158°F)
- Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- Humidity** 10% ~ 95% non-condensing

#### Interface Operation Modes

- Access Point (AP) / Client

#### Antenna

- Antenna Configuration 1x1 (1 Tx, 1 Rx)
- Default embedded 8 dBi directional antenna (Vertical-Pol)
- Reserve N-type Connector (Plug) \*Switchable by software
- Equipped N-to-RSMA adaptor and 5dBi dipole antenna for indoor AP applications.

#### Other Features

- Telnet, FTP, SNMP, Password Changes, Firmware updates, Configuration Files
- Radio on/off, WMM/Regatta Mode, Output Power Control, Fragmentation Length, Beacon Interval
- RTS/CTS threshold, DTIM Interval

#### Modulation Techniques

- IEEE 802.11n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
- IEEE 802.11b** DSSS (DBPSK, DQPSK, CCK)
- IEEE 802.11g** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

#### Channel Support

- IEEE 802.11b/g/n** HT20  
FCC: CH1 ~ CH11; ETSI: CH1 ~ CH13
- IEEE 802.11gn** HT40  
FCC: CH3 ~ CH9; ETSI: CH3 ~ CH11

#### Wireless Transmission Rates

- Transmitted Power** 802.11b: 26 dBm  
802.11g: 26 dBm @ 6 Mbps, 24 dBm @ 54 Mbps  
802.11gn HT20: 26 dBm @ MCS0, 22 dBm @ MCS7  
802.11gn HT40: 26 dBm @ MCS0, 21 dBm @ MCS7

#### Receiver Sensitivity

- 802.11b Sensitivity** -93 dBm @ 1 Mbps; -88 dBm @ 11 Mbps
- 802.11g Sensitivity** -89 dBm @ 6 Mbps; -73 dBm @ 54 Mbps
- 802.11n HT20** -88 dBm @ MCS0; -70 dBm @ MCS7
- 802.11n HT40** -84 dBm @ MCS0; -67 dBm @ MCS7

### Ordering Information

- EKI-6311GN** 802.11 b/g/n Wireless AP/Client (US)
- EKI-6311GN-EU** 802.11 b/g/n Wireless AP/Client (EU)

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-6310GN

## IEEE 802.11 b/g/n Wi-Fi AP/Client



### Features

- Compliant with IEEE802.11b/g/n
- IP66 waterproof certification
- High output power 27dBm
- Standard PoE (802.3af) support
- Supports distances up to 5Km
- Supports wireless data encryption with 64/128 bits WEP/WPA/WPA2/TKIP with IEEE 802.1X-Enterprise encryption for a highly secure wireless network
- WEP/WPA/WPA2/ IEEE 802.1 x authentication support
- Supports WPS by software

### Introduction

The EKI-6310GN is a feature rich wireless AP/Client which provides a reliable wireless connectivity for industrial environments. The standard PoE input enhances flexibility in deployment of this AP/Client even where the DC power supply is hard to fulfill. As an 802.11n compliant device, EKI-6310GN provides 3 times higher data rates than legacy 802.11g devices. EKI-6310GN, with an integrated Type N RF connector that can be directly plugged in to any antenna to create a robust outdoor AP/Client, effectively improves the reliability of wireless connectivity, especially in applications that need high reliability and high throughput data transmission. To secure wireless connections, EKI-6310GN implements the latest encryption technologies including WEP/WPA/WPA2/802.1x for powerful security authentication.

### Specifications

#### Standard Support

- **Wireless** IEEE802.11b/g/n
- **Ethernet** IEEE802.3u MDI / MDIX 10/100 Fast Ethernet
- **LAN** IEEE802.11b/g wireless LAN interface IEEE 802.11n wireless LAN standard Standard PoE 802.3af
- **Data Rates** 802.11b 11, 5.5, 2, 1 Mbps, auto-fallback, 802.11g 54, 48, 36, 24, 18, 12, 9, 6 Mbps, auto-fallback
- **802.11n** 6M, 6.5M, 13M, 13.5M, 19.5M, 26M, 27M, 39M, 40.5M, 53M, 54M, 58.5M, 65M, 78M, 81M, 104M, 108M, 117M, 121.5M, 130M, 135M, 150Mbps

#### Physical Specifications

- **Power** Standard PoE 802.3af
- **Dimensions (W x H x D)** 61.7 x 206.2 x 47.7 mm (2.43" x 8.12" x 1.88")
- **Mounting** DIN-rail, Wall, Pole
- **Weight** 0.5 Kg

#### Environment

- **Operating Temp.** Non Heater: -30 ~ 70°C (-22 ~ 158°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity** 10% ~ 95% non-condensing

#### Interface Operation Modes

- Access Point (AP)/Client

#### Antenna

- **Antenna Configuration** 1x1 (1 Tx, 1 Rx)
- Reserve N-type Connector (Plug)

\*Equipped N-to-RSMA adaptor and 5dBi dipole antenna for indoor AP applications.

#### Other Features

- Telnet, FTP, SNMP, Password Changes, Firmware updates, Configuration Files
- Output Power Control, Bandwidth Control, Distance Adjustment, Site survey
- Open System , Shared Key, Radius 802.1X , WPA, WPA2, WPA-PSK (TKIP)

#### Modulation Techniques

- **802.11n** OFDM(BPSK, QPSK, 16-QAM, 64-QAM)
- **802.11b** DSSS (DBPSK, DQPSK, CCK)
- **802.11g** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

#### Channel Support

- **802.11b/g/gn** HT20  
FCC: CH1 ~ CH11; ETSI: CH1 ~ CH13
- **802.11gn** HT40  
FCC: CH3 ~ CH9; ETSI: CH3 ~ CH11

#### Wireless Transmission Rates

- **Transmitted Power** Max. 27 dBm

#### Receiver Sensitivity

- **802.11b Sensitivity** -95dBm @ 11Mbps
- **802.11g Sensitivity** -92dBm @ 54Mbps
- **802.11n Sensitivity** -90dBm @ HT20

### Ordering Information

- **EKI-6310GN** 802.11 b/g/n Wireless AP/Client (US)
- **EKI-6310GN-EU** 802.11 b/g/n Wireless AP/Client (EU)



# Accessories



Advantech P/N	ANT-1208-G2E	ANT-2209-G2E	ANT-2216-G2E	ANT-3215-G2E	ANT-1208-G5E	ANT-2218-G5E	ANT-3213-G5E
<b>Frequency Range</b>	2.4-2.5G	2.4-2.5G	2.4-2.5G	2.3-2.7G	4.9-5.35G	4.9-5.9G	4.9-5.9G
<b>Antenna Type</b>	Omni	Patch	Patch	Sector	Omni	Patch	Sector
<b>Antenna Gain</b>	8 dBi	9.5 dBi	16 dBi	15 dBi	8 dBi	18 dBi	13.5 dBi
<b>Description</b>	8 dBi 2.4G Omni Antennna	9.5 dBi 2.4G Patch Antenna	16 dBi 2.4G Patch Antenna	15 dBi 2.4G Sector Antenna	8dBi 5G Omni Antennna	18 dBi 5G Patch Antenna	13.5 dBi 5G Sector Antenna
<b>Impedance</b>	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm
<b>Polarization</b>	Linear, vertical	Linear, vertical	Linear, vertical	Linear, vertical	Linear, vertical	Linear, vertical	Linear, vertical
<b>HPBW/Vertical</b>	360/15	50/50	25/25	90/8	360/12	23/19	120/6
<b>V.S.W.R.</b>	2.0:1 (Max.)	1.5:1 (Max.)	1.5:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)
<b>Power Handling</b>	20 W (cw)	20 W (cw)	20 W (cw)	50 W (cw)	20 W (cw)	5 W (cw)	10 W (cw)
<b>Connector</b>	N-Jack	N-Jack	N-Jack	N-Jack	N-Jack	N-Jack	N-Jack
<b>Operating Temp.</b>	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80
<b>IP Rating</b>	IP55	N/A	IP57	IP55	IP55	IP55	IP55
<b>Weight</b>	0.34 kg	0.14 kg	1.5 kg	1 kg	0.28 kg	0.825 kg	0.55 kg



Advantech P/N	ANT-1205D-G25E	ANT-1210D-G25E	ANT-2215D-G25E	ANT-3215D-G25E	ANT-2216M-G2E	ANT-2216M-G5E	ANT-3214M-G2E	ANT-3215M-G5E
<b>Frequency Range</b>	2.4-5G; 5.1-5.9G	2.4-5G; 5.1-5.9G	2.4-5G; 5.1-5.9G	2.4-5G; 4.9-5.9G	2.3-2.7GHz	5.1-5.9G	2.4-2.5G	5.1-5.9G
<b>Antenna Type</b>	Omni	Omni	Patch	Sector	Patch	Patch	Sector	Sector
<b>Antenna Gain</b>	4/7 dBi	8/10 dBi	13.5/15.5 dBi	12/15 dBi	16 dBi	16 dBi	14 dBi	15 dBi
<b>Description</b>	4/7dBi Dual-Band Omni Antennna	8/10dBi Dual-Band Omni Antennna	13.5/15.5dBi Dual-Band Patch Antennna	12/15dBi Dual-Band Sector Antennna	16dBi 2.4G MIMO Patch Antennna	16dBi 5G MIMO Patch Antennna	14dBi 2.4G MIMO Sector Antennna	15dBi 5G MIMO Sector Antennna
<b>Impedance</b>	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm
<b>Polarization</b>	Linear, vertical	Linear, vertical	Linear, vertical	Linear, vertical	Linear, vertical/horizontal	Linear, vertical	Linear, vertical	Linear, vertical
<b>HPBW/Vertical</b>	360/30	360/13	30/30	70/18	25/25	19/21	90/13	90/8
<b>V.S.W.R.</b>	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)	2.0:1 (Max.)
<b>Power Handling</b>	2 W (cw)	5 W (cw)	10 W (cw)	10 W (cw)	6 W (cw)	6 W (cw)	10 W (cw)	6 W (cw)
<b>Connector</b>	N-Plug	N-Jack	N-Jack	N-Jack	N-Jack	N-Jack	N-Jack	N-Jack
<b>Operating Temp.</b>	-40 to +70	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80
<b>IP Rating</b>	N/A	IP67	IP55	IP55	IP67	IP55	IP55	IP55
<b>Weight</b>	0.07 kg	0.394 kg	0.4 kg	0.462 kg	1.1 kg	0.8 kg	0.8 kg	1.4 kg

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards



Advantech P/N	ANT-5115-AE	ANT-5130-AE	ANT-5210-AE	ANT-5230-AE	ANT-5260-AE	ANT-5290-AE
<b>Description</b>	1.5M N-Plug to SMA-Plug cable	3M N-Plug to SMA-Plug cable	1M N-Plug to N-Plug cable	3M N-Plug to N-Plug cable	6M N-Plug to N-Plug cable	9M N-Plug to N-Plug cable
<b>Cable Type</b>	ULA-168	ULA-168	ULA400	ULA400	ULA400	ULA400
<b>VSWR</b>	1.5 : 1 Max.@ DC ~ 3.0 GHz 2.0 : 1 Max.@ 3.0 ~ 6.0 GHz	1.5 : 1 Max.@ DC ~ 3.0 GHz 2.0 : 1 Max.@ 3.0 ~ 6.0 GHz	1.5 : 1 Max.@ DC ~ 6.0 GHz	1.5 : 1 Max.@ DC ~ 6.0 GHz	1.5 : 1 Max.@ DC ~ 6.0 GHz	1.5 : 1 Max.@ DC ~ 6.0 GHz
<b>Insertion Loss</b>	2.0 dB Max.@ DC ~ 3.0 GHz 2.5 dB Max.@ 3.0 ~ 6.0 GHz	3.5 dB Max.@ DC ~ 3.0 GHz 4 dB Max.@ 3.0 ~ 6.0 GHz	0.7 dB Max.@ DC ~ 3 GHz 1.0 dB Max.@ 3 ~ 6.0 GHz	1.1 dB Max.@ DC ~ 3 GHz 1.6 dB Max.@ 3 ~ 6.0 GHz	1.8 dB Max.@ DC ~ 3 GHz 2.7 dB Max.@ 3 ~ 6.0 GHz	3.0 dB (Max.) @ DC ~ 3 GHz 4.0 dB (Max.) @ 3 ~ 6 GHz
<b>Connector Type</b>	N-plug to RP SMA-plug	N-plug to RP SMA-plug	N-plug to N-plug	N-plug to N-plug	N-plug to N-plug	N-plug to N-plug
<b>Cable Length</b>	1.5M	3M	1M	3M	6M	9M



Advantech P/N	ANT-5501-AE	ANT-5502-AE	ANT-5601-AE
<b>Description</b>	1KV Arurge Arrestor N-Jack to N-Jack	1KV Arurge Arrestor N-Plug to N-Jack	Bulkhead adapter N-Jack to N-Jack
<b>Surge Protection</b>	1KV	1KV	N/A
<b>VSWR</b>	1.25: 1 Max @ DC ~ 4GHz 1.45: 1 Max @ 4 ~ 6GHz	1.3: 1 Max @ DC ~ 4GHz 1.5: 1 Max @ 4 ~ 6GHz	1.2: 1 Max @ DC ~ 3GHz 1.4: 1 Max @ 3 ~ 6GHz
<b>Insertion Loss</b>	0.8 dB	0.8 dB	N/A
<b>Connector Type</b>	N Jack to N Jack	N plug to N Jack	N-jack to N-jack

# Industrial Ethernet Solutions

## Industrial Ethernet Product Selection Guide

9-2

### EN50155 Ethernet Switches

EKI-6558TI	EN50155 IP67 8-port M12 Managed Ethernet Switch with Wide Temperature	
EKI-6559TMI	EN50155 IP67 8-port M12 + 2-port Fiber Optic Managed Ethernet Switch with Wide Temperature	9-10
EKI-6528TI	EN50155 8-port M12 Unmanaged Switch with Wide Temperature	
EKI-6528TPI	EN50155 8-port M12 Unmanaged PoE Switch with Wide Temperature	9-11

### PoE Switch

EKI-9312P	Industrial-Class 12 Port Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+	9-12
EKI-9316P	Industrial-Class 16 Port Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+	9-13
EKI-7659CPI	8+2G Port Gigabit Managed Redundant Industrial PoE Switch with Wide Temperature	9-14
EKI-2726FHP1	4G+2 SFP W/ 4 IEEE 802.3 High Power PoE Industrial Wide Temperature Switch	9-15
EKI-2525P	5-port Industrial PoE Switch	
EKI-2526PI	6-port Industrial PoE Switch with Wide Temperature	9-16
EKI-2701HPI	IEEE 802.3af/at Gigabit PoE+ Injector with Wide Temperature	9-17

### Managed Ethernet Switch

EKI-9778	1U Rackmount Industrial-Class Switch with Combo Port Flexibility 24GbE + 4 10GbE Managed Switch	9-18
EKI-9312	Industrial-Class 12 Port Full Gigabit Managed DIN Rail Switch	9-19
EKI-9316	Industrial-Class 16 Port Full Gigabit Managed DIN Rail Switch	9-20
EKI-7758F	4G+4 SFP Gigabit Managed Redundant Industrial Ethernet Switch	9-21
EKI-7656C/CI	16+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch	9-22
EKI-7659C/CI	8+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch	9-23
EKI-7657C/CI	7+3G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch with 2 x DI/O	9-24
EKI-7654C	4+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch	9-25
EKI-7559SI/MI	8+2 SC Type Fiber Optic Managed Industrial Ethernet Switch with Wide Temperature	
EKI-7554SI/MI	4+2 SC Type Fiber Optic Managed Industrial Ethernet Switch with Wide Temperature	9-26

### ProView Ethernet Switch

EKI-5725/I	5-port Gigabit Ethernet ProView Switch	
EKI-5728/I	8-port Gigabit Ethernet ProView Switch	9-27
EKI-5525/I	5-port Fast Ethernet ProView Switch	
EKI-5528/I	8-port Fast Ethernet ProView Switch	9-28
EKI-5729F/FI	8-Port+2 SFP Gigabit Ethernet ProView Switch	9-29
EKI-5726/I	16-port Gigabit Ethernet ProView Switch	9-30
EKI-5726F/FI	16-port+2 SFP Gigabit Ethernet ProView Switch	9-31

### Unmanaged Ethernet Switch

EKI-7629C/CI	8+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch	9-32
EKI-2525/I	5-port Unmanaged Industrial Ethernet Switch	
EKI-2528/I	8-port Unmanaged Industrial Ethernet Switch	9-33

### Media Converter

EKI-2541M/MI	10/100T (X) to Multi-Mode SC Type Fiber Optic Industrial Media Converter	
EKI-2541S/SI	10/100T (X) to Single-Mode SC Type Fiber Optic Industrial Media Converter	9-34
EKI-2741 Series	10/100/1000T (X) to Fiber Optic Gigabit Industrial Media Converters	9-35

### Accessories

Accessories	SFP Transceiver Modules	9-36
-------------	-------------------------	------



To view all of Advantech's Industrial Ethernet Solutions, please visit [www.advantech.com/products](http://www.advantech.com/products).

# Industrial Ethernet Product Selection Guide

## EN50155 Ethernet Switches



Model Name		EKI-6558TI	EKI-6559TMI	EKI-6528TI	EKI-6528TPI
Description		EN50155 IP67 8-port M12 Managed Ethernet Switch with Wide Temperature	EN50155 IP67 8-port M12 + 2-port Fiber Optic Managed Ethernet Switch with Wide Temperature	EN50155 8-port M12 Unmanaged Switch with Wide Temperature	EN50155 8-port PoE M12 Unmanaged Switch with Wide Temperature
Interface	Ports Number	8	10	8	8
	10/100Base-T (X)	8	8	8	8
	100BaseFX	-	2	-	-
	10/100/1000Base-T (X)	-	-	-	-
	1000Base-SX/LX/LHX/XD/ZX/EZX	-	-	-	-
	PoE (10/100 Mbps)	-	-	-	4
	PoE (10/100/1000 Mbps)	-	-	-	-
	DI/DO	-	-	-	-
Console	V	V	-	-	
Network Management	Redundancy	V	V	-	-
	Diagnostics	V	V	-	-
	VLAN	V	V	-	-
	Configuration	V	V	-	-
	SNMP	V	V	-	-
	Security	V	V	-	-
	Traffic Control	V	V	-	-
Power	2 x Unregulated 12 ~ 48 V <sub>DC</sub>	V	V	12 ~ 48 V <sub>DC</sub>	24 ~ 48 V <sub>DC</sub>
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-
	2 x Unregulated 100 ~ 240 V <sub>AC</sub>	-	-	-	-
	Relay Output	V	V	-	-
Mechanism	DIN-rail Mount	-	-	V	V
	Wall Mount	V	V	V	V
	Rack Mount	-	-	-	-
	IP Level	IP67	IP67	IP40	IP40
Protection	ESD (Ethernet)	V	V	V	V
	Surge (EFT for power)	V	V	V	V
	Power Reverse	V	V	V	V
Operating Temperature	-10 ~ 60°C (14 ~ 140°F)	-	-	-	-
	-40 ~ 75°C (-40 ~ 158°F)	V	V	V	V
	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-
Certification	CE	V	V	V	V
	FCC	V	V	V	V
	UL/cUL 60950-1	-	-	V	V
	Class I, Division 2	-	-	-	-
	UL 508	V	V	-	-
Page		9-10	9-10	9-11	9-11

## PoE Switches

NEW



NEW



Model Name		EKI-9312P	EKI-9316P	EKI-7659CPI	EKI-2726FHPI	EKI-2525P	EKI-2526PI
Description		12 Port Industrial-Class Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+	16 Port Industrial-Class Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+	8+2G Port Gigabit Managed Redundant Industrial PoE Switch with Wide Temperature	4G+2 SFP W/ 4 IEEE 802.3 High Power PoE Industrial Wide Temperature Switch	5-port Industrial PoE Switch	6-port Industrial PoE Switch with Wide Temperature
Interface	Ports Number	12	16	10	6	5	6
	10/100Base-T (X)	-	-	-	-	1	2
	100BaseFX	-	-	-	-	-	-
	10/100/1000Base-T (X)	8	12	-	4	-	-
	1000Base-SX/LX/LHX/XD/ZX/EZX	4	4	2	2	-	-
	PoE (10/100 Mbps)	8	12	8	4 (PoE+, 30W)	4	4
	M12 Connector (10/100 Mbps)	-	-	-	-	-	-
	DI/DO	-	-	-	-	-	-
Console	1	1	V	-	-	-	
Network Management	Redundancy	v	v	V	-	-	-
	Diagnostics	v	v	V	-	-	-
	VLAN	v	v	V	-	-	-
	Configuration	v	v	V	-	-	-
	SNMP	v	v	V	-	-	-
	Security	v	v	V	-	-	-
	Traffic Control	v	v	V	-	-	-
Power	2 x Unregulated 48 V <sub>DC</sub>	48 V <sub>DC</sub>	48 V <sub>DC</sub>	48 V <sub>DC</sub>	48 V <sub>DC</sub>	48 V <sub>DC</sub>	48 V <sub>DC</sub>
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-	-	-
	2 x Unregulated 100 ~ 240 V <sub>AC</sub>	-	-	-	-	-	-
	Relay Output	-	-	V	V	V	V
Mechanism	DIN-rail Mount	V	V	V	V	V	V
	Wall Mount	v	v	V	V	V	V
	Rack Mount	-	-	-	-	-	-
	IP Level	IP30	IP30	V	IP30	V	V
Protection	ESD (Ethernet)	V	V	V	V	V	V
	Surge (EFT for power)	V	V	V	V	V	V
	Power Reverse	V	V	V	V	V	V
Operating Temperature	-10 ~ 60°C (14 ~ 140°F)	-	-	-	-	V	-
	-40 ~ 75°C (-40 ~ 167°F)	v	v	V	V	-	V
	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-	-	-
Certification	CE	v	v	V	V	V	V
	FCC	v	v	V	V	V	V
	UL/cUL 60950-1	v	v	V	-	V	V
	Class I, Division 2	v	v	-	-	-	-
	UL 508	-	-	-	V	-	-
Page		9-12	9-13	9-14	9-15	9-16	9-16

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Industrial Ethernet Product Selection Guide



Model Name		EKI-2525PA	EKI-2528PAI	EKI-2701HPI	EKI-2701PSI
Description		5-port Industrial PoE Switch with 24/48 V <sub>DC</sub> Power Input	8-port Industrial PoE Switch with 24/48 V <sub>DC</sub> Power Input and Wide Temperature	Industrial PoE+ Injector with Wide Temperature	Industrial PoE Splitter with Wide Temperature
Interface	Ports Number	5	8	2	2
	10/100Base-T (X)	1	4	-	-
	100BaseFX	-	-	-	-
	10/100/1000Base-T (X)	-	-	1	1
	1000Base-SX/LX/LHX/XD/ZX/EZX	-	-	-	-
	PoE (10/100 Mbps)	4	4	1 (10/100/1000 Mbps)	1 (10/100/1000 Mbps)
	M12 Connector (10/100 Mbps)	-	-	-	-
	DI/DO	-	-	-	-
Network Management	Console	-	-	-	-
	Redundancy	-	-	-	-
	Diagnostics	-	-	-	-
	VLAN	-	-	-	-
	Configuration	-	-	-	-
	SNMP	-	-	-	-
	Security	-	-	-	-
	Traffic Control	-	-	-	-
Power	2 x Unregulated	24/48 V <sub>DC</sub>	24/48 V <sub>DC</sub>	24/48 V <sub>DC</sub>	44~57 V <sub>DC</sub>
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-
	2 x Unregulated 100 ~ 240 V <sub>AC</sub>	-	-	-	-
	Relay Output	V	V	V	-
Mechanism	DIN-rail Mount	V	V	V	V
	Wall Mount	V	V	V	V
	Rack Mount	-	-	-	-
	IP Level	IP30	IP30	IP30	IP30
Protection	ESD (Ethernet)	V	V	V	V
	Surge (EFT for power)	V	V	V	V
	Power Reverse	V	V	V	V
Operating Temperature	-10 ~ 60°C (14 ~ 140°F)	V	-	-	-
	-40 ~ 75°C (-40 ~ 167°F)	-	V	V	V
	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-
Certification	CE	V	V	V	V
	FCC	V	V	V	V
	UL/cUL 60950-1	-	-	V	V
	Class I, Division 2	-	-	-	-
	UL 508	V	V	V	-
Page		online	online	9-17	online

## Managed Ethernet Switches



Model Name		EKI-9778	EKI-9316/ EKI-9312	EKI-7758F	EKI-7656C/CI	EKI-7659C/CI	EKI-7657C/CI	EKI-7654C
Description		24GbE + 4 10GbE Port Managed Switch with Combo Port	16/12 Port Industrial-Class Managed DIN Rail Switch Full Gigabit Switch	4G+4SFP Gigabit Managed Redundant Industrial Ethernet Switch	16+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch	8+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch	7+3G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch with 2 x DI/O	4+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch
Interface	Ports Number	28	16/12	8	18	10	10	6
	10/100Base-T (X)	-	-	-	16	8	7	4
	100BaseFX	-	-	-	-	-	-	-
	10/100/1000Base-T (X)	16 combo	12/8	4	2	2	3	2
	1000Base-SX/LX/LHX/XD/ZX/EZX	8 & 16 combo	4	4	2	2	3	2
	10GBE SFP+	4	-	-	-	-	-	-
	PoE (10/100 Mbps)	-	-	-	-	-	-	-
	DI/DO	-	-	-	-	-	2	-
Console	1	1	V	V	V	V	V	
Network Management	Redundancy	V	V	V	V	V	V	V
	Diagnostics	V	V	V	V	V	V	V
	VLAN	V	V	V	V	V	V	V
	Configuration	V	V	V	V	V	V	V
	SNMP	V	V	V	V	V	V	V
	Security	V	V	V	V	V	V	V
Traffic Control	V	V	V	V	V	V	V	
Power	2 x Unregulated 12 ~ 48 V <sub>DC</sub>	-	24/48 V <sub>DC</sub>	V	V	V	V	V
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-	-	-	-
	2 x Unregulated 100 ~ 240 V <sub>AC</sub>	V	-	-	-	-	-	-
	Relay Output	-	-	V	V	V	V	V
Mechanism	DIN-rail Mount	-	V	V	V	V	V	V
	Wall Mount	-	V	V	V	V	V	V
	Rack Mount	V	-	-	-	-	-	-
	IP Level	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Protection	ESD (Ethernet)	V	V	V	V	V	V	V
	Surge (EFT for power)	V	V	V	V	V	V	V
	Power Reverse	V	V	V	V	V	V	V
Operating Temperature	-10 ~ 60°C (14 ~ 140°F)	V	-	V	V	V	V	V
	-40 ~ 75°C (-40 ~ 158°F)	-	V	-	V (EKI-7656CI)	V (EKI-7659CI)	-	-
	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-	-	-	-
Certification	CE	V	V	V	V	V	V	V
	FCC	V	V	V	V	V	V	V
	UL/cUL 60950-1	Ongoing	V	V	V	V	V	V
	Class I, Division 2	-	V	V	V	-	V	-
UL 508	-	-	-	-	-	-	-	
Page	9-18	9-19/9-20	9-21	9-22	9-23	9-24	9-25	

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Industrial Ethernet Product Selection Guide

## Managed Ethernet Switches



Model Name		EKI-7559SI/MI	EKI-7554SI/MI	EKI-2748FI/CI	EKI-2548I
Description		8+2 SC Type Fiber Optic Managed Redundant Industrial Ethernet Switch with Wide Temperature	4+2 SC Type Fiber Optic Managed Redundant Industrial Ethernet Switch with Wide Temperature	8Gx Managed Ethernet Switch with Wide Temperature	8Tx Managed Ethernet Switch with Wide Temperature
Interface	Ports Number	10	6	8	8
	10/100Base-T (X)	8	4	-	8
	100BaseFX	2	2	-	-
	10/100/1000Base-T (X)	-	-	4/6	-
	1000Base-SX/LX/LHX/XD/ZX/EZX	-	-	4/2	-
	PoE (10/100 Mbps)	-	-	-	-
	PoE (10/100/1000 Mbps)	-	-	-	-
Network Management	DI/DO	-	-	-	-
	Console	V	V	V	-
	Redundancy	V	V	V	V
	Diagnostics	V	V	V	V
	VLAN	V	V	V	V
	Configuration	V	V	V	V
	SNMP	V	V	V	V
Power	Security	V	V	V	V
	Traffic Control	V	V	V	V
	2 x Unregulated 12 ~ 48 V <sub>DC</sub>	V	V	V	V
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-
Mechanism	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-
	Relay Output	V	V	V	V
	DIN-rail Mount	V	V	V	V
	Wall Mount	V	V	V	V
Protection	Rack Mount	-	-	-	-
	IP Level	IP30	IP30	IP30	IP30
	ESD (Ethernet)	V	V	V	V
	Surge (EFT for power)	V	V	V	V
Operating Temperature	Power Reverse	V	V	V	V
	-10 ~ 60°C (14 ~ 140°F)	-	-	-	-
	-40 ~ 75°C (-40 ~ 167°F)	V	V	V	V
Certification	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-
	CE	V	V	V	V
	FCC	V	V	V	V
	UL/cUL 60950-1	V	V	-	-
	Class I, Division 2	V	-	V	V
Page	UL 508	-	-	V	V
	9-26	9-26	online	online	



## ProView Series Ethernet Switches



Model Name		EKI-5725/I EKI-5728/I	EKI-5525/I EKI-5528/I	EKI-5729F/FI	EKI-5726/I	EKI-5726F/FI
Description		5/8-port Gigabit Ethernet ProView Switch	5/8-port Fast Ethernet ProView Switch	8-Port+2 SFP Gigabit Ethernet ProView Switch	16-port Gigabit Ethernet ProView Switch	16-port+2 SFP Gigabit Ethernet ProView Switch
Interface	Ports Number	5/8	5/8	8	16	16
	10/100Base-T (X)	-	5/8	-	-	-
	100BaseFX	-	-	V	-	V
	10/100/1000Base-T (X)	5/8	-	8	16	16
	1000Base-SX/LX/LHX/ XD/ZX/EZX	-	-	V	-	V
	PoE (10/100 Mbps)	-	-	-	-	-
Network Management	DI/DO	-	-	-	-	-
	Console	-	-	-	-	-
	VIP Port	V	V	V	V	V
	Modbus TCP	V	V	V	V	V
	EtherNet/IP	EKI-5728 EKI-5728I	-	V	V	V
Power	Configuration	V	V	V	V	V
	SNMP	V	V	V	V	V
	2 x Unregulated 48 V <sub>DC</sub>	V	V	V	V	V
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-	-	-
Mechanism	2 x Unregulated 100 ~ 240 V <sub>AC</sub>	-	-	-	-	-
	Relay Output	v	v	v	v	v
	DIN-rail Mount	v	v	v	v	v
	Wall Mount	v	v	v	v	v
Protection	Rack Mount	-	-	-	-	-
	IP Level	IP30	IP30	IP30	IP30	IP30
	ESD (Ethernet)	V	V	V	V	V
Operating Temperature	Surge (EFT for power)	V	V	V	V	V
	Power Reverse	V	V	V	V	V
	-10 ~ 60°C (14 ~ 140°F)	V	V	V	V	V
Certification	-40 ~ 75°C (-40 ~ 167°F)	EKI-5725I EKI-5728I	EKI-5525I EKI-5528I	EKI-5729FI	EKI-5726I	EKI-5726FI
	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-	-
	CE	V	V	V	V	V
	FCC	V	V	V	V	V
	UL/cUL 60950-1	V	V	V	V	V
	Class I, Division 2	V	V	V	V	V
Page	ATEX	V	V	V	V	V
	UL 508	V	V	V	V	V
	EtherNet/IP	EKI-5728 EKI-5728I	-	V	V	V
Page		9-27	9-28	9-29	9-30	9-31

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Industrial Ethernet Product Selection Guide

## Unmanaged Ethernet Switches



Model Name		EKI-4524I/RI	EKI-7626C/CI	EKI-7629C/CI	EKI-7526I	EKI-2525/I EKI-2528/I
Description		24+2 SPF Port Unmanaged Industrial Ethernet Switch with Wide Temperature	16+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch	8+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch	16+2 SC Type Fiber Optic Unmanaged Industrial Ethernet Switch with Wide Temperature	5/8-port Unmanaged Industrial Ethernet Switch
Interface	Ports Number	24/26	18	10	16	5/8
	10/100Base-T (X)	24	16	8	16	5/8
	100BaseFX	0/2	-	-	-	-
	10/100/1000Base-T (X)	-	2	2	-	-
	1000Base-SX/LX/LHX/XD/ZX/EZX	-	2	2	-	-
	PoE (10/100 Mbps)	-	-	-	-	-
	PoE (10/100/1000 Mbps)	-	-	-	-	-
	DI/DO	-	-	-	-	-
Network Management	Console	-	-	-	-	-
	Redundancy	-	-	-	-	-
	Diagnostics	-	-	-	-	-
	VLAN	-	-	-	-	-
	Configuration	-	-	-	-	-
	SNMP	-	-	-	-	-
	Security	-	-	-	-	-
Power	Traffic Control	-	-	-	-	-
	2 x Unregulated 12 ~ 48 V <sub>DC</sub>	-	V	V	V	V
	1 x Unregulated 100 ~ 240 V <sub>DC</sub>	V	-	-	-	-
	1 x Unregulated 100 ~ 240 V <sub>AC</sub>	V	-	-	-	-
Mechanism	Relay Output	V	V	V	V	V
	DIN-rail Mount	-	V	V	V	V
	Wall Mount	-	V	V	V	V
	Rack Mount	V	-	-	-	-
Protection	IP Level	IP30	IP30	IP30	IP30	IP30
	ESD (Ethernet)	V	V	V	V	V
	Surge (EFT for power)	V	V	V	V	V
Operating Temperature	Power Reverse	V	V	V	V	V
	-10 ~ 60°C (14 ~ 140°F)	-	V	V	-	V
	-40 ~ 75°C (-40 ~ 167°F)	V	V (EKI-7626CI)	V (EKI-7629CI)	V	V (EKI-2525I/ EKI-2528I)
Certification	-40 ~ 85°C (-40 ~ 185°F)	-	-	-	-	-
	CE	V	V	V	V	V
	FCC	V	V	V	V	V
	UL/cUL 60950-1	-	V	V	-	V
	Class I, Division 2	-	-	-	-	V
UL 508		-	-	-	V	-
Page		online	online	9-32	online	9-33

## Media Converters



Model Name		EKI-2541 M/MI/S/SI	EKI-3541 M/S	EKI-2741 F/FI/SX/SXI/LX/LXI
Description		10/100TX to Multi-mode / Single-mode SC Type Fiber Optic Industrial Media Converters	10/100TX to Multi-mode / Single-mode SC Type Fiber Optic Industrial Media Converters	10/100/1000TX to Fiber Optic Gigabit Industrial Media Converters
Interface	Ports Number	2	2	2
	10/100Base-T (X)	1	1	-
	100BaseFX	1	1	-
	10/100/1000Base-T (X)	-	-	1
	1000Base-SX/LX/LHX/XD/ZX/EZX	-	-	1
	PoE (10/100 Mbps)	-	-	-
	PoE (10/100/1000 Mbps)	-	-	-
	DI/DO	-	-	-
Network Management	Console	-	-	-
	Redundancy	-	-	-
	Diagnostics	-	-	-
	VLAN	-	-	-
	Configuration	-	-	-
	SNMP	-	-	-
	Security	-	-	-
Power	Traffic Control	-	-	-
	2 x Unregulated 12 ~ 48 V <sub>DC</sub>	V	V	V
	2 x Unregulated 100 ~ 240 V <sub>DC</sub>	-	-	-
	2 x Unregulated 100 ~ 240 V <sub>AC</sub>	-	-	-
Mechanism	Relay Output	V	V	V
	DIN-rail Mount	V	V	V
	Wall Mount	V	V	V
	Rack Mount	-	-	-
Protection	IP Level	IP30	IP40	IP30
	ESD (Ethernet)	V	V	V
	Surge (EFT for power)	V	V	V
Operating Temperature	Power Reverse	V	V	V
	-10 ~ 60°C (14 ~ 140°F)	V	V	V
	-40 ~ 75°C (-40 ~ 167°F)	V (EKI-2541M/MI/SI)	-	V (EKI-2741FI/SXI/LXI)
Certification	-40 ~ 85°C (-40 ~ 185°F)	-	-	-
	CE	V	V	V
	FCC	V	V	V
	UL/cUL 60950-1	V	V	V
	Class I, Division 2	V	-	V
UL 508	-	-	-	
Page		9-34	online	9-35

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-6558TI

# EKI-6559TMI

**EN50155 IP67 8-port M12 Managed Ethernet Switch with Wide Temperature**

**EN50155 IP67 8-port M12 + 2-port Fiber Optic Managed Ethernet Switch with Wide Temperature**



## Features

- EN50155 certified
- Supports X-Ring Pro function (ultra high-speed recovery time < 20 ms)
- Wide redundant power design
- Provides M12 connector with IP67 protection
- Provides Waterproof fiber optic connector
- TFTP firmware updates and system configure restore and backup
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Supports wide operating temperature -40 ~ 75°C
- Provides 100 Mbps LC type connector

## Introduction

The EKI-6558TI and EKI-6559TMI are EN50155 certified IP67 wide temperature industrial switches which are especially designed for railway industry and harsh environments. M12 connectors secure highly reliable connectivity for industrial communication applications. EN50155 certification ensures the use of railway application. EKI-6559TMI also provides two additional fiber optic ports to extend communication range. Both EKI-6558TI and EKI-6559TMI provide Advantech's X-Ring Pro protocol, which enables users to establish a redundant Ethernet network with ultra high-speed recovery (less than 20 ms). They also support advanced network standards to optimize network performance, reduce maintenance cost, and secure network safety.

## Specifications

### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ad, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X
- **LAN** 10/100Base-T (X), 100Base-FX
- **Transmission Speed** Up to 100 Mbps

### Interface

- **Ethernet** M12, 4-pole D-coded, Female x 8
- **Fiber Optic** LC type waterproof x 2, Multi-mode (EKI-6559TMI)
- **Console** M12, 8-pole A-coded, Female x 1

### Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNMP, Syslog, Email Alert, SNMP Trap, RMON

### Mechanism

- **Enclosure** IP67, aluminum shell with solid mounting kits
- **Dimensions (W x H x D)** 193 x 176 x 62.5 mm (7.59" x 6.93" x 2.46")
- **Mounting** Wall

### Power

- **Power Consumption** Max. 8.1 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Power Connector** M12, 5-pole A-coded, male x 1
- **P-Fail Output** 1A @ 24 V<sub>DC</sub>
- **P-Fail Connector** M12, 8-pole A-coded, Female x 1

### Protection

- **Power Reverse** Present

### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 388,201 hours (EKI-6558TI)  
320,420 hours (EKI-6559TMI)

### Certification

- **Safety** UL 508
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 61373
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 61373
- **Railway** EN50155, EN 50121-3-2, EN 50121-4

## Ordering Information

- **EKI-6558TI** EN50155 8-port M12 Managed Ethernet Switch
- **EKI-6559TMI** EN50155 8-port M12+ 2-port FX Managed Ethernet Switch

# EKI-6528TI

# EKI-6528TPI

## EN50155 8-port M12 Unmanaged Switch with Wide Temperature

## EN50155 8-port M12 Unmanaged PoE Switch with Wide Temperature



### Features

- Auto Bypass between Port 1 and Port 2
- EN50155 certified
- Wide redundant power design
- 8-port 10/100 Mbps M12 type connector with IP40 protection
- 4-port PoE type M12 (EKI-6528TPI)
- Dual redundant power input
- Supports wide operating temperature -40 ~ 75°C

### Introduction

The EKI-6528TI and EKI-6528TPI are EN50155 certified industrial switches with IP40 protection and wide temperature support designed for railway applications. EKI-6528TPI provides four PoE ports that support IEEE 802.3af and can provide up to 15.4 watts of power per port. M12 connectors ensure highly reliable connectivity for industrial communication applications. With IP40 compact metal housings, these switches are protected against dusty environments and are a good fit for many industrial applications. Under no-power condition, 'Auto Bypass' function ensures the Ethernet signal connection through internal circuitry. This feature provides non-stop communication to rolling stocks even no power exists in some of the carriages.

### Specifications

#### Communications

- **Standard** IEEE 802.3  
IEEE 802.3u  
IEEE 802.3x  
IEEE 802.3af
- **LAN** 10/100Base-T (X)
- **Transmission Speed** Up to 100 Mbps

#### Interface

- **Ethernet** M12, 4-pole D-coded, Female x 8

#### Mechanism

- **Enclosure** IP40 protected metal shell
- **Dimensions (W x H x D)** 92 x 180 x 42 mm (3.62" x 7.08" x 1.65")
- **Mounting** DIN-rail, Wall

#### Power

- **Power Consumption** Max. 3.36 W (EKI-6528TI)  
Max. 72 W (EKI-6528TPI)
- **Power Input** 24 ~ 48 V<sub>DC</sub>, redundant dual inputs (for EKI-6528TPI)  
12 ~ 48 V<sub>DC</sub>, redundant dual inputs (for EKI-6528TI)
- **Power Connector** M12, 5-pole A-coded, male x 1
- **P-Fail Output** 1A @ 24 V<sub>DC</sub>
- **P-Fail Connector** M12, 8-pole A-coded, Female x 1

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 391,307 hours (EKI-6528TI)  
348,384 hours (EKI-6528TPI)

#### Certification

- **Safety** UL 60950-1
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 61373
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 61373
- **Railway** EN50155, EN 50121-3-2, EN 50121-4

### Ordering Information

- **EKI-6528TI** EN50155 8-port M12 Unmanaged Ethernet Switch
- **EKI-6528TPI** EN50155 8-port M12 Unmanaged PoE Switch

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-9312P

## Industrial-Class 12 Port Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+

NEW



FC CE

### Features

- All Gigabit connections support dual ring protection and non-blocking traffic forwarding
- X-Ring+: recovery time within 20ms for 250 node connections
- IEEE 802.3at PoE+ to supply 30W power
- IEEE 802.3af PoE to supply 15.4 power
- IEEE 802.3af/802.3at per port with system PoE power management
- Dual power input, dual image for system reliability
- Operating temperature: -40 ~ 75°C

### Introduction

The EKI-9312P Gigabit managed PoE+ Ethernet switches come standard with 8 10/100/1000BaseT(X), 802.3af (PoE), and 802.3at (PoE+) compliant Ethernet ports, and 4 fiber optic Gigabit Ethernet ports. The EKI-9312P PoE Ethernet switches provide up to 30 watts of power per PoE+ port for heavy-duty, industrial PoE devices, such as weather-proof IP surveillance cameras, high performance wireless access points, and rugged IP phones.

The EKI-9312P are equipped with 8 Gigabit Ethernet ports and up to 4 fiber optic ports, making them ideal for upgrading an existing network to Gigabit speed or building a new, full Gigabit network. The X-Ring+ with RSTP, STP and MSTP support, increases system reliability and the availability of your network. The EKI-9312P are designed especially for bandwidth demanding applications, such as video and process monitoring, intelligent transportation systems, all of which benefit from a scalable backbone construction.

### Specifications

#### Interface

- I/O Port** 8 x 10/100/1000Base-T/TX RJ-45  
4 x 1000BASE-X SFP
- Console port** RJ-45
- F/W backup port** USB
- Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 30
- Installation** DIN Rail
- Dimensions (W x H x D)** 86 x 165 x 125 (mm)

#### LED Display

- System LED** PWR1, PWR2, SYS, CFG, Alarm and R.M.
- Port LED** Link / Speed / Activity / PoE

#### Environment

- Operating Temperature** -40 ~ 75°C
- Storage Temperature** -40 ~ 85°C
- Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- Humidity** 10 ~ 95% (non-condensing)

#### Power

- Power Consumption** ~ 21.82 Watts (System)  
EKI-9316P: ~294.22 Watts  
EKI-9312P: ~203.42 Watts
- Power Input** 48 (46 to 57 V) V<sub>DC</sub> dual inputs  
(> 53 V<sub>DC</sub> for PoE+ output recommended)

#### Certification

- EMI** CE, FCC Class A
- Safety** UL60950 C1D2
- EMC** EN61000-6-4; EN61000-6-2; EN61000-4-2 (ESD) Level 4  
EN61000-4-3 (RS) Level 3; EN61000-4-4 (EFT) Level 4;  
EN50121-4; EN61000-4-5 (Surge) Level 4; EN61000-4-6 (CS) Level 3  
EN61000-4-8 (Magnetic Field) Level 4
- Shock** IEC 60068-2-27
- Freefall** IEC 60068-2-32
- Vibration** IEC 60068-2-6

#### L2 Features

- L2 MAC Address** 16K
- Jumbo Frame** 12KB
- VLAN Group** 4K (VLAN ID 1-4094)
- VLAN Arrange** Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- Port Mirroring** Per port, Multi-source port, RSAPN,
- IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control** Broadcast, Multicast, Unknown unicast
- Spanning Tree** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring+

#### QoS

- Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Priority), Hybrid Priority
- Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- Rate Limiting** Ingress Rate limit, Egress Rate limit
- Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

#### Security

- Port Security** Static, Dynamic
- Authentication** 802.1x (Port-Based, MAC-Based, MD5/TLS/TTLS/PEAP Encryption), RADUIS, TCACAS+
- ACL** 1K rules
- Advanced Security** IP Source guard, ARP inspection, DHCP Snooping

#### Management

- DHCP** Client, Server, Relay, Option66/67/82
- Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- Security access** SSH2.0, SSL
- Software upgrade** TFTP, HTTP, Dual Image
- NTP** NTP client/server

### Ordering Information

- EKI-9312-POID42E** Layer 2 Fastpath, 8 x GbE 100/1000Base-T with PoE+ 4 x GbE SFP w/ 48 V<sub>DC</sub> Redundant Power Input

Contact our sales for more pricing & ordering information.

# EKI-9316P

## Industrial-Class 16 Port Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+

**NEW**



FC CE

### Features

- All Gigabit connections support dual ring protection and non-blocking traffic forwarding
- X-Ring+: recovery time within 20ms for 250 node connections
- IEEE 802.3at PoE+ to supply 30W power
- IEEE 802.3af PoE to supply 15.4 power
- IEEE 802.3af/802.3at per port with system PoE power management
- Dual power input, dual image for system reliability
- Operating temperature: -40 ~ 75°C

### Introduction

The EKI-9316P Gigabit managed PoE+ Ethernet switches come standard with 12 10/100/1000BaseT(X), 802.3af (PoE), and 802.3at (PoE+) compliant Ethernet ports, and 4 fiber optic Gigabit Ethernet ports. The EKI-9316P PoE Ethernet switches provide up to 30 watts of power per PoE+ port for heavy-duty, industrial PoE devices, such as weather-proof IP surveillance cameras, high performance wireless access points, and rugged IP phones.

The EKI-9316P are equipped with 12 Gigabit Ethernet ports and up to 4 fiber optic ports, making them ideal for upgrading an existing network to Gigabit speed or building a new, full Gigabit network. The X-Ring+ with RSTP, STP and MSTP support, increases system reliability and the availability of your network. The EKI-9316P are designed especially for bandwidth demanding applications, such as video and process monitoring, intelligent transportation systems, all of which benefit from a scalable backbone construction.

### Specifications

#### Interface

- I/O Port** 12 x 10/100/1000Base-T/TX RJ-45  
4 x 1000 BASE-X SFP
- Console port** RJ-45
- F/W backup port** USB
- Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 30
- Installation** DIN Rail
- Dimensions (W x H x D)** 86 x 165 x 125 (mm)

#### LED Display

- System LED** PWR1, PWR2, SYS, CFG, Alarm and R.M.
- Port LED** Link / Speed / Activity / PoE

#### Environment

- Operating Temperature** -40 ~ 75°C
- Storage Temperature** -40 ~ 85°C
- Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- Humidity** 10 ~ 95% (non-condensing)

#### Power

- Power Consumption** ~ 21.82 Watts (System)  
EKI-9316P: ~294.22 Watts  
EKI-9312P: ~203.42 Watts
- Power Input** 48 (46 to 57 V) V<sub>DC</sub> dual inputs  
(> 53 V<sub>DC</sub> for PoE+ output recommended)

#### Certification

- EMI** CE, FCC Class A
- Safety** UL60950 C1D2
- EMC** EN61000-6-4; EN61000-6-2; EN61000-4-2 (ESD) Level 4  
EN61000-4-3 (RS) Level 3; EN61000-4-4 (EFT) Level 4  
EN61000-4-5 (Surge) Level 4;  
EN61000-4-6 (CS) Level 3 EN61000-4-8 (Magnetic Field) Level 4; EN50121-4
- Shock** IEC 60068-2-27
- Freefall** IEC 60068-2-32
- Vibration** IEC 60068-2-6

#### L2 Features

- L2 MAC Address** 16K
- Jumbo Frame** 12KB
- VLAN Group** 4K (VLAN ID 1-4094)
- VLAN Arrange** Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- Port Mirroring** Per port, Multi-source port, RSAPN,
- IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control** Broadcast, Multicast, Unknown unicast
- Spanning Tree** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring+

#### QoS

- Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Priority), Hybrid Priority
- Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- Rate Limiting** Ingress Rate limit, Egress Rate limit
- Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

#### Security

- Port Security** Static, Dynamic
- Authentication** 802.1x (Port-Based, MAC-Based, MD5/TLS/TTL/PEAP Encryption), RADUIS, TCACAS+
- ACL** 1K rules
- Advanced Security** IP Source guard, ARP inspection, DHCP Snooping

#### Management

- DHCP** Client, Server, Relay, Option66/67/82
- Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- Security access** SSH2.0, SSL
- Software upgrade** TFTP, HTTP, Dual Image
- NTP** NTP client/server

### Ordering Information

- EKI-9316-P0ID42E** Layer 2 Fastpath, 12 x GbE 100/1000Base-T with PoE+ 4 x GbE SFP w/ 48V<sub>DC</sub> Redundant Power Input

Contact our sales for more pricing & ordering information.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-7659CPI

## 8+2G Port Gigabit Managed Redundant Industrial PoE Switch with Wide Temperature



### Features

- 2 Gigabit Copper/SFP combo ports, plus 8 PoE injector ports
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL, SNMPv3
- Diagnostic: Port Statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 48 V<sub>DC</sub> power input and 1 relay output
- Supports wide operating temperatures -40 ~ 75°C

### Introduction

The EKI-7659CPI supports eight Power over Ethernet (PoE) ports and two Gigabit combo ports. The PoE device helps realize a centralized power supply solution and provides up to 15.4 watts of power per port. To create reliability in your network, the EKI-7659CPI comes equipped with a proprietary redundant network protocol -- X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, EKI-7659CPI also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.3ad, 802.3ab, 802.3af, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X
- **LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: Up to 1000 Mbps

#### Interface

- **Connectors** 8 x RJ45 (Ethernet)  
2 x RJ45/SFP (mini-GBIC) combo ports  
6-pin removable screw terminal (Power&Relay)
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail  
10/100T (X): Link/Activity, Duplex/Collision  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)  
SFP: Link/Activity
- **Console** RS-232 (RJ45)

#### Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/ DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNMP, Syslog, E-Mail Alert, SNMP Trap, RMON

#### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

#### Power

- **Power Consumption** 116 W (Full load PoE)
- **Power Input** 48 V<sub>DC</sub>, redundant dual power input
- **Power Output** 15.4W at 48V (per PoE port)
- **Fault Output** 1 Relay Output

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 190,200 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-7659CPI** 8FE + 2G Combo Port Managed PoE Ethernet Switch w/Wide Temp



# EKI-2726FHPI

## 4G+2 SFP W/ 4 IEEE 802.3 High Power PoE Industrial Wide Temperature Switch

NEW



### Features

- All Gigabit Ethernet ports for 4 Copper and 2 SFP
- Back-plane (Switching Fabric): 12Gbps
- Embedded 4 ports PoE inject function
- Provide 30W at 55V power output
- Redundant Power Design
- IP30 Chassis Design
- Supports operating temperatures from -40 ~ 75°C

### Introduction

The EKI-2726 FHPI switch has 4 x 10/100/1000BASE-T Ethernet ports with PoE+ function and 2 x SFP sockets, it has been designed to work within a wide operating temperature range. This cost-effective solution, meets the high reliability requirements and demands of industrial applications. The equipment also meets the IEEE 802.3 at standard and can provide 30Watts output per PoE port.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af/at, 802.3ab, 802.3z
- **LAN** 10/100/1000Base-T  
1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m  
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: Up to 1000 Mbps

#### Interface

- **Connectors** 10/100/1000T(X): RJ-45 x 4  
SFP: Gigabit Base x 2
- **LED Indicators** System: P1, P2, P-Fail,  
Per port: Link/Activity, Speed, PoE (1 to 4 ports)

#### Power

- **Power Consumption** 5.5 watts @ 48V<sub>DC</sub> (Ethernet only)
- **Power Input** 48 V<sub>DC</sub> (44V<sub>DC</sub> to 57 V<sub>DC</sub>), redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **MTBF** 339,740 hours

#### Certification

- **Safety** UL/cUL508  
Class I, Division 2, Groups A, B, C and D  
FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMI**
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-2726FHPI** 4G+2 SFP Unmanaged Gigabit Switch with 4-port PoE+(IEEE 802.3af/at)

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# EKI-2525P

# EKI-2526PI

## 5-port Industrial PoE Switch

## 6-port Industrial PoE Switch with Wide Temperature



EKI-2525P

EKI-2526PI



### Features

- Provides 5/6 Fast Ethernet ports with 4 PoE ports with injector function
- Supports 10/100 Mbps Auto Negotiation
- Provides broadcast storm protection
- Supports Ethernet ESD protection
- Provides Slim size, DIN-rail/Wall mount with IP30 metal mechanism
- Supports Redundant 48 V<sub>DC</sub> power input and P-Fail relay
- Supports operating temperatures from -10 to 60°C (EKI-2525P)
- Supports wide operating temperature -40 ~ 75°C (EKI-2526PI)

### Introduction

The EKI-2525P is a 5-port unmanaged PoE (Power-over-Ethernet) Industrial Ethernet switch and EKI-2526PI is a 6-port unmanaged PoE Industrial Ethernet switch, they support 4 PoE ports which are classified as power source equipments (PSE). The PoE devices makes centralized power supply come true and provides up to 15.4 watts of power per port. Advantech EKI PoE devices can be used to power IEEE 802.3af compliant powered devices (PD) by Ethernet cable and eliminates the need for additional power wiring. Advantech EKI PoE devices come equipped with all the standard features of the EKI family. Furthermore, it offers a 48 V<sub>DC</sub> redundant power input design (EKI-2525P/EKI-2526PI), and is secured with a double protection mechanism; Power Polarity Reverse Protect and an Overload Current Resettable Fuse. Advantech EKI PoE devices come with compact metal housing that rates IP30 to help against from dusty industrial environments.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af
- **LAN** 10/100Base-T (X)
- **Transmission Distance** Ethernet: Up to 100 m (EKI-2525P/EKI-2526PI)
- **Transmission Speed** Up to 100 Mbps

#### Fiber Optics (EKI-2525PI)

- **Single-mode** 1310 nm  
Tx Power: -8/-15 dBm  
Rx Sensitivity: -34 dBm  
Parameters: 9/125 um

#### Interface

- **Connectors** PoE Ports: 4 (Ports 1 ~ 4)  
Ethernet x1 (EKI-2525P)  
Ethernet x2 (EKI-2526PI)  
6-pin removable screw terminal (power & relay)  
P1, P2, P-Fail
- **LED Indicators** 10/100TX: Link/Activity, Duplex/Collision

#### Power

- **Power Consumption** EKI-2525P: 65 W (Full load PoE)  
EKI-2526PI: 62.6 W (Full load PoE)
- **Power Input** 48 V<sub>DC</sub> (EKI-2525P/EKI-2526PI), redundant dual inputs
- **Power Output** 15.4 W at 48 V (per PoE port)
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")  
(EKI-2525P)  
48.6 x 140 x 95 mm (1.91" x 5.51" x 3.74")  
(EKI-2526PI)
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F) (EKI-2525P)  
-40 ~ 75°C (-40 ~ 167°F) (EKI-2526PI)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 440,132 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-2525P** 5-port Switch with 4 port-PoE
- **EKI-2526PI** 6-port Switch with 4 port-PoE

# EKI-2701HPI

## IEEE 802.3af/at Gigabit PoE+ Injector with Wide Temperature

NEW



### Features

- Supports 10/100/1000Base-T (X) for PoE+ OUT and Data IN
- IEEE 802.3af/at compliant, supports a full 30 watt output
- Power input (24 ~ 48 V<sub>DC</sub>), inject 30 W for each port
- Provides slim size and DIN-rail/Wall mount with IP30 metal mechanism
- Supports operating temperatures from -40 to 75°C

### Introduction

With PoE (Power over Ethernet) technology, we can transfer both data and electrical power to Ethernet-enabled devices using a standard CAT5 cable. EKI-2701HPI is compliant IEEE 802.3af/at and inject 30W for PD device. This product can operate in a wide range of Temp. between -40 to 75°C and support wide power input range between 24 to 48 V<sub>DC</sub>.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af/at, 802.3ab
- **LAN** 10/100/1000Base-T (X)
- **Transmission Distance** Up to 100 m
- **Transmission Speed** up to 1000 Mbps

#### Interface

- **Connectors** PoE OUT: RJ45  
DATA IN: RJ45  
6-pin removable screw terminal
- **LED Indicators** PWR1, PWR2, PoE status, Link/Activity

#### Power

- **Power Consumption** Max. 33.36 W @ 24 V<sub>DC</sub> (Full load PoE)
- **Power Input** 24 ~ 48 V<sub>DC</sub>, redundant dual power inputs
- **Power Output** 30 W @ 24 V<sub>DC</sub>

#### Mechanism

- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 1,419,817 hours

#### Certification

- **Safety** UL508
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-2701HPI** PoE+ Injector, support a full 30 W output

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules

16  
IoT Ethernet I/O  
Modules

17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# EKI-9778

## 1U Rackmount Industrial-Class Switch with Combo Port Flexibility 24GbE + 4 10GbE Managed Switch

NEW



FCC CE

### Features

- Switching architecture with 24 x GbE ports and 4 x 10GbE ports
- 16 x gigabit combo ports (1000BASE-T/TX or GbE SFP)
- 4 x 10 Gigabit SFP+ ports
- 2 x redundant power 110 ~ 220 V<sub>AC</sub> input
- Fanless design
- IEEE1588 PTPv2 with 1-step precision clock
- 128 Gbps switch fabric capacity supported
- Embedded hardware monitor
- Operating temperature -10 ~ 60°C

### Introduction

The EKI-9778 Industrial-Class switch represents the entry level of Advantech's rackmount industrial class switch portfolio; EKI-9778 Industrial-Class switch is designed for flexible installation, and can be deployed in demanding industrial environments. The EKI-9778 gigabit combo switch design makes network planning easy, and allows greater flexibility for users install up to 16 Gigabit Ethernet combo ports plus 8 Gigabit 1000Base-X and 4 10 Gigabit SFP+ ports, making EKI-9778 suitable for edge to core industrial networks. It integrates Layer 2 switching software, which is optimized for scale and performance, delivering wire speed across all ports up to 128Gbps for layer 2 traffic forwarding. In addition, the fanless convection design provides a high degree of reliability, operating under -10 ~ 60°C operating temperatures, and two built-in 110 ~ 220 V<sub>AC</sub> input redundant power modules ensure vital network capabilities with minimum downtime.

### Specifications

#### Interface

- I/O Port
  - 4 x 10GbE SFP+ slot
  - 8 x 1000Base-X SFP
  - 16 x Gigabit Combo Port (10/100/1000Base-T(X) or 1000Base-X SFP)
- Console port
  - RJ-45
- F/W upgraded
  - USB
- Power Connector
  - AC Socket

#### Physical

- Enclosure
  - Metal Shell
- Installation
  - Rack-Mount
- Dimensions (W x H x D)
  - 446 x 44 x 352 (mm)

#### LED Display

- System LED
  - PWR1, PWR2, SYS, CFG, Alarm
- Port LED
  - Link / Activity / Speed

#### Environment

- Operating Temperature
  - 10 ~ 60°C
- Storage Temperature
  - 40 ~ 85°C
- Ambient Relative Humidity
  - 5 ~ 95% (non-condensing)
- Humidity
  - 5 ~ 95% (non-condensing)

#### Power

- Power Consumption
  - ~72 Watts Max
- Power Input
  - 110 ~ 220 V<sub>AC</sub> Redundant Inputs

#### Certification

- EMI
  - FCC Part 15 Subpart B Class A
  - CE EN55022, EN55024
- Safety
  - EN 60950-1\*
- Shock
  - IEC 60068-2-27
- Frefall
  - IEC 60068-2-32
- Vibration
  - IEC 60068-2-6

#### L2 Features

- L2 MAC Address
  - 16K
- Jumbo Frame
  - 12KB
- VLAN Group
  - 4K (VLAN ID 1~4094)
- VLAN Arrange
  - Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- Port Mirroring
  - Per port, Multi-source port
- IP Multicast
  - IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control
  - Broadcast, Multicast, Unknown unicast
- Spanning Tree
  - IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring+

#### QoS

- Scheduling for priority queue
  - WRR (Weighted Round Robin), SP (Strict Priority), Hybrid Priority
- Class of Service
  - IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- Rate Limiting
  - Ingress Rate limit, Egress Rate limit
- Link Aggregation
  - IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

#### Security

- Port Security
  - Static, Dynamic
- Authentication
  - 802.1x (Port-Based, MAC-Based, MD5/TLS/TTL/PEAP Encryption), RADUIS, TCACAS+
- ACL
  - 1K rules
- Advanced Security
  - IP Source guard, ARP inspection, DHCP Snooping

#### Management

- DHCP
  - Client, Server, Relay, Option66/67/82
- Access
  - SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- Security access
  - SSH2.0, SSL
- Software upgrade
  - TFTP, HTTP, Dual Image
- NTP
  - NTP client/server

\* EN 60950-1 is ongoing

### Ordering Information


- EKI-9778-C0SA820E
  - Layer 2 Fastpath, 8xGbE SFP slot + 16xGbE Combo Port + 4x(10GbE SFP+ slot) w/110 ~ 220 V<sub>AC</sub> Redundant Power Input Mass Production

Contact our sales for more pricing & ordering information.

# EKI-9312

## Industrial-Class 12 Port Full Gigabit Managed DIN Rail Switch

**NEW**



FC CE

### Features

- All Gigabit connections support dual-ring protection and non-blocking traffic forwarding
- X-Ring+: recovery time within 20ms for 250 node connections
- STP, RSTP, MSTP for better redundancy
- Super security mechanism includes SSL, SSH, 802.1X, MAC, IP filtering, RADIUS, TACACS+, VLAN for access protection
- Dual power input, dual image for system reliability
- Operating temperature: -40 ~ 75°C

### Introduction

The EKI-9312 Gigabit Managed Ethernet Switches are designed for rigorous mission critical applications, such as factory automation, ITS, and process control. The 4 Gigabit Ethernet ports allow great flexibility to build up a Gigabit redundant ring and a Gigabit uplink.

The EKI-9312 is equipped with 8 Gigabit Ethernet ports and up to 4 fiber optic ports, making them ideal for upgrading an existing network to Gigabit speed or building a new, full Gigabit network. The X-Ring+ with RSTP, STP and MSTP support, increases system reliability and the availability of your network. The EKI-9312 are designed especially for communication demanding applications, such as video and process monitoring, or intelligent transportation systems, all of which can benefit from a scalable backbone construction.

### Specifications

#### Interface

- I/O Port** 8 x 10/100/1000Base-T/TX RJ-45  
4 x 1000BASE-X SFP
- Console port** RJ-45
- F/W backup port** USB
- Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 30
- Installation** DIN Rail
- Dimensions (W x H x D)** 86 x 165 x 125 (mm)

#### LED Display

- System LED** PWR1, PWR2, SYS, CFG, Alarm and R.M.
- Port LED** Link / Speed / Activity

#### Environment

- Operating Temperature** -40 ~ 75°C
- Storage Temperature** -40 ~ 85°C
- Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- Humidity** 10 ~ 95% (non-condensing)

#### Power

- Power Consumption** ~ 21.82 Watts (System)
- Power Input** 24/48 V<sub>DC</sub> dual inputs

#### Certification

- EMI** CE, FCC Class A
- Safety** UL60950 C1D2
- EMC** EN61000-6-4; EN61000-6-2; EN61000-4-2 (ESD) Level 4  
EN61000-4-3 (RS) Level 3; EN61000-4-4 (EFT) Level 4  
EN61000-4-5 (Surge) Level 4;  
EN61000-4-6 (CS) Level 3 EN61000-4-8 (Magnetic Field) Level 4; EN50121-4
- Shock** IEC 60068-2-27
- Freefall** IEC 60068-2-32
- Vibration** IEC 60068-2-6

#### L2 Features

- L2 MAC Address** 16K
- Jumbo Frame** 12KB
- VLAN Group** 4K (VLAN ID 1~4094)
- VLAN Arrange** Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- Port Mirroring** Per port, Multi-source port, RSAPN,
- IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control** Broadcast, Multicast, Unknown unicast
- Spanning Tree** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring+

#### QoS

- Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Priority), Hybrid Priority
- Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- Rate Limiting** Ingress Rate limit, Egress Rate limit
- Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

#### Security

- Port Security** Static, Dynamic
- Authentication** 802.1x (Port-Based, MAC-Based, MD5/TLS/TTLs/PEAP Encryption), RADIUS, TACACS+
- ACL** 1K rules
- Advanced Security** IP Source guard, ARP inspection, DHCP Snooping

#### Management

- DHCP** Client, Server, Relay, Option66/67/82
- Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- Security access** SSH2.0, SSL
- Software upgrade** TFTP, HTTP, Dual Image
- NTP** NTP client/server

### Ordering Information

- EKI-9312-C0ID42E** Layer 2 Fastpath, 8xGbE 100/1000Base-T + 4x GbE SFP w/ 24/48 V<sub>DC</sub> Redundant Power Input

Contact our sales for more pricing & ordering information.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-9316

## Industrial-Class 16 Port Full Gigabit Managed DIN Rail Switch

NEW



FC CE

### Features

- All Gigabit connections support dual-ring protection and non-blocking traffic forwarding
- X-Ring+: recovery time within 20ms for 250 node connections
- STP, RSTP, MSTP for better redundancy
- Super security mechanism includes SSL, SSH, 802.1X, MAC, IP filtering, RADIUS, TACACS+, VLAN for access protection
- Dual power input, dual image for system reliability
- Operating temperature: -40 ~ 75°C

### Introduction

The EKI-9316 Gigabit Managed Ethernet Switches are designed for rigorous mission critical applications, such as factory automation, ITS, and process control. The 4 Gigabit Ethernet ports allow great flexibility to build up a Gigabit redundant ring and a Gigabit uplink.

The EKI-9316 is equipped with 12 Gigabit Ethernet ports and up to 4 fiber optic ports, making them ideal for upgrading an existing network to Gigabit speed or building a new, full Gigabit network. The X-Ring+ with RSTP, STP and MSTP support, increases system reliability and the availability of your network. The EKI-9316 is designed especially for communication demanding applications, such as video and process monitoring, or intelligent transportation systems, all of which can benefit from a scalable backbone construction.

### Specifications

#### Interface

- **I/O Port** 12 x 10/100/1000Base-T/TX RJ-45  
4 x 1000 BASE-X SFP
- **Console port** RJ-45
- **F/W backup port** USB
- **Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- **Enclosure** Aluminum Shell
- **Protection Class** IP 30
- **Installation** DIN Rail
- **Dimensions (W x H x D)** 86 x 165 x 125 (mm)

#### LED Display

- **System LED** PWR1, PWR2, SYS, CFG, Alarm and R.M.
- **Port LED** Link / Speed / Activity

#### Environment

- **Operating Temperature** -40 ~ 75°C
- **Storage Temperature** -40 ~ 85°C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

#### Power

- **Power Consumption** ~ 21.82 Watts (System)
- **Power Input** 24/48 V<sub>DC</sub> dual inputs

#### Certification

- **EMI** CE, FCC Class A
- **Safety** UL60950 C1D2
- **EMC** EN61000-6-4; EN61000-6-2; EN61000-4-2 (ESD) Level 4  
EN61000-4-3 (RS) Level 3; EN61000-4-4 (EFT) Level 4  
EN61000-4-5 (Surge) Level 4;  
EN61000-4-6 (CS) Level 3 EN61000-4-8 (Magnetic Field) Level 4; EN50121-4
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

#### L2 Features

- **L2 MAC Address** 16K
- **Jumbo Frame** 12KB
- **VLAN Group** 4K (VLAN ID 1~4094)
- **VLAN Arrange** Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port, RSAPN, IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **IP Multicast** Broadcast, Multicast, Unknown unicast
- **Storm Control** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring+
- **Spanning Tree**

#### QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Priority), Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

#### Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based, MAC-Based, MD5/TLS/TTL/PEAP Encryption), RADIUS, TACACS+
- **ACL** 1K rules
- **Advanced Security** IP Source guard, ARP inspection, DHCP Snooping

#### Management

- **DHCP** Client, Server, Relay, Option66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP client/server

### Ordering Information

- **EKI-9316-C0ID42E** Layer 2 Fastpath, 12xGbE 100/1000Base-T + 4x GbE SFP w/ 24/48 V<sub>DC</sub> Redundant Power Input

Contact our sales for more pricing & ordering information.

# EKI-7758F

## 4G+4 SFP Gigabit Managed Redundant Industrial Ethernet Switch



### Introduction

The EKI-7758F supports eight Gigabit ports with four Ethernet and four SFP. To create reliability in your network, the EKI-7758F comes equipped with a proprietary redundant network protocol – X-Ring that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, the EKI-7758F also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

### Specifications

#### Communications

- Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab, 100Base-T (X), 10/100Base-T, Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- LAN**
- Transmission Distance** Ethernet : Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
SFP: Up to 110 km (depends on SFP)
- Transmission Speed** Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
SFP: Up to 1000 Mbps

#### Interface

- Connectors** 4 x RJ45 (Ethernet)  
4 x SFP (mini-GBIC) ports  
6-pin removable screw terminal (Power & Relay)
- LED Indicators** System: PWR, R.M., PWR1, PWR2, P-Fail  
Gigabit Copper: Link/Activity, Speed  
SFP: Link/Activity
- Console** RS-232 (RJ45)

#### Network Management

- Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/ DSCP priority queuing, IEEE 802.3x flow control
- Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNMP, Syslog, E-Mail Alert, SNMP Trap, RMON

### Features

- All Gigabit Ethernet ports for 4 Copper and 4 SFP
- SFP sockets for easy and flexible fiber expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL
- Diagnostic: Port statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output

#### Mechanism

- Enclosure** IP30, metal shell with solid mounting kits
- Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- Mounting** DIN-rail, Wall

#### Power

- Power Consumption** Max. 17 W
- Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- Fault Output** 1 Relay Output

#### Protection

- Power Reverse** Present
- Overload Current** Present

#### Environment

- Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Operating Humidity** 5 ~ 95% (non-condensing)
- Storage Humidity** 0 ~ 95% (non-condensing)
- MTBF** 289,777 hours

#### Certification

- Safety** UL 60950-1, CAN/CSA-C22.2 No.60950 Class I, Division 2
- EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8  
IEC 60068-2-27
- Shock** IEC 60068-2-32
- Freefall** IEC 60068-2-32
- Vibration** IEC 60068-2-6

### Ordering Information

- EKI-7758F** 4G+4 SFP Managed Gigabit Ethernet Switch

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-7656C/CI

## 16+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch



### Features

- 2 Gigabit Copper/SFP combo ports, plus 16 Fast Ethernet ports
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL, SNMPv3
- Diagnostic: Port Statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 12 ~ 48 V<sub>DC</sub> power inputs and 1 relay output
- Supports wide operating temperatures from -40 to 75°C (EKI-7656CI)

### Introduction

The EKI-7656C supports 16 Fast Ethernet ports and 2 Gigabit combo ports. To create reliability in your network, the EKI-7656C comes equipped with a proprietary redundant network protocol -- X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, EKI-7656C also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- **LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation, SFP: Up to 1000 Mbps

#### Interface

- **Connectors** 16 x RJ45 (Ethernet)  
2 x RJ45/SFP (mini-GBIC) combo ports  
6-pin removable screw terminal (Power&Relay)
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail  
Ethernet: Link/Activity, Duplex/Collision  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)  
SFP: Link/Activity
- **Console** RS-232 (RJ45)

#### Network Management

- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, STMP, Syslog, E-Mail Alert, SNMP Trap, RMON
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control

#### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

#### Power

- **Power Consumption** Max. 10.7 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
-40 ~ 75°C (-40 ~ 167°F) (EKI-7656CI)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 295,000 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-7656C** 16FE + 2G Combo Port Managed Ethernet Switch
- **EKI-7656CI** 16FE + 2G Combo Port Managed Ethernet Switch w/ Wide Temp



# EKI-7659C/CI

## 8+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch



### Introduction

The EKI-7659C supports eight Fast Ethernet ports and two Gigabit combo ports. To create reliability in your network, the EKI-7659C comes equipped with a proprietary redundant network protocol – X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, EKI-7659C also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab, 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **LAN**
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: Up to 1000 Mbps

#### Interface

- **Connectors** 8 x RJ45 (Ethernet)  
2 x RJ45/SFP (mini-GBIC) combo ports  
6-pin removable screw terminal (Power & Relay)
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail  
10/100T (X): Link/Activity, Duplex/Collision  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)
- **Console** RS-232 (RJ45)

#### Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, STMP, Syslog, E-Mail Alert, SNMP Trap, RMON

### Features

- 2 Gigabit Copper/SFP combo ports, plus 8 Fast Ethernet ports
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL, SNMPv3
- Diagnostic: Port Statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Supports wide operating temperatures from -40 to 75°C (EKI-7669CI)

#### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

#### Power

- **Power Consumption** Max. 10.7 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
-40 ~ 75°C (-40 ~ 167°F) (EKI-7659CI)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 284,409 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8  
IEC 60068-2-27  
IEC 60068-2-32  
IEC 60068-2-6
- **Shock**
- **Freefall**
- **Vibration**

### Ordering Information

- **EKI-7659C** 8FE + 2G Combo Port Managed Ethernet Switch
- **EKI-7659CI** 8FE + 2G Combo Port Managed Ethernet Switch w/ Wide Temp

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-7657C/CI

## 7+3G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch with 2 x DI/O



### Features

- 3 Gigabit Copper/SFP combo ports, plus 7 Fast Ethernet ports
- 2 Digital Inputs and 2 Digital Outputs for Events and Alarms in the Network
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL, SNMPv3
- Diagnostic: Port Statistics, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Operating temperature from -40 to 75°C (EKI-7657CI)

### Introduction

The EKI-7657C supports seven Fast Ethernet ports and three Gigabit combo ports with 2 x Digital Input and Digital Output ports. To create reliability in your network, the EKI-7657C comes equipped with a proprietary redundant network protocol -- X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, the EKI-7657C also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- **LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: Up to 1000 Mbps

#### Interface

- **Connectors** 7 x RJ45 (Ethernet)  
3 x RJ45/SFP (mini-GBIC) combo ports  
1 x 6-pin removable terminal (Power & Relay)  
1 x 6-pin removable terminal (DI/DO)
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail  
10/100T (X): Link/Activity, Duplex/Collision  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)  
SFP: Link/Activity
- **Console** RS-232 (RJ45)

#### Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/ DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNTp, Syslog, Email Alert, SNMP Trap, RMON

#### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

#### Power

- **Power Consumption** Max. 10.7 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
-40 ~ 75°C (-40 ~ 167°F) (EKI-7657CI)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 284,409 hours

#### Certifications

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-7657C** 7FE + 3G Combo Port Managed Ethernet Switch w/ 2 x DI/DO
- **EKI-7657CI** 7FE + 3G Combo Port Managed Ethernet Switch w/ 2 x DI/DO and Wide Temp

# EKI-7654C

## 4+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch



### Introduction

The EKI-7654C supports four Fast Ethernet ports and two Gigabit combo ports. To create reliability in your network, the EKI-7654C comes equipped with a proprietary redundant network protocol -- X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, the EKI-7654C also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- **LAN** 100Base-TX, 10/100Base-T, Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: Up to 1000 Mbps

#### Interface

- **Connectors** 4 x RJ45 (Ethernet) 2 x RJ45/SFP (mini-GBIC) combo ports 6-pin removable screw terminal (Power & Relay)
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail  
10/100T (X): Link/Activity, Duplex/Collision  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)  
SFP: Link/Activity
- **Console** RS-232 (RJ45)

#### Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNTP, Syslog, E-Mail Alert, SNMP Trap, RMON

### Features

- 2 Gigabit Copper/SFP combo ports, plus 4 Fast Ethernet ports
- Full/half duplex mode flow control
- MDI/MDI-X auto crossover
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate
- Limit Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL, SNMPv3 Diagnostic: Port Statistic, Port Mirroring, RMON, SNMP Trap, SMTP, Syslog, SSL
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output

#### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

#### Power

- **Power Consumption** Max. 10.7 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Protection

- **Power Reverse** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 284,409 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-7654C** 4FE + 2G Combo Port Managed Ethernet Switch

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-7559SI/MI

# EKI-7554SI/MI

**8+2 SC Type Fiber Optic Managed Industrial Ethernet Switch with Wide Temperature**

**4+2 SC Type Fiber Optic Managed Industrial Ethernet Switch with Wide Temperature**



EKI-7559SI/MI

EKI-7554SI/MI



## Features

- 2 x SC type fiber ports, plus 4 Fast Ethernet ports. (EKI-7554SI/MI)
- 2 x SC type fiber ports, plus 8 Fast Ethernet ports. (EKI-7559SI/MI)
- Redundancy: X-Ring Pro (high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC, port binding, DHCP Server, IP access list, 802.1X, SSL, SNMPv3
- Diagnostic: Port Statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Supports wide operating temperature -40 ~ 75°C

## Introduction

Both the EKI-7554SI/MI and EKI-7559SI/MI support two SC type Fiber ports, EKI-7554SI/MI four Fast Ethernet ports and EKI-7559SI/MI can support up to eight Fast Ethernet ports. To create reliability in your network, the EKI-7554SI/MI come equipped with a proprietary redundant network protocol -- X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, EKI-7554SI/MI also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

## Specifications

### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ad, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X
- **LAN** 10/100Base-T (X), 100Base-FX
- **Transmission Distance** Ethernet : Up to 100 m  
Multi-mode Fiber: Up to 2 km (EKI-7554MI)  
Single-mode Fiber: Up to 30 km (EKI-7554SI)
- **Transmission Speed** Up to 100 Mbps

### Interface

- **Connectors** 4 x RJ45 ports (EKI-7554SI/MI)  
8 x RJ45 ports (EKI-7559SI/MI)  
2 x SC type fiber optic connectors
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail  
10/100T (X): Link/Activity, Duplex/Collision
- **Console** RS-232 (RJ45)

### Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/ DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNTP, Syslog, Email Alert, SNMP Trap, RMON

### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

### Power

- **Power Consumption** Max. 7.7 W (EKI-7554SI/MI)  
Max. 8.4 W (EKI-7559SI/MI)
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

### Protection

- **Power Reverse** Present
- **Overload Current** Present

### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 262,230 hours (EKI-7554SI/MI)  
264,964 hours (EKI-7559SI/MI)

### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950 Class 1, Division 2 (EKI-7559MI/SI)
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

## Ordering Information

- **EKI-7554SI** 4FE + 2-port Single-mode Fiber Managed Ethernet Switch w/Wide Temp
- **EKI-7554MI** 4FE + 2-port Multi-mode Fiber Managed Ethernet Switch w/Wide Temp
- **EKI-7559SI** 8FE + 2-port Single-mode Fiber Managed Ethernet Switch w/Wide Temp
- **EKI-7559MI** 8FE + 2-port Multi-mode Fiber Managed Ethernet Switch w/Wide Temp

# EKI-5725/I

# EKI-5728/I

## 5-port Gigabit Ethernet ProView Switch

## 8-port Gigabit Ethernet ProView Switch



### Features

- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS (Networking management system) via SNMP
- Port-based QoS for deterministic data transmission
- -40 ~ 75°C operating temperature range (EKI-5725I and EKI-5728I only)
- 12 ~ 48V<sub>DC</sub> (8.4 ~ 52.8V<sub>DC</sub>) wide-range power input
- EMS level 3 protection for extreme outdoor environments
- IEEE 802.3az Energy Efficient Ethernet (EEE)
- Jumbo Frame Support (Up to 9,216 Bytes)
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input and P-Fail relay
- Loop detection

### Introduction

The EKI-5725/I and EKI-5728/I are the world's first convergence switches for process control and IT networking management. This series uses Modbus/TCP to communicate with the SCADA software and SNMP to communicate with the NMS (Networking Management System) at the same time, thereby allowing full read control over the devices either for control engineers or for IT. The devices come with the Port-based QoS for deterministic data transmission allows the priority ports to prioritize the traffic coming over those ports and delay the less immediately necessary data over the remaining ports. EKI-5725/I and EKI-5728/I switches use the highest quality components, to enable the range to operate in temperatures of between -40 and 75°C along with EMS Level 3 protection to repel electromagnetic interference for industrial resistance.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1p, 802.3az, 802.3ab
- **LAN** 10/100/1000Base-T(X)
- **Transmission Distance** Up to 100 m
- **Transmission Speed** Up to 1000 Mbps

#### Interface

- **Connectors** EKI-5725/I: 5 x RJ45  
EKI-5728/I: 8 x RJ45  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail, Loop detection  
10/100/1000T(X): Link/Activity, Speed

#### Switch Properties

- **MAC Table Size** EKI-5725/I: 2K  
EKI-5728/I: 8K
- **Packet Buffer Size** EKI-5725/I: 1M bit  
EKI-5728/I: 4.1M bit
- **Switching Capacity** EKI-5725/I: 10 Gbps  
EKI-5728/I: 16 Gbps
- **Jumbo Frame** 9216 bytes

#### Power

- **Power Consumption** EKI-5725/I: Max. 2 W  
EKI-5728/I: Max. 5.2 W
- **Power Input** 12~48 V<sub>DC</sub> (8.4~52.8 V<sub>DC</sub>), redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** EKI-5725/I: 27 x 120 x 84 mm  
EKI-5728/I: 43 x 120 x 84 mm
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-Rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** EKI-5725 & EKI-5728: -10~60°C (14~140°F)  
EKI-5725I & EKI-5728I: -40~75°C (-40~167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** EKI-5725/I: 5,168,110 hours  
EKI-5728/I: 4,176,861 hours

#### Certification

- **Safety** IEC/EN60950, UL60950, UL508, Class 1 Division 2, ATEX
- **EMI** FCC Part 15 Subpart B Class A, EN 55011/55022 Class A
- **EMS** EN 61000-4-2 (Level 3)  
EN 61000-4-3 (Level 3)  
EN 61000-4-4 (Level 3)  
EN 61000-4-5 (Level 3)  
EN 61000-4-6 (Level 3)  
EN 61000-4-8 (Level 3)
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-5725** 5-port Gigabit Ethernet ProView Switch
- **EKI-5725I** 5-port Gigabit Ethernet ProView Switch with Wide Temperature
- **EKI-5728** 8-port Gigabit Ethernet ProView Switch
- **EKI-5728I** 8-port Gigabit Ethernet ProView Switch with Wide Temperature

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# EKI-5525/I

# EKI-5528/I

## 5-port Fast Ethernet ProView Switch

## 8-port Fast Ethernet ProView Switch



### Features

- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS (Networking management system) via SNMP
- Port-based QoS for deterministic data transmission
- 40 ~ 75°C operating temperature range (EKI-5525I and EKI-5528I only)
- 12 ~ 48 V<sub>DC</sub> (8.4 ~ 52.8 V<sub>DC</sub>) wide-range power input EMS level 3 protection for extreme outdoor environments
- IEEE 802.3az Energy Efficient Ethernet (EEE)
- Jumbo Frame Support
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input and P-Fail relay
- Loop detection

### Introduction

The EKI-5525/I and EKI-5528/I are the world's first convergence switches for process control and IT networking management. This series uses Modbus/TCP to communicate with the SCADA software and SNMP to communicate with the NMS (Networking Management System) at the same time, thereby allowing full read control over the devices either for control engineers or for IT. The devices come with the Port-based QoS for deterministic data transmission allows the priority ports to prioritize the traffic coming over those ports and delay the less immediately necessary data over the remaining ports. EKI-5525/I and EKI-5528/I switches use the highest quality components, to enable the range to operate in temperatures of between -40 and 75°C along with EMS Level 3 protection to repel electromagnetic interference for industrial resistance.

### Specifications

#### Communications

- Standard** IEEE 802.3, 802.3u, 802.3x, 802.1p, 802.3az
- LAN** 10/100Base-T(X)
- Transmission Distance** Up to 100 m
- Transmission Speed** Up to 100 Mbps

#### Interface

- Connectors** EKI-5525/I: 5 x RJ45  
EKI-5528/I: 8 x RJ45  
6-pin removable screw terminal (power & relay)
- LED Indicators** P1, P2, P-Fail, Loop detection  
10/100T (X): Link/Activity, Speed

#### Switch Properties

- MAC Table Size** EKI-5525/I: 2K  
EKI-5528/I: 8K
- Packet Buffer Size** EKI-5525/I: 1M bit  
EKI-5528/I: 128K bit
- Switching Capacity** EKI-5525/I: 1Gbps  
EKI-5528/I: 1.6 Gbps
- Jumbo Frame** EKI-5525/I: 9216 bytes  
EKI-5528/I: 2048 bytes

#### Power

- Power Consumption** EKI-5525/I: Max. 2 W  
EKI-5528/I: Max. 3.6 W
- Power Input** 12~48 V<sub>DC</sub> (8.4~52.8 V<sub>DC</sub>), redundant dual inputs
- Fault Output** 1 Relay Output

#### Mechanism

- Dimensions (W x H x D)** EKI-5525/I: 27 x 120 x 84 mm  
EKI-5528/I: 43 x 120 x 84 mm
- Enclosure** IP30, metal shell with solid mounting kits
- Mounting** DIN-Rail, Wall

#### Protection

- Reverse Polarity** Present
- Overload Current** Present

#### Environment

- Operating Temperature** EKI-5525 & EKI-5528: -10~60°C (14~140°F)  
EKI-5525I & EKI-5528I: -40~75°C (-40~167°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Operating Humidity** 10 ~ 95% (non-condensing)
- Storage Humidity** 10 ~ 95% (non-condensing)
- MTBF** EKI-5525/I: 5,168,110 hours  
EKI-5528/I: 5,235,270 hours

#### Certification

- Safety** IIEC/EN60950, UL60950, UL508, Class 1 Division 2, ATEX
- EMI** FCC Part 15 Subpart B Class A, EN 55011/55022 Class A
- EMS** EN 61000-4-2 (Level 3)  
EN 61000-4-3 (Level 3)  
EN 61000-4-4 (Level 3)  
EN 61000-4-5 (Level 3)  
EN 61000-4-6 (Level 3)  
EN 61000-4-8 (Level 3)
- Shock** IEC 60068-2-27
- Freefall** IEC 60068-2-32
- Vibration** IEC 60068-2-6

### Ordering Information

- EKI-5525** 5-port Fast Ethernet ProView Switch
- EKI-5525I** 5-port Fast Ethernet ProView Switch with Wide Temperature
- EKI-5528** 8-port Fast Ethernet ProView Switch
- EKI-5528I** 8-port Fast Ethernet ProView Switch with Wide Temperature

# EKI-5729F/FI

## 8-Port+2 SFP Gigabit Ethernet ProView Switch



### Features

- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS (Networking management system) via SNMP
- Port-based QoS for deterministic data transmission
- -40 ~ 75°C operating temperature range (EKI-5729FI only)
- 12 ~ 48 V<sub>DC</sub> (8.4 to 52.8 V<sub>DC</sub>) wide-range power input
- EMS level 3 protection for extreme outdoor environments
- IEEE 802.3az Energy Efficient Ethernet (EEE)
- Jumbo Frame Support (Up to 9,216 Bytes)
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input and P-Fail relay
- Loop detection

### Introduction

The EKI-5729F/FI are the world's first convergence switches for process control and IT networking management. This series uses Modbus/TCP to communicate with the SCADA software and SNMP to communicate with the NMS (Networking Management System) at the same time, thereby allowing full read control over the devices either for control engineers or for IT. The devices come with the Port-based QoS for deterministic data transmission allows the priority ports to prioritize the traffic coming over those ports and delay the less immediately necessary data over the remaining ports. EKI-5729F/FI switches use the highest quality components, to enable the range to operate in temperatures of between -40 and 75°C along with EMS Level 3 protection to repel electromagnetic interface for industrial resistance.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1p, 802.3az, 802.3ab
- **LAN** 10/100/1000Base-T(X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: UP to 100 m (4-wire Cat.5e, Cat.6 RJ-45 cable suggested for Gigabit port)  
SFP: UP to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100/1000 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: UP to 1000 Mbps

#### Interface

- **Connectors** 8 x RJ45  
2 x SFP ports  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail, Loop detection  
10/100/1000T(X): Link/Activity, Speed  
SFP: Link/Activity

#### Switch Properties

- **MAC Table Size** 8K
- **Packet Buffer Size** 4.1M bit
- **Switching Capacity** 20 Gbps
- **Jumbo Frame** 9216 bytes

#### Power

- **Power Consumption** Max. 6.8 W
- **Power Input** 12~48 V<sub>DC</sub> (8.4~52.8 V<sub>DC</sub>), redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 43 x 120 x 84 mm
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-Rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** EKI-5729F: -10~60°C (14~140°F)  
EKI-5729FI: -40~75°C (-40~167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 3,858,286 hours

#### Certification

- **Safety** IEC/EN60950, UL60950, UL508, Class 1 Division 2, ATEX
- **EMI** FCC Part 15 Subpart B Class A, EN 55011/55022 Class A
- **EMS** EN 61000-4-2 (Level 3)  
EN 61000-4-3 (Level 3)  
EN 61000-4-4 (Level 3)  
EN 61000-4-5 (Level 3)  
EN 61000-4-6 (Level 3)  
EN 61000-4-8 (Level 3)
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-5729F** 8-port+2 SFP Gigabit Ethernet ProView Switch
- **EKI-5729FI** 8-port+2 SFP Gigabit Ethernet ProView Switch with Wide Operating Temperature Range

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-5726/I

## 16-port Gigabit Ethernet ProView Switch



### Features

- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS (Networking management system) via SNMP
- Port-based QoS for deterministic data transmission
- -40 ~ 75°C operating temperature range (EKI-5726I only)
- 12 ~ 48 V<sub>DC</sub> (8.4 ~ 52.8 V<sub>DC</sub>) wide-range power input
- EMS level 3 protection for extreme outdoor environments
- IEEE 802.3az Energy Efficient Ethernet (EEE)
- Jumbo Frame Support (Up to 9,216 Bytes)
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input and P-Fail relay
- Loop detection

### Introduction

The EKI-5726/I is the world's first convergence switch for process control and IT networking management. This series uses Modbus/TCP to communicate with the SCADA software and SNMP to communicate with the NMS (Networking Management System) at the same time, thereby allowing full read control over the devices either for control engineers or for IT. The devices come with the Port-based QoS for deterministic data transmission allows the priority ports to prioritize the traffic coming over those ports and delay the less immediately necessary data over the remaining ports. The EKI-5726/I switch uses the highest quality components, to enable the range to operate in temperatures of between -40 and 75°C along with EMS Level 3 protection to repel electromagnetic interference for industrial resistance.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1p, 802.3az, 802.3ab
- **LAN** 10/100/1000Base-T(X)
- **Transmission Distance** Up to 100 m
- **Transmission Speed** Up to 1000 Mbps

#### Interface

- **Connectors** 16 x RJ45  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail, Loop detection  
10/100/1000T(X): Link/Activity, Speed

#### Switch Properties

- **MAC Table Size** 8K
- **Packet Buffer Size** 4.1M bit
- **Switching Capacity** 32 Gbps
- **Jumbo Frame** 9216 bytes

#### Power

- **Power Consumption** Max. 8 W
- **Power Input** 12~48 V<sub>DC</sub> (8.4~52.8 V<sub>DC</sub>), redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 74 x 120 x 84 mm
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-Rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** EKI-5726: -10~60°C (14~140°F)  
EKI-5726I: -40~75°C (-40~167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 2,788,343 hours

#### Certification

- **Safety** IEC/EN60950, UL60950, UL508, Class 1 Division 2, ATEX
- **EMI** FCC Part 15 Subpart B Class A, EN 55011/55022 Class A
- **EMS** EN 61000-4-2 (Level 3)  
EN 61000-4-3 (Level 3)  
EN 61000-4-4 (Level 3)  
EN 61000-4-5 (Level 3)  
EN 61000-4-6 (Level 3)  
EN 61000-4-8 (Level 3)
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-5726** 16-port Gigabit Ethernet ProView switch
- **EKI-5726I** 16-port Gigabit Ethernet ProView Switch with Wide Temperature



# EKI-5726F/FI

## 16-port+2 SFP Gigabit Ethernet ProView Switch



### Features

- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS (Networking management system) via SNMP
- Port-based QoS for deterministic data transmission
- -40 ~ 75°C operating temperature range (EKI-5726FI only)
- 12 ~ 48 V<sub>DC</sub> (8.4 ~ 52.8 V<sub>DC</sub>) wide-range power input
- EMS level 3 protection for extreme outdoor environments
- IEEE 802.3az Energy Efficient Ethernet (EEE)
- Jumbo Frame Support (Up to 9,216 Bytes)
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input and P-Fail relay
- Loop detection

### Introduction

The EKI-5726F/FI are the world's first convergence switches for process control and IT networking management. This series uses Modbus/TCP to communicate with the SCADA software and SNMP to communicate with the NMS (Networking Management System) at the same time, thereby allowing full read control over the devices either for control engineers or for IT. The devices come with the Port-based QoS for deterministic data transmission allows the priority ports to prioritize the traffic coming over those ports and delay the less immediately necessary data over the remaining ports. EKI-5726F/FI switches use the highest quality components, to enable the range to operate in temperatures of between -40 and 75°C along with EMS Level 3 protection to repel electromagnetic interface for industrial resistance.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1p, 802.3az, 802.3ab
- **LAN** 10/100/1000Base-T(X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: UP to 100 m (4-wire Cat.5e, Cat.6 RJ-45 cable suggested for Gigabit port)  
SFP: UP to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100/1000 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
Gigabit Fiber: UP to 1000 Mbps

#### Interface

- **Connectors** 16 x RJ45  
2 x SFP ports  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail, Loop detection  
10/100/1000T(X): Link/Activity, Speed  
SFP: Link/Activity

#### Switch Properties

- **MAC Table Size** 8K
- **Packet Buffer Size** 4.1M bit
- **Switching Capacity** 36 Gbps
- **Jumbo Frame** 9216 bytes

#### Power

- **Power Consumption** Max. 9.6W
- **Power Input** 12~48 V<sub>DC</sub> (8.4~52.8 V<sub>DC</sub>), redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 74 x 120 x 84 mm
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-Rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** EKI-5726F: -10~60°C (14~140°F)  
EKI-5726FI: -40~75°C (-40~167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 1,962,789 hours

#### Certification

- **Safety** IEC/EN60950, UL60950, UL508, Class 1 Division 2, ATEX
- **EMI** FCC Part 15 Subpart B Class A, EN 55011/55022 Class A
- **EMS** EN 61000-4-2 (Level 3)  
EN 61000-4-3 (Level 3)  
EN 61000-4-4 (Level 3)  
EN 61000-4-5 (Level 3)  
EN 61000-4-6 (Level 3)  
EN 61000-4-8 (Level 3)
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-5726F** 16-port+2 SFP Gigabit Ethernet ProView Switch
- **EKI-5726FI** 16-port+2 SFP Gigabit Ethernet ProView Switch with Wide Operating Temperature Range

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-7629C/CI

## 8+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch



### Features

- Provides 2 Gigabit Copper/SFP combo port plus 8 Fast Ethernet ports (EKI-7629C/CI)
- SFP socket for Easy and Flexible Fiber Expansion
- Supports Auto Negotiation and Auto MDI/MDI-X
- Provides flexible mounting: DIN-rail and Wall mount
- Supports Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Supports wide operating temperatures from -40 to 75°C (EKI-7629CI)

### Introduction

Aside from 2 Gigabit fiber optic/copper combo ports, the EKI-7629C/CI comes equipped with 8 x 10/100Base-TX fast Ethernet ports. Traditional RJ45 ports can be used for up-linking wide-band paths in short distances (< 100 m), or the appropriate replaceable SFP module can be used for the application of wideband uploading and long distance transmissions to flexibly fit field requests. The long MTBF (Mean Time Between Failures) ensures low operation and maintenance cost. EKI-7629C/CI includes a switch controller that can automatically sense transmission speeds (10/100 Mbps) The RJ45 interface can also be auto-detected, so MDI or MDI-X is automatically selected and a cross-over cable is not required. All Ethernet ports have memory buffers that support the store-and-forward mechanism, which assures that data can be transmitted properly

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3ab, 802.3u, 802.3x, 802.3z
- **LAN** 100Base-TX, 10/100Base-T, Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
Gigabit Fiber: Up to 110 km (depending on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
SFP: Up to 1000 Mbps

#### Interface

- **Connectors** 8 x RJ45 (Ethernet) with 2 x RJ45/SFP (mini-GBIC) combo ports (EKI-7629C/CI)  
6-pin removable screw terminal (Power & Relay)
- **LED Indicators** System: PWR1, PWR2, P-Fail  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)  
Gigabit SFP: Link/Activity

#### Power

- **Power Consumption** Max. 6.5 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
Wide Temp. Model -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 295,000 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-7629C** 8+2G Combo Port Unmanaged Ethernet Switch
- **EKI-7629CI** 8+2G Combo Port Unmanaged Ethernet Switch w/ Wide Temp

# EKI-2525/I

# EKI-2528/I

## 5-port Unmanaged Industrial Ethernet Switch

## 8-port Unmanaged Industrial Ethernet Switch



EKI-2525

EKI-2528



### Features

- Provides 5/8 Fast Ethernet ports with Auto MDI/MDI-X
- Supports 10/100 Mbps Auto-Negotiation
- Provides broadcast storm protection
- Provides compact size with DIN-rail/Wall mount, and IP30 metal mechanism
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input and P-Fail relay
- Supports wide operating temperatures from -40 to 75°C (EKI-2525/EKI-2528)

### Introduction

The EKI-2525/2528 supports a Fast Ethernet solution. The power is a +12 ~ 48 V<sub>DC</sub> redundant input design, and is secured with a double protection mechanism: Power Polarity Reverse Protect and an Overload Current Resettable Fuse. The former tolerates reverse power wiring while the later secures the system from overload currents. As the power supply turns normal, EKI-2525/2528 will automatically get back to work. Each port of EKI-2525/2528 has 2 LED's to show the link status transmission speed and collision status. It also provides a relay output for an event alarm. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED, and have troubleshooting easy and quick. EKI-2525/2528 comes with compact metal housing that rates IP30 to help against from dusty industrial environments.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x
- **LAN** 10/100Base-T (X)
- **Transmission Distance** Up to 100 m
- **Transmission Speed** Up to 100 Mbps

#### Interface

- **Connectors** 8 x RJ45 (EKI-2528) or 5 x RJ45 (EKI-2525)  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail  
10/100T (X): Link/Activity, Duplex/Collision

#### Power

- **Power Consumption** EKI-2528: Max. 5 W  
EKI-2525: Max. 3 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
-40 ~ 75°C (-40 ~ 167°F), (EKI-2525I and EKI-2528I)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 689,000 hours (EKI-2528)  
412,590 hours (EKI-2525)

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950  
Class I, Division 2
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-2525** 5-port Ethernet Switch
- **EKI-2525I** 5-port Ethernet Switch w/ Wide Temp
- **EKI-2528** 8-port Ethernet Switch
- **EKI-2528I** 8-port Ethernet Switch w/ Wide Temp

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-2541M/MI

# EKI-2541S/SI

## 10/100T (X) to Multi-Mode SC Type Fiber Optic Industrial Media Converter

## 10/100T (X) to Single-Mode SC Type Fiber Optic Industrial Media Converter



EKI-2541M

EKI-2541S



### Features

- Provides 1 x 10/100 Mbps Ethernet port with RJ45 connector
- Provides 1 x 100 Mbps Multi-mode/Single-mode SC type fiber port
- Provides internal jumper for Link Fault Pass-through (LFP) setting
- Supports full/half duplex flow control
- Supports store and forward transmission
- Supports Auto-negotiation
- Supports MDI/MDI-X auto-crossover
- Supports redundant 12-48 V<sub>DC</sub> power input
- Provides flexible mounting: DIN-rail and Panel mount
- Supports wide operating temperatures from -40 to 75°C (EKI-2541M/SI)

### Introduction

The EKI-2541M/2541S is designed to convert Ethernet networks to fiber networks by transparently converting Ethernet signals to optic signals. The advantages of fiber optics are wide bandwidth, EMI immunity and long-distance transmissions. Therefore, the EKI-2541M/2541S is an ideal solution for "fiber to building" applications at central offices or local sites. EKI-2541M/2541S supports MDI/MDIX auto detection, so you don't need to use crossover wires. Furthermore, the EKI-2541M/2541S can work normally from -10 to 60°C and accepts a wide voltage range from 12 ~ 48 V<sub>DC</sub>. Besides, it also provides 3,000 V<sub>DC</sub> surge (EFT) protection against over-voltage, so it is suitable for harsh operating environments.

#### Link Fault Pass-Through (LFP)

The EKI-2541M/2541S is an enhanced Ethernet to fiber-optic converter. Aside from its standard features, the versatile the EKI-2541M/2541S also has the LFP (Link Fault Pass-through) feature. When one side of the link fails, the other side continues transmitting packets, and waiting for a response that never arrives from the disconnected side. Use the internal jumper to enable the LFP function, then the EKI-2541M/2541S will force the link to shut down as soon as noticed that the other link has failed, giving the application software a chance to react to the situation.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x
- **LAN** 10/100Base-T (X), 100Base-FX
- **Transmission Distance** Ethernet: Up to 100 m  
Fiber: Multi-mode: up to 2 km  
Fiber: Single-mode: up to 30 km
- **Transmission Speed** Up to 100 Mbps
- **Optical Fiber**
  - Multi-mode (EKI-2541M/MI)
    - Wavelength: 1310 nm
    - Tx Power: -14/-20 dBm
    - Rx Sensitivity: -31 dBm
    - Parameters: 50/125 um, 62.5/125 um
  - Single-mode (EKI-2541S/SI)
    - Wavelength: 1310 nm
    - Tx Power: -8/-15 dBm
    - Rx Sensitivity: -34 dBm
    - Parameters: 9/125 um

#### Interface

- **Connectors** 1 x RJ45  
1 x SC type fiber connector  
6-pin removable screw terminal (power)
- **LED Indicators** P1, P2, P-Fail  
Ethernet: 10/100 m, LNK/ACT  
Fiber: HDX/FDX, LNK/ACT
- **DIP Switch** Port/Power Alarm, LFP  
Fiber: HDX/FDX, Converter/Switch

#### Power

- **Power Consumption** Max. 2.7 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs

#### Mechanism

- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- **Mounting** DIN-rail, Wall
- **Enclosure** IP30, Metal shell with solid mounting

#### Protection

- **Power Reverse** Present
- **Overload current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Wide Temp. model** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 577,175 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-2541M** Ethernet to Multi-mode Fiber Converter
- **EKI-2541MI** Ethernet to Multi-mode Fiber Converter w/ Wide Temp.
- **EKI-2541S** Ethernet to Single-mode Fiber Converter
- **EKI-2541SI** Ethernet to Single-mode Fiber Converter w/ Wide Temp.

# EKI-2741 Series

## 10/100/1000T (X) to Fiber Optic Gigabit Industrial Media Converters



### Features

- Provides 1 x 1000 Mbps Ethernet port with RJ45 connector
- Provides 1 x 1000 Mbps fiber port with SC or SFP (mini-GBIC) type connector for 1000Base-SX/LX device
- Provides DIP switch for full/half duplex setting
- Supports MDI/MDI-X auto crossover
- Supports Auto-Negotiation
- Supports redundant 12 ~ 48 V<sub>DC</sub> power input
- Provides flexible mounting: DIN-rail and Wall mount
- Provides Link Fault Pass-through (LFP)
- Jumbo Frame: 9K bytes

### Introduction

The EKI-2741 is designed to convert Gigabit Ethernet networks to Gigabit fiber networks by transparently converting Ethernet signals to optic signals. Therefore, the EKI-2741 is an ideal solution for “fiber to building” applications at central offices or local sites. EKI-2741 supports MDI/MDIX auto detection, so you don't need to use crossover wires. Furthermore, the EKI-2741 accepts a wide voltage range from 12 ~ 48 V<sub>DC</sub>. Besides, it also provides 3,000 V<sub>DC</sub> surge (EFT) protection against over-voltage, so it is suitable for harsh operating environments. EKI-2741 is an enhanced gigabit Ethernet to fiber optic converter. Aside from its standard features, the versatile the EKI-2741 also has the LFP (Link Fault Pass-through) feature. When one side of the link fails, the other side continues transmitting packets, and waiting for a response that never arrives from the disconnected side. EKI-2741 will force the link to shut down as soon as noticed that the other link has failed, giving the application software a chance to react to the situation.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3ab, 802.3x, IEEE 802.3z
- **LAN** 10/100/1000Base-T (X), 1000Base-SX or 1000Base-LX
- **Transmission Distance** Ethernet: Up to 100 m  
Fiber:  
Multi-mode: Up to 550 m  
Single-mode: Up to 10 km (EKI-2741LX) or up to 110 km (EKI-2741F)  
SFP: Up to 110 km (EKI-2741F)  
Up to 1000 Mbps
- **Transmission Speed**
- **Optical Fiber** Multi-mode (EKI-2741SX)  
Single-mode (EKI-2741LX/LXI)  
Wavelength: 850 nm  
Tx Power: -4/-9.5 dBm  
Rx Sensitivity: -18 dBm  
Parameters: 50/125 um, 62.5/125 um  
Wavelength: 1310 nm  
Tx Power: -3/-9.5 dBm  
Rx Sensitivity: -20 dBm  
Parameters: 9/125 um

#### Interface

- **Connectors** 1 x RJ45  
1 x SC type fiber connector (EKI-2741SX/LX) or 1 x SFP type fiber connector (EKI-2741F)  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail  
Fiber: LNK/ACT  
Ethernet: 1000M, LNK/ACT  
Port Alarm, LFP
- **DIP Switch**

#### Power

- **Power Consumption** 5.28 W (EKI-2741F)  
5.18 W (EKI-2741SX)  
5.30 W (EKI-2741LX)
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs

#### Mechanism

- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Power Reverse** Present
- **Overload current** Present

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
Wide Temp Model  
-40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 515,600 hours (EKI-2741F)  
525,300 hours (EKI-2741SX/LX)

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

### Ordering Information

- **EKI-2741F** Giga Ethernet to SFP Fiber Converter
- **EKI-2741SX** Giga Ethernet to 1000Base-SX Fiber Converter
- **EKI-2741LX** Giga Ethernet to 1000Base-LX Fiber Converter
- **EKI-2741FI** Giga Ethernet to SFP Fiber Converter w/ Wide Temperature
- **EKI-2741SXI** Giga Ethernet to 1000Base-SX Fiber Converter w/ Wide Temperature
- **EKI-2741LXI** Giga Ethernet to 1000Base-LX Fiber Converter w/ Wide Temperature

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# SFP Transceiver Modules



## Features


- Industry standard small form pluggable (SFP) package
- Immovable lock design
- Hot pluggable
- Duplex LC connector
- Full duplex speeds support
- TTL signal detect indicator
- 3.3 V<sub>DC</sub> power supply
- Industry leading EMI performance for high port density
- Class 1 laser product complies with EN 60825-1
- RoHS compliant

## Introduction

Advantech's Small Form-factor Pluggable (SFP) transceiver family is available with a variety of different types, allowing users to select the appropriate transceiver for each link to provide the required optical reach over the available optical fiber type. Advantech's SFP transceiver immovable lock design can fix SFP module into the switch firmly. Besides Advantech's SFP transceiver's compact design provides high port density and compliant with Fast Ethernet and IEEE 802.3z Gigabit Ethernet Standards. Advantech's SFP transceivers ensure your networks operate with maximum performance, reliability, and flexibility.

## Specifications

Category	Distance	Model Name	Wavelength	TX Power	RX Sens	Voltage	Operating Temp
100Base-FX	M.M. (2km)	SFP-FXM/LC-AE	1310 nm	-14dBm ~ -20dBm	-31dBm (Min)	3.3V	0 to 70°C
	M.M. (2km)	SFP-FXM/LCI-AE					(-40 to 85°F)
	S.M. (30km)	SFP-FXS/LC-30E	1310 nm	-8 dBm ~ -15dBm	-34dBm (Min)	3.3V	0 to 70°C
	S.M. (30km)	SFP-FXS/LCI-30E					(-40 to 85°F)
1000Base	SX (550m)	SFP-GSX/LC-AE	850 nm	-4 dBm ~ -9.5dBm	-18dBm (Min)	3.3V	0 to 70°C
		SFP-GSX/LCI-AE					(-20 to 85°F)
	LX (10 km)	SFP-GLX/LC-10E	1310 nm	-3 dBm ~ -9.5dBm	-20dBm (Min)	3.3V	0 to 70°C
		SFP-GLX/LCI-10E					(-40 to 85°F)
	LX (20 km)	SFP-GLX/LC-20E	1310 nm	-2 dBm ~ -8dBm	-23dBm (Min)	3.3V	0 to 70°C
		SFP-GLX/LCI-20E					(-40 to 85°F)
	LX (40 km)	SFP-GLX/LC-40E	1310 nm	+1 dBm ~ -4dBm	-24dBm (Min)	3.3V	0 to 70°C
		SFP-GLX/LCI-40E					(-40 to 85°F)
	XD (50km)	SFP-GXD/LC-50E	1550 nm	+1 dBm ~ -4dBm	-24dBm (Min)	3.3V	0 to 70°C
		SFP-GXD/LCI-50E					(-40 to 85°F)
	ZX (70km)	SFP-GZX/LC-70E	1550 nm	+5 dBm ~ 0dBm	-24dBm (Min)	3.3V	0 to 70°C
		SFP-GZX/LCI-70E					(-40 to 85°F)
EZ (110km)	SFP-GZX/LC-110E	1550 nm	+5 dBm ~ 0dBm	-30dBm (Min)	3.3V	0 to 70°C	
	SFP-GZX/LCI-110E					(-40 to 85°F)	
1000Base	RJ45 (100m)	SFP-GTX/RJ45-AE				3.3V	0 to 70°C

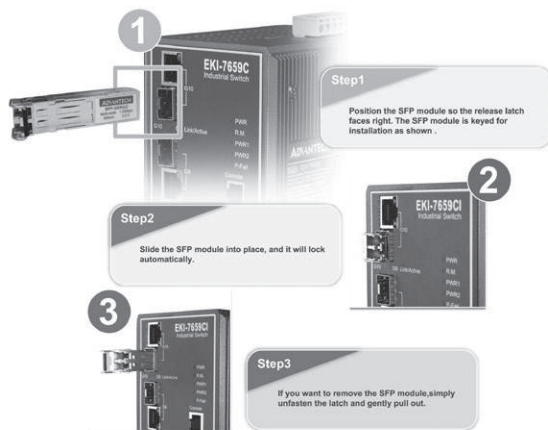

Note: Don't remove the SFP module plugs until you are ready to install the cables

## Ordering Information

- **SFP-FXM/LC** 100Base-FX Multi-mode SFP module
- **SFP-FXS/LC-30E** 100Base-FX Single-mode SFP module
- **SFP-GSX/LC** 1000Base-SX Multi-mode SFP module
- **SFP-GLX/LC-10E** 1000Base-LX Single-mode SFP module (10 km)
- **SFP-GLX/LC-20E** 1000Base-LX Single-mode SFP module (20 km)
- **SFP-GLX/LC-40E** 1000Base-LX Single-mode SFP module (40 km)
- **SFP-GXD/LC-50E** 1000Base-XD Single-mode SFP module (50 km)
- **SFP-GZX/LC-70E** 1000Base-ZX Single-mode SFP module (70 km)
- **SFP-GTX/RJ45** 1000Base RJ45 SFP module

# Industrial Gateway Solutions

<b>Selection Guide</b>		<b>10-2</b>
<b>Wireless Serial Device Servers</b>		
<b>EKI-1361</b>	1-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server	<b>10-4</b>
<b>EKI-1362</b>	2-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server	
<b>Dual Ethernet Serial Device Servers</b>		
<b>EKI-1521/C1/I</b>	1-port RS-232/422/485 Serial Device Server	<b>10-5</b>
<b>EKI-1522/C1/I</b>	2-port RS-232/422/485 Serial Device Server	
<b>EKI-1524/C1/I</b>	4-port RS-232/422/485 Serial Device Server	
<b>EKI-1528/T</b>	8-port RS-232/422/485 Serial Device Server	<b>10-6</b>
<b>EKI-1526/T</b>	16-port RS-232/422/485 Serial Device Server	
<b>Modbus Gateways</b>		
<b>EKI-1221/C1/I</b>	1-port Modbus Gateway	<b>10-7</b>
<b>EKI-1222/C1/I</b>	2-port Modbus Gateway	
<b>EKI-1224/C1/I</b>	4-port Modbus Gateway	
<b>EKI-1221D</b>	1-port Modbus Gateway with Integrated Ethernet Cascading	<b>10-8</b>
<b>EKI-1222D</b>	2-port Modbus Gateway with Integrated Ethernet Cascading	

To view all of Advantech's Serial Device Servers, please visit [www.advantech.com/products](http://www.advantech.com/products).



# Selection Guide

## Wireless Serial Device Servers

NEW



NEW



Model Name		EKI-1361	EKI-1362	EKI-1351	EKI-1352
Description		1-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server	2-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server	1-port RS-232/422/485 to 802.11b/g WLAN Serial Device Server	2-port RS-232/422/485 to 802.11b/g WLAN
Wireless LAN	IEEE Standard	802.11 b/g/n		802.11 b/g	
	Radio Number	1			
RF	Security	WEP, WPA/WPA2-Personal, WPA/WPA2-Enterprise		WEP, WPA, WPA2, w/o 802.11i	
	MIMO	2T2R		-	
	Maximum Transmit Output Power	19dBm (11n)		13dBm (11b)	
Ethernet LAN	Rceive Sensitivity	-93dBm (11g Rx0+Rx1)		-89dBm (11b 1Mbps)	
	Antenna Connector	R-SMA			
	No.	1			
Serial Communication	Connector	RJ45			
	Speed	10/100/1000 Mbps			
	Protection	1.5 KV built-in magnetic isolation protection			
Software	Type	RS-232/422/485			
	Baud Rate	50 bps ~ 921.6 kbps, any baud rate setting			
	No. of Ports	1	2	1	2
	Port Connector	DB9 Male			
Power	Protection	15 KV ESD for all signals			
	Configuration	Windows utility, Telnet console, Web Browser		Windows utility, Web Browser	
	Operation mode	VCOM, TCP Server/Client, UDP Server/Client			
Mechanism	Driver	32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux			
	Power Input Range	12 - 48 V <sub>DC</sub>			
Certification	Fault Relay	V			
	No.	2			
Operating Temperature	Mounting	Din-Rail / Wall Mount			
	Operating Temperature	-30 ~ 65°C (-22 ~ 149°F)		-0 ~ 50°C (32 ~ 122°F)	
Page	CE	V		V	
	FCC	V		V	
	C1D2	V		-	
	ATEX	V		-	

## Dual Ethernet Serial Device Servers



Model Name		EKI-1521/I/CI	EKI-1522/I/CI	EKI-1524/I/CI	EKI-1528/T	EKI-1526/T
Description		1-port RS-232/422/485 Serial Device Server	2-port RS-232/422/485 Serial Device Server	4-port RS-232/422/485 Serial Device Server	8-port RS-232/422/485 Serial Device Server	16-port RS-232/422/485 Serial Device Server
Ethernet LAN	No.	2				
	Connector	RJ45				
	Speed	10/100 Mbps				
Serial Communication	Protection	1.5 KV built-in magnetic isolation protection				RS-232/422/485
	Type	RS-232/422/485 (CI model with RS-422/485 only)				RS-232/422/485
	Baud Rate	50 bps ~ 921.6 kbps, any baud rate setting				
Power	No. of Ports	1	2	4	8	16
	Port Connector	DB9 Male				RJ45
	Protection	15 KV ESD for all signals (CI model with 2KV Isolation)				15 KV ESD for all signals
Software	Configuration	Windows utility, Telnet, Web Browser		Windows utility, Telnet, Console, Web Browser		
	Operation mode	VCOM, TCP Server/Client, UDP Server/Client				
Mechanism	Driver	32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux				
	Power Input Range	12 - 48 V <sub>DC</sub>		100 ~ 240 V <sub>AC</sub> , 47 ~ 63 Hz (T model with 48 V <sub>DC</sub> , Terminal Block)		
Operating Temperature	Fault Relay	V				-
	No.	2				1
	Mounting	Din-Rail / Wall Mount				Rack Mount
	Operating Temperature	-10 ~ 60°C (-14 ~ 140°F)		V		V
Certification	-30 ~ 65°C (-22 ~ 149°F)	-		-		
	-40 ~ 70°C (-40 ~ 158°F)	V (I & CI model)		-		
	CE	V		V		
	FCC	V		V		
	C1D2	V		-		
Page	ATEX	V		-		
	Page	10-5	10-5	10-5	10-6	10-6



## Single Ethernet Serial Device Servers



Model Name		ADAM-4571	ADAM-4571L	ADAM-4570	ADAM-4570L
Description		1-port RS-232/422/485 Serial Device Server	1-port RS-232 Serial Device Server	2-port RS-232/422/485 Serial Device Server	2-port RS-232 Serial Device Server
Ethernet LAN	No.	1			
	Connector	RJ45			
	Speed	10/100 Mbps			
	Protection	1.5 KV built-in magnetic isolation protection			
Serial Communication	Type	RS-232	RS-232/422/485	RS-232	RS-232/422/485
	Baud Rate	50 bps ~ 921.6 kbps, any baud rate setting			
	No. of Ports	1			2
	Port Connector	DB9 Male			RJ48
Software	Protection	15 KV ESD for all signals			
	Configuration	Windows utility, Web Browser			
	Operation mode	VCOM, TCP Server/Client, UDP Server/Client			
	Driver	32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux			
Power Input Range		10 - 30 Vdc			
Certification		CE/FCC			
Page		Online			

## Dual Ethernet Serial Device Servers



Model Name		EKI-1221I/CI	EKI-1222I/CI	EKI-1224I/CI	EKI-1221D	EKI-1222D
Description		1-port Modbus Gateway	2-port Modbus Gateway	4-port Modbus Gateway	1-port Modbus Gateway with Integrated Ethernet Cascading	2-port Modbus Gateway with Integrated Ethernet Cascading
Ethernet LAN	No.	2				
	Connector	RJ45				
	Speed	10/100 Mbps				
	Protection	1.5 KV built-in magnetic isolation protection				
Serial Communication	Embedded Switch (Daisy-Chain)	V				
	Type	RS-232/422/485 (CI model with RS-422/485 only)				
	Baud Rate	50 bps ~ 921.6 kbps, any baud rate setting				
	No. of Ports	1	2	4	1	2
Power	Port Connector	DB9 Male				
	Protection	15 KV ESD for all signals (CI model with 2KV Isolation)				
	Power Input Range	12 - 48 Vdc				
	Fault Relay	V				
Mechanism	No.	2				
	Mounting	Din-Rail / Wall Mount				
	Enclosure	IP30				
Operating Temperature	-10 ~ 60°C (-14 ~ 140°F)	V				
	-40 ~ 70°C (-40 ~ 158°F)	V (I & CI model)				
Certification	CE	V				
	FCC	V				
	C1D2	V				
	ATEX	V				
Page		10-7	10-7	10-7	10-8	10-8

## Accessories



Model Name		OPT1-DB9	OPT1A	OPT1D	OPT1I	OPT1J
Length		-	1 m	30 cm	1 m	30 cm
Communication Interfaces	Connector Type	DB9 Female		RJ48		RJ45
	Qty	1		1		1
	Connector Type	Terminal		DB9 Male		DB9 Male
	Qty	1		1		1
Where Used		EKI-1000 Series, ADAM-4570 Series	ADAM-4570, ADAM-4570L		EKI-1526, EKI-1528	
Page		online	online		online	

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-1361

# EKI-1362

## 1-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server

## 2-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server



### Features

- Link any serial device to an IEEE 802.11b/g/n network
- Support 802.11n MIMO 2T2R
- WLAN transmission rate up to 300 Mbps
- Supports secure access with WEP, WPA/WPA2-Personal, WPA/WPA2-Enterprise
- Provides COM port redirection, TCP, UDP, and pair connection modes
- Supports up to 921.6 kbps, and any baud rate setting
- Provides Web-based configuration and Windows utility
- Allows a max. of 5 hosts to access one serial port

### Introduction

EKI-1361 and EKI-1362 wireless serial device servers bring RS-232/422/485 to wireless LAN or LAN. They allow nearly any device with serial ports to connect and share an WLAN network. EKI-1361 and EKI-1362 provide a quick, simple and cost-effective way to bring the advantages of remote management and data accessibility to thousands of devices that cannot connect to a network.

With EKI-1361 and EKI-1362, your existing serial devices can be used with the most popular operating systems on the market. There is no need to write special drivers for specific operating systems. Moreover, you can make serial devices communicate with other devices peer-to-peer, without any intermediate host PCs and software programming. That saves a lot of cost and effort. In addition, you can actively request data or issue commands from the RS-232/422/485 side or wireless LAN side. This data can be sent bilaterally. Thus, the EKI-1361 and EKI-1362 are especially suitable for remote monitoring environments such as security systems, factory automaton, SCADA, transportation and more.

### Specifications

#### Ethernet Communications

- **Port Type** RJ45
- **No. of Ports** 1
- **Speed** 10/100/1000 Mbps

#### Wireless LAN Communications

- **Compatibility** IEEE 802.11b/g/n
- **Speed** Up to 300Mbps
- **Network Mode** Infrastructure, Ad-hoc
- **Antenna Connector** Reverse SMA
- **No. of Antenna** 2 (supports 2T2R)
- **Free Space Range** Open space 100 m
- **Wireless Security** WEP, WPA/WPA2-Personal, WPA/WPA2-Enterprise

#### Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** EKI-1361: 1  
EKI-1362: 2
- **Port Connector** DB9 male
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Baud Rate** 50 bps ~ 921.6 kbps, any baud rate setting
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND  
RS-422: TxD+, TxD-, RxD+, RxD-, GND  
RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals

#### Software

- **OS Support** 32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux
- **Utility Software** Advantech EKI Device Configuration Utility

- **Operation Modes** COM port redirection mode (Virtual COM)  
TCP/UDP server (polling) mode  
TCP/UDP client (event handling) mode  
Pair connection without AP (peer to peer) mode
- **Configuration** Windows utility, Telnet console, Web Browser
- **Protocol** ARP, ICMP, IPv4, IPv6, TCP, UDP, BOOTP, DHCP Client, Auto IP, Telnet, DNS, SNMP, HTTP, SMTP, SNT

#### Mechanics

- **Enclosure** Plastic and metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall
- **Dimensions (W x H x D)** 28.5 x 120 x 85.3 mm (1.12" x 4.72" x 3.36")
- **Weight** 0.5 Kg

#### General

- **LED Indicators** System: Power, System Status  
WLAN: Quality, Link/Active  
LAN: Link/Active  
Serial: Tx, Rx
- **Reboot Trigger** Built-in WDT (watchdog timer)

#### Power Requirements

- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Power Connector** Terminal block
- **Power Consumption** EKI-1361: 8W  
EKI-1362: 9W

#### Environment

- **Operating Temperature** -30 ~ 65°C (-22 ~ 149°F)
- **Storage Temperature** -40 ~ 80°C (-40 ~ 176°F)
- **Operating Humidity** 5 ~ 95% RH

#### Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class B)

### Ordering Information

- **EKI-1361** 1-port 802.11b/g/n WLAN Serial Device Server
- **EKI-1362** 2-port 802.11b/g/n WLAN Serial Device Server
- **OPT1-DB9** D-Sub9 to Terminal Converter

# EKI-1521/CI/1

# EKI-1522/CI/1

# EKI-1524/CI/1

1-port RS-232/422/485 Serial Device Server

2-port RS-232/422/485 Serial Device Server

4-port RS-232/422/485 Serial Device Server



EKI-1521

EKI-1522

EKI-1524



## Features

- Provides 2 x 10/100 Mbps Ethernet ports for LAN redundancy
- Provides COM port redirection (Virtual COM), TCP and UDP operation modes
- Supports up to 921.6 kbps, and any baud rate setting
- Allows a max. of 5 hosts to access one serial port
- Allows a max. of 16 hosts to be accessed as TCP client mode
- Built-in 15 KV ESD protection for all serial signals
- Provides multiple configuration methods including Windows utility, Telnet console, and Web Browser
- Supports 32-bit/64-bit Windows 2000/XP/Vista/7/8/8.1, Windows Server 2003/2008/2012, Windows CE 5.0, and Linux
- Automatic RS-485 data flow control
- Supports surge protection for D.C. power ports with line to line 2 KV, and line to earth 4 KV; for signal ports with 4 KV.
- 'I' models support a wide operating temperature
- 'CI' models support isolation and wide operating temperature

## Introduction

EKI-1521, EKI-1522 and EKI-1524 feature two independent Ethernet ports and MAC addresses to provide a redundant network mechanism to guarantee Ethernet network reliability. EKI-1521, EKI-1522 and EKI-1524 are serial device servers that connect RS-232/422/485 serial devices, such as PLC, meters, sensors, and barcode reader to an IP-based Ethernet LAN. They allow nearly any device with serial ports to connect and share an Ethernet network. EKI-1521, EKI-1522 and EKI-1524 provide various operations: COM port redirection (Virtual COMport), TCP Server, TCP Client and UDP mode. With COM port redirection mode, standard serial operation calls are transparently redirected to the EKI-1521, EKI-1522 and EKI-1524, guaranteeing compatibility with legacy serial devices and enabling backward compatibility with existing software. With TCP server, TCP client, and UDP modes, EKI-1521, EKI-1522 and EKI-1524 ensure the compatibility of network software that uses a standard network API. Moreover, you can make serial devices communicate with other devices peer-to-peer, without any intermediate host PCs and software programming.

## Specifications

### Ethernet Communications

- **Compatibility** IEEE 802.3, IEEE 802.3u
- **Speed** 10/100 Mbps
- **No. of Ports** 2
- **Port Connector** 8-pin RJ45
- **Protection** Built-in 1.5 KV magnetic isolation

### Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** EKI-1521: 1/EKI-1522: 2/EKI-1524: 4
- **Port Connector** DB9 male
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS, DTR/DSR
- **Baud Rate** 50 bps ~ 921.6 kbps, any baud rate setting
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND  
RS-422: TxD+, TxD-, RxD+, RxD-, GND  
RS-485: Data+, Data-, GND
- **Protection** Built-in 15 KV ESD for all signals  
'CI' models: 2KV Isolation for RS-422/485 signals

### Software

- **OS Support** 32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux
- **Utility Software** Advantech EKI Device Configuration Utility
- **Operation Modes** COM port redirection mode (Virtual COM)  
TCP/UDP server (polling) mode  
TCP/UDP client (event handling) mode  
Pair connection (peer to peer) mode
- **Configuration Management** Windows utility, Telnet console, Web Browser  
SNMP MIB-II

### Mechanics

- **Dimensions (W x H x D)** EKI-1521: 36.6 x 140 x 95 mm (1.44" x 5.51" x 3.74")  
EKI-1524: 48.6 x 140 x 95 mm (1.91" x 5.51" x 3.74")
- **Enclosure** Metal with solid mounting hardware

- **Mounting** DIN-rail, Wall
- **Weight** EKI-1521: 612g/EKI-1522: 620g/EKI-1524: 690g

### General

- **LED Indicators** System: Power, System Status/LAN: Speed, Link/Active  
Serial: Tx, Rx

### Power Requirements

- **Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Connector** Terminal block
- **Consumption** EKI-1521: 5.2 W  
EKI-1522: 5.2 W  
EKI-1524: 6.3 W

### Environment

- **Operating Temperature** EKI-1521/EKI-1522/EKI-1524: -10 ~ 60°C (14 ~ 140°F) 'CI' & 'I' models: -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% RH

### Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class A)

## Ordering Information

- **EKI-1521** 1-port RS-232/422/485 Serial Device Server
- **EKI-1522** 2-port RS-232/422/485 Serial Device Server
- **EKI-1524** 4-port RS-232/422/485 Serial Device Server
- **EKI-1521I** 1-port RS-232/422/485 Serial Device Server with wide operating temperature
- **EKI-1522I** 2-port RS-232/422/485 Serial Device Server with wide operating temperature
- **EKI-1524I** 4-port RS-232/422/485 Serial Device Server with wide operating temperature
- **EKI-1521CI** 1-port RS-422/485 Serial Device Server with wide operation temperature and isolation
- **EKI-1522CI** 2-port RS-422/485 Serial Device Server with wide operation temperature and isolation
- **EKI-1524CI** 4-port RS-422/485 Serial Device Server with wide operation temperature and isolation
- **OPT1-DB9** D-Sub9 to Terminal Converter

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EKI-1528/T

# EKI-1526/T

## 8-port RS-232/422/485 Serial Device Server

## 16-port RS-232/422/485 Serial Device Server



EKI-1528

EKI-1526



### Features

- 8 or 16-port RS-232/422/485 serial communication
- Provides 2 x 10/100 Mbps Ethernet ports for LAN redundancy
- Supports up to 921.6 kbps, and any baud rate setting
- Provides COM port redirection (Virtual COM), TCP and UDP operation modes
- Provides rich configuration methods: Windows utility, Telnet console, Web Browser, and serial console
- Built-in 15 KV ESD protection for all serial signals
- SNMP MIB-II for network management
- Built-in buzzer for easy location
- Standard 1U rackmount size
- Rear wiring
- Automatic RS-485 data flow control

### Introduction

The EKI-1528 and EKI-1526 are industrial-grade network-based serial device servers for connecting up to 8 or 16 serial RS-232/422/485 devices, such as CNCs, PLCs, scales and scanners, directly to a TCP/IP network. The EKI-1528 and EKI-1526 feature two independent Ethernet ports and MAC addresses to provide a redundant network mechanism to guarantee Ethernet network reliability. The EKI-1528 and EKI-1526 provide a simple and cost-effective way to bring the advantages of remote management and data accessibility to thousand of devices that can't connect to an Ethernet network. The EKI-1528 and EKI-1526 offer multiple ways to configure through Windows utility, Web Browser, serial console or Telnet console, these methods make it easy manage many EKI-1528 and EKI-1526 or serial devices on your network.

### Specifications

#### Ethernet Communications

- **Compatibility** IEEE 802.3, IEEE 802.3u
- **Speed** 10/100 Mbps, auto MDI/MDIX
- **No. of Ports** 2
- **Port Connector** 8-pin RJ45
- **Protection** Built-in 1.5 KV magnetic isolation

#### Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** EKI-1528/EKI-1528T: 8  
EKI-1526/EKI-1526T: 16
- **Port Connector** 8-pin RJ45
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS, DTR/DSR
- **Baud Rate** 50 bps ~ 921.6 kbps, any baud rate setting  
16 ports up to 230.4 kbps simultaneously
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, GND  
RS-422: TxD+, TxD-, RxD+, RxD-, GND  
RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals

#### Software

- **OS Support** 32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux
- **Utility Software** Advantech EKI Device Configuration Utility
- **Operation Modes** COM port redirection mode (Virtual COM)  
TCP/UDP server (polling) mode  
TCP/UDP client (event handling) mode  
Pair connection (peer to peer) mode  
RFC2217 mode
- **Configuration** Windows utility, Telnet console, Web Browser, serial console
- **Protocols** ARP, ICMP, IPv4, TCP, UDP, BOOTP/DHCP Client, Auto IP, Telnet, SNMP, HTTP, DNS, SMTP, NTP
- **Management** SNMP MIB-II

#### Mechanics

- **Dimensions (W x H x D)** 440 x 44 x 220 mm (17.32" x 1.73" x 8.66")
- **Enclosure** SECC chassis
- **Mounting** Rack

#### General

- **LED Indicators** System: Power, System Status  
LAN: Speed, Link/Active  
Serial: Tx, Rx
- **Alert Tools** Built-in buzzer and RTC (real time clock)
- **Reboot Trigger** Built-in WDT and push button for hardware reboot

#### Power Requirements

- **Power Input** EKI-1528/EKI-1526: 100 ~ 240 VAC, 47 ~ 63 Hz  
EKI-1528T/EKI-156T: 48 VDC, Terminal Block
- **Power Consumption** EKI-1528/EKI-1528T: 10 W  
EKI-1526/EKI-1526T: 12 W

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 5 ~ 95% RH

#### Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class A)

### Ordering Information

- **EKI-1528** 8-port RS-232/422/485 Serial Device Server
  - **EKI-1526** 16-port RS-232/422/485 Serial Device Server
  - **EKI-1528T-VDC** 8-port RS-232/422/485 Serial Device Server w/ DC Input
  - **EKI-1526T-VDC** 16-port RS-232/422/485 Serial Device Server w/ DC Input
- \*All items include 1pc OPT1J

#### Accessories

- **OPT1I** 1 m RJ45 to DB9 Male Cable
- **OPT1J** 30 cm RJ45 to DB9 Male Cable
- **1702002600** Power Cable US Plug 1.8 m
- **1702002605** Power Cable EU Plug 1.8 m
- **1702031801** Power Cable UK Plug 1.8 m
- **1702031836** Power Cable China/Australia Plug 1.8 m

# EKI-1221/CI/I

# EKI-1222/CI/I

# EKI-1224/CI/I

1-port Modbus Gateway

2-port Modbus Gateway

4-port Modbus Gateway



EKI-1221

EKI-1222

EKI-1224



## Features

- Provides 2 x 10/100 Mbps Ethernet ports for LAN redundancy
- Integration of Modbus TCP and Modbus RTU/ASCII networks
- Supports up to 921.6 kbps, and any baud rate setting
- Supports up to 16 connections and 32 requests simultaneously
- Auto searching slave ID over configuration utility
- Software selectable RS-232/422/485 communication
- Mounts on DIN-rail and Wall mount
- Built-in 15 KV ESD protection for all serial signals
- Automatic RS-485 data flow control
- Supports surge protection for D.C. power ports with line to line 2 KV, and line to earth 4 KV; for signal ports with 4 KV.
- 'I' models support a wide operating temperature
- 'CI' models support auto isolation and wide operating temperature

## Introduction

The EKI-1200 series Modbus gateways are bi-directional gateways for integrating new and existing Modbus/RTU and Modbus/ASCII serial devices to newer TCP/IP networked-based devices. The EKI-1221/1222/1224 feature two independent Ethernet ports and MAC addresses to provide a redundant networking mechanism to guarantee Ethernet networking reliability. They provide a simple and cost-effective way to bring the advantage of remote management and data accessibility to thousand of devices that can not connect to a network. The EKI-1221/1222/1224 provide a feature that can allow users to select master or slave operation mode for each serial port. They not only allow an Ethernet master to control serial slaves, but also allow serial masters to control Ethernet slaves.

## Specifications

### Ethernet Communications

- **Compatibility** IEEE 802.3, IEEE 802.3u
- **Speed** 10/100 Mbps
- **No. of Ports** 2
- **Port Connector** 8-pin RJ45
- **Protection** Built-in 1.5 KV magnetic isolation

### Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports**
  - EKI-1221: 1
  - EKI-1222: 2
  - EKI-1224: 4
- **Port Connector** DB9 male
- **Data Bits** 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS, DTR/DSR
- **Baud Rate** 50 bps ~ 921.6 kbps, any baud rate setting
- **Serial Signals**
  - RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND
  - RS-422: TxD+, TxD-, RxD+, RxD-, GND
  - RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals  
'CI' models: 2KV Isolation for RS-422/485 signals

### Software

- **OS Support** 32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux
- **Utility Software** Advantech EKI Device Configuration Utility
- **Operation Modes** Modbus RTU Master/Slave mode  
Modbus ASCII Master/Slave mode
- **Configuration** Windows Utility, Web Browser
- **Protocols** Modbus RTU, Modbus TCP, Modbus ASCII

### General

- **LED Indicators** System: Power, System Status  
LAN: Speed, Link/Active  
Serial: Tx, Rx
- **Reboot Trigger** Built-in WDT (watchdog timer)

### Mechanics

- **Dimensions (W x H x D)**
  - EKI-1221/1222: 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
  - EKI-1224: 55 x 140 x 95 mm (2.17" x 5.51" x 3.74")
- **Enclosure** Metal with solid mounting hardware
- **Mounting** DIN-rail, Wall
- **Weight**
  - EKI-1221: 0.592 Kg
  - EKI-1222: 0.6 Kg
  - EKI-1224: 0.668 Kg

### Power Requirements

- **Power Input** 12 ~ 48 V<sub>dc</sub>, redundant dual inputs
- **Power Connector** Terminal block
- **Power Consumption**
  - EKI-1221: 5.2 W
  - EKI-1222: 5.2 W
  - EKI-1224: 6.3 W

### Environment

- **Operating Temperature** EKI-1221/EKI-1222/EKI-1224: -10 ~ 60°C (14 ~ 140°F)  
'CI' & 'I' models: -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 5 ~ 95% RH

### Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class A)

## Ordering Information

- **EKI-1221** 1-port RS-232/422/485 Modbus Gateway
- **EKI-1222** 2-port RS-232/422/485 Modbus Gateway
- **EKI-1224** 4-port RS-232/422/485 Modbus Gateway
- **EKI-1221I** 1-port RS-232/422/485 Modbus Gateway with Wide Operating Temperature
- **EKI-1222I** 2-port RS-232/422/485 Modbus Gateway with Wide Operating Temperature
- **EKI-1224I** 4-port RS-232/422/485 Modbus Gateway with Wide Operating Temperature
- **EKI-1221CI** 1-port RS-422/485 Modbus Gateway with Wide Operation Temperature and Isolation
- **EKI-1222CI** 2-port RS-422/485 Modbus Gateway with Wide Operation Temperature and Isolation
- **EKI-1224CI** 4-port RS-422/485 Modbus Gateway with Wide Operation Temperature and Isolation
- **OPT1-DB9** D-Sub9 to Terminal Converter

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# EKI-1221D

# EKI-1222D

## 1-port Modbus Gateway with Integrated Ethernet Cascading

## 2-port Modbus Gateway with Integrated Ethernet Cascading



EKI-1221D

EKI-1222D



### Features

- Provides 2 x 10/100 Mbps Ethernet ports for Daisy-Chain connectivity
- Integration of Modbus TCP and Modbus RTU/ASCII networks
- Supports Ethernet auto-bypass function
- Master mode supports 32 TCP slaves at the same time
- Slave mode supports up to 16 TCP masters
- Supports mapping Modbus slave ID option
- Auto searching Modbus slave ID over configuration utility
- Mounts on DIN-rail and Wall mount
- Class I, Division 2 certification

### Introduction

The EKI-1200 series Modbus gateways are bi-directional gateways for integrating new and existing Modbus/RTU and Modbus/ASCII serial devices to newer TCP/IP networked-based devices. The EKI-1221D/1222D feature two Ethernet ports with one IP address for easier network wiring. One port can be used to connect to the network, and the other port can be used to connect to another Ethernet device or another EKI-1221D/1222D. They provide a simple and cost-effective way to bring the advantage of remote management and data accessibility to thousand of devices that can not connect to a network. The EKI-1221D/1222D provide a feature that can allow users to select master or slave operation mode for each serial port. They not only allow an Ethernet master to control serial slaves, but also allow serial masters to control Ethernet slaves.

### Specifications

#### Ethernet Communications

- **Compatibility** IEEE 802.3, IEEE 802.3u
- **Speed** 10/100 Mbps
- **No. of Ports** 2
- **Port Connector** 8-pin RJ45
- **Protection** Built-in 1.5 KV magnetic isolation

#### Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** EKI-1221D: 1  
EKI-1222D: 2
- **Port Connector** DB9 male
- **Data Bits** 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS, DTR/DSR
- **Baud Rate** 50 bps ~ 921.6 kbps, any baud rate setting
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND  
RS-422: TxD+, TxD-, RxD+, RxD-, GND  
RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals

#### Software

- **OS Support** 32-bit/64-bit Windows XP/Vista/7/8/8.1, Windows Server 2003/2008/2008 R2/2012/2012 R2, Windows CE 5.0, and Linux
- **Utility Software** Advantech EKI Device Configuration Utility
- **Operation Modes** Modbus RTU Master/Slave mode  
Modbus ASCII Master/Slave mode
- **Configuration** Windows Utility, Web Browser
- **Protocols** Modbus RTU, Modbus TCP, Modbus ASCII

#### General

- **LED Indicators** System: Power, System Status  
LAN: Speed, Link/Active  
Serial: Tx, Rx
- **Reboot Trigger** Built-in WDT (watchdog timer)

#### Mechanics

- **Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- **Enclosure** Metal with solid mounting hardware
- **Mounting** DIN-rail, Wall
- **Weight** EKI-1221D: 0.58 Kg  
EKI-1222D: 0.588 Kg

#### Power Requirements

- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Power Connector** Terminal block
- **Power Consumption** EKI-1221D: 2 W  
EKI-1222D: 2.5 W

#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 5 ~ 95% RH

#### Regulatory Approvals

- **EMC** EN 55022, EN 55011, EN 61000-6-4, IEC 61000-4-2/3/4/5/6/8, FCC 47 CFR Part 15 Subpart B (Class A)
- **Hazardous Location** Class I, Division 2


### Ordering Information

- **EKI-1221D** 1-port Modbus Gateway with Ethernet Cascading
- **EKI-1222D** 2-port Modbus Gateway with Ethernet Cascading
- \* All items include 1 pc OPT1-DB9 D-Sub9 to Terminal Converter
- **OPT1-DB9** D-Sub9 to Terminal Converter

# Serial Communication Cards

<b>Serial Communication Card Selection Guide</b>		<b>11-2</b>
<b>PCI &amp; Universal Communication Cards</b>		
<b>PCI-1602UP</b>	2-port RS-422/485 Low-Profile Universal PCI Communication Card with Isolation Protection	<b>11-4</b>
<b>PCI-1604UP</b>	2-port RS-232 Low-Profile Universal PCI Communication Card with Isolation Protection	
<b>PCI-1601</b>	2-port RS-422/485 Universal PCI Communication Card	<b>11-5</b>
<b>PCI-1602</b>	2-port RS-422/485 Universal PCI Communication Card with Isolation Protection	
<b>PCI-1603</b>	2-port RS-232/Current-loop Universal PCI Communication Card with Isolation Protection	
<b>PCI-1610</b>	4-port RS-232 Universal PCI Communication Card	<b>11-6</b>
<b>PCI-1612</b>	4-port RS-232/422/485 Universal PCI Communication Card	
<b>PCI-1620</b>	8-port RS-232 Universal PCI Communication Card	<b>11-7</b>
<b>PCI-1622</b>	8-port RS-422/485 Universal PCI Communication Card	
<b>PCI Express Communication Cards</b>		
<b>PCIE-1602</b>	2-port RS-232/422/485 PCI-express PCI Comm. Card	<b>11-8</b>
<b>PCIE-1604</b>	2-port RS-232 PCI-express PCI Comm. Card	
<b>PCIE-1610</b>	4-port RS-232/422/485 PCI-express PCI Comm. Card	
<b>PCIE-1612</b>	4-port RS-232 PCI-express PCI Comm. Card	
<b>PCIE-1620</b>	8-port RS-232 PCI Express Communication Card	<b>11-9</b>
<b>PCIE-1622</b>	8-port RS-232/422/485 PCI Express Communication Card	
<b>CAN Communication Cards</b>		
<b>PCIE-1680</b>	2-Port CAN-Bus PCIE card with Isolation Protection	<b>11-10</b>
<b>PCL-841</b>	2-port CAN-bus ISA Card with Isolation Protection	<b>11-11</b>
<b>PCI-1680U</b>	2-port CAN-bus Universal PCI Card with Isolation Protection	
<b>PCM-3680/I</b>	2-port CAN-bus PC/104 / PCI-104 Module with Isolation Protection	
<b>PC/104 &amp; PCI-104 Communication Modules</b>		
<b>PCM-3610</b>	2-port RS-232/422/485 PC/104 Module with Isolation Protection	<b>11-12</b>
<b>PCM-3612</b>	2-port RS-422/485 PC/104 Module	
<b>PCM-3614</b>	4-port RS-422/485 High-speed PC/104 Module	
<b>PCM-3618</b>	8-port RS-422/485 High-speed PC/104 Module	<b>11-13</b>
<b>PCM-3640/3641</b>	4-port RS-232 High-speed PC/104 Module	
<b>PCM-3660</b>	Jumperless Ethernet PC/104 Module	
<b>PCM-3614I</b>	4-port RS-232/422/485 PCI-104 Module	<b>11-14</b>
<b>PCM-3641I</b>	4-port RS-232 PCI-104 Module	

To view all of Advantech's Serial Communication Cards, please visit [www.advantech.com/products](http://www.advantech.com/products).

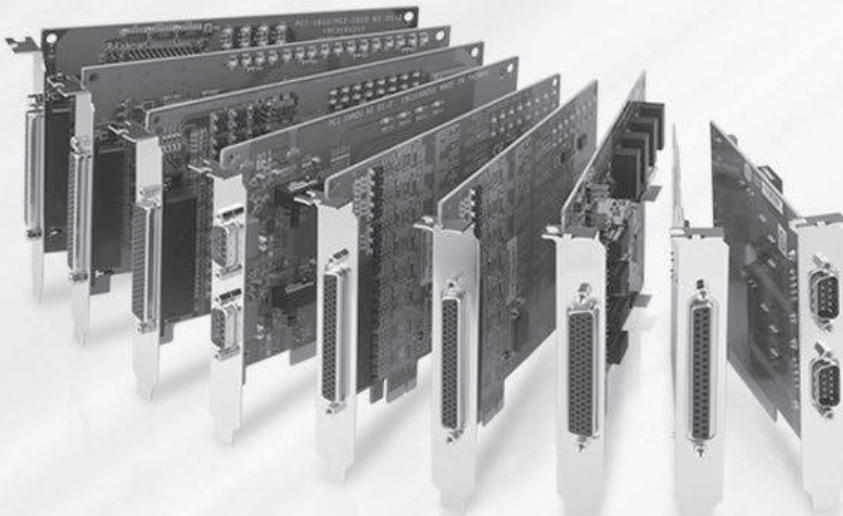

# Serial Communication Card Selection Guide

## Serial Communication Cards



Bus		Universal Low-Profile PCI			Universal PCI			
Model Name		PCI-1602UP	PCI-1604UP	PCI-1601A/B	PCI-1602	PCI-1603	PCI-1610A/B	PCI-1610C
Number of Ports		2	2	2	2	2	4	4
Communication Interfaces	Current Loop	-	-	-	-	V	-	-
	RS-232	-	V	-	-	V	V	V
	RS-422	V	-	V	V	-	-	-
	RS-485	V	-	V	V	-	-	-
CAN		-	-	-	-	-	-	-
Driver		32-bit/64-bit Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX						
Protection	ESD	8KV (air), 4KV (contact)						
	Isolation	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>
Cable Connector Type		DB9 Male	DB9 Male	-	-	-	DB9 Male	DB9 Male
Page		12-4	12-4	12-5	12-5	12-5	12-6	12-6



Bus		Universal PCI				
Model Name		PCI-1620A/B	PCI-1612C	PCI-1612A/B	PCI-1622B	PCI-1622C
Number of Ports		4	4	8	8	8
Communication Interfaces	Current Loop	-	-	-	-	-
	RS-232	V	V	V	-	-
	RS-422	V	V	-	V	V
	RS-485	V	V	-	V	V
CAN		-	-	-	-	-
Driver		32-bit/64-bit Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX				
Protection	ESD	8KV (air), 4KV (contact)				
	Isolation	-	2,500 V <sub>DC</sub>	-	-	2,500 V <sub>DC</sub>
Cable Connector Type		DB9 Male	DB9 Male	-	-	-
Page		12-6	12-6	12-6	12-7	12-7

**NEW** **NEW** **NEW** **NEW** **NEW**



Bus		PCI Express							CAN-bus PCI	CAN-bus ISA	
Model Name		PCIE-1602	PCIE-1604	PCIE-1610	PCIE-1612	PCIE-1620	PCIE-1622	PCIE-1680	PCI-1680U	PCL-841	
Number of Ports		2	2	4	4	8	8	2	2	2	
Communication Interfaces	RS-232	V	V	V	V	V	V	-	-	-	
	RS-422	V	-	-	V	-	V	-	-	-	
	RS-485	V	-	-	V	-	V	-	-	-	
	CAN	-	-	-	-	-	-	V	V	V	
Driver		Windows Xp, 7, 8, 8.1, 10, server 2008, server2012, Linux, Qnx and Vxworks							32-bit/64-bit Windows 2000/XP/Vista/7, Linux, and QNX		
Protection	ESD	15KV (air), 8KV (contact)							8KV (air), 4KV (contact)		
	Isolation	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	2,500 V <sub>DC</sub>	1,000 V <sub>DC</sub>	1,000 V <sub>DC</sub>	
Cable Connector Type		-	-	-	-	-	-	-	-	-	
Page		11-8	11-8	11-8	11-8	11-9	11-9	11-10	11-11	11-11	




## PC/104 Communication Modules



Bus		PC/104						
Model Name		PCM-3680	PCM-3660	PCM-3610	PCM-3612	PCM-3614	PCM-3618	PCM-3640/3641
Ports		2	2	2	2	4	8	4
Communication Interfaces	Ethernet	-	V	-	-	-	-	-
	RS-232	-	-	V	-	-	-	V
	RS-422	-	-	V	V	V	V	-
	RS-485	-	-	V	V	V	V	-
	CAN	V	-	-	-	-	-	-
Protection	ESD	8KV (air), 4KV (contact)						
	Isolation	2,500 V <sub>dc</sub>	-	2,500 V <sub>dc</sub>	-	-	-	-
Cable Connector Type		-	-	-	-	-	-	-
Page		12-11	12-13	12-12	12-12	12-12	12-13	12-13

## PCI-104 Communication Modules



Bus		PCI-104		
Model Name		PCM-3680I	PCM-3614I	PCM-3641I
Ports		2	4	4
Communication Interfaces	Current Loop	-	-	-
	RS-232	-	V	V
	RS-422	-	V	-
	RS-485	-	V	-
	CAN	V	-	-
Protection	ESD	8KV (air), 4KV (contact)		
	Isolation	2,500 V <sub>dc</sub>	-	-
Cable Connector Type		-	-	-
Page		12-11	12-14	12-14

## Accessories




Model Name		1700018791	OPT4A	OPT8C	OPT8H	OPT8J
Length		30 cm	30 cm	1 m	1 m	1 m
Communication Interfaces	Connector Type	DB37 Male	DB37 Male	DB62 Male	DB62 Male	DB78
	Qty	1	1	1	1	1
	Connector Type	DB25 Male	DB9 Male	DB25 Male	DB9 Male	DB9 Male
	Qty	4	4	8	8	8
Where Used		PCI-1610, PCI-1610C, PCI-1612, PCI-1612C, PCIE-1610B, PCI-1612B, PCI-1612C	PCI-1610, PCI-1610C, PCI-1612, PCI-1612C, PCIE-1610B, PCI-1612B, PCI-1612C	PCI-1620, PCIE-1620A, PCIE-1622A, PCIE-1622B,	PCI-1620, PCIE-1620A, PCIE-1622A, PCIE-1622B	PCI-1622, PCI-1622C, PCIE-1622C
Page		online	online	online	online	online

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1602UP PCI-1604UP

**2-port RS-422/485 Low-Profile Universal PCI Communication Card with Isolation Protection**

**2-port RS-232 Low-Profile Universal PCI Communication Card with Isolation Protection**

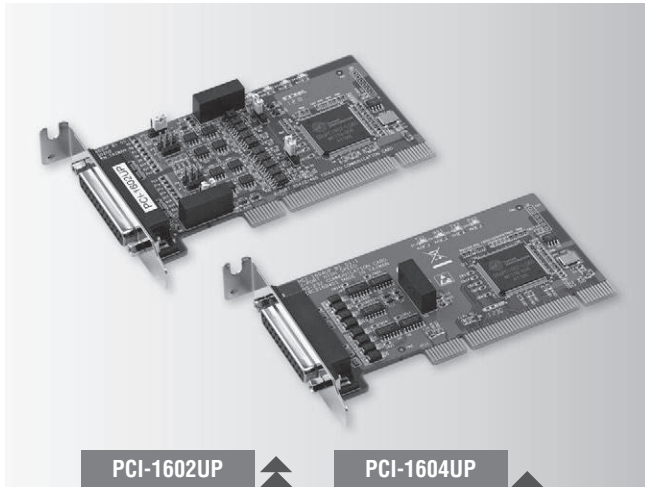

## Features

- PCI bus 2.2 compliant
- Speeds up to 921.6 kbps
- 2-port RS-422/485 (PCI-1602UP); 2-port RS-232 (PCI-1604UP)
- I/O address automatically assigned by PCI Plug & Play
- OS support: Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux
- 2,500 V<sub>DC</sub> EFT Protection
- 2,500 V<sub>DC</sub> Isolation protection for RS-422/485 (PCI-1602UP) or RS-232 (PCI-1604UP)
- Interrupt status register for increased performance
- Space reserved for termination resistors (PCI-1602UP)
- Automatic RS-485 data flow control (PCI-1602UP)
- Powerful and easy-to-use utility (ICOM Tools)
- Universal and low-profile PCI (Supports 3.3 V or 5 V PCI bus signal)

## Introduction

These RS-232/422/485 PCI communication cards are compatible with the PCI 2.2 bus specification for universal connectivity and low-profile PCI cards. The PCI-1604UP provides two independent RS-232 ports, while the PCI-1602UP has two RS-422/485 ports. To improve system performance, all cards allow transmission rates up to 921.6 kbps. To increase reliability, the cards offer EFT protection, protecting your system from abrupt high voltages up to 2,500 V<sub>DC</sub>. High-performance OXuPC1952 and OXuPC1954 UARTs with 128-byte FIFO, reduces the CPU load, making the cards especially suitable for multitasking environments.

The cards follow the Low Profile PCI MD1 standard. This standard has the same protocol and electronic definition as standard PCI, but the low-profile PCI standard is smaller. Thus, the cards are suitable for embedded systems, and size-constrained environments. Moreover, all cards are equipped with an universal PCI connector, which allows support for traditional systems with 5 V signaling or newer systems with 3.3 V signaling.

## Specifications

### General

- **Bus Type** Universal PCI V 2.2
- **Certification** CE, FCC class A
- **Connectors** 1 x Female DB25
- **Dimensions (L x W)** 119.91 x 64.41 mm (4.7" x 2.5") (low-profile MD1)
- **Power Consumption** 5 V @ 400 mA (Max.)

### Communications

- **Communication Controller** OXuPC1952
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: Tx+, Rx+, RTS, CTS, DTR, DSR, DCD, RI, GND  
RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-, GND  
RS-485: Data+, Data-, GND
- **FIFO** 128 bytes
- **Flow Control** CTS/RTS, Xon/Xoff
- **IRQ** Assigned by Plug & Play
- **Parity** None, Even, Odd, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

### Protection

- **EFT Protection** 1 KV
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **ESD Protection** 8KV (air), 4KV (contact)

### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX

### Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- **PCI-1602UP** 2-port RS-422/485 Low-Profile Uni PCI Comm Card w/Iso
- **PCI-1604UP** 2-port RS-232 Low-Profile Uni PCI Comm Card w/Iso


Note: PCI-1602UP and PCI-1604UP include one DB25 to 2 x DB9 cable

# PCI-1601 PCI-1602 PCI-1603

**2-port RS-422/485 Universal PCI Communication Card**

**2-port RS-422/485 Universal PCI Communication Card with Isolation Protection**

**2-port RS-232/Current-loop Universal PCI Communication Card with Isolation Protection**

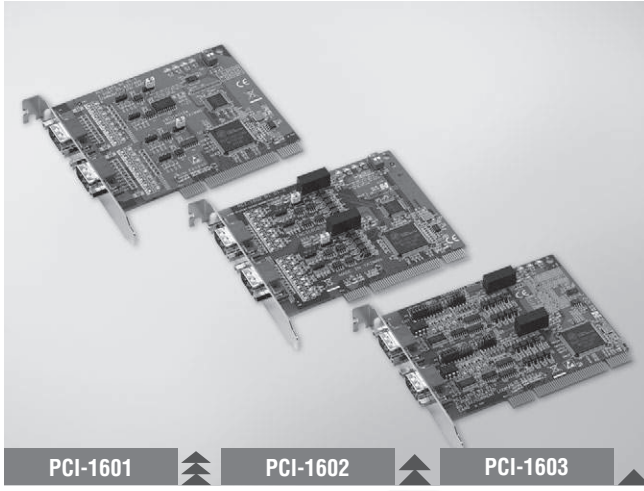

## Features

- PCI bus 2.2 compliant
- Supports serial speed up to 921.6 kbps, and any baud rate setting
- 2-port RS-422/485 interface (PCI-1601/PCI-1602)
- 2 independent RS-232 or Current-loop serial ports (PCI-1603)
- I/O address automatically assigned by PCI Plug & Play
- OS supported: Windows 2K/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX
- Interrupt status register for increased performance

## Introduction

The PCI-1601 and PCI-1602 are two RS-422/485 PCI communication cards that are compatible with the PCI 2.2 bus specification. Both cards provide EFT protected RS-422/485 ports, and come with features such as: high transmission speed of 921.6 kbps, optional isolation protection, windows utility software and more. The cards also come with high-performance OXuPCI952 UART with a 128-byte FIFO to reduce CPU load. This makes the PCI-1601 and PCI-1602 especially suitable for multitasking environments.

The PCI-1603 offers a versatile range of high-speed interfacing options. You can switch its ports between the popular RS-232 or noise-resistant current-loop. The card utilizes OXuPCI952 UART with 128-byte FIFO buffer for faster and more reliable communication, especially under multi-tasking environments such as Windows operating systems. The card utilizes OXuPCI952 UART that buffers data into packets before sending it to the bus. This drastically reduces CPU load and avoids data loss when the system is busy and cannot process an interrupt quickly. These FIFO buffers make the PCI-1603 especially suitable for high speed serial I/O under Windows.

## Specifications

### General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** 2 x Male DB9
- **Dimensions (L x W)** 123 x 92 mm (4.8" x 3.6")
- **Power Consumption** 300 mA @ +5V

### Current-loop Interface (PCI-1603)

- **Baud-rate** 50 ~ 57600 bps
- **Current Value** 20 mA (Standard)
- **Mode** Asynchronous, full duplex
- **Signal Driver/Receiver** 6N136
- **Signals** TxD+, TxD-, RxD+, RxD-
- **Transmission Distance** 1,000 m (RS-422/485 mode only)

### Communications

- **Communications Controller** OXuPCI952
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-, GND  
RS-485: Data+, Data-, GND  
RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- **FIFO** 128 bytes
- **Flow Control** RTS/CTS. Xon/Xoff
- **IRQ** Assigned by Plug & Play
- **Parity** None, Even, Odd, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps, any baud rate setting  
230.4 kbps (PCI-1601B, PCI-1602 and PCI-1603 in Current-loop mode only)
- **Stop Bits** 1, 1.5, 2

### Protection

- **ESD Protection** 8 KV (air), 4 KV (contact)
- **EFT Protection** 1 KV

Model Name	Surge Protection	Isolation Protection
PCI-1601A	-	-
PCI-1601B	1000 V <sub>DC</sub>	-
PCI-1602	1000 V <sub>DC</sub>	2500 V <sub>DC</sub>
PCI-1603	1000 V <sub>DC</sub>	2500 V <sub>DC</sub>

### Software

- **Bundled Software** ICOM Tools
- **OS Support** 32-bit/64-bit Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX

### Environment

- **Humidity (Operating)** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 144°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Regulatory Approvals

- **EMC** EN 55011: 2009 + A1:2010, Group 1, Class A  
EN 55022: 2010, Class A  
EN 61000-6-4: 2007  
EN 55024: 2010  
EN 61000-6-2: 2005  
IEC 61000-4-2: 2008  
IEC 61000-4-3: 2006 +A1: 2007 +A2: 2010  
IEC 61000-4-4: 2010  
IEC 61000-4-6: 2008  
IEC 61000-4-8: 2009  
FCC 47 CFR Part 15 Subpart B (Class B), IC ICES-003 (2004)

## Ordering Information

- **PCI-1601A** 2-port RS-422/485 PCI Comm. Card
- **PCI-1601B** 2-port RS-422/485 PCI Comm. Card w/Surge
- **PCI-1602** 2-port RS-422/485 PCI Comm. Card w/Surge-Iso
- **PCI-1603** 2-port RS-232/Current Loop PCI Comm. Card w/Surge-Iso

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules


17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# PCI-1610 PCI-1612

## 4-port RS-232 Universal PCI Communication Card

## 4-port RS-232/422/485 Universal PCI Communication Card

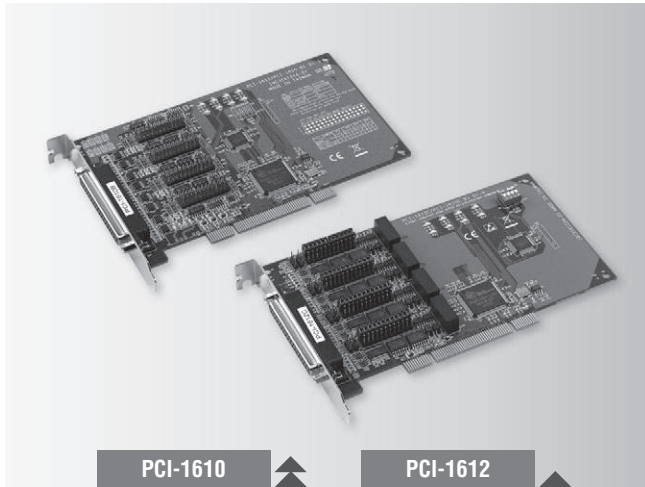

### Features

- PCI bus 2.2 compliant
- Supports serial speed up to 921.6 kbps, and any baud rate setting
- 4-port RS-232 (PCI-1610), 4-port RS-232/422/485 (PCI-1612)
- OXuPCI954 UART with 128-byte FIFO standard
- I/O address automatically assigned by PCI Plug & Play
- OS supported: Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX
- Interrupt status register for increased performance
- Powerful and easy to use utility (ICOM Tools)
- Universal PCI, supports 3.3 V or 5 V PCI bus signal
- 1,000 V<sub>DC</sub> surge protection
- 2,500 V<sub>DC</sub> isolation protection (PCI-1610C and PCI-1612C only)

### Introduction

The PCI-1610 is a four port RS-232, and PCI-1612 is a four port RS-232/422/485 PCI communication card that are compatible with the PCI 2.2 bus specification, and offer transmission speeds up to 921.6 kbps. They also support any baud rate setting, for example 500 kbps is acceptable. The PCI-1610 and PCI-1612 also come with high-performance OXuPCI954 UART with 128-byte FIFO to reduce CPU load. These components make your system more stable and reliable. Thus, the PCI-1610 and PCI-1612 are especially suitable for multitasking environments.

Both the PCI-1610 and PCI-1612 have an universal PCI connector that is compatible with both the latest 3.3 V signaling systems and the traditional 5V signaling system. This gives high compatibility and allows usage in diverse systems. To further increase reliability, the cards can protect your system from abrupt high voltages up to 2,000 voltage thanks to EFT protection technology. PCI-1610C and PCI-1612C also provide 2,500 voltage optical isolation to protect your PC and equipment against damages from ground loops in harsh environments.

### Specifications

#### General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** 1 x Female DB37
- **Dimensions (L x W)** 185 x 100 mm (7.3" x 3.9")
- **Power Consumption** 180 mA @ +5 V

#### Communications

- **Communication Controller** OXuPCI954
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND (PCI-1610, PCI-1612)  
RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS- (PCI-1612)  
RS-485: Data+, Data- (PCI-1612)
- **FIFO** 128 bytes
- **Flow Control** RTS/CTS, Xon/Xoff
- **IRQ** Assigned by Plug & Play
- **Parity** None, Even, Odd, Mark and Space
- **Stop Bits** 1, 1.5, 2
- **Speed** 50 bps ~ 921.6 kbps, any baud rate setting  
230.4 kbps (PCI-1610B/C and PCI-1612B/C only)

#### Protection

- **ESD Protection** 8KV (air), 4KV (contact)
- **EFT Protection** 1 KV

Model Name	Surge Protection	Isolation Protection
PCI-1610A	-	-
PCI-1610B	1000 V <sub>DC</sub>	-
PCI-1610C	1000 V <sub>DC</sub>	2500 V <sub>DC</sub>
PCI-1612A	-	-
PCI-1612B	1000 V <sub>DC</sub>	-
PCI-1612C	1000 V <sub>DC</sub>	2500 V <sub>DC</sub>

#### Software

- **Bundled Software** ICOM Tools
- **OS Support** 32-bit/64-bit Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX

#### Environment

- **Operating Humidity** 5 ~ 95% RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 144°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

#### Regulatory Approvals

- **EMC** EN 55011: 2009 + A1:2010, Group 1, Class A  
EN 55022: 2010, Class A  
EN 61000-6-4: 2007  
EN 55024: 2010  
EN 61000-6-2: 2005  
IEC 61000-4-2: 2008  
IEC 61000-4-3: 2006 +A1: 2007 +A2: 2010  
IEC 61000-4-4: 2010  
IEC 61000-4-6: 2008  
IEC 61000-4-8: 2009  
FCC 47 CFR Part 15 Subpart B (Class B), IC ICES-003

### Ordering Information

- **PCI-1610A** 4-port RS-232 PCI Comm. Card
- **PCI-1610B** 4-port RS-232 PCI Comm. Card w/Surge
- **PCI-1610C** 4-port RS-232 PCI Comm. Card w/Surge+Iso
- **PCI-1612A** 4-port RS-232/422/485 PCI Comm. Card
- **PCI-1612B** 4-port RS-232/422/485 PCI Comm. Card w/Surge
- **PCI-1612C** 4-port RS-232/422/485 PCI Comm. Card w/Surge+Iso

Note: this series includes cable OPT4A.


#### Accessories

- **OPT4A** DB37 x1 to DB9 x4 Cable, 30cm
- **1700018791** DB37 x1 to DB25 x4 Cable, 30cm

# PCI-1620 PCI-1622

## 8-port RS-232 Universal PCI Communication Card

## 8-port RS-422/485 Universal PCI Communication Card

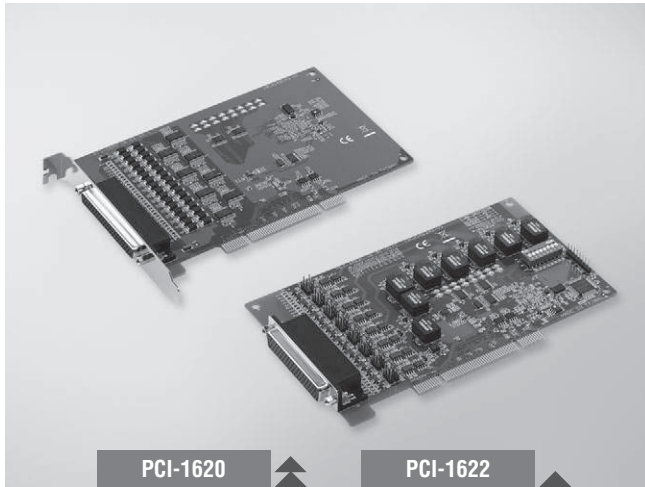

PCI-1620

PCI-1622



### Introduction

The PCI-1620 is an eight port RS-232, and PCI-1622 is an eight port RS-422/485 PCI communication card that are compatible with the PCI 2.2 bus specification, and offer transmission speeds up to 921.6 kbps. They also support any baud rate setting, for example 500 kbps is acceptable. PCI-1620 and PCI-1622 also come with high-performance OXuPC1954 UART with 128-byte FIFO to reduce CPU load. These components make your system more stable and reliable. Thus, the PCI-1620 and PCI-1622 are especially suitable for multitasking environments.

The PCI-1620 and PCI-1622 have an universal PCI connector that is compatible with both the latest 3.3 V signaling systems and the traditional 5V signaling system. This gives high compatibility and allows usage in diverse systems. To further increase reliability, the PCI-1620 and PCI-1622 offer EFT protection technology, protecting your system from electrical surges up to 2,500 volts. The PCI-1622C also provides 2,500 voltage optical isolation to protect your PC and equipment against damages from ground loops in harsh environments.

### Specifications

#### General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** PCI-1620: 1 x Female DB62  
PCI-1622: 1 x Female DB78
- **Dimensions (L x W)** 185 x 100 mm (7.3" x 3.9")
- **Power Consumption** 600 mA @ +5 V

#### Communications

- **Communication Controller** OXPci958
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND (PCI-1620)  
RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS- (PCI-1622)  
RS-485: Data+, Data- (PCI-1622)
- **FIFO** 128 bytes
- **Flow Control** RTS/CTS, Xon/Xoff
- **IRQ** Assigned by Plug & Play
- **Parity** None, Even, Odd
- **Speed** 50 bps ~ 921.6 kbps, any baud rate setting  
230.4 kbps (PCI-1622C only)
- **Stop Bits** 1, 1.5, 2

#### Protection

- **ESD Protection** 8KV (air), 4KV (contact)
- **EFT Protection** 1 KV

Model Name	Surge Protection	Isolation Protection
PCI-1620A	-	-
PCI-1620B	1000 V <sub>DC</sub>	-
PCI-1622B	1000 V <sub>DC</sub>	-
PCI-1622C	1000 V <sub>DC</sub>	2500 V <sub>DC</sub>

### Features

- PCI bus 2.2 compliant
- Supports serial speed up to 921.6 kbps, and any baud rate setting
- 8-port RS-232, or 8-port RS-422/485
- OXPci958 UARTs with 128-byte FIFOs standard
- I/O address automatically assigned by PCI Plug & Play
- OS supported: Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux, and QNX
- Interrupt status register for increased performance
- Space reserved for termination resistors
- Automatic RS-422 data flow control
- Powerful and easy to use utility (ICOM Tools)
- Universal PCI, supports 3.3 V or 5 V PCI bus signal
- 1,000 V<sub>DC</sub> surge protection and 2,500 V<sub>DC</sub> isolation protection (PCI-1622C only)

#### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 2000/XP/Vista/7, Windows CE 5.0/6.0, Linux and QNX

#### Environment

- **Operating Humidity** 5 ~ 95% RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 144°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

#### Regulatory Approvals

- **EMC** EN 55022, EN 61000-3-2, EN 61000-3-3, EN 55044 including (IEC 61000-4-2/3/4/5/6/8/11), FCC Part 15 Subpart B

### Ordering Information

- **PCI-1620A** 8-port RS-232 PCI Comm. Card w/Surge
- **PCI-1620B** 8-port RS-232 PCI Comm. Card w/Surge
- **PCI-1622B** 8-port RS-422/485 PCI Comm. Card w/Surge
- **PCI-1622C** 8-port RS-422/485 PCI Comm. Card w/Surge+Iso

#### Accessories

- **OPT8C** DB62 x1 to DB25 x8 Cable, 1m
- **OPT8H** DB62 x1 to DB9 x8 Cable, 1m
- **OPT8J** DB78 x1 to DB9 x8 Cable, 1m

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards



# PCIE-1602 PCIE-1604 PCIE-1610 PCIE-1612

2-port RS-232/422/485 PCI Express Communication Card

2-port RS-232 PCI Express Communication Card

4-port RS-232 PCI Express Communication Card

4-port RS-232/422/485 PCI Express Communication Card

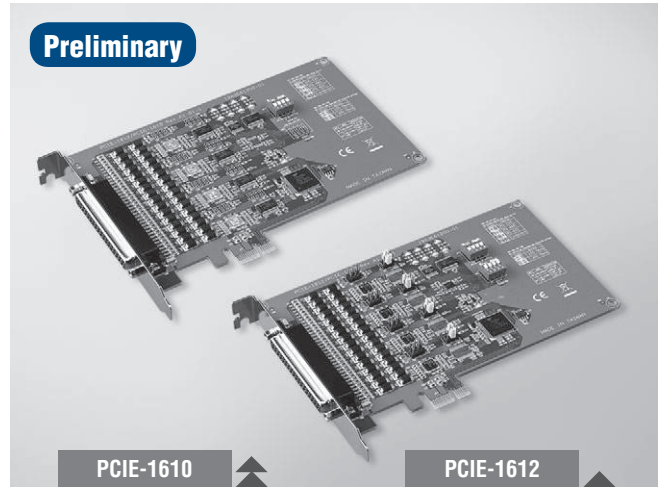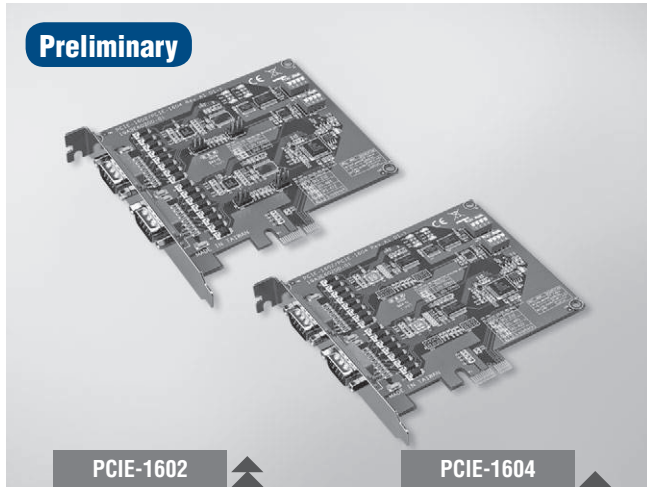

## Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS-232/422/485 ports
- Operating systems supported: Windows 2000/XP/Vista/7, and Linux 2.4/2.6
- XR17V352 with 256-byte FIFOs standard

## Specifications

### General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 2x male DB9
- **Dimensions (L x W)** 119.63 x 100 mm (4.71" x 3.9")
- **Power Consumption** 260 mA @ +3.3 V

### Communications

- **Comm. Controller** XR17V352
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps and any other baud rate setting 230.4 kbps
- **Stop Bits** 1, 1.5, 2

### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows Xp, win7, win8, win8.1, win10, server 2008, server2012, Linux 2.6.x, 3.x.x, Qnx 6.3, 6.5, Vxworks 6.9

### Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1602B	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	
PCIE-1602C	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	3000 V <sub>DC</sub>
PCIE-1604B	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	
PCIE-1604C	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	3000 V <sub>DC</sub>

## Ordering Information

- **PCIE-1602B** 2-port RS-232/422/485 PCI Express Comm. Card w/Surge
- **PCIE-1602C** 2-port RS-232/422/485 PCI Express Comm. Card w/Surge & Isolation
- **PCIE-1604B** 2-port RS-232 PCI Express Comm. Card w/Surge
- **PCIE-1604C** 2-port RS-232 PCI Express Comm. Card w/Surge & Isolation

## Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS-232/422/485 ports
- Operating systems supported: Windows 2000/XP/Vista/7, and Linux 2.4/2.6
- XR17V354 with 256-byte FIFOs standard

## Specifications

### General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 1x Female DB37
- **Dimensions (L x W)** 185 x 100 mm (7.3" x 3.9")
- **Power Consumption** 260 mA @ +3.3 V

### Communications

- **Comm. Controller** XR17V354
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps and any other baud rate setting 230.4 kbps
- **Stop Bits** 1, 1.5, 2

### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows Xp, win7, win8, win8.1, win10, server 2008, server2012, Linux 2.6.x, 3.x.x, Qnx 6.3, 6.5, Vxworks 6.9

### Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1610B	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	
PCIE-1612B	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	
PCIE-1612C	15KV (air), 8KV (contact)	2500 V	1000 V <sub>DC</sub>	3000 V <sub>DC</sub>

## Ordering Information

- **PCIE-1610B** 4-port RS-232 PCI Express Comm. Card w/Surge
- **PCIE-1612B** 4-port RS-232/422/485 PCI Express Comm. Card w/Surge
- **PCIE-1612C** 4-port RS-232/422/485 PCI Express Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

### Accessories

- **OPT4A** DB37 x1 to DB9 x4 Cable, 30cm
- **1700018791** DB37 x1 to DB25 x4 Cable, 30cm


# PCIE-1620

# PCIE-1622

## 8-port RS-232 PCI Express Communication Card

## 8-port RS-232/422/485 PCI Express Communication Card

Preliminary

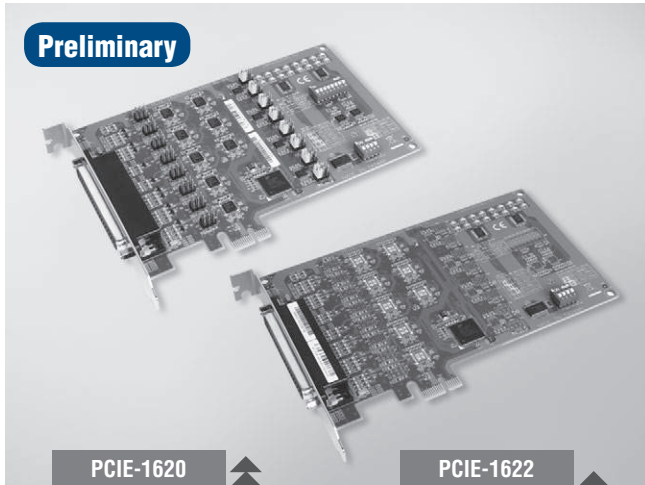

PCIE-1620

PCIE-1622



### Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 8 x RS-232 or RS-232/422/485 ports
- XR17V358 UART with 256-byte FIFOs

### Introduction

PCIE-1620 is an 8-port RS-232, and PCIE-1622 is an 8-port RS-232/422/485 PCI Express communication cards that are compatible with the PCI Express x1 specification. The cards provide eight EFT protected ports up to 2,500 V, and have many functions such as high transmission speed of 921.6 kbps; The cards utilizes high-performance XR17V358 UARTs with 256-byte FIFOs to reduce CPU load. Thus, the PCIE-1620 and PCIE-1622 are especially suitable for making reliable systems in multitasking environments.

### Specifications

#### General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 1x Female DB62 (PCIE-1620A/22A/22B)  
1x Female DB78 (PCIE-1622C)
- **Dimensions (L x W)** 168 x 111 mm (6.6" x 4.4")
- **Power Consumption** 260 mA @ +3.3 V

#### Communications

- **Comm. Controller** XR17V358
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI  
RS-422: Tx+, Tx-, Rx+, Rx- (PCIE-1622)  
RS-485: Data+, Data- (PCIE-1622)
- **FIFO** 256 bytes
- **Flow Control** RTS/CTS, Xon/Xoff
- **Parity** None, Odd, Even, Mark, or Space
- **Speed** 50 bps ~ 921.6 kbps and any other baud rate setting  
230.4 kbps (PCIE-1622B only)
- **Stop Bits** 1, 1.5, 2

#### Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1620A	15KV (air), 8KV (contact)	2500 V		
PCIE-1622A	15KV (air), 8KV (contact)	2500 V		
PCIE-1622B	15KV (air), 8KV (contact)	2500 V	1000 V	
PCIE-1622C	15KV (air), 8KV (contact)	2500 V	1000 V	3000 V <sub>DC</sub>

#### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows Xp, win7, win8, win8.1, win10, server 2008, server2012  
Linux 2.6.x, 3.x.x  
Qnx 6.3, 6.5  
Vxworks 6.9

#### Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **PCIE-1620A** 8-port RS-232 PCI-express Comm. Card
- **PCIE-1622A** 8-port RS-232/422/485 PCI-express Comm. Card
- **PCIE-1622B** 8-port RS-232/422/485 PCI-express Comm. Card w/ Surge Protection
- **PCIE-1622C** 8-port RS-232/422/485 PCI-express Comm. Card w/ Surge & Isolation Protection

### Accessories


- **OPT8C** DB62 x1 to DB25 x8 Cable, 1m
- **OPT8H** DB62 x1 to DB9 x8 Cable, 1m
- **OPT8J** DB78 x1 to DB9 x8 Cable, 1m

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCIE-1680

## 2-Port CAN-Bus PCIE card with Isolation Protection

NEW

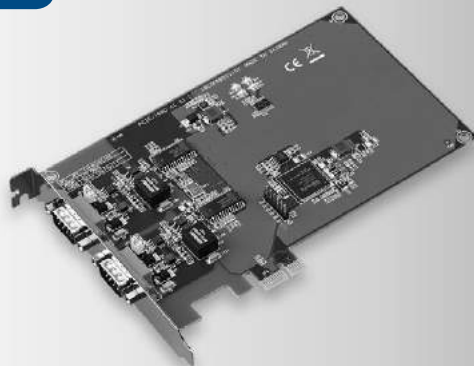

FCC CE

### Features

- PCIe bus specification 1.1 compliant
- Two independent CAN ports
- High speed transmission up to 1 Mbps
- 16 MHz CAN controller frequency
- Optical isolation protection of 2,500 V<sub>DC</sub>
- I/O address automatically assigned by PCI PnP
- Transmit/Receive status LED indicators
- Windows DLL library and examples included
- Supports Windows CE5/CE6/XP/7
- Supports Linux 2.4.xx / 2.6.xx; Intel x86 architecture

### Introduction

The PCIE-1680 is a special purpose communication card that offers connectivity to Controller Area Networks (CAN) on your PC. With its built-in CAN controllers, the PCIE-1680 provides bus arbitration and error detection with an automatic transmission repetition. This drastically reduces the chance of data loss and ensures system reliability. Both CAN controllers operate independently. The PCIE-1680 operates at baud rates up to 1 Mbps.

### Specifications

#### General

- **Bus Type** PCI Express 1.1
- **Certification** CE, FCC
- **Connectors** 2 x DB9 male connectors  
2 x 10 pin box wafer (optional)
- **Ports** 2
- **Power Consumption** 3.3 V @ 600 mA (Typical)

#### Communication

- **CAN Controller** NXP SJA-1000
- **CAN Transceiver** NXP TJA1051T
- **Signal Support** CAN\_H, CAN\_L
- **Protocol** CAN 2.0 A/B
- **Data Transfer Rate(bps)** Programmable up to 1 Mbps
- **CAN Frequency** 16MHz

#### Protection

- **Isolation Protection** 2,500 V<sub>DC</sub>

#### Mechanical and Environmental

- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F)  
(refer to IEC 60068-2-1, 2)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% Relative Humidity, non-condensing
- **Dimensions (L x W)** 168 x 111 mm(6.6" x 4.4")

### Ordering Information

- **PCIE-1680-AE** 2-Port CAN-Bus PCIE card with Isolation Protection




# PCL-841 PCI-1680U PCM-3680/I

## 2-port CAN-bus ISA Card with Isolation Protection

## 2-port CAN-bus Universal PCI Card with Isolation Protection


## 2-port CAN-bus PC/104 / PCI-104 Module with Isolation Protection

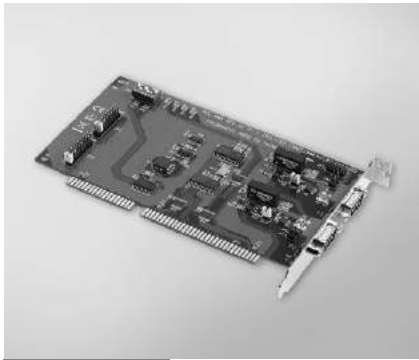

PCL-841




CE FCC

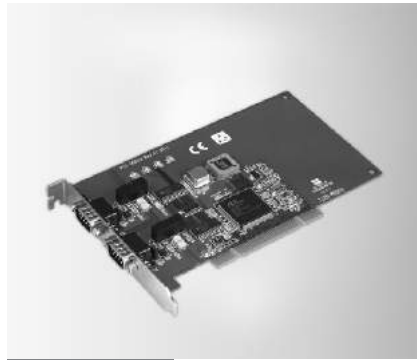

PCI-1680U



CE FCC

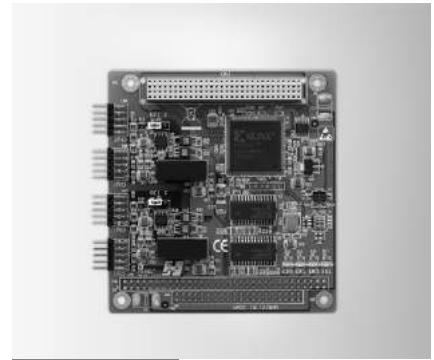

PCM-3680I



CE FCC

### Features

- Operates two separate CAN networks simultaneously
- High speed transmission up to 500 kbps
- Optical isolation protection of 1000 V<sub>DC</sub>
- Windows DLL library and examples included
- Wide IRQ selection for each port: IRQ 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- Supports 32-bit/64-bit Windows 2000/XP/Vista/7 and Linux

### Specifications

#### General

- Card Interface** ISA
- Certification** CE, FCC
- Connectors** 2 x DB9-M
- Dimensions** 185 x 100 mm (7.3" x 3.9")
- Ports** 2
- Power Consumption** 5 V @ 400 mA typical

#### Communications

- CAN Controller** SJA-1000
- CAN Transceiver** 82C250
- Protocol** CAN2.0 A/B
- Speed** 500 kbps
- IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, or 15
- Memory Segment Base Address** From C800H to EF00H
- Signal Support** CAN\_H, CAN\_L

#### Protection

- Isolation Protection** 1,000 V<sub>DC</sub>

#### Environment

- Operating Temp.** 0 ~ 50°C (32 ~ 122°F)

### Ordering Information

- PCL-841** 2-port CAN-bus ISA Comm. Card w/ Iso

### Features

- Operates two separate CAN networks simultaneously
- High speed transmission up to 1 Mbps
- Optical isolation protection of 1000 V<sub>DC</sub>
- Windows DLL library and examples included
- I/O address automatically assigned by PCI PnP
- Supports 32-bit/64-bit Windows 2000/XP/Vista/7 and Linux

### Specifications

#### General

- Card Interface** Universal PCI
- Certification** CE, FCC
- Connectors** 2 x DB9-M
- Dimensions** 175 x 107 mm (6.9" x 4.2")
- Ports** 2
- Power Consumption** 5 V @ 400 mA typical

#### Communications

- CAN Controller** SJA-1000
- CAN Transceiver** 82C250
- Protocol** CAN2.0 A/B
- Speed** 1 Mbps
- CAN Frequency** 16 MHz
- Signal Support** CAN\_H, CAN\_L

#### Protection

- Isolation Protection** 1,000 V<sub>DC</sub>

#### Environment

- Operating Temp.** 0 ~ 65°C (32 ~ 149°F)

### Ordering Information

- PCI-1680U** 2-port CAN Uni-PCI COMM Card w/Iso

### Features

- Operates two separate CAN networks simultaneously
- High speed transmission up to 1 Mbps
- 16 MHz CAN controller frequency
- Optical isolation protection
- Transmit/receive status LED indicators on each port
- Supports wide operating temperature
- Supports 32/64-bit WinXP/Vista/7 and Linux
- Supports WinCE 5.0/6.0

### Specifications

#### General

- Card Interface** PCM-3680: PC/104  
PCM-3680I: PCI-104
- Certification** CE, FCC
- Connectors** 2 x DB9-M with cable
- Dimensions** 90 x 96 mm (3.6" x 3.8")
- Ports** 2
- Power Consumption** 5 V @ 400 mA

#### Communications

- CAN Controller** SJA-1000
- CAN Transceiver** 82C250
- Protocol** CAN2.0 A/B
- Speed** Up to 1 Mbps programmable transfer rate
- CAN Frequency** 16 MHz
- Signal Support** CAN\_H, CAN\_L

#### Protection

- Isolation Protection** 2,500 V<sub>DC</sub>

#### Environment

- Operating Temp.** -40 ~ 85°C (-40 ~ 185°F)

### Ordering Information

- PCM-3680** Dual-port Iso CAN-bus PC/104 Module
- PCM-3680I** Dual-port Iso CAN-bus PCI-104 Module

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-3610


# PCM-3612

# PCM-3614


## 2-port RS-232/422/485 PC/104 Module with Isolation Protection

## 2-port RS-422/485 PC/104 Module


## 4-port RS-422/485 High-speed PC/104 Module

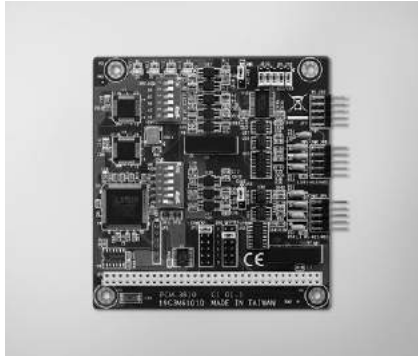

PCM-3610

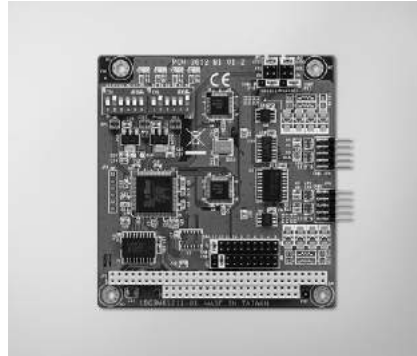

PCM-3612

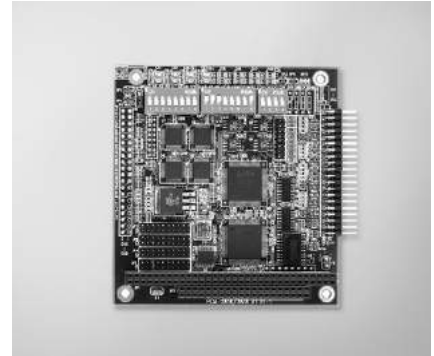

PCM-3614



### Features

- High speed transmission rate
- Automatic RS-485 data flow control
- Jumper selectable interrupt level
- Supports Windows 2000/XP/Vista/7
- Supports WinCE 4.2, 5.0
- Powerful and easy-to-use utility (ICOM Tools)

### Specifications

#### General

- **Card Interface** PC/104
- **Certification** CE, FCC
- **Connectors** 2 x DB9-M
- **Ports** 2
- **Power Consumption** +5V @ 400mA (Typical)

#### Communications

- **Channel 1** RS-232, 422, or 485
- **Channel 2** RS-422, or RS-485
- **Character Length** 5, 6, 7, or 8 bits
- **IRQ** 3, 4, 5, 6, 7, 9
- **Parity** Even, Odd, or None
- **Speed** 50 bps ~ 115.2 kbps
- **Stop Bit** 1, 1.5, or 2

#### Protection

- **Isolation Protection** 2,500 V<sub>DC</sub>

#### Environment

- **Operating Humidity** 0 ~ 90 % RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

### Ordering Information

- **PCM-3610** Isolated RS-232/422/485 Module

### Features

- Long distance communication
- Automatic RS-485 data flow control
- Jumper selectable interrupt level
- Supports Windows 2000/XP/Vista/7
- Supports WinCE 4.2, 5.0
- Powerful and easy-to-use utility (ICOM Tools)

### Specifications

#### General

- **Card Interface** PC/104
- **Certification** CE, FCC
- **Connectors** 2 x DB9-M
- **Indicators** Red LED for TX  
Green LED for RX
- **Ports** 2
- **Power Consumption** +5V @ 400mA (Typical)

#### Communications

- **Channel 1 and 2** RS-422, or RS-485
- **Character Length** 5,6,7, or 8 bits
- **IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12 or 15
- **Parity** Even, Odd, or None
- **Speed** 50 bps ~ 115.2 kbps
- **Stop Bit** 1, 1.5, or 2

#### Environment

- **Operating Humidity** 0 ~ 90 % RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

### Ordering Information

- **PCM-3612** Dual Port RS-422/485 Module

### Features

- Automatic RS-485 data flow control
- Shared IRQ settings for each ports
- LED indicators: TX, RX
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Supports Windows 2000/XP/Vista/7
- Supports WinCE 4.2, 5.0
- Powerful and easy-to-use utility (ICOM Tools)

### Specifications

#### General

- **Card Interface** PC/104
- **Certification** CE, FCC
- **Connectors** 4 x DB9-M
- **Ports** 4
- **Power Consumption** +5V @ 450mA (Typical)

#### Communications

- **Data Bits** 5, 6, 7, 8
- **I/O Address Range** 0 x 000 ~ 0 x 3F8
- **IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, or 15
- **Parity** Even, Odd, or None
- **Data Signals** RS-422: TxD+, TxD-, RxD+, RxD-, CTS+, CTS-, RTS+, and RTS-  
RS-485: DATA+, DATA-  
50 bps ~ 921.6 kbps
- **Speed**
- **Stop Bits** 1, 1.5, 2
- **Termination Resistor** 120 Ω

#### Environment

- **Operating Humidity** 0 ~ 90 % RH
- **Operating Temperature** 0~65°C (32~149°C)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

### Ordering Information

- **PCM-3614** 4-port RS-422/485 High-speed Module

# PCM-3618


# PCM-3640/3641

# PCM-3660

8-port RS-422/485 High-speed PC/104 Module

4-port RS-232 High-speed PC/104 Module


Jumperless Ethernet PC/104 Module

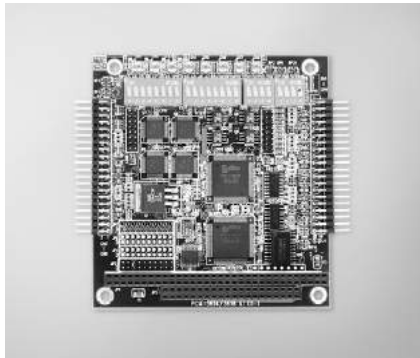

PCM-3618



CE FCC

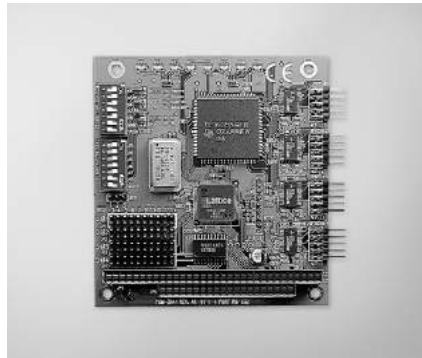

PCM-3641



CE FCC



PCM-3660



CE FCC

## Features

- Automatic RS-485 data flow control
- Shared IRQ settings for each ports
- LED indicators: TX, RX
- Supports Windows 2000/XP/Vista/7
- Supports WinCE 5.0/6.0
- Powerful and easy-to-use utility (ICOM Tools)

## Specifications

### General

- Card Interface** PC/104
- Certification** CE, FCC
- Connectors** 8 x DB9-M
- Ports** 8
- Power Consumption** +5V @ 650 mA

### Communications

- Data Bits** 5, 6, 7, 8
- I/O Address Range** 0 x 000 ~ 0 x 3F8
- IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- Parity** None, Even, or Odd
- Data Signals** RS-422: TxD+, TxD-, RxD+, RxD-, CTS+, CTS-, RTS+, and RTS-  
RS-485: DATA+, DATA-  
50 bps ~ 921.6 kbps
- Speed** 1, 1.5, 2
- Termination Resistor** 120 Ω

### Environment

- Operating Humidity** 0 ~ 90 % RH
- Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- Storage Temperature** -25 ~ 80°C (-13 ~ 176°F)

## Ordering Information

- PCM-3618** 8-port RS-422/485 High-Speed Module

## Features

- Transmission speeds up to 460 kbps (PCM-3641)
- Shared IRQ settings for each of 4 RS-232 ports (PCM-3641)
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Supports Windows 2000/XP/Vista/7
- Supports WinCE 5.0/6.0
- Powerful and easy-to-use utility (ICOM Tools)

## Specifications

### General

- Card Interface** PC/104
- Certification** CE, FCC
- Connectors** 4 x DB9-M
- Ports** 4
- Power Consumption** +5V @ 200 mA (Typical)  
+5V @ 250 mA (Max)

### Communications

- Data Bits** 5, 6, 7, 8
- Data Signals** RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI  
0 x 0200 ~ 0 x 03F8
- I/O Address Range** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- Parity** None, Even, or Odd
- Speed** 50 bps ~ 460.3 kbps (PCM-3641)  
50 bps ~ 115.2 kbps (PCM-3640)
- Stop Bits** 1, 1.5, 2

### Environment

- Operating Humidity** 0 ~ 90 % RH
- Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- Storage Temperature** -25 ~ 80°C (-13 ~ 176°F)

## Ordering Information

- PCM-3640** 4-port RS-232 Module
- PCM-3641** 4-port RS-232 High-speed Module

## Features

- Automatically detects 8-bit or 16-bit
- AUI connector supports external MAUs
- Onboard 32 KB buffer for multi-packages

## Specifications

### General

- Boot ROM Address** C0000, C8000, D0000, or D8000H
- Card Interface** PC/104
- Certification** CE, FCC
- Connectors** 1 x PC/104 stackthrough  
1 x 10Base-T (RJ-45)  
1 x 16-pin insulation displacement connector for AU1

### Power Consumption

- Power Consumption** +5V @ 400 mA max

### Communications

- Data Bus** 8-bit, 16-bit, or auto-sending
- I/O Address** 200, 220, 240, 260, 280, 2A0, 2C0, 300, 320, 340, 380, 3A0
- IRQ** 3,4,5,9, 10, 11, 12 or 15
- Standard** IEEE 802.3 10 Mbps CSMA/CD 10Base-T Transceiver

### Environment

- Operating Humidity** 10 ~ 90% RH
- Operating Temperature** 0 ~ 70°C (32 ~ 158°F)
- Storage Temperature** -15 ~ 80°C (5 ~ 176°F)

## Ordering Information

- PCM-3660** Jumperless Ethernet Module


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-3614I


# PCM-3641I

## 4-port RS-232/422/485 PCI-104 Module

## 4-port RS-232 PCI-104 Module

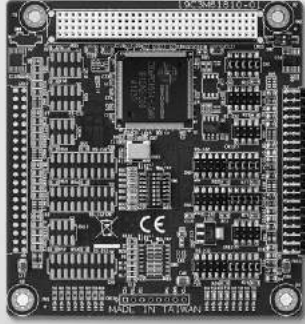

PCM-3614I



PCM-3641I



### Features

- Automatic RS-485 data flow control
- Shared IRQ settings for each port
- LED indicators: TX, RX
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Supports Windows 2000/XP/Vista/7 and Linux
- Supports WinCE 5.0/6.0
- Powerful and easy-to-use utility (ICOM Tools)

### Specifications

#### General

- **Card Interface** PCI-104
- **Connectors** 1 x 40-pin header
- **Ports** 4
- **Power Consumption** +5V @ 450 mA

#### Communications

- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-422: TxD+, TxD-, RxD+, RxD-  
RS-485: DATA+, DATA-  
RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI
- **IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- **Parity** None, Even, or Odd
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2
- **Termination Resistor** 120 Ω

#### Environment

- **Operating Humidity** 0 ~ 90 % RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

### Ordering Information

- **PCM-3614I** 4-port RS-232/422/485 PCI-104 Module
- **PCM-3618I** 8-port RS-232/422/485 PCI-104 Module

### Features

- Transmission speeds up to 460 kbps
- Shared IRQ settings for each port
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Supports Windows 2000/XP/Vista/7 and Linux
- Supports WinCE 5.0/6.0
- Powerful and easy-to-use utility (ICOM Tools)

### Specifications

#### General

- **Card Interface** PCI-104
- **Connectors** 1 x 40-pin header
- **Ports** 4
- **Power Consumption** +5V @ 250 mA (max.)

#### Communications

- **Data Bits** 5, 6, 7, 8
- **Data Signals** TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI
- **IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- **Parity** None, Even, or Odd
- **Speed** 50 bps ~ 460.3 kbps
- **Stop Bits** 1, 1.5, 2
- **Termination Resistor** 120 Ω

#### Environment

- **Operating Humidity** 0 ~ 90 % RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

### Ordering Information

- **PCM-3641I** 4-port RS-232 PCI-104 Module

# Embedded Automation Computers

<b>Embedded Automation PCs Selection Guide</b>		<i>12-2</i>
<b>Control DIN-Rail PCs Selection Guide</b>		<i>12-3</i>
<b>Control Cabinet PCs Selection Guide</b>		<i>12-4</i>
<b>iDoor Module Selection Guide</b>		<i>12-5</i>
<b>Embedded Automation PCs</b>		
<b>UNO-2272G</b>	Intel® Atom™ Palm-Size Automation Computer with 1 x GbE, 2 x mPCIe, VGA	<i>12-6</i>
<b>UNO-2362G</b>	AMD® Dual Core T40E Small-Size Automation Computer w/ 1 x GbE, 1 x mPCIe, HDMI/DP	<i>12-8</i>
<b>UNO-2473G</b>	Intel® Atom™ Regular-Size Automation Computer w/ 4 x GbE, 3 x mPCIe, HDMI/VGA	<i>12-10</i>
<b>UNO-2483G</b>	Intel® Core™ i7/i3/Celeron Regular-Size Automation Computer w/ 4 x GbE, 3 x mPCIe, HDMI/VGA	<i>12-12</i>
<b>UNO-2483P</b>	Intel® Core™ i7/Celeron Regular-Size Vision Controller w/ 4 x PoE, 4 x GbE, HDMI/VGA	<i>12-14</i>
<b>UNO-2174G/GL</b>	Intel® Celeron®/Core™ i7 Regular-Size Automation Computer with 4 x GbE, 2 x Mini PCIe, DVI/DP/HDMI	<i>12-16</i>
<b>UNO-2184G</b>		
<b>Control DIN-Rail/ Cabinet PCs</b>		
<b>UNO-1110</b>	TI Cortex AM3505 DIN-rail PC with 2 x LAN, 5 x COM, 4 x USB	<i>12-17</i>
<b>UNO-1252G</b>	Intel® Quark Palm-Size Control DIN-Rail PC w/ 2 x LAN, 2 x mPCIe, 2 x COM, 8 x GPIO, 2 x USB, 1 x microSD, 1 x SIM	<i>12-18</i>
<b>UNO-1372G</b>	Intel® Atom™ Quad-Core Small-Size Control DIN-Rail PC w/ 3 x GbE, 2 x mPCIe, 1 mSATA, 2 x COM, 8 x DIO, 3 x USB, HDMI/VGA	<i>12-20</i>
<b>UNO-1483G</b>	Intel® Core™ i3 Regular-Size Control DIN-Rail PC w/ 4 x GbE, 3 x mPCIe, 1 PCIe, DP/VGA, 8 DI/O	<i>12-22</i>
<b>UNO-3382G</b>	Intel® Core™ i7/Celeron Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/DP	<i>12-24</i>
<b>UNO-3384G</b>		
<b>UNO-3483G</b>	Intel® Core™ i7 Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/VGA	<i>12-26</i>
<b>UNO-3083G/3085G</b>	Intel® Core i7/Celeron 800 series Automation Computers with 3/5 PCI(e) expansion slots, 2 mPCIe slots and 2 CFast sockets	<i>12-28</i>
<b>UNO-3073G/3075G</b>		
<b>UNO-3073GL</b>		
<b>iDoor Modules</b>		
<b>PCM-2300MR</b>	MR4A16B, MRAM, 2 MByte, mPCIe	<i>12-29</i>
<b>PCM-23C1CF</b>	1 CFast Slot with Cover Protection	<i>12-30</i>
<b>PCM-23U1DG</b>	USB Slot w/ Lock for USB Dongle	
<b>PCM-24D2R2</b>	2-Port Isolated RS-232 mPCIe, DB9	<i>12-31</i>
<b>PCM-24D2R4</b>	2-Port Isolated RS-422/485 mPCIe, DB9	
<b>PCM-24D4R2</b>	4-Port Non-Isolated RS-232 mPCIe, DB37	
<b>PCM-24D4R4</b>	4-Port Non-Isolated RS-422/485 mPCIe, DB37	
<b>PCM-24R2PE</b>	2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45	<i>12-32</i>
<b>PCM-24R2GL</b>	2-Port Gigabit Ethernet, mPCIe, RJ45	<i>12-33</i>
<b>PCM-24R1TP</b>	1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45	<i>12-34</i>
<b>PCM-24U2U3</b>	2-Port USB 3.0, mPCIe, USB-A type	<i>12-35</i>
<b>PCM-24S1ZB</b>	Wireless Zigbee Gateway, mPCIe, 1-port SMA	<i>12-36</i>
<b>PCM-24S2WF</b>	WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA	<i>12-37</i>
<b>PCM-24S23G</b>	Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA	<i>12-38</i>
<b>PCM-27D24DI</b>	24-Channel Isolated Digital I/O w/ counter mPCIe, DB37	<i>12-39</i>
<b>PCM-26D2CA</b>	2-Port Isolated CANBus mPCIe, CANOpen, DB9	<i>12-40</i>
<b>PCM-26D1DB</b>	1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9	<i>12-41</i>
<b>PCM-26R2EC</b>	2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45	<i>12-42</i>
<b>PCM-26R2EI</b>	2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45	
<b>PCM-26R2S3</b>	2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45	
<b>PCM-26R2PN</b>	2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45	
<b>PCM-26R2PL</b>	2-Port Hilscher netX100 FieldBus mPCIe, POWERLINK, RJ45	
<b>PCM-28P1AD</b>	PCIe to mPCIe, 2-Slots mPCIe, iDoor I/O plate expansion	<i>12-43</i>
<b>PCM-28P1BK</b>	iDoor PCIe I/O Plate	
<b>Accessories</b>		
<b>Accessories</b>		<i>12-44</i>



To view all of Advantech's Embedded Automation Computers and iDoor Technology, please visit [www.advantech.com/products](http://www.advantech.com/products).

# Embedded Automation PCs Selection Guide

NEW

NEW

NEW

NEW



Model Name	UNO-2272G	UNO-2362G	UNO-2483G / UNO-2473G	UNO-2483P	UNO-2174G/GL UNO-2184G
CPU	Intel® Atom™ N2800, 1.86GHz Intel® Atom™ J1900, 2GHz	AMD G-Series APU T40E 1.0GHz Dual Core	Intel® Core™ i7-4650U ULT 1.7GHz Dual Core Intel® Core™ i3-4010U ULT 1.7GHz Dual Core Intel® Celeron® 2980U ULT 1.6GHz Dual Core Intel® Atom™ E3845 1.91GHz Quad Core	Intel® Core™ i7-4650U ULT 1.7GHz Dual Core Intel® Celeron® 2980U ULT 1.6GHz Dual Core	UNO-2174G/GL: Intel® Celeron™ 847/807UE, 1.1/1.0 GHz UNO-2184G: Intel® Core™ i7-3555LE/ i7-2655LE 2.5/2.2 GHz
Onboard RAM	2G DDR3/DDR3L SDRAM	2G DDR3 SDRAM	8G/4G DDR3L SDRAM	8G/4G DDR3L SDRAM	4 GB/8 GB DDR3 SDRAM
Battery-Backup RAM	-	-	-	-	-
Display	VGA for N2800 HDMI for J1900	HDMI/DP	HDMI/VGA	HDMI/VGA	DVI-I/HDMI/DP
Audio	Yes	-	Yes	Yes	Yes
Serial Ports	1 x RS-232	1 x RS-232, 1 x RS-485	2 x RS-232, 2 x RS-422/485	2 x RS-232, 2 x RS-422/485	2 x RS-232 2 x RS-232/422/485
Ethernet Ports	1 x 10/100/1000Base-T	2 x 10/100/1000Base-T, (1 x Giga Ethernet switch with daisy chain technology)	4 x 10/100/1000Base-T	4 x 10/100/1000Base-T 4 x POE	4 x 10/100/1000Base-T
USB Ports	3 external (1 x USB3.0)	4 external	4 external (2 x USB3.0)	4 external (2 x USB3.0)	6 external
PC Card Slots	-	-	-	-	-
Printer Ports	-	-	-	-	-
PC/104 Expansion	-	-	-	-	PCI-104 (optional)
PCIe/PCI Expansion	1 x Mini PCIe, 1 x Half-size Mini PCIe with 1 x SIM slot for N2800 2 x Mini PCIe with 1 x SIM slot for J1900	1 x Mini PCIe with 1 x SIM slot	2 x mPCIe, 1 x Half-size mPCIe	1 x Half-size Mini PCIe	2 x Mini PCIe with 1 x SIM slot
Onboard I/O	-	-	-	-	-
Watchdog Timer	Yes	Yes	Yes	Yes	Yes
CompactFlash Slots	1 x mSATA	1 x mSATA	1 x mSATA	1 x mSATA	1x CFast
2.5" HDD Expansion	-	1 x SATA (optional)	1 x SATA for UNO-2473G 2 x SATA for UNO-2483G	2 x SATA	2 x SATA (optional)
Operating Systems	Microsoft® Windows 7, WEST7, Linux	Microsoft® Windows XP/7/8 WEST7, Linux	Microsoft® Windows 7/8, WEST7, Linux	Microsoft® Windows 7/8, WEST7, Linux	Windows XP/7, WEST7, WEST-2009, Linux
Mounting	Stand, Wall, VESA (Optional)	Stand, Wall, VESA (Optional)	Stand, Wall, VESA (Optional)	Stand, Wall, VESA (Optional)	DIN-rail/Wall/VESA
Anti-Vibration	0.75G w/mSATA, 2G w/HDD	0.75G w/mSATA, 2G w/HDD	0.7G w/mSATA, 2G w/HDD	0.7G w/mSATA, 2G w/HDD	2 G w/CF, 1 G w/HDD
Anti-Shock	50G w/mSata, 20G w/HDD	50G w/mSata, 20G w/HDD	50G w/mSata, 20G w/HDD	50G w/mSata, 20G w/HDD	50 G w/CF, 20 G w/HDD
Power Input Range*	24V ± 20%	24V ± 15%	24V ± 20%	24V ± 20%	9 ~ 36 V <sub>DC</sub>
Operating Temperature	- 20 ~ 60°C (-4 ~ 140°F) for N2800, 0 ~ 50°C (32 ~ 122°F) for J1900	- 10 ~ 60°C (14 ~ 140°F)	- 20 ~ 60°C (-4 ~ 140°F)	- 20 ~ 50°C (-4 ~ 122°F)	-10 ~ 60°C (14 ~ 140°F)
Power Consumption Typical	10 W	14 W	28 W	48 W	UNO-2174G/GL: 30 W/ 20 W UNO-2184G: 40 W
Power Requirements	12W, +24 V @ 0.5 A power input	24W, +24 V @ 1A power input	72 W, +24 V @ 3A power input	134W, +24V @ 5.6A power input	72 W, +24 V @ 3 A power input
Dimensions (W x D x H)	157 x 88 x 50 mm (6.2" x 3.5" x 2.0")	190 x 107 x 47 mm (7.5" x 4.2" x 1.8")	252 x 149 x 62 mm (9.9" x 5.9" x 2.4")	252 x 149 x 68 mm (9.9" x 5.9" x 2.7")	255 x 152 x 69 mm (10" x 6.0" x 2.7")
Weight	0.8kg	1.0kg	1.6kg	1.6kg	3.0 kg
Page	12-6	12-8	12-10/12-12	12-14	12-16

\* All power input ranges represent the minimum and maximum values recommended for these devices.

# Control DIN-Rail PCs Selection Guide

**NEW**



**NEW**



**NEW**



Model Name	UNO-1110	UNO-1252G	UNO-1372G	UNO-1483G
CPU	TI Cortex A8 AM3505, 600 MHz	Intel® Quark 400 MHz	Intel® Atom™ E3845 1.91 GHz	4th Gen. Intel® Core™ i3-4010U 1.7 GHz
Onboard RAM	256 MB DDR2 SDRAM	256 MB DDR3 SDRAM	4 GB DDR3L SDRAM	8 GB DDR3L SDRAM
Battery-Backup SRAM	-	-	-	-
Display	VGA	-	HDMI, VGA	DP, VGA
Audio	-	-	Line-out	Line-out
Serial Ports	4 x RS-232/422/485 (2 x Isolation, optional) 1 x RS-485	1 x RS-232, 1 x RS-485	1 x RS-232, 1 x RS-422/485	1 x RS-232, 2 x RS-422/485
Ethernet Ports	2 x 10/100Base-T	2 x 10/100 Base-T	3 x 10/100/1000 Base-T	4 x 10/100/1000 Base-T
USB Ports	2 x USB 2.0	1 x USB 2.0 1 x USB 2.0 client	2 x USB 2.0 1 x USB 3.0	2 x USB 2.0 2 x USB 3.0
PC Card Slots	-	-	-	-
Printer Ports	-	-	-	-
PC/104 Expansion	-	-	-	-
PCIe/PCI Expansion	1 x Mini PCIe (w/ USB signal only)	2 x Mini PCIe	2 x Mini PCIe	1 x PCIe1 2 x Mini PCIe, mPCIe 2.0 (1 supports mSATA / SIM card)
Onboard I/O	4-ch DI, 2-ch DO	4-ch DI, 4-ch DO	4-ch DI, 4-ch DO	4-ch DI, 4-ch DO
Watchdog Timer	Yes	-	-	Yes
CompactFlash Slots	-	-	-	-
2.5" HDD Expansion	-	-	1 x SATA 6Gb/s	1 x SATA 6Gb/s
Operating Systems	Windows CE 6.0, Linux	Linux	Windows 7/8, WES7/WE8S, Linux	Windows 7/8, WES7/8, Linux
Mounting	DIN-rail/Wall	DIN-rail Mount	DIN-rail/Wall Mount	DIN-rail/Wall
Anti-Vibration	-	-	-	2 G w/ mSATA, 1 G w/ HDD
Anti-Shock	-	-	-	50 G w/ mSATA, 20 G w/ HDD
Power Input Range*	10 ~ 30 V <sub>DC</sub>	9 ~ 36 V <sub>DC</sub>	9 ~ 36 V <sub>DC</sub>	12/24 V <sub>DC</sub>
Operating Temperature	-10 ~ 70°C @ 5 ~ 85% RH	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)
Power Consumption Typical	Min. 8.5 W	6 W	24 W	41 W
Power Requirements	Min. 13 W	12 W, 24 V <sub>DC</sub> @ 0.5A	36 W, 24 V <sub>DC</sub> @ 1.5A	60 W, 24 V <sub>DC</sub> @ 2.5A
Dimensions (W x D x H)	48 x 127 x 152 mm (1.9" x 5" x 6")	70 x 90 x 100 mm (2.76" x 3.54" x 3.94")	85 x 139 x 152 mm (3.3" x 5.5" x 6.0")	110 x 198 x 139 mm (4.3" x 7.8" x 5.8")
Weight	0.45 kg			1.6kg (3.5 lbs)
Page	12-17	12-18	12-20	12-22

\* All power input ranges represent the minimum and maximum values recommended for these devices.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Control Cabinet PCs Selection Guide



NEW



NEW



NEW



Model Name	UNO-3083G/3085G UNO-3073G/3075G UNO-3073GL	UNO-3283G/UNO-3273G	UNO-3382G/3384G	UNO-3483G
CPU	UNO-3073GL: Intel Celeron 807UE 1GHz UNO-3073G: Intel Celeron 847 1.1GHz UNO-3083G/3085G : Intel Core i7 3555 LE 2.5 GHz or -2655LE 2.2 GHz	UNO-3283G: Intel® Skylake CPU UNO-3273G: Intel® CeleronR J1900 2.0GHz	Intel® Core™ i7-4650U 1.7Hz	Intel® Core™ i7-3612QE
Onboard RAM	4GB DDR3 SDRAM built-in	UNO-3283G: 8GB DDR3L SDRAM UNO-3273G: 4GB DDR3L SDRAM	8GB DDR3L SDRAM	8GB SO-DIMM DDR3/DDR3L
Battery-Backup RAM	-	-	On board MRAM 512K	-
Display	1 x DVI-I, 1 x HDMI	UNO-3283G: DVI, HDMI UNO-3273G: VGA, HDMI	HDMI, DP (disabled when attached to display module)	VGA, HDMI
Audio	Mic in, Line Out	N/A (built-in Line-in/out/Mic, I/O through iDoor)	N/A (built-in Line-in/out/Mic, I/O through iDoor)	Mic in, Line out (pin header)
Serial Ports	2 x RS-232/422/485 2 x RS-232 (optional)	2 x RS-232/422/485	RS-232/422/485 x 1 (isolation)	1 x RS-232, 1 x RS-232/422/485 with DB9 connection (pin header)
Ethernet Ports	2 x 10/100/1000 Base-T RJ-45 ports Supports AMT (UNO-3083G/3085G only)	2 x 10/100/1000 Base-T RJ-45 (support IEEE1588)	2 x 10/100/1000 Base-T RJ-45 (support IEEE1588)	2 x 10/100/1000 Base-T RJ-45 (support IEEE1588)
USB Ports	Nine (One Internal)	UNO-3283G: 2 x USB 2.0, 4 x USB 3.0 UNO-3273G: 5 x USB 2.0, 1 x USB 3.0	2 x USB 2.0 2 x USB 3.0	2 x USB 2.0 2 x USB 3.0
Printer Ports	-	-	-	-
PC/104 Expansion	-	-	-	-
PCIe/PCI Expansion	UNO-3073G/UNO-3073GL/ 3083G: 3 slots 3085G: 5 slots	UNO-3283G: 2x PCIe or 2x PCI or 1x PCI/1x PCIe UNO-3273G: 2x PCI	UNO-3382G: 2 x Mini PCIe UNO-3384G: 2 x Mini PCIe, 2 x PCI/PCIe (2 x PCI, 1 x PCIe x1+1 x PCIe x4, 1 x PCI + 1 x PCIe x4)	1 x PCIe x4, 3 x Mini PCIe (2 x full, 1 x half)
Onboard I/O	-	-	-	-
Watchdog Timer	Yes	-	-	-
CompactFlash Slots	Two internal	-	-	-
2.5" HDD Expansion	2 x SATA, support RAID 0/1 (except UNO-3073GL)	Two built-in 2.5" SATA HDD brackets with support for RAID 0/1	Two built-in 2.5" SATA HDD brackets with support for RAID 0/1	Two built-in 2.5" SATA HDD brackets with support for RAID 0/1
Operating Systems	Windows XP/Windows7/8, WES7, WES-2009, Linus	WIN7/8, WES7, WES-2009, Linus	Linux, Win 7, WES 7, Win 8, Win Emb 8.1 Industry	WIN7/8, WES7, WES-2009, Linus
Mounting	Wall/Stand/Panel	Wall/Stand	Book Mount	Enclosure Mount
Anti-Vibration	-	-	-	-
Anti-Shock	50 G w/CF 20 G w/HDD	-	-	-
Power Input Range*	9 ~ 36 V <sub>DC</sub>	9 ~ 36 V <sub>DC</sub>	18 ~ 36 V <sub>DC</sub>	12/24 V <sub>DC</sub> ± 20%
Operating Temperature	-10 ~ 60°C (14 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)
Power Consumption Typical	UNO-3073GL: 25W (Typical) UNO-3073G: 35W (Typical) UNO-3083G/3085G: 45W (Typical)	45W (Typical)	45W	50W
Power Requirements	12 V ±20%, 24 V ±20%	12V/24V <sub>DC</sub> ± 20% (24V@5A)	24V <sub>DC</sub> @ 4.5A	12V/24V <sub>DC</sub> @ 4A
Dimensions (W x D x H)	UNO-3083G/3073G/GL: 148 x 238 x 177 mm (5.8" x 9.3" x 7.0") UNO-3085G: 193 x 238 x 177 mm (7.6" x 9.3" x 7.0")	157 x 238 x 177 mm	UNO-3382G: 254 x 207 x 65.2 mm (100" x 81.5" x 25.7") UNO-3384G: 254 x 207 x 103.2 mm (100" x 81.5" x 40.6")	305 x 82 x 225 mm (120.1" x 32.3" x 88.6")
Weight	UNO-3083G/3073G/GL: 4.5 kg UNO-3085G: 5.0 kg	4.5 kg	UNO-3382G: 3.1 kg UNO-3384G: 3.9 kg	4.9 kg
Page	12-28	online	12-24	12-26

\* All power input ranges represent the minimum and maximum values recommended for these devices.



# iDoor Module Selection Guide

## Multiple I/O & Peripheral



Model Name	PCM-2300MR	PCM-23C1CF	PCM-23U1DG	PCM-24R1TP	PCM-24U2U3	PCM-24R2PE	PCM-24R2GL	PCM-28P1AD	PCM-28P1BK
Description	MR4A16B, MRAM, 2 MByte, mPCIe	1 CFast Slot with Cover Protection	USB Slot w/ Lock for USB Dongle	1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45	2-Port USB 3.0, mPCIe, USB-A type	2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45	2-Port Gigabit Ethernet, mPCIe, RJ45	PCIe to mPCIe, 2-Slots mPCIe, iDoor I/O plate expansion	iDoor PCIe I/O Plate
Page	12-29	12-30	12-30	12-34	12-35	12-32	12-33	12-43	12-43

## Smart I/O & Comm.



Model Name	PCM-24D2R4	PCM-24D2R2	PCM-24D4R4	PCM-24D4R2	PCM-27D24DI
Description	2-Port Isolated RS-422/485 mPCIe, DB9	2-Port Isolated RS-232 mPCIe, DB9	4-Port Non-Isolated RS-422/485 mPCIe, DB37	4-Port Non-Isolated RS-232 mPCIe, DB37	24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
Page	12-31	12-31	12-31	12-31	12-39

## Communication



Model Name	PCM-24S1ZB	PCM-24S2WF	PCM-24S33G	PCM-24S34G
Description	Wireless Zigbee Gateway, mPCIe, 1-port SMA	WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA	Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA	LTE Bands, UMTS/HSPA Bands, GPS/GPRS Bands, 2-port SMA
For the information of regulation, please refer to the product page of each model (Wifi Accessory kit- PCM-24S200, 3G/ 4G Accessory kit- PCM-24S300)				
Page	12-36	12-37	12-38	-

## Industrial Fieldbus



Model Name	PCM-26D2CA	PCM-26D1DB	PCM-26R2PN	PCM-26R2EC	PCM-26R2EI	PCM-26R2S3	PCM-26R2PL
Description	2-Port Isolated CANBus mPCIe, CANOpen, DB9	1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9	2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45	2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45	2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45	2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45	2-Port Hilscher netX100 FieldBus mPCIe, POWERLINK, RJ45
Page	12-40	12-41	12-42	12-42	12-42	12-42	12-42

## Naming Convention

PCM-26D2CA


Category	Connector	Function
23-Memory / Storage / External I/O	R-RJ45	BK-Bracket
24-Communication	D-DB9	DB-PROFIBUS
25-Display	U-USB	PN-PROFINET
26-Fieldbus	P-mPCIe	EI-Ethernet/IP
27-Digital/Analog I/O		EC-EtherCAT
28-Expansion kit		S3-SERCOS III
	<b>Port</b>	CA-CANopen
	0-No Connector	PL-PowerLink
	1-One Connector	WF-Wifi/BT
	2-Two Connectors	3G-3G/GPS
	4-Four Connectors	ZB-ZigBee
		AD-Adapter
		PE-POE
		TP-Precision Time Protocol
		DC-Daisy-Chain
		MR-MRAM
		DI-Digital I/O
		AI-Analog I/O
		R4-Multi-drop RS-422/485
		R2-Single-ended RS-232
		ID-Intelligent Displays
		U3-USB 3.0
		HD-HDMI
		4G-4G/LTE
		DG-Dongle
		GL-Gigabit LAN

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# UNO-2272G

## Intel® Atom™ Palm-Size Automation Computer with 1 x GbE, 2 x mPCIe, VGA

**NEW**

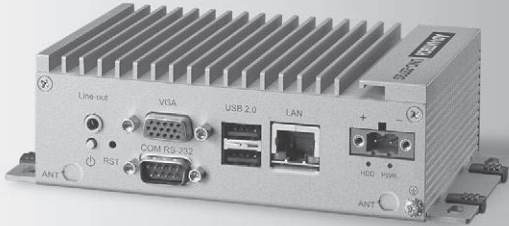

### Introduction

Advantech's UNO-2000 series of Embedded Automation Computers are Fanless with highly ruggedized with an embedded operating system (Windows CE, Windows XPE, Linux-Embedded). It also includes iDoor technology which supports automation feature extensions such as industry fieldbus communication, Wi-Fi/3G, Digital I/O, including Palm, Small, and Regular-size Form-Factors with indicated market segments in terms of entry, value and performance product positioning. Both entry and value Embedded Automation Computers feature specific functions and they are suitable for data gateway, concentrator and data server applications. The performance model can shorten your development time and offer multiple networking interfaces to fulfill a diverse range of requirements.

### Specifications

#### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions (W x D x H)** 157 x 88 x 50mm (6.2" x 3.5" x 2.0")
- **Form Factor** Palm Size
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional)
- **Weight (Net)** 0.8 kg (1.76lbs)
- **Power Requirement** 24V<sub>DC</sub> ± 20%
- **Power Consumption** 10W (Typical), 15W (Max)
- **OS Support** Microsoft® Windows 7, WES7, Linux Fedora

#### System Hardware

- **BIOS** AMI EFI64 Mbit
- **Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- **Processor** Intel Atom Dual Core N2800 1.86GHz  
Intel Atom Quad Core J1900 2GHz
- **System Chip** Intel Atom SoC integrated
- **Memory** Built-in 2GB DDR3 1600 MHz for UNO-2272G-N2AE  
Built-in 2GB DDR3L 1333 MHz for UNO-2272G-J2AE
- **Graphics Engine** Intel® HD Graphics
- **Ethernet** Intel® 82583V GbE, 802.1Qav, IEEE1588/802.1AS, 802.3az
- **LED Indicators** LEDs for Power, LAN (Active, Status)
- **Storage** 1 x mSATA for UNO-2272G-N2AE  
1 x half-size mSATA for UNO-2272G-J2AE  
Support HDD/SSD by project
- **Expansion** 1 x Full-size mPCIe slot, 1 x Half-size mPCIe slot, mPCIe2.0 for N2800  
2 x Full-size mPCIe slot, mPCIe2.0 for J1900 (supports SIM card)

#### I/O Interfaces

- **Serial Ports** 1 x RS-232, DB9, 50-115.2kbps
- **LAN Ports** 1 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **USB Ports** 3 x USB 2.0 for UNO-2272G-N2AE  
2 x USB 2.0 and 1 x USB 3.0 for UNO-2272G-J2AE
- **Displays** 1 x VGA, supports 1920x1200@60Hz 24bpp for UNO-2272G-N2AE  
1 x HDMI, support 1920 x 1080@60Hz for UNO-2272G-J2AE
- **Audio** Line-Out
- **Power Connector** 1 x 2 Pins, Terminal Block
- **Grounding Protection** Chassis Grounding

### Features

- Intel® Atom™ N2800/J1900 Processors up to 2.41 GHz with 2GB DDR3/DDR3L Memory
- 1 x GbE, 3 x USB 2.0, 1 x RS-232, 1 x VGA or HDMI, Audio
- Comprehensive Palm, Small, Regular-size form-factor
- Compact with Fanless Design
- Rubber Stopper Design with Captive Screw
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPRS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection


#### Environment

- **Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow for UNO-2272G-N2AE  
0 ~ 50°C (32 ~ 122°F) @ 5 ~ 85% RH with 0.7m/s airflow for UNO-2272G-J2AE
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)
- **Ingress Protection** IP40


### Application Software

	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.


## Dimensions

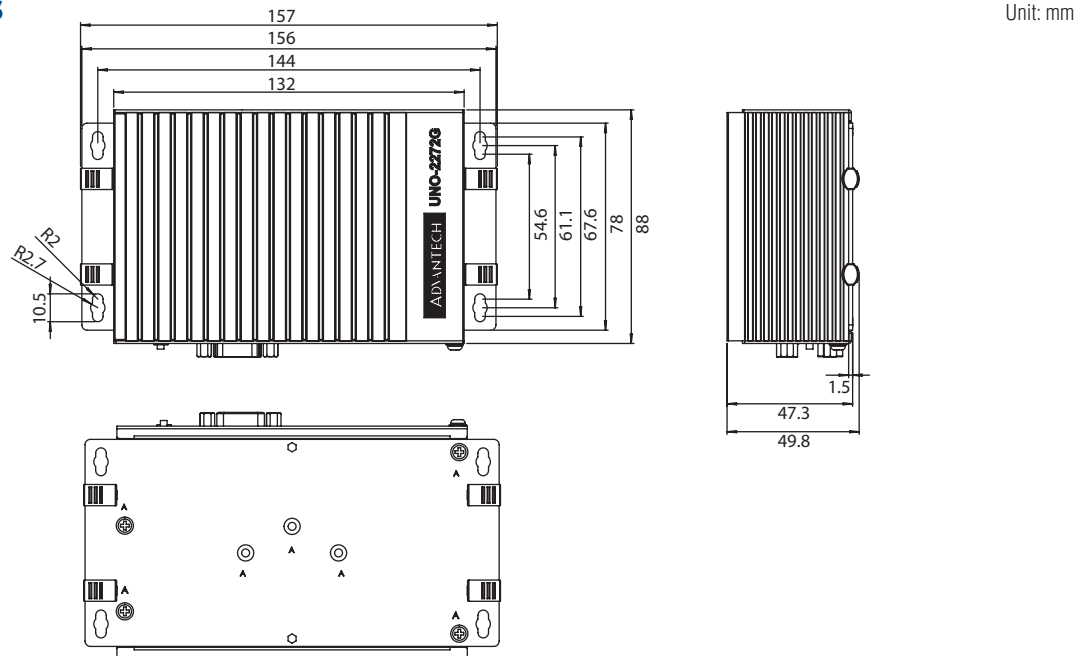

## Front I/O View

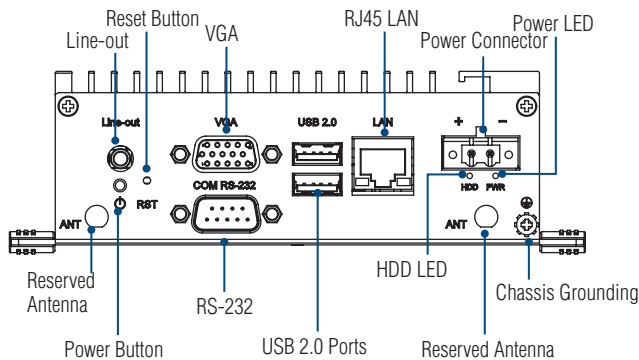

## Rear I/O View

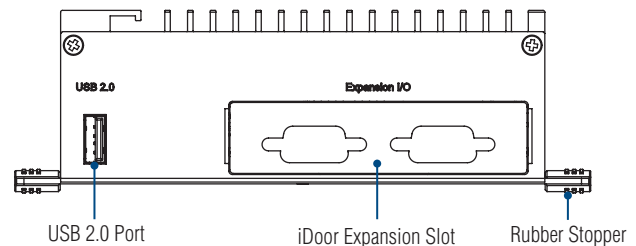

## Ordering Information

- UNO-2272G-N2AE Intel Atom N2800 1.86GHz, 2GB, 1xLANs, 2xmPCIe
- UNO-2272G-J2AE Intel Atom J1900 2GHz, 2GB, 1xLANs, 2xmPCIe

## iDoor Modules

- PCM-24S2WF-AE 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24U2U3-AE 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- PCM-24R2GL-AE 2-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24D2R2-AE 2-Port Isolated RS-232 mPCIe, DB9
- PCM-24D4R4-AE 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26D1DB-SAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2PN-SAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave

## Accessories

- 1757002321 63WC to DC UNO series power adapter (Industrial Grade)
- PWR-249-AE 65W AC to DC power adapter (Commercial Grade)
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- 1700001524 Power Cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A Power Cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software

- 2070013098 Image WES7P X86 MJL V4.12 B001 for UNO-2272G-Nx
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-2362G

## AMD® Dual Core T40E Small-Size Automation Computer w/ 1 x GbE, 1 x mPCIe, HDMI/DP

**NEW**



### Introduction

Advantech's UNO-2000 series of Embedded Automation Computers are Fanless with highly ruggedised with an embedded operating system (Windows CE, Windows XPE, Linux-Embedded). It also includes iDoor technology which supports automation feature extensions such as industry fieldbus communication, Wi-Fi/3G, Digital I/O, including Palm, Small, and Regular-size Form-Factors with indicated market segments in terms of entry, value and performance product positioning. Both entry and value Embedded Automation Computers feature specific functions and they are suitable for data gateway, concentrator and data server applications. The performance model can shorten your development time and offer multiple networking interfaces to fulfill a diverse range of requirements.

### Specifications

#### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions ( W x D x H )** 190 x 107 x 47 mm (7.5" x 4.2" x 1.8")
- **Form Factor** Small Size
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional)
- **Weight (Net)** 1.0kg (2.2lbs)
- **Power Requirement** 24V<sub>DC</sub> ±15%
- **Power Consumption** 14W (Typical), 24W (Max)
- **OS Support** Microsoft® Windows XP/7/8 WES7  
Linux Fedora

#### System Hardware

- **BIOS** AMI UEFI 32Mbit Flash BIOS
- **Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- **Processor** AMD® G-series T40E 1.0GHz dual core, 512MB
- **System Chip** AMD® A50M FCH
- **Memory** On-board 2GB DDR3 833/1066 MHz
- **Graphics Engine** AMD Radeon™ HD 6250 DirectX® 11 graphics with UVD 3.0 2D/3D Accelerator
- **Ethernet** Realtek RTL8111E, Marvell 88E6172 Giga Ethernet switch with daisy chain technology
- **LED Indicators** LEDs for Power, battery, LAN (Active, Status) and HDD
- **Storage** One mSATA drive or  
One drive bay for SATA 2.5" HDD (Compatible with 9.5mm height HDD)  
Note: iDoor technology isn't compatible with HDD storage.  
CFast drive by iDoor Technology (Optional)
- **Expansion** 1 x Full-size mPCIe slot, mPCIe 2.0 (supports SIM card)

#### I/O Interfaces

- **Serial Ports** 1 x RS-232, DB9, 50~115.2kbps  
1 x RS-485, DB9, auto flow control, 50~115.2kbps
- **LAN Ports** 2 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **USB Ports** 4 x USB 2.0 Compliant
- **Displays** 1 x DisplayPort 1.1, supports 1920x1200 (HD 6250) @ 30 bpp  
1 x HDMI v1.3, supports 1920x1080p @ 36 bpp
- **Power Connector** 1 x 2 Pins, Terminal Block
- **Grounding Protection** Chassis Grounding

### Features

- Onboard AMD® Dual Core T40E 1.0GHz processors with 2GB DDR3 SO-DIMM Memory
- 1 x GbE, 4 x USB 2.0, 1 x RS-232, 1 x RS-485, 1 x DP, 1 x HDMI
- Comprehensive Palm, Small, Regular-size form-factor
- Compact with Fanless Design
- Rubber Stopper Design with Captive Screw
- Daisy-Chain for Ethernet with auto-bypass protection enabled
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPRS/Wi-Fi Communication by iDoor Technology
- Supports Battery-backup MRAM by iDoor Technology
- Chassis Grounding Protection


#### Environment

- **Operating Temperature** - 10 ~ 60°C (14 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)  
Operating, IEC 60068-2-64, 0.75Grms, random, 5 ~ 500Hz, 1hr/axis (HDD)
- **Ingress Protection** IP40


### Application Software

	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.


## Dimensions

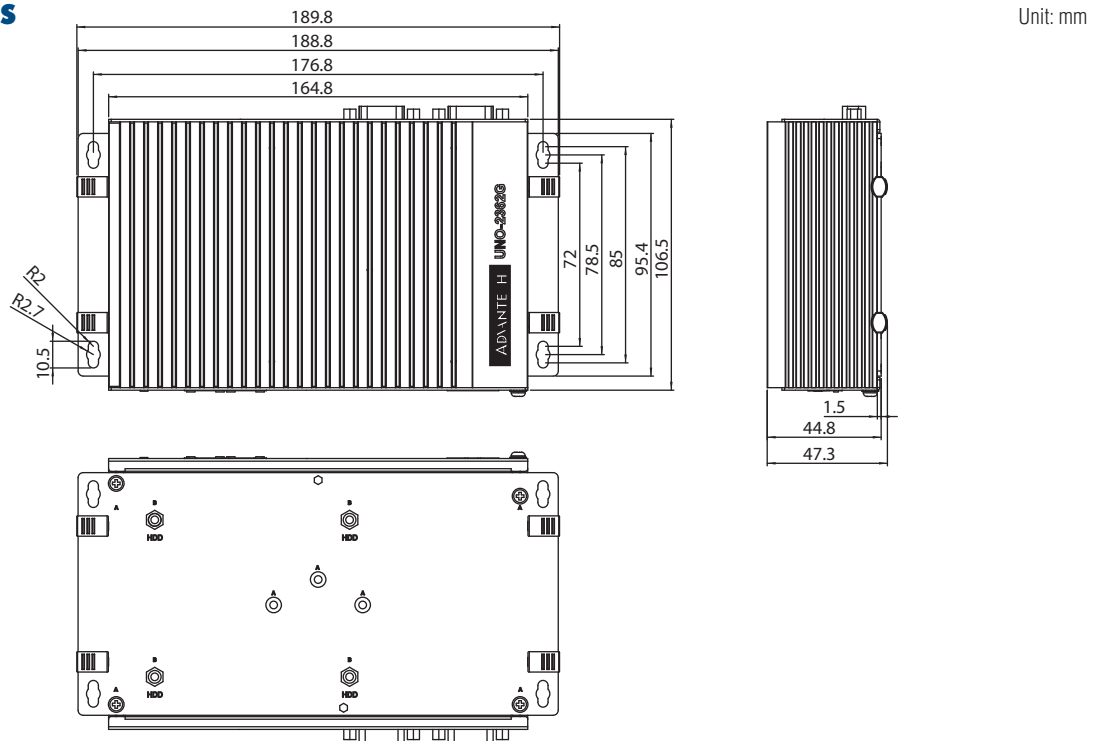

## Front IO View

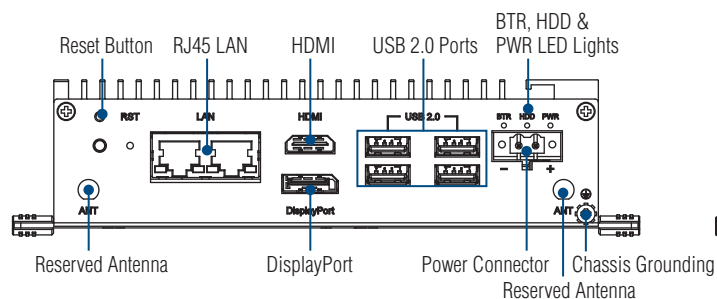

## Rear IO View

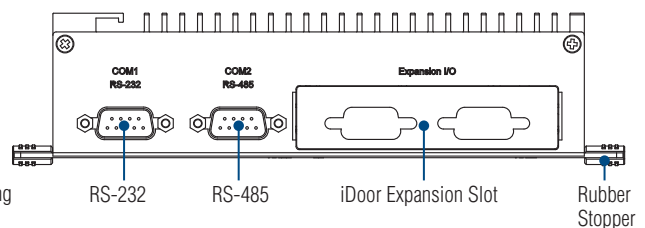

## Ordering Information

- UNO-2362G-T2AE AMD G-series T40E 1.0GHz, 2GB, 1 x GbE, 1 x mPCIe, HDMI/DP

## iDoor Modules

- PCM-24D2R2-AE 2-Port Isolated RS-232 mPCIe, DB9
- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-24D4R2-AE 4-Port Non-Isolated RS-232 mPCIe, DB37
- PCM-24D4R4-AE 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-2300MR-AE MR4A16B, MRAM, 2 MByte, mPCIe
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

## Accessories

- 1757002321 63WC to DC UNO series power adapter (Industrial Grade)
- PWR-249-AE 65W AC to DC power adapter (Commercial Grade)
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- 1700001524 Power Cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A Power Cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software


- 2070012411 Image WES7P MUI. V4.12 for UNO-2362G
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-2473G

## Intel® Atom™ Regular-Size Automation Computer w/ 4 x GbE, 3 x mPCIe, HDMI/VGA

**NEW**

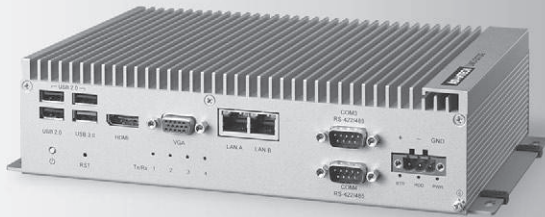

## Introduction

Advantech's UNO-2000 series of Embedded Automation Computers are Fanless with highly ruggedised with an embedded operating system (Windows CE, Windows XPE, Linux-Embedded). It also includes iDoor technology which supports automation feature extensions such as industry fieldbus communication, Wi-Fi/3G, Digital I/O, including Palm, Small, and Regular-size Form-Factors with indicated market segments in terms of entry, value and performance product positioning. Both entry and value Embedded Automation Computers feature specific functions and they are suitable for data gateway, concentrator and data server applications. The performance model can shorten your development time and offer multiple networking interfaces to fulfill a diverse range of requirements.

## Specifications

### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions ( W x D x H )** 252 x 149 x 62 mm (9.9" x 5.9" x 2.4")
- **Form Factor** Regular Size
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional), Din-rail (Optional)
- **Weight (Net)** 1.6kg (3.5lbs)
- **Power Requirement** 24Vdc ± 20%
- **Power Consumption** 28W (Typical), 48W (Max)
- **OS Support** Microsoft® Windows 7/8

### System Hardware

- **BIOS** AMI UEFI 128Mbit Flash BIOS
- **Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- **Processor** Intel® Atom™ Processor E3845 1.91 GHz Quad Core, 2MB L2
- **System Chip** Intel Atom SoC integrated
- **Memory** On-board 4GB DDR3L 1600 MHz
- **Graphics Engine** Intel® HD Graphics: Gen7 with 4EU
- **Ethernet** Intel® i210-IT GbE, 802.1Qav, IEEE1588/802.1AS, 802.3az
- **LED Indicators** LEDs for Power, battery, LAN (Active, Status), Tx/Rx and HDD
- **Storage** One mSATA  
One drive bay for SATA 2.5" HDD (Compatible with 9.5mm height HDD)  
CFAST drive by iDoor Technology (Optional)
- **Expansion** 3 x Full-size mPCIe slot, mPCIe 2.0

### I/O Interfaces

- **Serial Ports** 2 x RS-232, DB9, 50-115.2kbps  
2 x RS-422/485, DB9, auto flow control, 50-115.2kbps
- **LAN Ports** 4 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **USB Ports** 4 x USB Ports (3 x USB2.0, 1 x USB3.0 compliant)
- **Displays** 1 x VGA (2560x1600)  
1 x HDMI (1920x1200)
- **Audio** Line-In, Line-Out
- **Power Connector** 1 x 3 Pins, Terminal Block
- **Grounding Protection** Chassis Grounding

## Features

- 4th Generation Intel® Atom™ Processor up to 1.91GHz with 4GB DDR3L Memory
- 4 x GbE, 4 x USB 2.0/3.0, 2 x RS-232, 2 x RS-422/485, 1 x VGA, 1 x HDMI, Audio
- Comprehensive Palm, Small, Regular-size form-factor
- Compact with Fanless Design
- Rubber Stopper Design with Captive Screw
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPRS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- LAN Redundancy (Teaming)
- Fault-Protected RS-485 Transceivers With Extended Common-Mode Range

### Environment


- **Operating Temperature** UNO-2473G-E3AE: -20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow  
UNO-2473XXXXX: -40 ~ 60°C (-40 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)  
Operating, IEC 60068-2-64, 0.7Grms, random, 5 ~ 500Hz, 1hr/axis (HDD)
- **Ingress Protection** IP40

## Application Software


	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

## Dimensions


Unit: mm

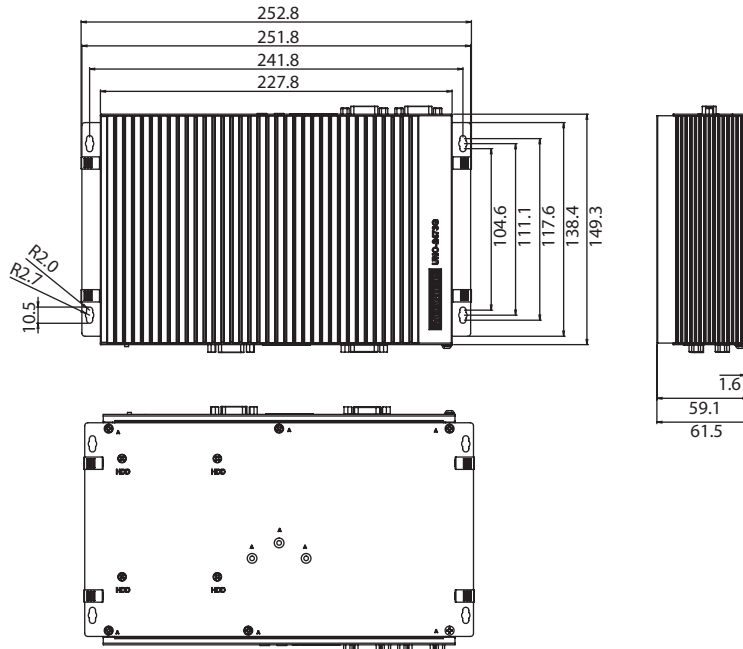

## Front I/O View

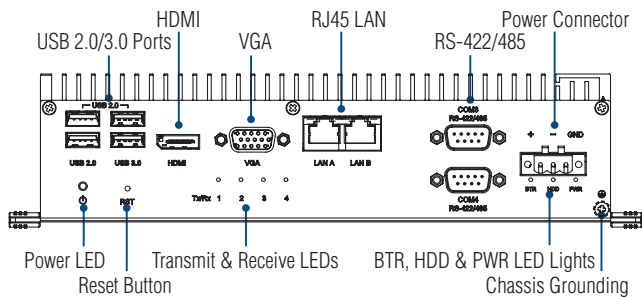

## Rear I/O View

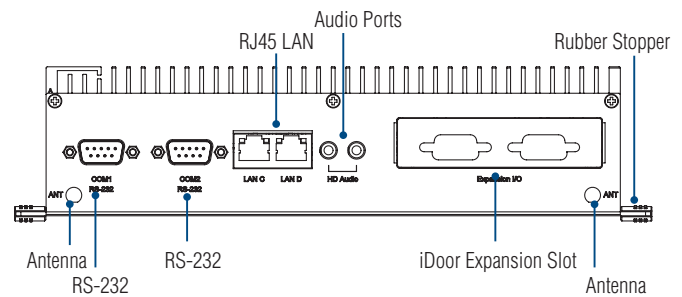

## Ordering Information

- UNO-2473G-E3AE Intel® Atom E3845 1.91GHz, 4GB, 4 x LANs, 3 x mPCIe

## iDoor Modules

- PCM-24D4R2-AE 4-Port Non-Isolated RS-232 mPCIe, DB37
- PCM-24D4R4-AE 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-2300MR-AE MR4A16B, MRAM, 2 MByte, mPCIe
- PCM-23U1DG-AE USB Slot w/ Lock for USB Dongle
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24U2U3-AE 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24R2GL-AE 2-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

## Accessories

- 1757002321 63WC to DC UNO series power adapter (Industrial Grade)
- PWR-249-AE 65W AC to DC power adapter (Commercial Grade)
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- 1700001524 Power Cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A Power Cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software

- 2070013268 Image WES7P X64 MUI. V4.12 B001 for UNO-2473G-Ex
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-2483G

## Intel® Core™ i7/i3/Celeron Regular-Size Automation Computer w/ 4 x GbE, 3 x mPCIe, HDMI/VGA

**NEW**



### Introduction

Advantech's UNO-2000 series of Embedded Automation Computers are Fanless with highly ruggedised with an embedded operating system (Windows CE, Windows Embedded 7/8, Linux-Embedded). It also includes iDoor technology which supports automation feature extensions such as industry fieldbus communication, Wi-Fi/3G, Digital I/O, including Palm, Small, and Regular-size Form-Factors with indicated market segments in terms of entry, value and performance product positioning. Both entry and value Embedded Automation Computers feature specific functions and they are suitable for data gateway, concentrator and data server applications. The performance model can shorten your development time and offer multiple networking interfaces to fulfill a diverse range of requirements.

### Specifications

#### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions (W x D x H)** 252 x 149 x 62 mm (9.9" x 5.9" x 2.4")
- **Form Factor** Regular Size
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional)
- **Weight (Net)** 1.6kg (3.5lbs)
- **Power Requirement** 24V<sub>DC</sub> ± 20%
- **Power Consumption** 28W (Typical), 72W (Max)
- **OS Support** Microsoft® Windows 7/8

#### System Hardware

- **BIOS** AMI UEFI 128Mbit Flash BIOS
- **Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- **Processor** 4th Gen Intel® Core™ i7-4650U ULT 1.7 GHz Dual Core, 4MB L2  
4th Gen Intel® Core™ i3-4010U ULT 1.7 GHz Dual Core, 3MB L2  
4th Gen Intel® Celeron® 2980U ULT 1.6 GHz Dual Core, 2MB L2
- **System Chip** Integrated Intel 8 Series Chipset
- **Memory** On-board 4GB DDR3L 1600 MHz for UNO-2483G-4C3AE  
On-board 8GB DDR3L 1600 MHz for UNO-2483G-434AE and UNO-2483G-474AE
- **Graphics Engine** Intel® HD Graphics 5000/4400
- **Ethernet** Intel® i210-IT GbE, 802.1Qav, IEEE1588/802.1AS, 802.3az  
Intel® i218-LM GbE, Intel® AMT, IEEE1588/802.1AS, 802.3az
- **LED Indicators** LEDs for Power, battery, LAN (Active, Status), Tx/Rx and HDD
- **Storage** One mSATA  
Two drive bays for SATA 2.5" HDD (Compatible with 9.5mm height HDD)  
CFast drive by iDoor Technology (Optional)
- **Expansion** 2 x Full-size mPCIe slot, mPCIe 2.0

#### I/O Interfaces

- **Serial Ports** 2 x RS-232, DB9, 50~115.2kbps  
2 x RS-422/485, DB9, auto flow control, 50~115.2kbps
- **LAN Ports** 4 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)
- **Displays** 1 x VGA, supports 1920 x 1200 @ 60Hz 24bpp  
1 x HDMI 1.4a, supports 3200 x 2000 @ 60Hz 24bpp
- **Audio** Line-In, Line-Out
- **Power Connector** 1 x 3 Pins, Terminal Block

### Features

- 4th Generation Intel® Core™ i7/i3/Celeron Processors up to 1.9GHz with 4GB/8GB DDR3L Memory
- 4 x GbE, 4 x USB 2.0/3.0, 2 x RS-232, 2 x RS-422/485, 1 x VGA, 1 x HDMI, Audio
- Comprehensive Palm, Small, Regular-size form-factor
- Compact with Fanless Design
- Rubber Stopper Design with Captive Screw
- Dual HDD/SSD support with RAID 0/1 in regular-size
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- LAN Redundancy (Teaming)
- Fault-Protected RS-485 Transceivers With Extended Common-Mode Range

#### Environment


- **Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)  
Operating, IEC 60068-2-64, 0.7Grms, random, 5 ~ 500Hz, 1hr/axis (HDD)
- **Ingress Protection** IP40

### Application Software


	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.




## Dimensions

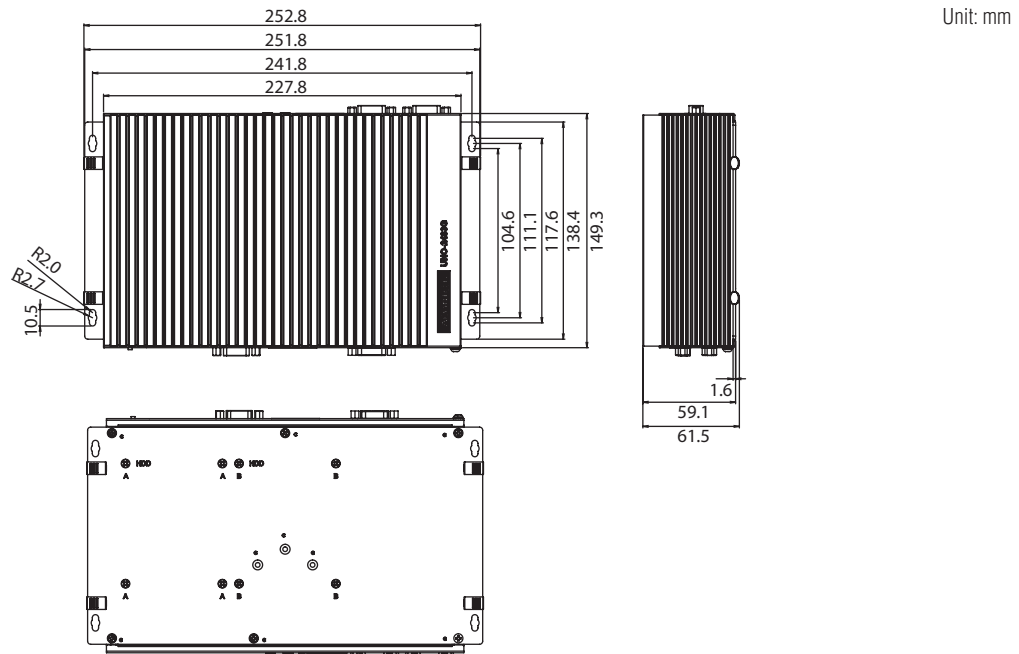

## Front IO View

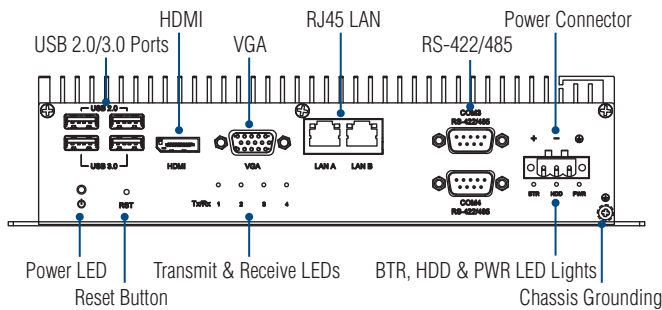

## Rear IO View

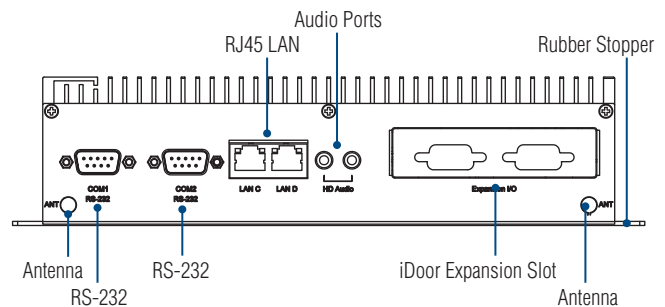

## Ordering Information

- **UNO-2483G-4C3AE** Intel® Celeron 2980U ULT 1.6GHz, 4GB, 4 x LANs, 2 x mPCIe
- **UNO-2483G-434AE** Intel® Core™ i3-4010U ULT 1.7GHz, 8GB, 4 x LANs, 2 x mPCIe
- **UNO-2483G-474AE** Intel® Core™ i7-4650U ULT 1.7GHz, 8GB, 4 x LANs, 2 x mPCIe

## iDoor Modules

- **PCM-24D4R2-AE** 4-Port Non-Isolated RS-232 mPCIe, DB37
- **PCM-24D4R4-AE** 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- **PCM-26D2CA-AE** 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24R11TP-AE** 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- **PCM-2300MR-AE** MR4A16B, MRAM, 2 MByte, mPCIe
- **PCM-24R2GL-AE** 2-Port Gigabit Ethernet, mPCIe, RJ45
- **PCM-24R2PE-AE** 2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

## Accessories

- **1757002321** 63WC to DC UNO series power adapter (Industrial Grade)
- **PWR-249-AE** 65W AC to DC power adapter (Commercial Grade)
- **PWR-244-AE** 96W AC to DC power adapter (Commercial Grade)
- **1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- **1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- **1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- **1700000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- **1700001524** Power Cable 3-pin US type 1.8 M (Commercial Grade)
- **170203183C** Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- **170203180A** Power Cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software

- **2070012443** Image WES7P MUI. V4.12 B001 for UNO-2483G
- **2070012949** Image WES7P X64 MUI. V4.12 B002 for UNO-2483G
- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license

# UNO-2483P

## Intel® Core™ i7/Celeron Regular-Size Vision Controller w/ 4 x PoE, 4 x GbE, HDMI/VGA

**NEW**



### Introduction

Advantech's UNO-2000 series of Embedded Automation Computers are Fanless with highly ruggedised with an embedded operating system (Windows CE, Windows Embedded 7/8, Linux-Embedded). It also includes iDoor technology which supports automation feature extensions such as industry fieldbus communication, Wi-Fi/3G, Digital I/O, including Palm, Small, and Regular-size Form-Factors with indicated market segments in terms of entry, value and performance product positioning. Both entry and value Embedded Automation Computers feature specific functions and they are suitable for data gateway, concentrator and data server applications. The performance model can shorten your development time and offer multiple networking interfaces to fulfill a diverse range of requirements.

### Specifications

#### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions (W x D x H)** 252 x 149 x 68 mm (9.9" x 5.9" x 2.7")
- **Form Factor** Regular Size
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional)
- **Weight (Net)** 1.6kg (3.5lbs)
- **Power Requirement** 24V<sub>DC</sub> ± 20%
- **Power Consumption** 48W (Typical), 134W (Max)
- **OS Support** Microsoft® Windows 7/8

#### System Hardware

- **BIOS** AMI UEFI 128Mbit Flash BIOS
- **Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- **Processor** Intel 4th Gen Core™ i7-4650U ULT 1.7 GHz Dual Core, 4MB L2 Intel 4th Gen Celeron® 2980U ULT 1.6 GHz Dual Core, 2MB L2 Integrated Intel 8 Series Chipset
- **System Chip** On-board 4GB DDR3L 1600 MHz for UNO-2483P-4C3AE
- **Memory** On-board 8GB DDR3L 1600 MHz for UNO-2483P-474AE Intel® HD Graphics 5000/Intel® HD Graphics
- **Graphics Engine** Intel® i210-IT GbE, 802.1Qav, IEEE1588/802.1AS, 802.3az
- **Ethernet** Intel® i218-LM GbE, Intel® AMT, IEEE1588/802.1AS, 802.3az Intel® i350-AM2 GbE, 802.1Q, IEEE1588/802.1AS, 802.3az LEDs for Power, battery, LAN (Active, Status), Tx/Rx and HDD
- **LED Indicators** One mSATA
- **Storage** Two drive bays for SATA 2.5" HDD (Compatible with 9.5mm height HDD)
- **Expansion** 1 x Half-size mPCIe slot, mPCIe 2.0  
1 x full size mPCIe slot when without 2 POE module through iDoor

#### I/O Interfaces

- **Serial Ports** 2 x RS-232, DB9, 50~115.2kbps  
2 x RS-422/485, DB9, auto flow control, 50~115.2kbps
- **LAN Ports** 4 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **PoE** 4 x RJ45 IEEE 802.3af compliant, 15.4W per port
- **USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)
- **Displays** 1 x VGA, supports 1920 x 1200 @ 60Hz 24bpp  
1 x HDMI 1.4a, supports 3200 x 2000 @ 60Hz 24bpp
- **Audio** Line-In, Line-Out
- **Power Connector** 1 x 3 Pins, Terminal Block

### Features

- Intel® 4th Generation Core™ i7/Celeron Processors up to 1.9GHz with 4GB/8GB DDR3L Memory
- 4 PoE, 4 x GbE, 4 x USB 2.0/3.0, 2 x RS-232, 2 x RS-422/485, 1 x VGA, 1 x HDMI, Audio
- Comprehensive Palm, Small, Regular-size form-factors
- Compact with Fanless Design
- Rubber Stopper Design with Captive Screw
- Dual HDD/SSD support with RAID 0/1 in regular-size
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- LAN Redundancy (Teaming)
- Fault-Protected RS-485 Transceivers With Extended Common-Mode Range

#### Environment


- **Operating Temperature** - 20 ~ 50°C (-4 ~ 122°F) @ 5 ~ 85% RH with 0.7m/s airflow
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)  
Operating, IEC 60068-2-64, 0.7Grms, random, 5 ~ 500Hz, 1hr/axis (HDD)
- **Ingress Protection** IP40

### Application Software


	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

Dimensions


Unit: mm

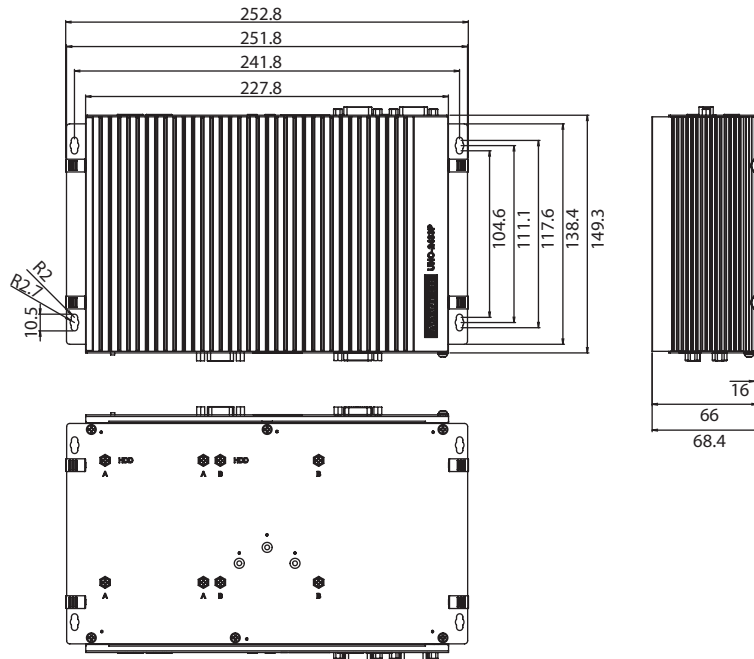

Front I/O View

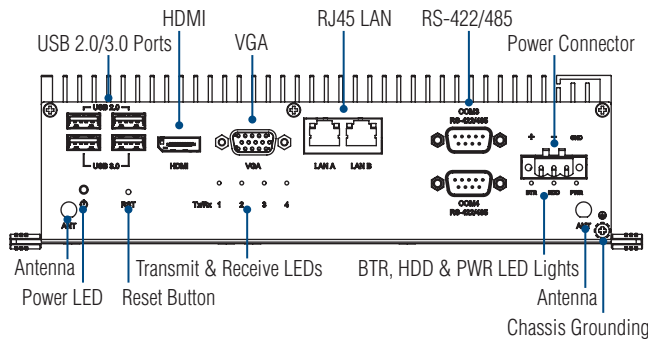

Rear I/O View

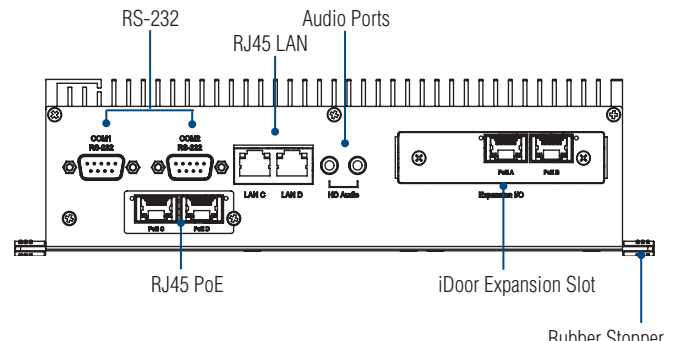

Ordering Information

- **UNO-2483P-4C3AE** Intel® Celeron 2980U ULT 1.6GHz, 4GB, 4 x PoE, 4 x LANs
- **UNO-2483P-474AE** Intel® Core™ i7-4650U ULT 1.7GHz, 8GB, 4 x PoE, 4 x LANs

Accessories

- **1757002161** 150W AC to DC power adapter (Commercial Grade)
- **1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- **1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- **1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- **1700000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- **1700001524** Power Cable 3-pin US type 1.8 M (Commercial Grade)
- **170203183C** Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- **170203180A** Power Cable 3-pin UK type 1.8 M (Commercial Grade)

Embedded OS & Automation Software

- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-2174G/GL UNO-2184G

Intel® Celeron® Automation Computers  
with 4 x GbE, 2 x Mini PCIe, DVI/DP/HDMI

Intel® Core™ i7 Automation Computer  
with 4 x GbE, 2 x Mini PCIe, DVI/DP/HDMI



## Features

- Onboard Intel Celeron 847E 1.1GHz/807UE 1.0GHz/Core i7-2655LE 2.2GHz/i7-3555LE 2.5GHz processors
- 2 x RS-232 and 2 x RS-232/422/485 ports with automatic flow control
- 4 x 10/100/1000Base-T Ethernet
- DVI-I, DP, HDMI support 2 x independent displays
- Audio with Mic in, Line in, Line out
- 6 x USB ports
- Supports 2 x PCI-104 plug-in card with daughterboard expansion
- Windows® WES 2009, WES 7 ready solution
- External accessible CFast slot
- Onboard system status LED indicators
- Supports wake on LAN and boot from LAN function
- Supports Power eSATA
- Isolation between chassis and power ground
- IP40 ingress protection

## Introduction

The UNO-2184G & 2174G/GL are high-performance Intel 3<sup>rd</sup> generation Core i7-3555LE/Intel 2<sup>nd</sup> generation core i7-2655LE/847E/807UE grade controllers that support PCI-104 with daughterboard expansion, 3 x display, 6 x USB, and 2 x Mini PCIe socket. They also feature WLAN, 3G expansion and compatibility with Windows 7. The 4 x Gigabit LANs on the UNO-2184G support teaming function with fault tolerance, link aggregation, and load balance features. The UNO-2184G & 2174G/GL are high end computing platforms designed to support applications with tremendous data volume and 3D content.

## Specifications

### General

- Certification** CE, UL, CCC, FCC, C-Tick, BSMI
- Dimensions (W x D x H)** 255 x 152 x 69 mm (10" x 6.0" x 2.7")
- Enclosure** Aluminum
- Mounting** DIN-rail, Wallmount, VESA
- Power Consumption** UNO-2174G/GL: 30 W/ 20 W (Typical)  
UNO-2184G: 40 W (Typical)
- Power Requirements** 9 ~ 36 V<sub>DC</sub> (e.g. +24V @ 3A) (Min. 72W), AT/ATX
- Weight** 3.0 kg
- OS Support** Windows XP/7, WES7, WES-2009, Linux
- System Design** Fanless with no internal cabling (except COM3/COM4)
- Remote Management** Built-in Advantech DiagAnywhere agent on WES2009 / WES7

### System Hardware

- CPU** UNO-2174G: Intel Celeron 847E 1.1GHz  
UNO-2174GL: Intel Celeron 807UE 1.0GHz  
UNO-2184G: Intel Core i7-3555LE 2.5GHz/i7-2655LE 2.2GHz
- Memory** UNO-2174G/GL: 4 GB DDR3 SDRAM built-in  
UNO-2184G: 4 GB/8 GB DDR3 SDRAM built-in
- Indicators** LEDs for Power, battery, LAN (Active, Status) and Serial (Tx, Rx)
- Keyboard/Mouse** 1 x PS/2
- PC/104 Slot** PCI-104 slot, supports +5 & 3.3V power
- Storage** CF: 1 x CFast slot  
HDD: One built-in 2.5" SATA HDD bracket (Optional 2 x HDD Bracket Kit)
- Display** 1 x DVI-I, 1 x HDMI, 1 x DP (2 x independent displays)
- Audio** Mic in, Line in, Line out
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Mini PCIe Expansion** 2 x Mini PCIe slots with 1 x SIM card

### Daughterboard (Additional purchase required)

- Expansion Slot** PCI-104 support (+5 & 3.3V power)

### I/O Interfaces

- Serial Ports** 2 x RS-232, 2 x RS-232/422/485 with DB9 connectors; automatic RS-485 data flow control
- Serial Port Speed** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 115.2 kbps (Max.)
- LAN** 4 x 10/100/1000Base-T RJ-45 ports  
Supports AMT (UNO-2184G only), wake on LAN and built-in boot ROM in flash BIOS
- USB Ports** 6 x USB (only UNO-2184G-D64E supports 2 x USB3.0)

### Environment

- Humidity** 95% @ 40°C (non-condensing)
- Operating Temperature** UNO-2174/2184 -10 ~ 60°C (14 ~ 140°F) @ 5 ~ 85% RH. (with air flow)  
UNO-2184GX (TBC) -40 ~ 60°C (-40 ~ 140°F) @ 5 ~ 85% RH. (with air flow)
- Storage Temperature** -40 ~ 60°C (-40 ~ 140°F)
- Shock Protection** IEC 60068-2-27  
CompactFlash: 50 G @ wall mount, half sine, 11 ms  
HDD: 20 G @ wall mount, half sine, 11 ms
- Vibration Protection** IEC 60068-2-64 (Random 1 Oct./min, 1hr/axis.)  
CompactFlash: 2 Grms @ 5 ~ 500 Hz,  
HDD: 1 Grms @ 5 ~ 500 Hz

## Ordering Information

- UNO-2184G-D44E** Intel Core i7-2655LE 2.2 GHz, 4 GB RAM Automation Computer
- UNO-2184G-D45E** Intel Core i7-2655LE 2.2 GHz, 8 GB RAM Automation Computer
- UNO-2184G-D64E** Intel Core i7-3555LE 2.5GHz, 4 GB RAM Automation Computer
- UNO-2174G-C54E** Intel Celeron 847 1.1 GHz, 4 GB RAM Automation Computer
- UNO-2174GL-C44E** Intel Celeron 807UE 1.0 GHz, 4 GB RAM Automation Computer

## Accessories

- UNO-2000G-VMKAE** UNO & FPM integration VESA Mount kit
- EWM-W135H01E** Mini PCIe card for WLAN
- 1750006043** Wi-Fi cable 15CM
- 1750002842** Antenna for Wi-Fi
- PCLS-DIAGAW10** Advantech Remote Monitoring & Diagnosis Utility
- UNO-PCM24-AE** 2 x PCI-104 expansion board
- 9656EWMG00E** Half size to full size Mini PCIe bracket
- UNO-2184HD-AE** 2 x HDD Bracket accessory kit for UNO-2184G/2174G

# UNO-1110

## TI Cortex AM3505 DIN-Rail PC with 2 x LAN, 5 x COM, 4 x USB



### Features

- TI Cortex A8 AM3505 600 MHz processor
- 256 MB DDR2 on board
- 4 x RS-232/422/485, 1 x RS-485 serial ports
- Dual 10/100 Mbps Ethernet
- 2 x SD card slots
- Windows® CE 6.0 Ready Platform and optional uClinux OS support
- Included Advantech DaigAnywhere for easy remote configuration & diagnosis
- DIN-rail and Wallmounting Options
- Onboard system & LED indicators
- Supports Microsoft .NET compact framework 3.5
- Fanless and no internal cabling design
- System/Field ground isolation

### Introduction

Advantech's UNO-1110 series are RISC-grade embedded platforms that offer up to 2 LAN ports, 5 serial ports and 2 SD card slots. The UNO-1110 series also come with Windows CE 6.0/Linux OS, offering an integrated image. Additionally, the UNO-1110 series operate at temperatures between -10 ~ 70°C, and their small size and lightweight design allows it to be installed in tight industrial environments. The UNO-1110 series are excellent communication gateways for converting communication protocols, I/O control, and data storage in the industrial field.

### Specifications

#### General

- Certification** CE, FCC Class A, UL, CCC
- Dimensions (W x H x D)** 50 x 154 x 127 mm (1.9" x 6.1" x 5")
- Enclosure** Aluminium with solid mounting hardware
- Mounting** DIN-rail, Wallmount
- Industrial Grounding** Isolation between chassis and power ground
- Power Consumption** 10 ~ 30 V<sub>DC</sub> (13 W), AT, ground isolation, dual power inputs.
- Weight** 0.45 kg
- System Design** Fanless design with no internal cabling

#### System Hardware

- CPU** TI Cortex A8 AM3505 600 MHz
  - Memory\*** Onboard 256 MB DDR2
  - Display** DB15 VGA connector, up to 1024 x 768
  - Indicators** Power, Serial (Tx, Rx), SD 4 x DI/2 x DO 4 x programmable LED
  - Storage** 2 x SD card slots (one for boot and another for data storage)
  - Other** Realtime clock, Watchdog timer
  - SIM** 1 x card slot (reserved for project and will only have 1 x SD card slot left)
  - Expansion** 1 x Mini PCIe card slot (Signal Protocol: USB Differential)
- \*Note: up to 512MB DDR2 (reserved for project)

#### System Software

- Operating System** WinCE 6.0/ Linux
- Remote Management** Built-in Advantech DiagAnywhere agent on Windows

#### I/O Interface

- Serial Ports** 4 x RS-232/422/485\*\*, 1 x RS-485  
\*\*COM3, 4 optional isolation by project  
Automatic RS-485 data flow control, DIP Switch configuration
- Serial Port Speed** RS-232: 300 ~ 115.2 kbps  
RS-422/485: 300 ~ 115.2 kbps (Max)
- LAN** 2 x 10/100Base-T RJ-45 ports
- USB** 4 x USB 2.0
- Digital Input** 4 x Digital Inputs\*\*  
Dry contact  
Logic level 0: Open  
Logic level 1: Close

#### Digital Output

- 2 x Digital Outputs\*\*
- \*\*Optional isolation by project
- Open Collect to 30 V
- 200 mA max Load, power dissipation 450mW
- \*\*\*Audio Line-out reserved for project

#### Environment

- Ingress Protection** IP40
- Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature** -40 ~ 80°C (-4 ~ 176°F)
- Operating Humidity** 20 ~ 95% (non-condensing)
- Storage Humidity** 20 ~ 95% (non-condensing)
- Shock Protection** Half-sine wave, 30G, 11ms
- Vibration Protection** Random 1Grms

### Accessories

- 1757002321** 63WC to DC UNO series power adapter (Industrial Grade)
- 1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- 170000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- PWR-249-AE** 65W AC to DC power adapter (Commercial Grade)
- 1700001524** Power Cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C** Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A** Power Cable 3-pin UK type 1.8 M (Commercial Grade)

### Embedded OS & Automation Software

- 2070012469** Image WinCE 6.0 Eng. V3.04 B304 for UNO-1110
- 2070012067** Image WinCE 6.0 TC for UNO-1110-R11AE
- 2070012070** Image WinCE 6.0 KR for UNO-1110-R11AE
- 2070012071** Image WinCE 6.0 JP for UNO-1110-R11AE
- 2070012073** Image WinCE 6.0 SC for UNO-1110-R11AE

### Ordering Information

- UNO-1110-R11AE** TI Cortex AM3505 600MHz DIN-rail PC UNO-1110 with WinCE 6.0 (English), 1GB SD Card Advantech Remote Monitoring & Diagnosis Utility
- PCLS-DIAGAW10** 1GB SLC SD Card (-40 ~ 85° C)
- SQF-ISDS1-1G-86E** UNO-1110 Linux MUL Image
- 2070012539**



# UNO-1252G

Intel® Quark Palm-Size Control DIN-Rail PC w/ 2 x LAN, 2 x mPCIe, 2 x COM, 8 x GPIO, 2 x USB, 1 x microSD, 1 x SIM

**NEW**



## Features

- Intel® Quark 400Mhz Processor with 256MB Memory
- 2 x LAN, 2 x mPCIe, 2 x COM, 8 x GPIO, 2 x USB, 1 x microSD, 1 x SIM, 1 x Power Terminal
- Compact with Fanless Design
- Supports Isolation COM, Digital I/O by iDoor Technology for Sensor Devices
- Supports 2 x GbE for Network Redundancy by iDoor Technology
- Supports 4G/ 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- Supports CANBus/CANOpen by iDoor for Transportation
- Supports FieldBus, ProfiBus by iDoor for Industrial Control

## Introduction

The UNO-1252G is a palm-size Intel Quark DIN-Rail controller for IoT gateway solution. This controller featured with dual LAN ports for basic gateway function to economic gateway application for bridging cloud and brown area. The general purpose input/output ports also help gateway controller direct read status of sensors and indicate results required. The UNO-1252G is also equipped with Advantech iDoor technology that uses iDoor modules to extend this product to become a protocol gateway controller, such as a GbE card for network redundancy, CANBus/CANOpen for transportation, ProfiBus for industrial control, 3G/4G/Wi-Fi for wireless gateway or isolation COM/DIO for sensors. In addition, the UNO-1252G also features eight LED indicators for Status of Power, Battery, SD, COM and three programmable indicators.

## Specifications

### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions (W x D x H)** 70 x 90 x 100 mm (2.76" x 3.54" x 3.94")
- **Form Factor** Palm Size
- **Enclosure** Aluminum Housing
- **Mounting** DIN-rail, Wallmount
- **Weight (Net)** 0.6 kg (1.33 lbs)
- **Power Requirement** 12V/24V<sub>DC</sub> ± 20%
- **Power Consumption** 10W (Typical)
- **OS Support** Linux

### System Hardware

- **BIOS** 8MB SPI Flash
- **Processor** Intel Quark 400 MHz
- **System Chip** Integrated Intel SoC Chipset
- **Memory** On-board 256 MB DDR3 800 MHz
- **LED Indicators** LEDs for Power, battery, LAN (Active, Status), Tx/Rx and MicroSD, Programmable Indicators
- **Storage** One MicroSD Slot  
CFast drive by iDoor Technology (Optional)
- **Expansion I/O Interfaces** 1 Full-size mPCIe, 1 half-size mPCIe w/o USB signal

### I/O Interfaces

- **Serial Ports** 1 x RS-232, DB9, 50~115.2kbps, , supports console debug  
1 x RS-422/485, DB9, auto flow control, 50~115.2kbps
- **LAN Ports** 2 x RJ45, 10/100 Mbps
- **USB Ports** 1 x USB 2.0, 1 x USB Client
- **Power Connector** 1 x 3 Pin, Terminal Block
- **Grounding Protection** Chassis Grounding
- **GPIO** 4-ch general purpose input, 4-ch general purpose output
- **SIM** 1 x SIM card slot

### Environment


- **Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 1Grms, random, 5 ~ 500Hz, 1 hr/axis
- **Ingress Protection** IP40

## Application Software


	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

Dimensions


Unit: mm

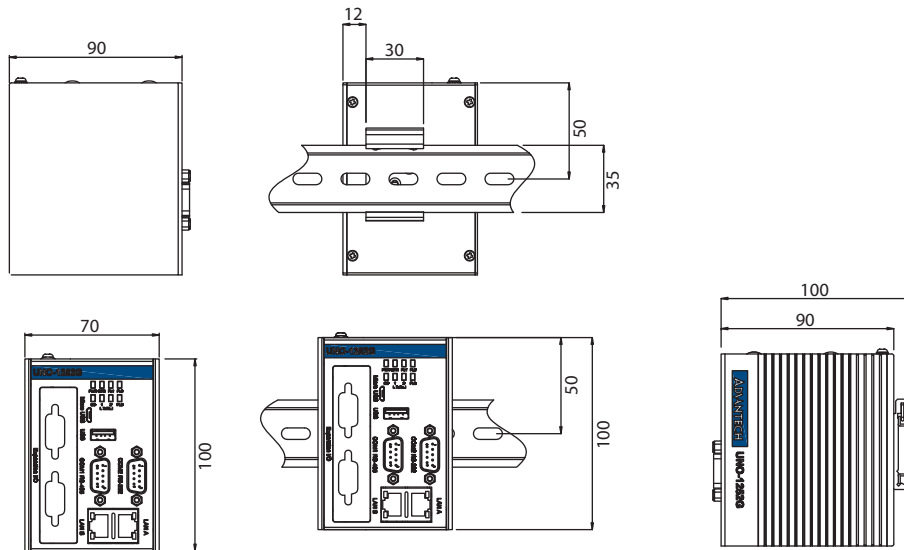


Front I/O View

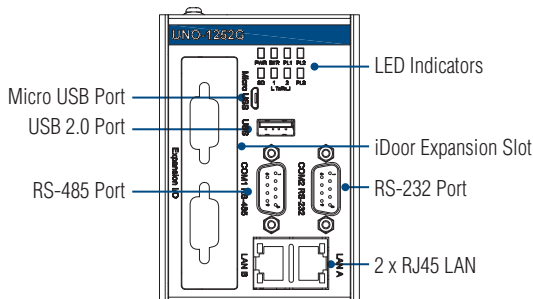

Top I/O View

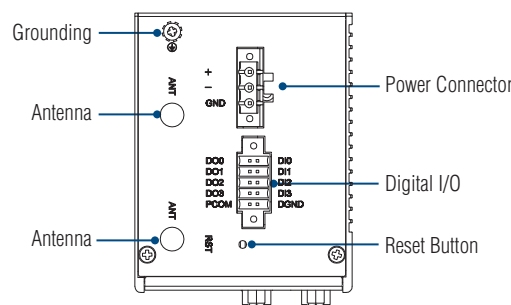

Bottom I/O View

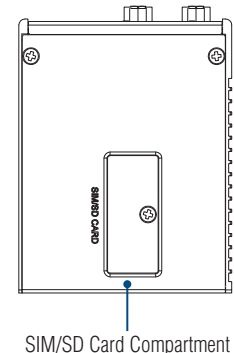

Ordering Information

- UNO-1252G-Q0AE Intel Quark, 2 x LAN, 2 x mPCIe, 2 x COM, 8 x GPIO, 2 x USB, 1 x microSD, 1 x SIM

Accessories

- 1757002321 63WC to DC UNO series power adapter (Industrial Grade)
- PWR-249-AE 65W AC to DC power adapter (Commercial Grade)
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- 1700001524 Power Cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A Power Cable 3-pin UK type 1.8 M (Commercial Grade)

Embedded OS & Automation Software

- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license

iDoor Modules

- PCM-24U2U3-AE 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24D2R2-AE 2-Port Isolated RS-232 mPCIe, DB
- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANOpen, DB9
- PCM-26D1DB-SAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave
- PCM-26R2EC-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- PCM-26R2EC-SAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Slave
- PCM-26R2EI-MAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- PCM-26R2EI-SAE 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Slave
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2PN-SAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Wireless I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# UNO-1372G

**Intel® Atom™ Quad-Core Small- Size Control DIN-Rail PC w/ 3 x GbE, 2 x mPCIe, 1 mSATA, 2 x COM, 8 x DI/O, 3 x USB, HDMI/VGA**

**NEW**



## Features

- Intel® Atom E3845 1.91GHz processor with 4GB DDR3L Memory
- 3 x GbE, 3 x USB, 2 x COM, 1 x VGA, 1 x HDMI, Audio, iDoor, mSATA, 2mPCIe, 1 x SATA, 8 x DIO, 1 x Power Terminal
- Compact with Fanless Design
- Dual Power Input for Reducing Power Down Time
- Hot-Swap RTC Battery with easy Access on the Top
- Digital I/O with Isolation Protection for Sensing and controlling
- Diverse system IO and Supports Fieldbus Protocol by iDoor Technology as a Protocol Gateway
- 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology as a Communication Gateway
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- LAN Redundancy (Teaming)

## Introduction

The UNO-1372G is an Intel Atom Quad-Core DIN-Rail controller. This controller featured with dual power input that shorten the down time to enhance operation excellence. The general purpose input/output ports also help machine builders integrate direct control of start/stop inspection and indicate inspection results. The UNO-1372G is also equipped with Advantech iDoor technology that uses iDoor modules to extend this product to become a gateway controller, such as a PoE card, or isolation serial port card. The UNO-1372G also features 3 gigabyte LAN ports, 1 USB 3.0 port, 2 COM ports and HDMI& VGA display ports for essential upstream and downstream links, for example, PoE connected to IP camera from iDoor.

## Specifications

### General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions ( W x D x H )** 85 x 139 x 152 mm (3.3" x 5.5" x 6.0")
- **Form Factor** Small Size
- **Enclosure** Aluminum Housing
- **Mounting** DIN-rail, Wallmount
- **Weight (Net)** 1.6kg (3.5lbs)
- **Power Requirement** 9~36V<sub>DC</sub>
- **Power Consumption** 24W (Typical)
- **OS Support** Microsoft® Windows 7/8, WES7/WE8S, Linux

### System Hardware

- **BIOS** AMI UEFI 128Mbit Flash BIOS
- **Watchdog Timer** Programmable 6 levels timer interval, from 15 to 255 sec
- **Processor** Intel Atom E3845 1.91GHz, 2MB L2 Cache
- **System Chip** Integrated Intel SoC Chipset
- **Memory** On-board 4GB DDR3L 1333 MHz
- **Graphics Engine** Intel® HD Graphics
- **Ethernet** Intel® i210-IT GbE, 802.1Qav, 802.1AS, 802.3az Realtek RTL8111E GbE
- **LED Indicators** LEDs for Power, battery, LAN (Active, Status), Tx/Rx and HDD
- **Storage** One drive bay for SATA 2.5" HDD (Compatible with 9.5mm height HDD) CFast drive by iDoor Technology (Optional)
- **Expansion** 2 x Full-size mPCIe slot, 1x mSATA (Full-size)

### I/O Interfaces

- **Serial Ports** 1 x RS-232, DB9, 50~115.2kbps  
1 x RS-422/485, DB9, auto flow control, 50~115.2kbps
- **LAN Ports** 3 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet, support Jumbo Frame
- **USB Ports** 3 x USB Ports (2 x USB2.0, 1 x USB 3.0 compliant )
- **Displays** 1 x VGA, supports 1920x1200@60Hz 24bpp  
1 x HDMI 1.4a, supports 1920x1080@60Hz 24bpp
- **Audio** Line-Out
- **Power Connector** 1 x 4 Pins, Terminal Block to support dual power input
- **Grounding Protection** Chassis Grounding





### Digital I/O

- **4-ch digital input** Wet/dry contact with Isolation Protection 2,500 VDC
- **4-ch digital output** Compatible 5 V/TTL, Capable Sink: 24 mA max. per channel

### Environment

- **Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 1Grms, random, 5 ~ 500Hz, 1 hr/axis
- **Ingress Protection** IP40


## Application Software

	<p>Version : V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version : V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version : V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version : V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>




## Dimensions


Unit: mm

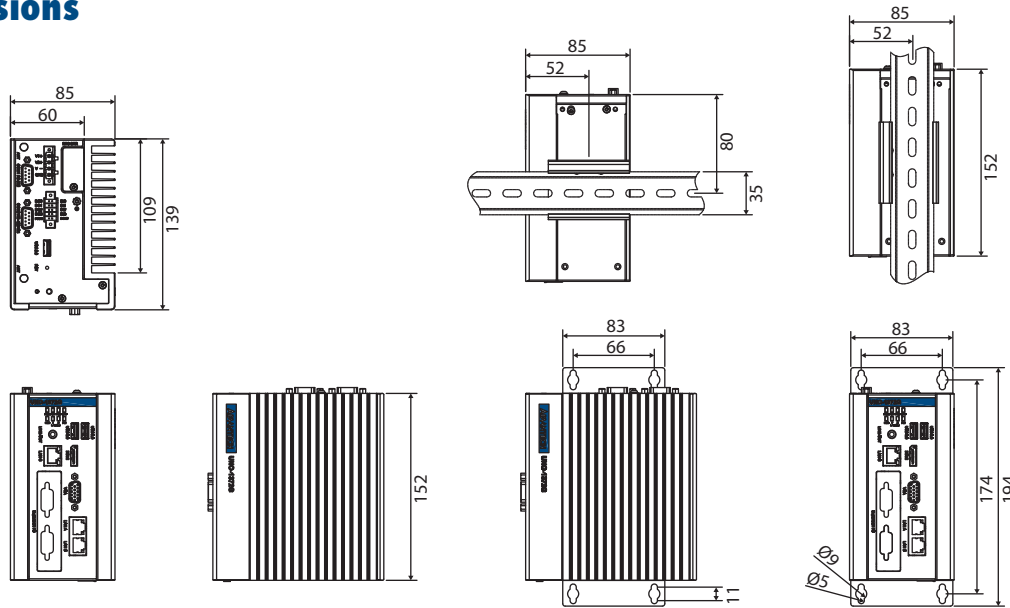

## Front IO View

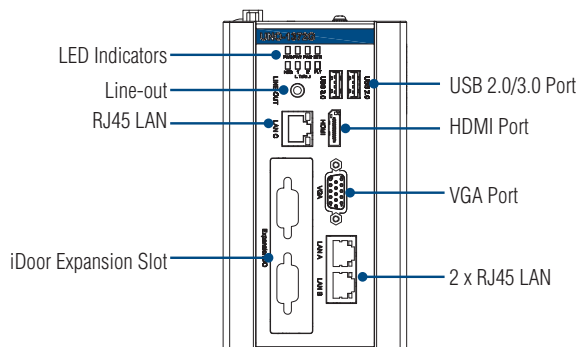

## Top IO View

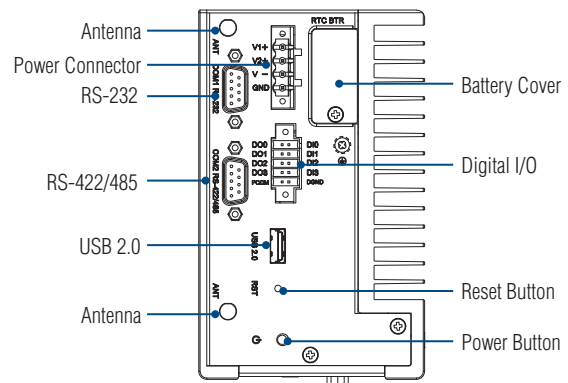

## Ordering Information

- UNO-1372G-E3AE Intel Atom Quad-Core 1.91GHz, 4GB, 3 x LAN, 2 mPCIe, iDoor

## iDoor Modules

- PCM-23C1CF-AE 1 CFast Slot with Cover Protection
- PCM-23U1DG-AE USB Slot w/ Lock for USB Dongle
- PCM-24R2GL-AE 2-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24U2U3-AE 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24D2R4-AE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-24D4R4-AE 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-24S2WF-AE WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24S23G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- PCM-26R2PN-MAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2PN-SAE 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- PCM-26D1DB-MAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26D1DB-SAE 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave

## Accessories

- 1757002321 65WC to DC UNO series power adapter (Industrial Grade)
- PWR-249-AE 65W AC to DC power adapter (Commercial Grade)
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- 1700001524 Power Cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C Power Cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A Power Cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software

- 2070013467 Image WES7P X64 MUI. for UNO-1372G
- 2070013468 Image Linux for UNO-1372G
- 968WEXP003X PanelExpress V2.0 300 tags S/W license
- 968WEXP015X PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X PanelExpress V2.0 5000 tags S/W license

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Wireless I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# UNO-1483G

Intel® Core™ i3 Regular-Size Control  
DIN-Rail PC w/ 4 x GbE, 3 x mPCIe,  
1 PCIe, DP/VGA, 8 DI/O

NEW



## Features

- 4th Generation Intel® Core™ i3 Processors up to 1.7GHz with 8GB DDR3L Memory
- 4 x GbE, 4 x USB 2.0/3.0, 1 x RS-232, 2 x RS-422/485, 1 x VGA, 1 x DP, Audio
- Compact with Fanless Design
- Supports PCIe card, PoE iDoor module and Digital I/O for Machine Motion/Vision application
- Dual Power Input and Remote Power Button for reducing power down time and remote power control
- 4G/3G/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- Hot-Swap RTC battery with easily access at top side
- Supports Fieldbus Protocol by iDoor Technology

## Introduction

The UNO-1483G is an Intel 4th generation Core i3 DIN-Rail controller. This controller featured with dual power input that shorten the down time to enhance operation excellence. The general purpose input/output ports also help machine builder integrate direct control of start/stop inspection and indicate inspection results. UNO-1483G also equipped with PCIe slot and Advantech iDoor technology that extend this product to motion controller, like motion control card, or isolation control unit from iDoor modules. In companion these features, UNO-1483G featured with 4 gigabyte LAN, 2 USB 3.0, 3 COM, DP, VGA can support essential link for upstream and downstream, for example, PoE connected to IP camera from iDoor.

## Specifications

### General

- Certification** CE, FCC, UL, CCC, BSMI
- Dimensions (W x D x H)** 106 x 139 x 198 mm (4.2" x 5.8" x 7.8")
- Form Factor** Regular Size
- Enclosure** Aluminum Housing
- Mounting** DIN-rail, Wallmount
- Weight (Net)** 2.4kg (5.3lbs)
- Power Requirement** 12V/24V<sub>DC</sub> ± 20%
- Power Consumption** 41W (Typical), 60W (Max)
- OS Support** Microsoft® Windows 7/8, WE7/WE8S, Linux

### System Hardware

- BIOS** AMI UEFI 128Mbit Flash BIOS
- Watchdog Timer** Programmable 6 levels timer interval, from 15 to 255 sec
- Processor** Intel® 4th Gen. Core™ i3-4010U ULT 1.7GHz Haswell Dual Core, 3MB L2  
Core i7-4650U/i5-4300U/Celeron 2980U by project  
Integrated Intel 8 Series Chipset  
On-board 8GB DDR3L 1333/1600 MHz
- System Chip** Intel® HD Graphics 4400
- Memory** Intel® i210-IT GbE
- Graphics Engine** Intel® i218-LM GbE
- Ethernet** LEDs for Power, battery, LAN (Active, Status), Tx/Rx and HDD
- LED Indicators** One drive bay for SATA 2.5" HDD (Compatible with 9.5mm height HDD)
- Storage** CFAST drive by iDoor Technology (Optional)
- Expansion** 2 x Full-size mPCIe slot, mPCIe 2.0 (1 supports mSATA / SIM card)  
1 x Half-size mPCIe slot w/o USB signal  
1 x PCIe slot with x1 signal

### I/O Interfaces

- Serial Ports** 1 x RS-232, DB9, 50-115.2kbps  
2 x RS-422/485, DB9, auto flow control, 50-115.2kbps
- LAN Ports** 4 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet, support Jumbo Frame
- USB Ports** 4 x USB Ports (2 x USB2.0, 2 x USB3.0 compliant)
- Displays** 1 x VGA, supports 1920x1200@60Hz 24bpp  
1 x DP 1.2, supports 1920x1080@60Hz 24bpp
- Audio** Line-Out
- Power Connector** 1 x 7 Pins, Terminal Block to support dual power input and remote power control
- Grounding Protection** Chassis Grounding

### Digital I/O

- 4-ch digital input** Wet/dry contact with Isolation Protection 2,500 V<sub>DC</sub>
- 4-ch digital output** Compatible 5 V/TTL, Capable Sink: 24 mA max. per channel


### Environment

- Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- Vibration Protection** Operating, IEC 60068-2-64, 1Grms, random, 5 ~ 500Hz, 1 hr/axis


## Application Software

	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.


### Dimensions

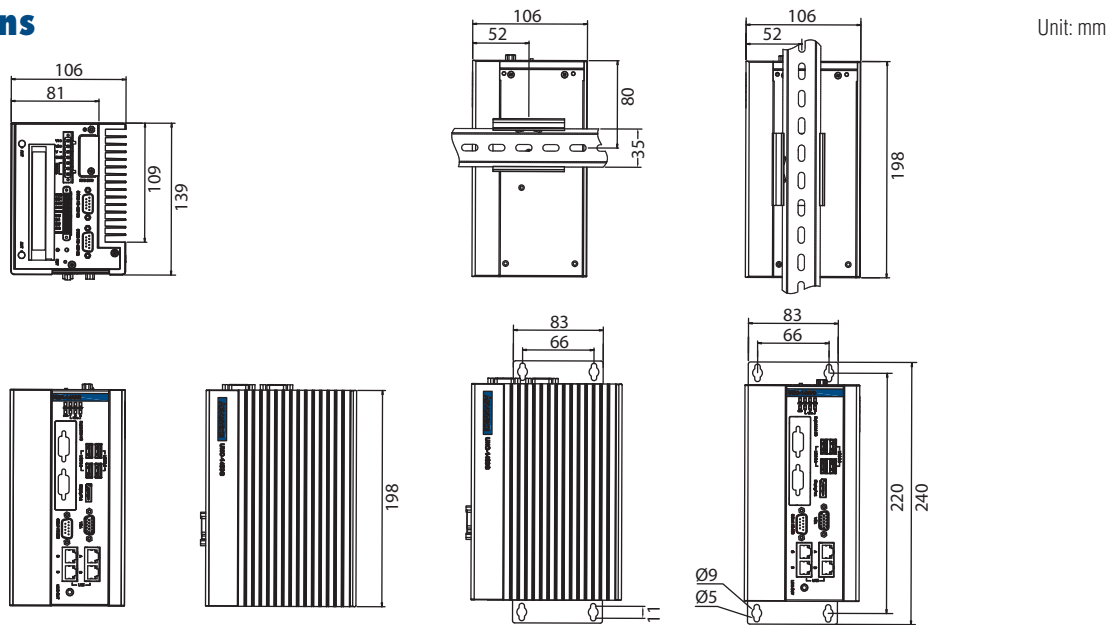

### Front I/O View

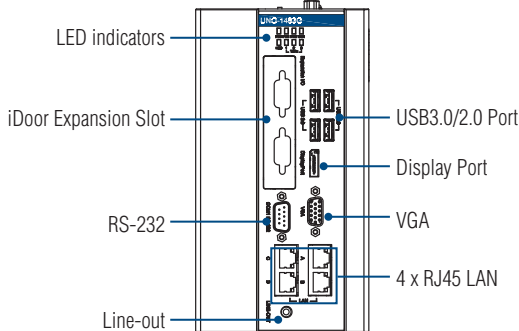

### Top I/O View

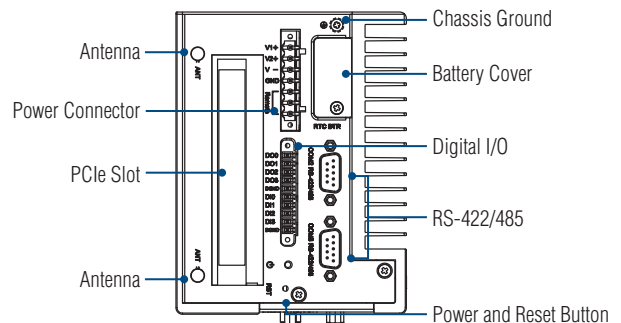

### Ordering Information

- UNO-1483G-434AE** Intel® Core™ i3-4010U ULT 1.7GHz, 8GB, 4 x LANs, 2 x mPCIe, 1 PCIe Slot

**Note:**

\* Processor i7-4650U/i5-4300U/Celeron 2980U reserved for project.  
 \* Support PCI expansion by project base.

### Accessories

- PWR-244-AE** 96W AC to DC power adapter (Commercial Grade)
- 1700001524** Power cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C** Power cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A** Power cable 3-pin UK type 1.8 M (Commercial Grade)
- SQF-SMSM4-16G-S8E** SQF MSATA 820 16G MLC 4-CH (-40~85°C)

### Embedded OS & Automation Software

- 2070013050** Image WES7P X64 MUI. for UNO-1483G
- 2070013219** Image Linux for UNO-1483G
- 968WEXP003X** PanelExpress V2.0 300 tags S/W license
- 968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- 968WEXP050X** PanelExpress V2.0 5000 tags S/W license
- 968EMLSAP2** SUSIAccess Pro V2.0 Package CD/ download card/flyer

### iDoor Modules

- PCM-24U2U3-AE** 2-Port USB 3.0, mPCIe, USB-A type
- PCM-24R2PE-AE** 2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45
- PCM-24R2GL-AE** 2-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-24D4R4-AE** 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-26R2PN-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- PCM-26R2PN-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- PCM-26R2EC-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- PCM-26R2EC-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Slave
- PCM-26R2EI-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- PCM-26R2EI-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Slave
- PCM-26D1DB-MAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- PCM-26D1DB-SAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPC Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-3382G

# UNO-3384G

## Intel® Core™ i7/Celeron Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/DP

**NEW**



### Features

- 4th Generation Intel® Core™ i7/Celeron Processors with 8GB/4GB DDR3L Memory
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232/RS-422/485, 1 x HDMI, 1 x DP, 2 x PCI/PCIe, 2 x mPCIe (2 x full)
- Hot-Swappable HDD/SSD support for RAID 0/1
- C1D2 & ATEX certified
- Protection Technology of optional UPS is compatible with UNO-3300 series which enhances the quality of input power and secure the data safety
- Able to quickly fit to Advantech FPM series products with accessible docking
- Supports Fieldbus Protocol by iDoor Technology 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- LAN Redundancy (Teaming)

### Introduction

Advantech's UNO-3300 series offer an open and universal automation solution, saving space of book mount and quickly build-in module with Advantech FPM series monitor in all industries. The newest UNO-3300 series of the Control Cabinet PC have attractive and flexible extension capabilities such as 2 x USB 2.0 ports and 2 x USB 3.0 ports, 1 x HDMI, 1 x DP, 1 x COM ports, 2 x LANS, 2 x mPCIe and 2 x PCI or PCI-E. From the easy back-up maintenance- Innovative transformers in detachable panel PC - Complete connectivity - Protection Technology with optional UPS (Optional UPS is compatible with UNO-3300 series which enhances the quality of input power and secure the data safety) they are at home in all applications, absolutely can be utilized for measuring, real-time vision inspection, open- and closed-loop control, Machine Control, collecting of process and machine data, industrial image processing.

### Specifications

#### General

- Certification** CE, FCC, UL, CCC, BSMI, C1D2, ATEX  
C1D2: Class I Division 2 Group A,B,C,D T4A  
ATEX: CE 0539 Ex II 2 D Ex nA (Ic) IIC T4 Gc
- Dimensions (W x D x H)** UNO-3382G: 254 x 207 x 65.2 mm (100" x 81.5" x 25.7")  
UNO-3384G: 254 x 207 x 103.2 mm (100" x 81.5" x 40.6")
- Form Factor** Regular Size
- Enclosure** Aluminum Housing
- Mounting** Book mounting
- Weight (Net)** UNO-3382G: 3.1kg  
UNO-3384G: 3.9kg
- Power Requirements** 18 ~ 36 V<sub>DC</sub>
- Power Consumption** 45W (Typical)
- OS Support** WIN7/8, WES7, WES-2009, Linux

#### System Hardware

- BIOS** AMI UEFI 128Mbit Flash BIOS
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Processor** Intel® Core™ i7-4650U 1.7GHz Haswell, 4MB L2  
Intel® Celeron 2980U 1.6GHz, 2MB L2
- System Chip** Integrated Intel 8 Series Chipset
- Memory** On-board 4GB/8GB DDR3L 1333 MHz
- Graphics Engine** Intel® HD graphics 5000
- Ethernet** Intel® i210-ITGbE
- LED Indicators** LEDs for Power, Battery, Tx/Rx, HDD and reserved x 2
- Storage** 1 x CFast slot  
Two built-in 2.5" SATA HDD brackets with support for RAID 0/1. (Compatible with 9.5mm height HDD)  
UNO-3382G: 2 Full-size mPCIe  
UNO-3384G: 2 Full-size mPCIe, 1x PCIe4, 1x PCIe1
- Expansion**

#### I/O Interfaces

- Serial Ports** 1 x RS-232/422/485, DB9, auto flow control, 50-115.2kbps
- LAN Ports** 2 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)
- Displays** 1 x HDMI, supports 1920 x 1200 @ 60Hz 24bpp  
1 x DP, supports 3200 x 2000 @ 60Hz 24bpp
- Power Connector** 1 x 3 Pin, Terminal Block

#### Environment

- Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)

### Application Software


	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.

## Dimensions

Unit: mm


### UNO-3382G

### UNO-3384G

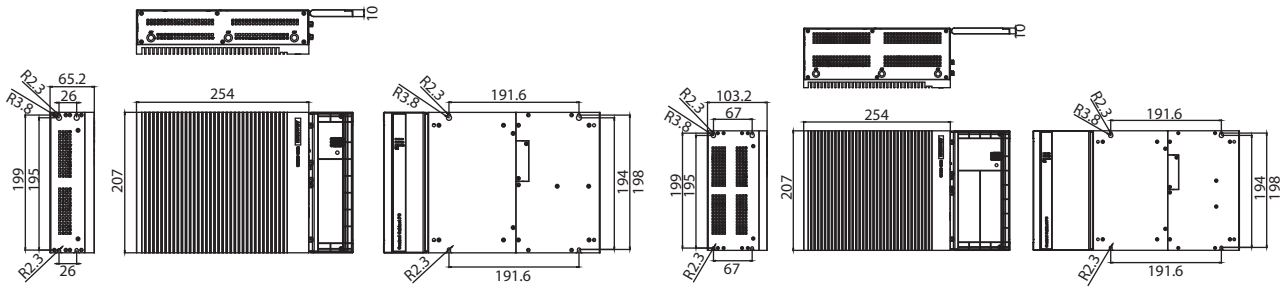

## I/O View

### UNO-3384G

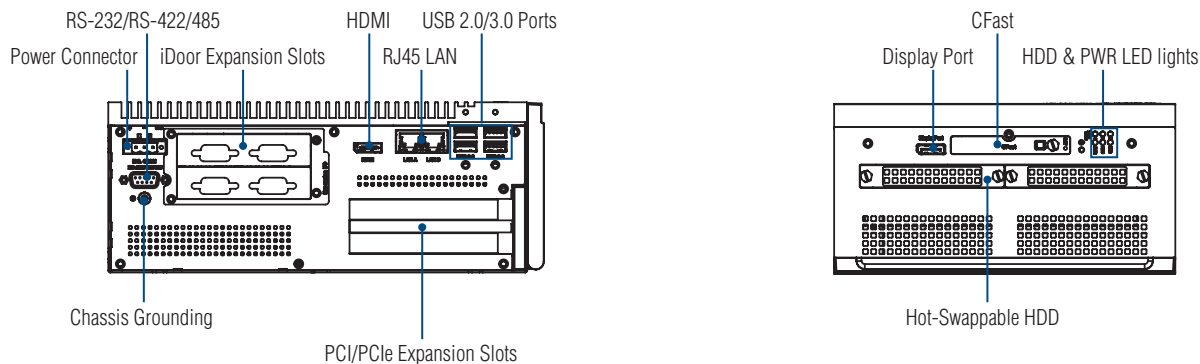

## Ordering Information

- **UNO-3382G-474AE** Intel® Core™ i7-4650U 1.7GHz, 8GB, 2 x LANs, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP
- **UNO-3384G-474AE** Intel® Core™ i7-4650U 1.7GHz, 8GB, 2 x LANs, 1 x PCIe4, 1 x PCI, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP
- **UNO-3382G-4C3AE** Intel® Celeron® 2980U 1.6GHz, 4GB, 2 x LANs, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP
- **UNO-3384G-4C3AE** Intel® Celeron® 2980U 1.6GHz, 4GB, 2 x LANs, 1 x PCIe4, 1 x PCI, 2 x Full-size mPCIe, 1 x HDMI, 1 x DP

## Accessories

- **1757002161** 150W AC to DC power adapter (Commercial Grade)
- **1700001524** Power cable 3-pin US type 1.8 M (Commercial Grade)
- **170203183C** Power cable 3-pin EU type 1.8 M (Commercial Grade)
- **170203180A** Power cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software

- **2070013477** Image WES7P X64 MUI. for UNO-3382G/3384G
- **2070013478** Image Linux for UNO-3382G/3384G
- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license

## iDoor Modules


- **PCM-24R2PE-AE** 2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45
- **PCM-24R2GL-AE** 2-Port Gigabit Ethernet, mPCIe, RJ45
- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-24D4R4-AE** 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-26R2PN-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- **PCM-26R2PN-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- **PCM-26R2EC-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Master
- **PCM-26R2EC-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45, Slave
- **PCM-26R2EI-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Master
- **PCM-26R2EI-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45, Slave
- **PCM-26D1DB-MAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- **PCM-26D1DB-SAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# UNO-3483G

## Intel® Core™ i7 Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/VGA

**NEW**

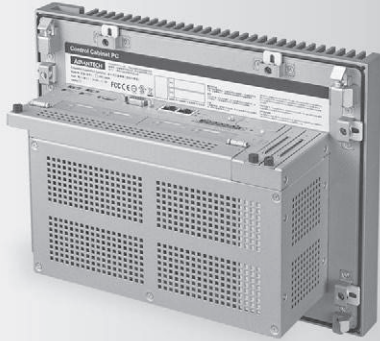

### Features

- 3rd Generation Intel® Quad Core Processors, up to 2.1 GHz with 8GB DDR3L Memory
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232, 1 x RS-422/485 (pin header), 1 x VGA, 1 x HDMI
- 1 x PCIe4, 3 x mPCIe (2 x full, 1 x half), 1 x mSATA slot
- Space-saving Compact with Fanless Design
- Thumb screw to easy maintenance
- Hot-Swappable HDD/SSD support for RAID 0/1
- High protection IP67 certification
- Convenient "Place & Click"
- Easily exchangeable RTC battery
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports MRAM by iDoor Technology
- Chassis Grounding Protection
- LAN Redundancy (Teaming)

### Introduction

Advantech's UNO-3483G Control Cabinet PC is configured with high-performance Intel Core i7 processors and QM77 PCH, which supports two displays, four USB ports, two mPCIe sockets, and up to three expansion slots. It also includes iDoor technology which supports automation feature extensions such as industry Fieldbus communication, Wi-Fi/3G, Digital I/O. The UNO-3483G has a compact heat sink with integrated seals mounted on the outside of the cabinet through a corresponding cutout, has a placing-and-click feature considers users' activities and then simplifies the installation procedure for space-saving and high protection using IP67 certification. The high performing UNO-3483G model offers user the maximum flexibility when selecting the control cabinet and remains independent of the number and form of control buttons and switches on the front panel.

### Specifications

#### General

- **Certification** CE, FCC, UL, BSMI
- **Dimensions (W x D x H)** 305 x 82 x 225 mm (12" x 3.2" x 8.9")
- **Form Factor** Regular Size
- **Enclosure** Aluminum Housing
- **Mounting** Enclosure mounting
- **Weight (Net)** 4.9kg (10.8lbs)
- **Power Requirements** 12V/24V<sub>DC</sub> ± 20%
- **Power Consumption** 50W (Typical)
- **OS Support** WIN7/8, WES7, WES-2009, Linux

#### System Hardware

- **BIOS** AMI UEFI 128Mbit Flash BIOS
- **Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- **Processor** Intel® Core™ i7-3612QE QC 2.1GHz Ivy Bridge Quad Core, 6MB L2
- **System Chip** Integrated Intel 8 Series Chipset
- **Memory** On-board 8GB DDR3L 1333 MHz
- **Graphics Engine** Intel® HD Graphics 4000
- **Ethernet** LAN A: Intel® 82579LM GbE, Intel® AMT, IEEE802.1AS, 802.3az  
LAN B: Intel® 82583V GbE, IEEE802.1AS, 802.3az
- **LED Indicators** LEDs for Power, LAN (Active, Status), Tx/Rx and HDD
- **Storage** One mSATA slot  
Two built-in 2.5" SATA HDD brackets with support for RAID 0/1. (Compatible with 9.5mm height HDD)  
1 x PCIe4, 2 x Full-size mPCIe, 1 x half-size mPCIe
- **Expansion**

#### I/O Interfaces

- **Serial Ports** 1 x RS-232, DB9, 50~115.2kbps (pin header)  
1 x RS-422/485, DB9, auto flow control, 50~115.2kbps (pin header)
- **LAN Ports** 2 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)
- **Displays** 1 x VGA, supports 1920 x 1200 @ 60Hz 24bpp  
1 x HDMI 1.4a, supports 3200 x 2000 @ 60Hz 24bpp
- **Audio** Mic-in, Line-In, Line-Out (Pin Header)
- **Power Connector** 1 x 7 Pin, Terminal Block to support dual power input and remote power control

#### Environment


- **Operating Temperature** - 20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)
- **Ingress Protection** Integrated seals maintain with IP67 design

### Application Software


	<p>Version : V2.1 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version : V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>
	<p>Version : V2.0.3.8 or above</p> <p>Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.</p>
	<p>Version : V2.0.3.8 or above</p> <p>An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.</p>

## Dimensions

Unit: mm

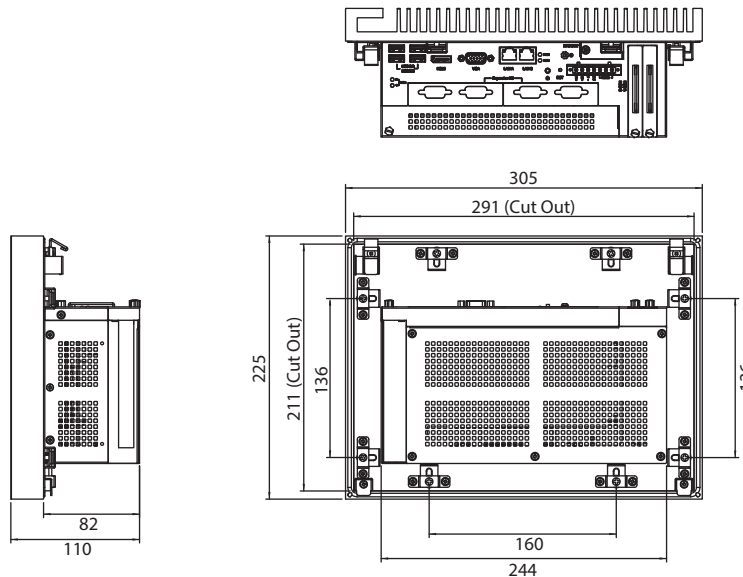

## I/O View

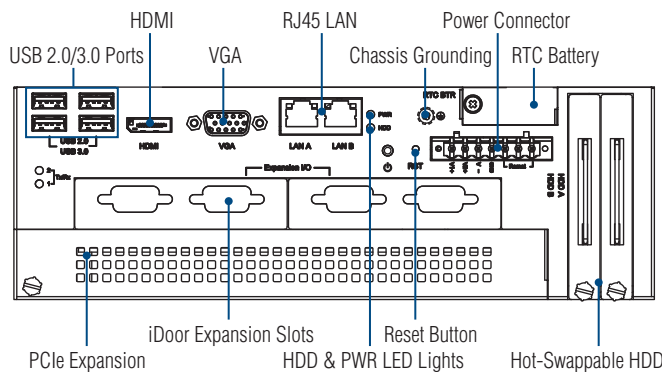

## iDoor Modules

- **PCM-23C1CF-AE** 1 CFast Slot with Cover Protection
- **PCM-24R2PE-AE** 2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45
- **PCM-24D2R4-AE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-24D4R4-AE** 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- **PCM-27D24DI-AE** 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- **PCM-24S2WF-AE** WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- **PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- **PCM-26R2PN-MAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Master
- **PCM-26R2PN-SAE** 2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- **PCM-26D1DB-MAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- **PCM-26D1DB-SAE** 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9, Slave

## Ordering Information

- **UNO-3483G-374AE** Intel® Core™ i7-3612QE QC 2.1GHz, 8GB, 2 x LANs, 1 x PCIe4, 2 x Full-size mPCIe, 1 x half-size mPCIe

## User scenario



## Accessories

- **1757002161** 150W AC to DC power adapter (Commercial Grade)
- **1700001524** Power cable 3-pin US type 1.8 M (Commercial Grade)
- **170203183C** Power cable 3-pin EU type 1.8 M (Commercial Grade)
- **170203180A** Power cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS & Automation Software

- **2070013472** Image WES7P X64 MUI. for UNO-3483G
- **2070013473** Image Linux for UNO-3483G
- **968WEXP003X** PanelExpress V2.0 300 tags S/W license
- **968WEXP015X** PanelExpress V2.0 1500 tags S/W license
- **968WEXP050X** PanelExpress V2.0 5000 tags S/W license

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# UNO-3083G/3085G UNO-3073G/3075G UNO-3073GL

Intel® Core i7/Celeron 800 series  
Automation Computers with 3/5 PCI(e)  
expansion slots, 2 mPCIe slots and  
2 CFast sockets



## Features

- Onboard Intel Core i7-3555LE/i7-2655LE/Celeron 847E/807UE, 2.2GHz/1.1GHz/1.0GHz
- 2 x RS-232/422/485 ports with automatic flow control and 2 x RS-232 pin head reserved
- 2 x 10/100/1000Base-T Ethernet
- DVI-I, HDMI support 2 x independent displays
- Audio with Mic in, Line out
- 9 x USB ports (4 x USB 3.0, 1 x internal USB for dongle and flash drive)
- Windows® WES 2009, WES 7 solution
- Dual power input for power redundancy
- Onboard system diagnosis LED indicators
- Supports wake on LAN and boot from LAN function
- Isolation between chassis and power ground
- Front accessible dual HDD/SSD with onboard RAID 0/1 support

## Introduction

The UNO-3083G/3085G/3073G/3075G/3073GL are configured with high-performance Intel® Core i7/Celeron 800 series processors and QM77/QM67/HM65 PCH, which supports two displays, eight USB ports, two Mini PCIe sockets, two CFast Sockets and up to five expansion slots. They also feature two power inputs for redundancy and relay function for alarm handling, furthermore, two friendly front accessible HDD/SSD bays to support RAID 0/1. Two Gigabit LANs support teaming function with fault tolerance, link aggregation and load balance features. The built-in intelligent BIOS to diagnose system status immediately via relay function or LED indication.

## Specifications

### General

- Certification** CE, UL, CCC, FCC, BSMI
- Dimensions (W x D x H)** UNO-3083G/3073G/GL: 148 x 238 x 177 mm (5.8" x 9.3" x 7.0")  
UNO-3085G/3075G: 193 x 238 x 177 mm (7.6" x 9.3" x 7.0")
- Enclosure** Aluminium
- Mounting** Wallmount, Stand mount, Panel mount
- Power Consumption** UNO-3083G/3085G: 45W (Typical)  
UNO-3073G/3075G: 35W (Typical)  
UNO-3073GL: 25W (Typical)
- Power Requirements** 12V ±20%/24V ±20% (e.g. +24V @ 5A), AT/ATX power Jumper selection and BIOS AT simulation (support system reboot automatically after power recovery)
- Weight** UNO-3083G/3073G/3073GL: 4.5kg  
UNO-3085G/3075G: 5.0kg
- OS Support** Windows XP, Windows 7/8, WES7, WES-2009, Linux
- System Design** Fanless with no internal cabling (except COM1/COM2)
- Remote Management** Built-in Advantech DiagAnywhere agent on WES2009/WES7

### System Hardware

- CPU** UNO-3083G/3085G: Intel Core i7-3555LE 2.5GHz/i7-2655LE 2.2GHz  
UNO-3073G/3075G: Intel Celeron 847E 1.1GHz  
UNO-3073GL: Intel Celeron 807UE 1.0GHz
- Memory** 4G DDR3 SDRAM built-in  
(UNO-3083G/3085G/3073G/3075G can support up to 16G RAM by project)
- Indicators** LEDs for Power, Battery, LAN (Active, Status), Serial communication (Tx, Rx) and User Defined
- Storage** CF  
HDD  
2 x CFast slot  
Two built-in 2.5" SATA HDD brackets with RAID 0/1 (except UNO-3073GL)
- Display** 1 x DVI-I, 1 x HDMI (2 x independent displays)
- Audio** Mic in, Line Out
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Mini PCIe Expansion** 2 x Mini PCIe slots with 2 x SIM cards
- PCI (e) Expansion** UNO-3083G/3073G: 1x PCIe16 slot and 2x PCI slots  
UNO-3085G: 2x PCIe8 slots and 3x PCI slots  
UNO-3073G: 1x PCIe16 slot and 4x PCI slots  
UNO-3073GL: 1x PCIe1 slot and 2x PCI slots
- PCI Slot Power** 12V @ 3A, -12V @ 0.8A, +5V @ 6A, +3.3V @ 6A (total combined power consumption on the PCI slots should be less than 40W)

### I/O Interface

- Serial Ports** 2 x RS-232/422/485 with DB9 connectors, automatic RS-485 data flow control, 2 x RS-232 (optional)
- Serial Port Speed** RS-232: 50 ~ 115.2 kbps  
RS-422/485: 50 ~ 115.2 kbps (Max.)
- LAN** 2 x 10/100/1000Base-T RJ-45 ports  
Supports AMT (UNO-3083G/3085G only), wake on LAN and built-in boot ROM in flash BIOS
- USB Ports** 9 x USB (one internal, and 4x USB3.0 support on UNO-3083G-D64E/UNO-3085G-D64E)

### Environment

- Humidity** 95% @ 40°C (non-condensing)
- Operating Temperature** -10 ~ 60°C (14 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- Shock Protection** IEC 60068-2-27  
CompactFlash: 50 G @ wall mount, half sine, 11 ms  
HDD: 20 G @ wall mount, half sine, 11 ms  
IEC 60068-2-64 (Random 1 Oct./min, 1hr/axis.)
- Vibration Protection** CompactFlash: 2 Grms @ 5 ~ 500 Hz,  
HDD: 0.5Grms@5-500Hz

## Ordering Information

- UNO-3083G-D64E** Intel Core i7-3555LE 2.5GHz, 4GB RAM, 1 x PCIe16 + 2 x PCI expansion slots
- UNO-3085G-D64E** Intel Core i7-3555LE 2.5GHz, 4GB RAM, 2 x PCIe8 + 3 x PCI expansion slots
- UNO-3083G-D44E** Intel Core i7-2655LE 2.2 GHz, 4 GB RAM, 1 x PCIe16 + 2 x PCI expansion slots
- UNO-3085G-D44E** Intel Core i7-2655LE 2.2 GHz, 4 GB RAM, 2 x PCIe8 + 3 x PCI expansion slots
- UNO-3073G-C54E** Intel Celeron 847E 1.1 GHz, 4 GB RAM, 1 x PCIe16 + 2 x PCI expansion slots
- UNO-3075G-C54E** Intel Celeron 847E 1.1GHz, 4GB RAM, 1 x PCIe16 + 4 x PCI expansion slots
- UNO-3073GL-C44E** Intel Celeron 807UE 1.0 GHz, 4 GB RAM, 1 x PCIe1 + 2 x PCI expansion slots

## Accessories

- UNO-SM83-AE** Stand mount kit for UNO-3000G series
- UNO-PM83-AE** Panel mount/wall mount kit for UNO-3000G series
- UNO-3000EM-AE** Extra 2x RS-232 modules for UNO-3000G series
- 1757002161** 150W AC to DC power adapter (Commercial Grade)
- 1700001524** Power cable 3-pin US type 1.8 M (Commercial Grade)
- 170203183C** Power cable 3-pin EU type 1.8 M (Commercial Grade)
- 170203180A** Power cable 3-pin UK type 1.8 M (Commercial Grade)

## Embedded OS

- 2070012746** Image WES2009 MUI. v3.34 B001 for UNO-3073GL/75G
- 2070012529** Image WS7P MUI. V4.12 B001 for UNO-3073G/3075G
- 2070012254** Image WS7P MUI. for UNO-3083G/3085G
- 2070012833** Image WS7P X64 MUI. for UNO-3083G/3085

### Optional Expansion Type by Project Support

Model	Optional Expansion Type
UNO-3083G	2x PCIe8 slots and 1x PCI slot
UNO-3085G	1x PCIe16 slot and 4x PCI slots
UNO-3073G	2x PCIe8 slots and 1x PCI slot
UNO-3075G	2x PCIe8 slots and 3x PCI slots
UNO-3073GL	2x PCIe1 slots and 1x PCI slot
UNO-3073GL (same dimensions as UNO-3085G)	2x PCIe1 slots and 3x PCI slots



# PCM-2300MR

MR4A16B, MRAM, 2 MByte, mPCIe

**NEW**



## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Data always non-volatile for >20-year at temperature
- Read / Write Memory speed 6 MB/Sec
- 2MB MRAM Storage
- I/O address automatically assigned by PCIe plug & play
- Supports Microsoft® Windows CE5/CE6
- Supports Microsoft® Windows Enterprise Server 2008, Windows Embedded Standard WES7/2009, Windows XP/7
- Supports Linux Intel x86 hardware platform
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-23 series is categorized as Industrial storage or memory modules for the mPCIe interface which is able to extend connection to the connector through iDoor technology with different functions. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2. including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")
- Power Consumption** Typical : +3.3 V @ 150 mA

### Memory

- Memory Everspin** MR4A16B
- Size** 2 MB
- Read/Write Speed** 6 MB/sec

### Software



- Driver** Microsoft® Windows CE5/CE6  
Microsoft® Windows Enterprise Server 2008  
Microsoft® Windows Embedded Standard WES7/2009  
Microsoft® Windows XP/7

### Environment

- Humidity (Operating)** 5-95% RH, non-condensing
- Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Maximum magnetic field immunity during write** 8000 A/m
- Maximum magnetic field during reading or standby** 8000 A/m

## Dimensions

Module  
PCM-2300MR

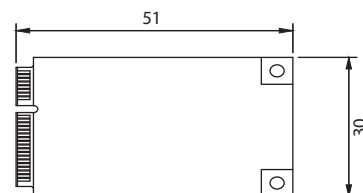

## Ordering Information

- PCM-2300MR-AE** MR4A16B, MRAM, 2MByte


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-23C1CF

# PCM-23U1DG

1 CFast Slot with Cover Protection

USB Slot w/ Lock for USB Dongle

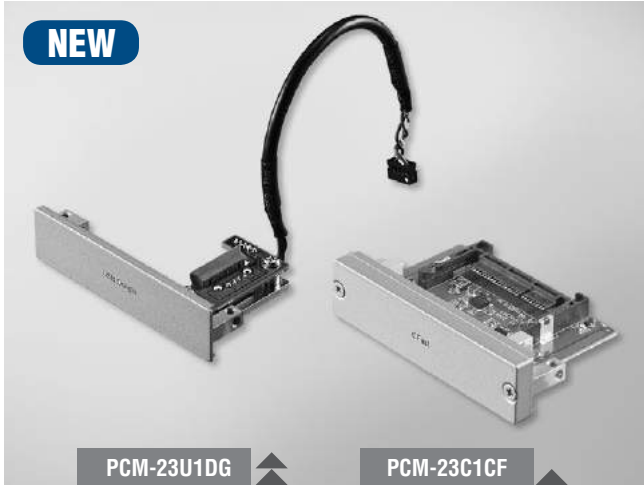

## Features

- Meets Advantech Standard iDoor Technology
- PCM-23C1CF includes single CFast II slot which utilizes existing internal HDD cable
- PCM-23C1CF includes a captive screw type cover for CFast card protection
- PCM-23U1DG includes locked USB connector preventing disk from falling out
- Supports Control DIN-Rail PC UNO-1300
- Supports Embedded Automation PC UNO-2400 series
- Supports Control Cabinet PC UNO-3200/3400 series
- Supports Control DIN-Rail PC UNO-1400 (PCM-23C1CF)
- Supports Embedded Automation PC UNO-2300 series (PCM-23C1CF)
- Supports Control Cabinet PC UNO-3300 series (PCM-23U1DG)

## Introduction

The PCM-23 series are storage modules from Advantech iDoor Technology. They are compatible with the PCI Express® Mini Card Specification Revision 1.2, including MRAM for automation machine memory back up which will no need battery, SATA to CFast on ThinClient terminal with storage for shorter maintenance and shorter MTB repair, Locked USB Dongle for Software protection in SCADA system, and TPM on Quality system management. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## PCM-23C1CF Specifications

### General

- Dimensions** 19.4 x 81 x 41 mm
- Features** I/O plate to SATA connector
- Form Factor** I/O Plate
- Contents** I/O module, bracket
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- I/O Port** CFast Type II connector
- Quantity** 1
- Color** Silver


## PCM-23U1DG Specifications

### General


- Dimensions** 19.4 x 81 x 41 mm (USB: L x W x H-max: 52 x 17 x 10)
- Features** USB A-type, 2.54 mm 5P header w/ +5V supported
- Form Factor** I/O Plate
- Contents** I/O module, cable, bracket
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- I/O Port** Internal USB 2.0
- Quantity** 1
- Color** Silver

\* PCM-23U1DG must be utilized on the platforms which includes internal USB pin-header

## Dimensions

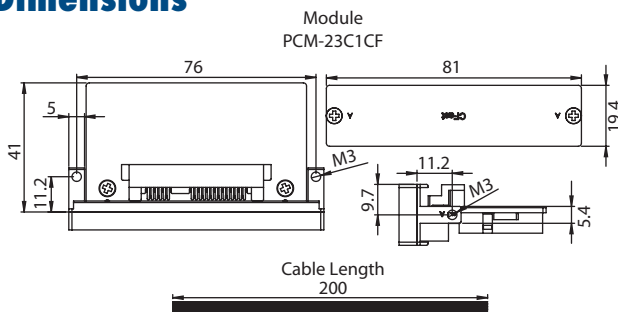

## Dimensions

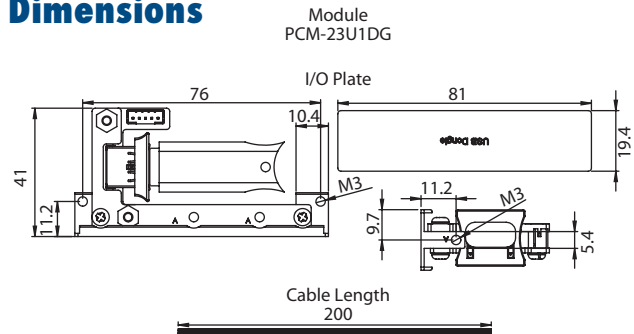


## Ordering Information

- PCM-23C1CF-AE** SATAII 3G/Sec to CFast


## Ordering Information

- PCM-23U1DG-AE** USB Slot w/ Lock for USB Dongle

## User scenario

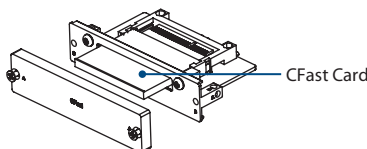

## User scenario

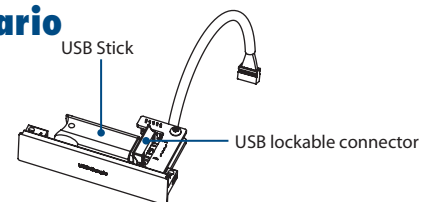

# PCM-24D2R2 PCM-24D2R4 PCM-24D4R2 PCM-24D4R4

2-Port Isolated RS-232 mPCIe, DB9

2-Port Isolated RS-422/485 mPCIe, DB9

4-Port Non-Isolated RS-232 mPCIe, DB37

4-Port Non-Isolated RS-422/485 mPCIe, DB37



## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting (50 bps ~ 921.6 kbps)
- Supports both Isolated & Non-Isolated Protection with 2/4 ports RS-232/422/485
- I/O address automatically assigned by PCIe plug & play
- Supports Windows 2000/XP/Vista/7, Linux 2.4/2.6
- OXPCle952/OXPCle954 UART with 128-byte FIFOs standard
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Connectors** 2 x Male DB9 for PCM-24D2xx  
1 x Female DB37 for PCM-24D4xx
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- Power Consumption** 400 mA @ +3.3 V for PCM-24D2xx  
500 mA @ +3.3 V for PCM-24D4xx

### Communications

- Comm. Controller** OXPCle952 for PCM-24D2xx  
OXPCle954 for PCM-24D4xx
- Data Bits** 5, 6, 7, 8
- Data Signals** RS-232: TX, RX, RTS, CTS, DTR, DSR, DCD, DI, GND  
RS-422: TX+, TX-, RX+, RX-, (PCM-24D4R4)  
TX+, TX-, RX+, RX-, CTS+, CTS-, RTS+, RTS- (PCM-24D2R4)  
RS-485: Data+, Data-
- FIFO** 128 bytes
- Flow Control** RTS/CTS (PCM-24D4R4 not supported), Xon/Xoff
- Parity** None, Odd, Even, Mark and Space
- Speed** 50 bps ~ 921.6 kbps (PCM-24D2R4 & PCM-24D4R4 only) and any other baud rate setting 230.4 kbps
- Stop Bits** 1, 1.5, 2

### Protection

- Isolation Protection** 2,000 V<sub>DC</sub> for PCM-24D2xx only
- ESD Protection** 15 KV
- EFT Protection** 2,500 V
- Surge Protection** 1,000 V<sub>DC</sub>



### Software

- Bundled Software** ICOM Tools & Drivers
- OS Support** Microsoft® Windows® 2000/XP/Vista/7 and Linux

### Environment

- Humidity (Operating)** 5-95% RH, non-condensing
- Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

## Dimensions

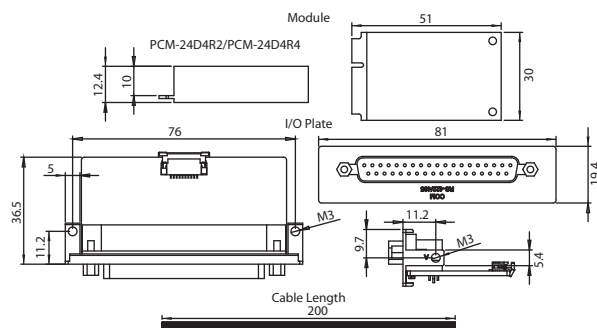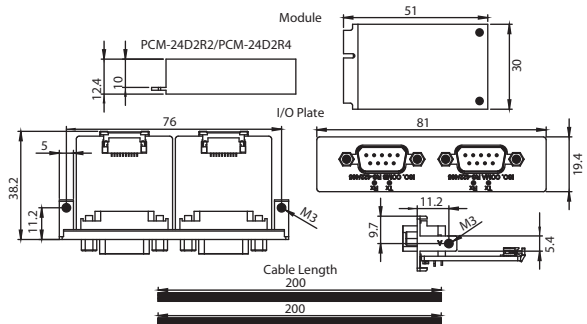

## Ordering Information


- PCM-24D2R2-AE** OXPCle-952 UART, Isolated RS-232, DB9 x 2
- PCM-24D2R4-AE** OXPCle-952 UART, Isolated RS-422/485, DB9 x 2
- PCM-24D4R2-AE** OXPCle-954 UART, Non-Isolated RS-232, DB37 x 1
- PCM-24D4R4-AE** OXPCle-954 UART, Non-Isolated RS-422/485, DB37 x 1

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Wireless I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# PCM-24R2PE

2-Port Gigabit Ethernet, IEEE 802.3af (PoE)  
Compliant, mPCIe, RJ45

NEW

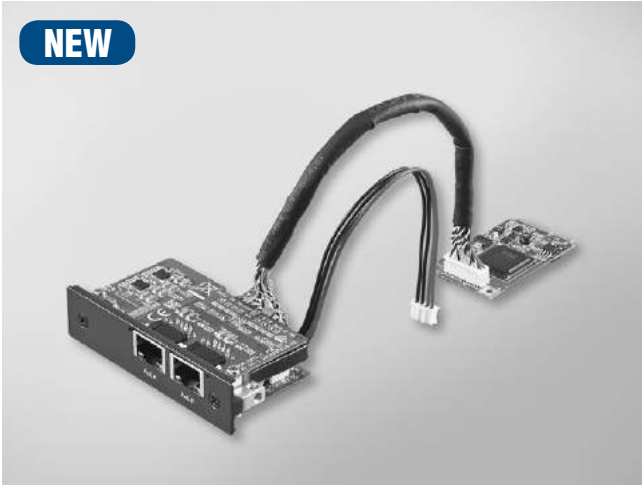

## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Supports 2 Gigabit Ethernet MAC Controller and PHY ports
- Supports 24 V<sub>DC</sub> input power boost up to 15.4 W at 48 V<sub>DC</sub> per PoE port
- Supports PoE (Power over Ethernet), IEEE 802.3af compliant
- Powered Device (PD) auto detection and classification
- Supports IEEE 802.3u Auto-Negotiation
- Supports 32/64-bit Windows 7/8, Linux 2.4/2.6
- Supports Embedded Automation PC UNO-2400 series
- Supports Control DIN-Rail PC UNO-1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. All of them are compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi /3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Connectors** 2 x RJ45 GbE Half-/Full-Duplex
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")

\*Shielding ethernet cable is recommended for use in PoE applications.

### Communications

- PoE Controller** MICROSEMI\_PD69101ILQ-TR
- Compatibility** IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3af
- Speed** 10/100/1000 Mbps
- No. of Ports** 2 Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.

### Power Requirements

- Input Voltage** 24 V<sub>DC</sub>
- Overload Current** Present Protection
- Connection** Internal 24 V<sub>DC</sub>  
External 24 V<sub>DC</sub> Phoenix terminal block (Optional add-on)
- Output PoE Power** 48 V<sub>DC</sub> PoE Power output PCM-24R2PE  
Supports 2 PoE ports up to 2 x 15.4 W at 48 V<sub>DC</sub>

### Protection

- Isolation Protection** 1,600 V<sub>DC</sub>
- ESD Protection** 4KV (Contact), 8KV (Air)
- EFT Protection** 1,000 V


### Software

- OS Support** Microsoft® Windows® XP/7/8, Linux 2.4/2.6

### Environment

- Operating Humidity** 5 ~ 95% RH
- Operating Temperature** 0 ~ 50°C (0 ~ 122°F)
- Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)

## Dimensions

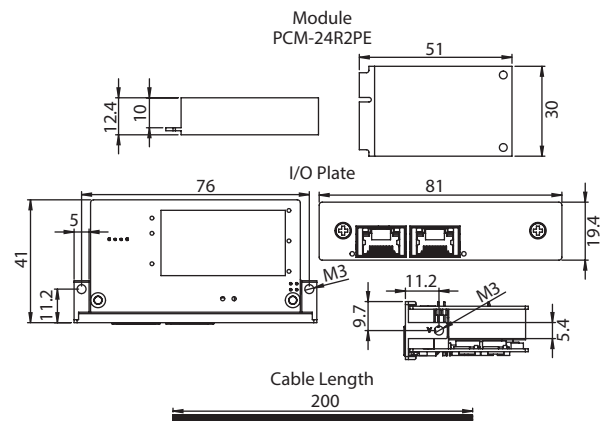


## Ordering Information

- PCM-24R2PE-AE** GbE, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45 x2

# PCM-24R2GL

## 2-Port Gigabit Ethernet, mPCIe, RJ45

NEW

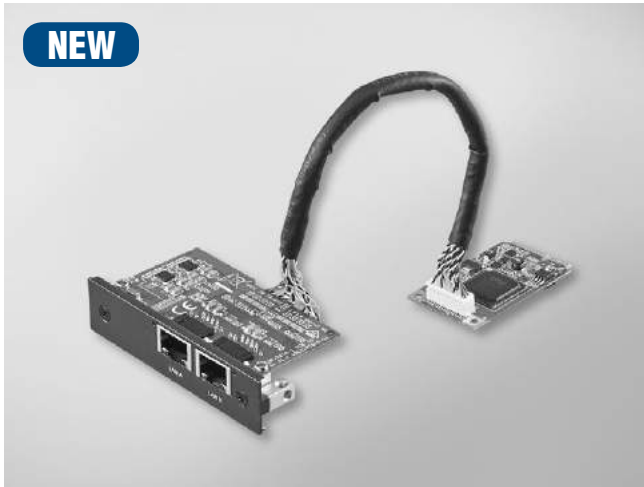

iDoor RoHS COMPLIANT 2009/10/EC CE FCC

### Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Supports 2 Gigabit Ethernet MAC Controller and PHY ports
- Supports 32/64-bit Windows 7/8, Linux 2.4/2.6
- Supports Embedded Automation PC UNO-2200/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

### Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. All of them are compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi /3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

### Specifications

#### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Connectors** 2 x RJ45
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")

#### Communications

- LAN Controller** Intel® I350-AM2 LAN Controller
- Speed** 10/100/1000 Mbps
- No. of Ports** 2 Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.

#### Power Requirements

- Power Consumption** Typical: +3.3 V @ 9 W

#### Protection

- Isolation Protection** 1,600 V<sub>oc</sub>
- ESD Protection** 4 KV (Contact), 8 KV (Air)
- EFT Protection** 1,000 V


#### Software

- OS Support** Microsoft® Windows® 7/8, Linux 2.4/2.6

#### Environment

- Operating Humidity** 5 ~ 95% RH
- Operating Temperature** 0 ~ 60°C (0 ~ 140°F)
- Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)

### Dimensions

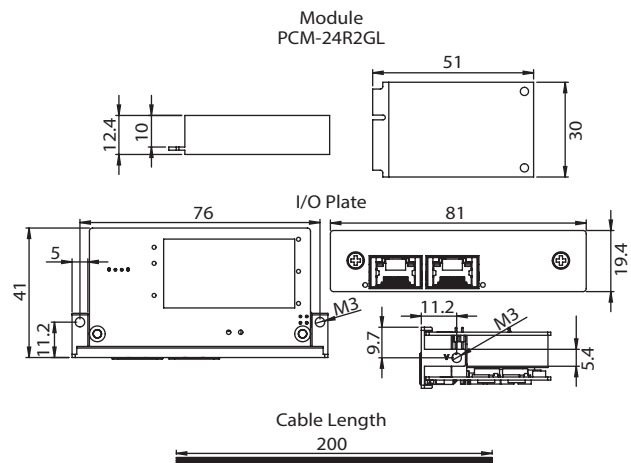

### Ordering Information

- PCM-24R2GL-AE** Gigabit Ethernet, mPCIe, RJ45 x 2

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-24R1TP

1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45

NEW



## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Real-time Ethernet with hardware based Precision Time Protocol
- Achieves time synchronization for device or system
- I/O address automatically assigned by PCIe plug & play
- Supports 32/64-bit Windows 7/8, Linux 2.4/2.6
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- **Bus Type** PCI Express Mini Card Revision 1.2
- **Certification** CE, FCC class A
- **Connectors** 1 x RJ45 GbE Half-/Full-Duplex
- **Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- **Power Consumption** Typical : +3.3V @ 9 W

### Communications

- **LAN Controller** Intel® 82574L Gigabit Ethernet Chip
- **Speed** 10/100/1000 Base-TX, Auto-negotiation
- **Support** 9K jumbo frames, hardware-based support for precise time synchronization over Ethernet, wake-on-LAN

### Protection

- **Isolation Protection** 1,500 V<sub>DC</sub>
- **ESD Protection** 4KV (Contact), 8KV (Air)
- **EFT Protection** 1,000 V
- **Surge Protection** 1,000 V<sub>DC</sub>


### Software

- **OS Support** Microsoft® Windows® 7/8, Linux

### Environment

- **Humidity (Operating)** 5-95% RH, non-condensing
- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

## Dimensions

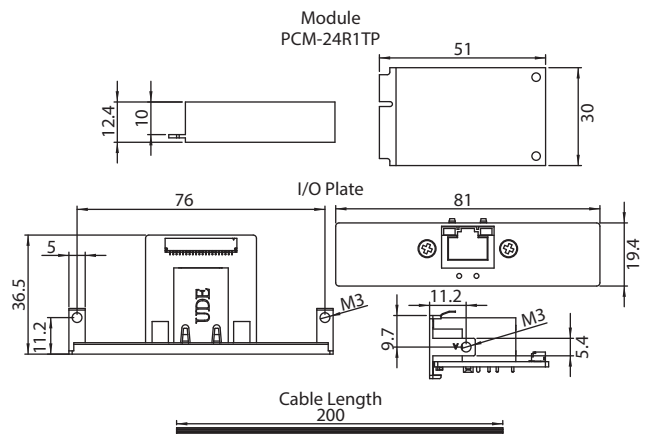

## Ordering Information

- **PCM-24R1TP-AE** Intel® 82574L, GbE, RJ45 x 1

# PCM-24U2U3

2-Port USB 3.0, mPCIe, USB-A type

NEW



iDoor RoHS COMPLIANT 2009/RECC CE FCC

## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Expands two external USB3.0 Super-Speed ports
- Supports hot-swapping function
- Supplies maximum +5 V/900 mA power output to USB device
- Supports Windows 2000/XP/Vista/7
- Supports Embedded Automation PC UNO-2200/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. They are all compatible with the PCI ExpressR Mini Card Specification Revision 1.2 including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- **Bus Type** PCI Express Mini Card Revision 1.2
- **Certification** CE, FCC class A
- **Connector** 2 x USB standard-A type
- **Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- **Power Consumption** Typical : +3.3 V

### Communication

- **Protocol** Universal Serial Bus 3.0 specification Rev. 1.0
- **Speed** 1.5 Mbps to 5 Gbps


### Software

- **OS Support** Microsoft® Windows® 2000/XP/2003/Vista/7

### Environment

- **Humidity (Operating)** 5-95% RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

## Dimensions

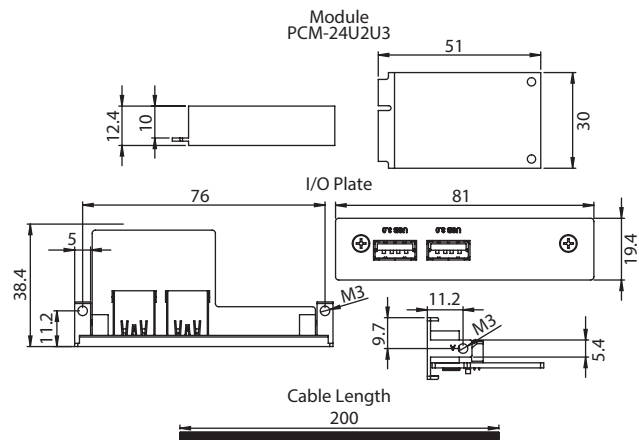

## Ordering Information

- **PCM-24U2U3-AE** USB 3.0, mPCIe, USB-A type x 2

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules

16  
IoT Ethernet I/O  
Modules

17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# PCM-24S1ZB

Wireless Zigbee Gateway, mPCIe, 1-port SMA

NEW



## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Radio frequency 2.4 GHz IEEE 802.15.4 compliant
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor technology.

## Specifications

### General

- **Bus Type** PCI Express Mini Card Revision 1.2
- **Dimensions** Module: 51 x 30 x 12.4mm (2" x 1.18" x 0.49")
- **Power Consumption** 0.8W @3.3V


### Communication

- **Network Standard** IEEE 802.15.4
- **Frequency Band** ISM 2.4 GHz ~ 2.4835 GHz
- **Channels** 11~26
- **RF data rate** 250 kbps
- **Topology** Star / Tree / Mesh
- **Outdoor Range** 1000 m with line of sight (with 2 dBi Antenna)
- **Network Capacity** Max. 32 nodes
- **Range Extenders** Max. 5 Hops

### Environment

- **Humidity (Operating)** 5~95% RH, non-condensing
- **Operating Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

## Dimension

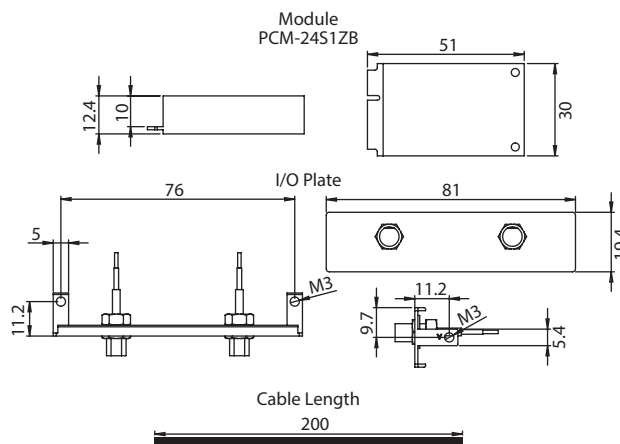

## Ordering Information

- **PCM-24S1ZB-AE** Wireless Zigbee Gateway, mPCIe



# PCM-24S2WF

WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth4.0,  
Half-size mPCIe, 2-port SMA

NEW



## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- IEEE 802.11 a/b/g/n + Bluetooth 4.0 HS standard
- 2 SMA, 2Tx/ 2Rx ports
- Up to 300 Mbps data throughput
- 64/128/152-bit WEP, 802.1x, TKIP and AES
- Operating temperature: 0 ~ 70°C (32 ~ 158°F)
- Supports 32/64-bit Windows XP/Vista/7/8/8.1
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- Power Consumption** 3.3 V, 445 mW (Wi-Fi continue, Avg.)
- Antenna** WiFi 2.4 GHz and 5 GHz dipole antenna, 109 mm
- Cable** WiFi coaxial cable, 200 mm

### Communications

- Data throughput** 300 Mbps (Max.)
- Security** 64/128-bit WEP

### Software

- OS Support** Microsoft® Windows® XP/Vista/7/8/8.1


### Environment

- Humidity (Operating)** 5-95% RH, non-condensing
- Operating Temperature** 0 ~ 70° C (32 ~ 158° F)

## Regulation

PCM-24S2WF-AE employs Atheros AR9462 as main chipset and corresponds to its regulatory.

## Dimensions

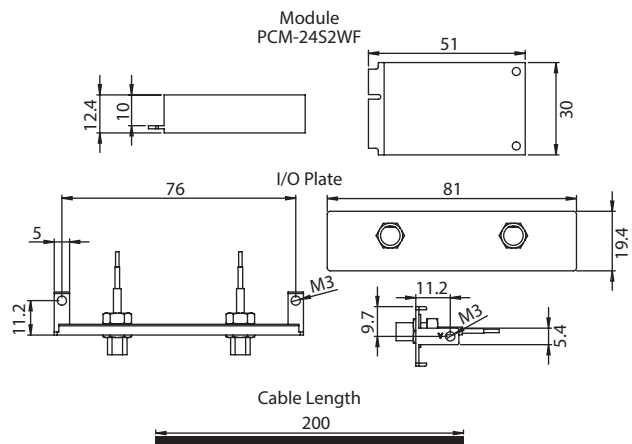

## Ordering Information

- PCM-24S2WF-AE** 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe
- PCM-24S200-AE** Accessory kit for WiFi solution, antenna, cables, bracket

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-24S23G

Wide-Temp 3.75G HSPA and GPS, 2-in-1,  
Full-size mPCIe w/ dual SIM Card holder, 2-port  
SMA

NEW



iDoor RoHS COMPLIANT 2009/SEC CE FCC

## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- 6-bands, 800/850/900/1700/1900/2100 MHz for UMTS/HSPA network
- 850/900/1800/1900 MHz for EDGE/GPRS/GSM network
- Includes dual SIM card holder with switch for redundancy
- With hardware standalone GPS, u-blox MAX-6
- HSDPA 7.2 Mbps, HSUPA 5.76 Mbps
- Operating temperature: -40 ~ 85°C (-40 ~ 185°F)
- Supports 32/64-bit Windows XP/Vista/7/8/8.1, Windows CE5.0/CE6.0, Linux 2.4/2.6, Mac
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-24 series are categorized as communication modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- Power Consumption** 3.3-3.6 V, <700 mA (HSPA connected mode)
- Antenna** 824-960 MHz, 1710-2170 MHz dipole antenna, 109 mm  
GPS antenna 1575MHz, cubic antenna 45 x 35 x 14 mm, wire length 5000mm
- Cable** Coaxial GSM/ GPS cable, 250 mm

### Communications

- Frequency Band** UMTS/HSPA: 800/850/900/1700/1900/2100 MHz  
EDGE/GPRS/GSM: 850/900/1800/1900 MHz
- Data throughput** Downlink: 7.2 Mbps  
Uplink: 5.76 Mbps

### Software

- OS Support** Microsoft® Windows® XP/Vista/7/8/8.1,  
Microsoft® Windows® CE5.0/6.0,  
Linux 2.4/2.6, Mac


### Environment

- Humidity (Operating)** 5-95% RH, non-condensing
- Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)

## Regulation

PCM-24S23G-AE employs u-blox LISA-U200/Max-6 as main chipset and corresponds to its regulatory.


## Dimensions

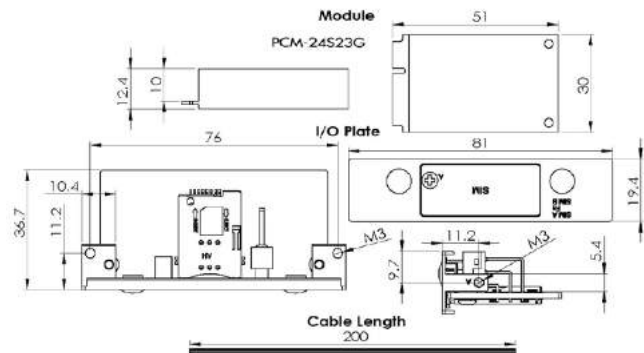

## Ordering Information


- PCM-24S23G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ dual SIM Card holder, Antenna, cable
- PCM-24S300-AE** Accessory kit for 3G/GPS solution, dual-SIM card holder w/ switch, antenna, cables

## User scenario

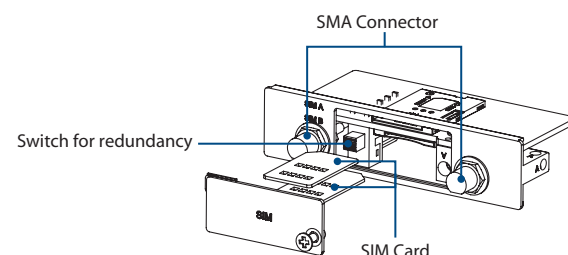

# PCM-27D24DI 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37

**NEW**

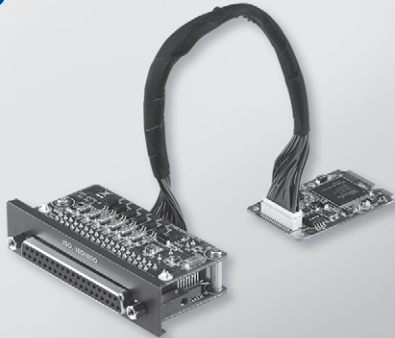

## Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Supports wide-input/output voltage (10-30 V<sub>DC</sub>/5-30 V<sub>DC</sub>)
- High over-voltage-protection (70 V<sub>DC</sub>) and voltage isolation (2,500 V<sub>DC</sub>)
- Easy configuration & efficient programming by Advantech DAQNav
- I/O address automatically assigned by PCIe plug & play
- Keeps the output settings and values after system hot reset
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

## Introduction

The PCM-27 series are categorized as digital input/output modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, FCC class A
- Connectors** 1 x Female DB37
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- Power Consumption** Typical: +3.3 V @ 400 mA  
Max.: +3.3V @ 520 mA

### Isolated Digital Input

- Input Channels** 16
- Input Voltage (Wet Contact)** Logic 0: 0-3 V<sub>DC</sub>  
Logic 1: 10-30 V<sub>DC</sub>
- Input Voltage (Dry Contact)** Logic 0: Open  
Logic 1: Shorted to GND
- Input Current** 10 V<sub>DC</sub> @ 2.97 mA  
20 V<sub>DC</sub> @ 6.35 mA  
30 V<sub>DC</sub> @ 9.73 mA
- Input Resistance** 5K Ohm
- Interrupt Capable Channels** 2 (ID10, ID18)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Overvoltage Protection** 70 V<sub>DC</sub>
- ESD Protection** 4KV (Contact), 8KV (Air)
- Opto-isolator Response** 50 μs

### Isolated Digital Output

- Output Channels** 8
- Output Type** MOSFET
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 30 V<sub>DC</sub>
- Sink Current** 100 mA max./channel
- Opto-isolator** Response 50 μs

### Counter

- Channels** 2
- Resolution** 32 bits
- Max. Input Frequency** 1 kHz


### Software

- Tools & Drivers** Advantech DAQNav Tools & API Drivers
- OS Support** Microsoft® Windows® XP/7/8

### Environment

- Humidity (Operating)** 5-95% RH, non-condensing
- Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

## Dimensions

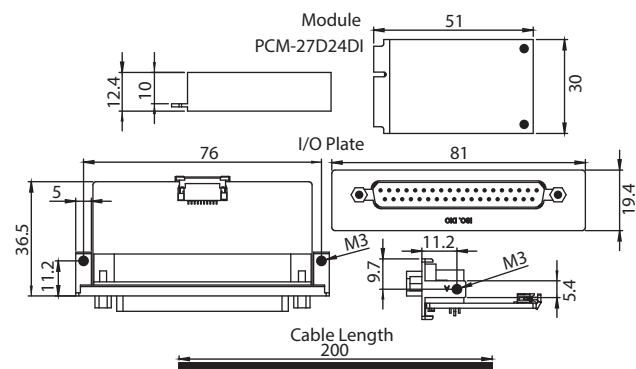

## Ordering Information

- PCM-27D24DI-AE** Iso. Digital I/O, 16DI/8DO, mPCIe, DB37 x 1

### Accessories

- PCL-10137-1E** DB-37 Shielded Cable, 1m
- PCL-10137-2E** DB-37 Shielded Cable, 2m
- PCL-10137-3E** DB-37 Shielded Cable, 3m
- ADAM-3937-BE** DB-37 Wiring Terminal, DIN-rail Mount

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-26D2CA

## 2-Port Isolated CANBus mPCIe, CANOpen, DB9

NEW



iDoor CANopen RoHS COMPLIANT 2005/618/EC CE FCC

### Features

- Meets Advantech Standard iDoor Technology
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Supports Advantech CANOpen Protocol Library
- Operates two separated CAN networks simultaneously
- High speed transmission up to 1 Mbps
- I/O address automatically assigned by PCIe plug & play
- Supports 32/64-bit Windows 2000/XP/Vista/7, Linux 2.4/2.6
- Optical isolation protection of 2,500 V<sub>DC</sub> ensures system reliability
- Includes Windows® DLL library and examples
- Supports Embedded Automation PC UNO-2200/2300/2400 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series
- Supports Thin Client Panel Computers TPC-xx51 series

### Introduction

The PCM-26 series is categorized as Industrial Communication with Fieldbus Protocol modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

### Specifications

#### General

- **Bus Type** PCI Express Mini Card Revision 1.2
- **Certification** CE, FCC class A
- **Connectors** 2 x Male DB9
- **Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41 mm (3.19" x 0.76" x 1.61")
- **Power Consumption** Typical : +5V @ 400 mA

#### Communications

- **CAN Controller** NXP SJA-1000
- **CAN Transceiver** NXP 82C251
- **Protocol** CAN 2.0 A/B
- **Signal Support** CAN\_H, CAN\_L
- **Speed** 1Mbps
- **CAN Frequency** 16MHz
- **Termination Resistor** 120 Ohm (selected by jumper)

#### Protection

- **Isolation Protection** 2,500 V
- **ESD Protection** 15 KV
- **EFT Protection** 2,500 V
- **Surge Protection** 1,000 V<sub>DC</sub>


#### Software

- **CAN Bus Driver** Windows 2000/XP/Vista/7 (x86 and x64), Windows CE 5.0/6.0, Linux, QNX
- **CANopen Software** Windows 2000/XP/Vista/7 (x86 and x64), Windows CE 5.0/6.0

#### Environment

- **Humidity (Operating)** 5-95% RH, non-condensing
- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

### Dimensions

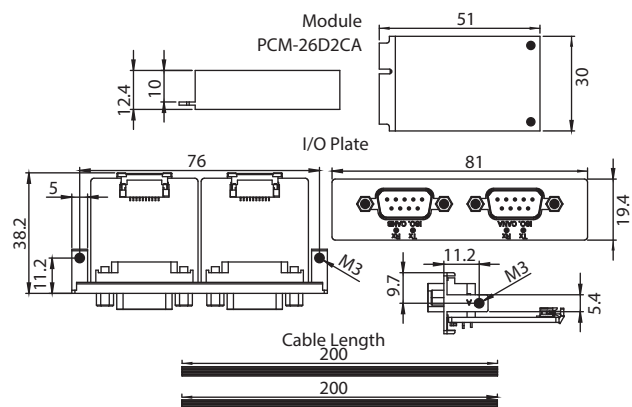


### Ordering Information

- **PCM-26D2CA-AE** SJA1000 CANBus, CANOpen, DB9 x 2

# PCM-26D1DB

## 1-Port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9

NEW

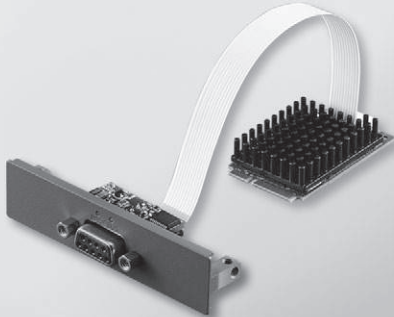

### Features

- Meets Advantech Standard iDoor Technology
- PCI Express Mini Card Specification Revision 1.2 compliant
- Supports Hilscher PROFIBUS Protocol Library
- Easy integration by wide range of device drivers
- High extended temperature range up to 70°C
- Supports Embedded Automation PC UNO-2200 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series

### Introduction

The PCM-26 series is categorized as Industrial Communication with Fieldbus Protocol modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

### Specifications

#### General

- **Bus Type** PCI Express Mini Card Revision 1.2
- **Certification** CE, UL
- **Connectors** 1 x Female DB9
- **Dimensions** Module: 51 x 30 x 12.4mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 41mm (3.19" x 0.76" x 1.61")
- **Power Consumption** Typical : +3.3 V @ 650mA

#### Communications

- **Controller** Hilscher netX100
- **Protocol** PROFIBUS DP V1
- **Signal interface** Iso. RS-485, RxD/TxD-P, RxD/TxD-N
- **Speed** 9.6 kbps ~ 12 Mbps
- **Displays** SYS, System status LED


#### Software

- **OS Device** Windows 2000/XP/Vista/7/8 (32/64-bit)
- **Utility** SYCON.net

#### Environment

- **Humidity (Operating)** 10-95% RH, non-condensing
- **Operating Temperature** -20 ~ 70°C (-4 ~ 158°F), w/ Air flow during measurement: 0.5 m/s
- **Storage Temperature** -10 ~ 70°C (14 ~ 158°F)

### Dimension

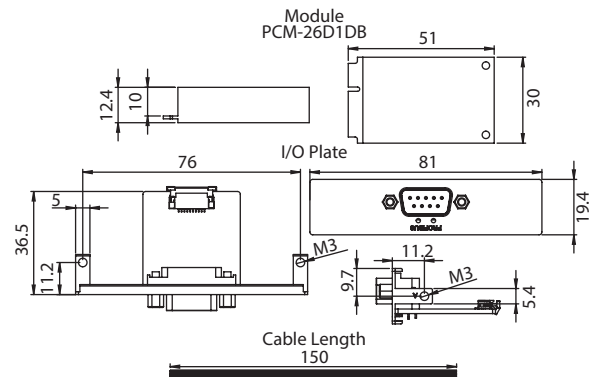

### Ordering Information

#### Master

- **PCM-26D1DB-MAE** Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9 x 1, Master


#### Slave

- **PCM-26D1DB-SAE** Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9 x 1, Slave

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCM-26R2EC PCM-26R2EI PCM-26R2S3 PCM-26R2PN PCM-26R2PL

2-Port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45  
2-Port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45  
2-Port Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45  
2-Port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45  
2-Port Hilscher netX100 FieldBus mPCIe, POWERLINK, RJ45

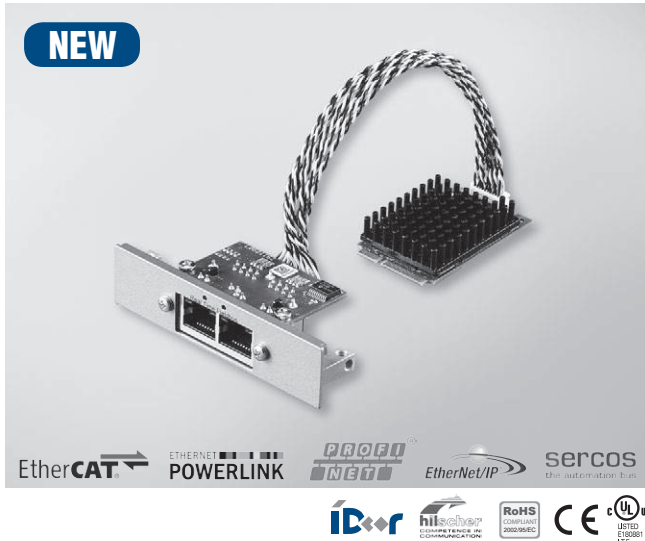

## Features

- Meets Advantech Standard iDoor Technology
- PCI ExpressR Mini Card Specification Revision 1.2 compliant
- Identical interface for all Hilscher Real-Time Ethernet Fieldbus Protocols
- Various colorful front plates for protocol identification
- Easy integration by wide range of device drivers
- High extended temperature range up to 70°C
- Supports Embedded Automation PC UNO-2200 series
- Supports Control DIN-Rail PC UNO-1200/1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series
- Supports Control Panel Computers TPC-xx81/xx82 series

## Introduction

The PCM-26 series is categorized as Industrial Communication with Fieldbus Protocol modules from Advantech iDoor Technology. They are all compatible with the PCI Express® Mini Card Specification Revision 1.2, including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express Mini Card Revision 1.2
- Certification** CE, UL
- Connectors** 2 x Female RJ45
- Dimensions** Module: 51 x 30 x 12.4 mm (2" x 1.18" x 0.49")  
I/O Plate: 81 x 19.4 x 45 mm (3.19" x 0.76" x 1.61")
- Power Consumption** Typical : +3.3 V @ 650 mA

### Communications

- Controller** Hilscher netX100
- Protocol** EtherCAT, EtherNET/IP, Sercos III, PROFINET, POWERLINK
- Signal interface** Isolation 10BASE-T/100BASE-TX
- Speed** 100 Mbps, 10 Mbps (depending on loaded firmware)
- Displays** SYS, System status LED


### Software

- OS Device** Windows 2000/XP/Vista/7/8 (32/64-bit)
- Utility** SYCON.net

### Environment

- Humidity (Operating)** 10-95% RH, non-condensing
- Operating Temperature** 0 ~ 70 °C (32 ~ 140 °F), w/ Air flow during measurement: 0,5 m/s
- Storage Temperature** 0 ~ 70 °C (32 ~ 185 °F)

## Dimension

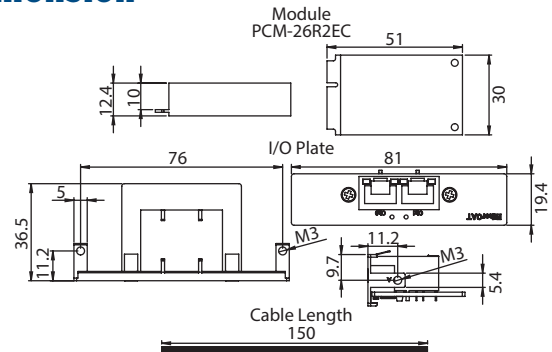

## Ordering Information

### Master

- PCM-26R2EC-MAE** Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45 x2, Master
- PCM-26R2EI-MAE** Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45 x2, Master
- PCM-26R2S3-MAE** Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45 x2, Master
- PCM-26R2PN-MAE** Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45 x2, Master

### Slave


- PCM-26R2EC-SAE** Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45 x2, Slave
- PCM-26R2EI-SAE** Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45 x2, Slave
- PCM-26R2S3-SAE** Hilscher netX100 FieldBus mPCIe, Sercos III, RJ45 x2, Slave
- PCM-26R2PN-SAE** Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45 x2, Slave
- PCM-26R2PL-SAE** Hilscher netX100 FieldBus mPCIe, POWERLINK, RJ45 x2, Slave

# PCM-28P1AD PCM-28P1BK

PCIe to mPCIe, 2-Slots mPCIe, iDoor I/O plate expansion

iDoor PCIe I/O Plate

NEW

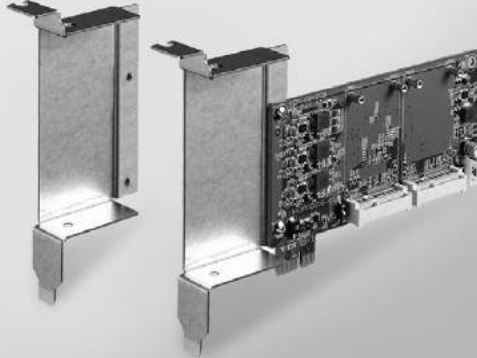

PCM-28P1BK

PCM-28P1AD



## Features

- Meets Advantech Standard iDoor Technology
- PCI Express base SPEC 2.0 and backward compatible with SEPC 1.1 & 1.0a compliant
- PCI Express® Mini Card Specification Revision 1.2 compliant
- Expands two external full-size mPCIe slots from an existing PCIe slot
- Expands one external iDoor I/O module plate from existing PCIe plate
- Supports Microsoft® Windows® XP/2003/Vista/7/8
- Supports Control DIN-Rail PC UNO-1300/1400 series
- Supports Control Cabinet PC UNO-3200/3300/3400 series

## Introduction

The PCM-28 series is categorized as expansion kits providing solutions for multi-application from Advantech iDoor technology. They are all compatible with the PCI Express Mini Card Specification Revision 1.2 including Isolated / Non-Isolated RS-232/422/485 communication cards for automation control, Wi-Fi/3G/GPS/GSM/LTE wireless communication models for data exchange during the management and machine level of automation application, Zigbee module as an IoT terminal or controller and PoE function for smart camera in detect inspection application of production. This is a flexible design that enables customers to customize their features which meet iDoor Technology.

## Specifications

### General

- Bus Type** PCI Express® Rev. 2.0 compliant
- Interface** PCI Express® Mini Card Specification Revision 1.2 compliant
- Certification** CE, FCC class A
- I/O Connectors** 1 x PCI Express Male, 2 x mPCIe Female
- Dimensions** 173 x 120.8 x 21.6mm (6.8" x 4.8" x 0.9")
- Power Consumption** +3.3V @2.2A; +12V @500mA; +1.5V@ 375mA

### Software


- OS Support** Windows® XP/2003/Vista/7/8

### Environment


- Humidity (Operating)** 5-95% RH, non-condensing
- Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

## User scenario

### 2-Slots mPCIe expansion

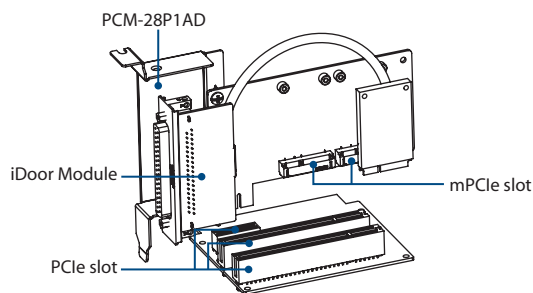


## Dimension

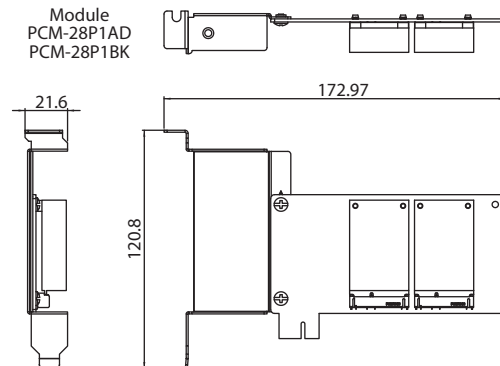

## Ordering Information

- PCM-28P1AD-AE** PCIe to mPCIe, mPCIe Slot x2, iDoor PCIe I/O plate x1
- PCM-28P1BK-AE** iDoor PCIe I/O Plate

### iDoor with PCIe I/O Plate

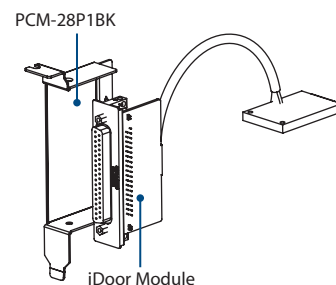

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Accessories

## Mounting Kit

### UNO-2000 Series VESA Mounting Kit UNO-2000G-VMKAE

#### Features



- Dimensions: 270 x 162 x 11 mm (W x H x D)  
(Only extension kit)
- Supports VESA 75 and 100 monitor

#### Supported Models

- UNO: All UNO-2000 series
- FPM : All FPM 12", 15", 17", 19" models

#### Ordering Information

- UNO-2000G-VMKAE

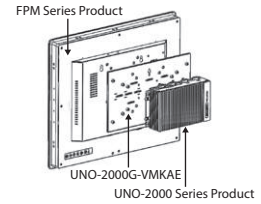

### UNO-2000 Series Din-Rail Mounting Kit UNO-2000G-DMKAE

#### Features


- Dimensions: 66 x 48.5 x 9 mm (W x H x D)

#### Supported Models

- UNO-2272G
- UNO-2362G
- UNO-2483G/2473G
- UNO-2483P

#### Ordering Information

- UNO-2000G-DMKAE




### UNO-3000 Series Stand Mounting Kit UNO-SM83

#### Supported Models

- UNO-3083G
- UNO-3085G

#### Ordering Information

- UNO-SM-83



### UNO-3000 Wall Mounting Kit


#### UNO-WM83

#### Supported Models

- UNO-3083G
- UNO-3085G

#### Ordering Information

- UNO-WM83



## Power Adapter/ Power Cord

	Industrial Grade			Commercial Grade	
	Part Number	Description		Part Number	Description
Power Adapter	1757002321	63WC to DC UNO series power adapter		PWR-249-AE	65W AC to DC power adapter
	<b>Features</b>			PWR-244-AE	96W AC to DC power adapter
	<ul style="list-style-type: none"> <li>▪ Input voltage: 90 ~ 264 V<sub>AC</sub>, 47 ~ 63 Hz</li> <li>▪ Output Voltage: 24 V<sub>DC</sub></li> <li>▪ Operating Temperature: -20 ~ 70°C</li> </ul>			1757002161	150W AC to DC power adapter
				<b>Features</b>	
				<ul style="list-style-type: none"> <li>▪ Input voltage: 100 ~ 240 V<sub>AC</sub>, 50 ~ 60 Hz</li> <li>▪ Output Voltage: 19 V<sub>DC</sub></li> <li>▪ Operating Temperature: 0 ~ 40°C</li> </ul>	
Power Cable	1702002600	Power Cable US Plug 1.8 M		1700001524	Power cable 3-pin US type 1.8 M
	1702002605	Power Cable EU Plug 1.8 M		170203183C	Power cable 3-pin EU type 1.8 M
	1702031801	Power cable UK Plug 1.8 M		170203180A	Power cable 3-pin UK type 1.8 M
	1700000596	Power Cable China/Australia Plug 1.8 M		-	-



## DIN-Rail IPCs

### APAX-5000 Series


<b>DIN-Rail IPCs Overview</b>		<b>13-2</b>
<b>SoftLogic Control Software</b>		<b>13-4</b>
<b>PC-based Programming Software</b>		<b>13-6</b>
<b>Batch Control Solution</b>		<b>13-7</b>
<b>APAX Series Overview</b>		<b>13-8</b>
<b>APAX System Architecture</b>		<b>13-10</b>
<b>APAX Controller Selection Guide</b>		<b>13-11</b>
<b>APAX I/O Module Selection Guide</b>		<b>13-12</b>
<b>APAX Communication Module Selection Guide</b>		<b>13-14</b>
<b>APAX-6572</b>	Intel® Atom™ D510 1.66 GHz, 2 GB RAM Controller with 3 x LAN, 2 x COM, VGA	<b>13-15</b>
<b>APAX-5580</b>	Intel® Core™ i7/i3/Celeron DIN-Rail PC Controller w/ 2 x GbE, 2 x mPCIe, VGA	<b>13-16</b>
<b>APAX-5430</b>	SATA HDD module	<b>13-17</b>
<b>APAX-5435</b>	mPCIe module to support iDoor	
<b>APAX-5490</b>	4-port RS-232/422/485 Communication Module	<b>13-18</b>
<b>APAX-5495</b>	2-port CANopen Communication Module	
<b>APAX-5520CE/KW</b>	PAC with Marvel XScale® CPU	<b>13-19</b>
<b>APAX-5620CE/KW</b>	PAC with Marvel XScale® CPU and CAN	
<b>APAX-5522PE</b>	IEC 61850-3 Certified RTU Controller	<b>13-20</b>
<b>APAX-5343/E</b>	Power Supply for APAX-5570 Series/ APAX Expansion Modules	<b>13-21</b>
<b>APAX-5001/5002/5002L</b>	1/2/2-slot Backplane Modules	
<b>APAX-5070</b>	Modbus/TCP Communication Coupler	
<b>APAX-5072</b>	EtherNet/IP Communication Coupler	<b>13-22</b>
<b>APAX-5071</b>	PROFINET Communication Coupler	
<b>APAX-5017H</b>	12-ch High Speed Analog Input Module	<b>13-23</b>
<b>APAX-5028</b>	8-ch Analog Output Module	
<b>APAX-5046</b>	24-ch Digital Output Module	<b>13-24</b>
<b>APAX-5046SO</b>	20-ch Source Type DO Module	
<b>APAX-5060</b>	12-ch Relay Output Module	<b>13-25</b>
<b>APAX-5080</b>	4/8-ch High/Low Speed Counter Module	
<b>APAX Controller Support table</b>		<b>13-26</b>

### ADAM-5000 Series

<b>ADAM-5000 Series</b>	Distributed I/O Systems & PC-based Controllers	<b>13-27</b>
<b>ADAM-5000 Controller Selection Guide</b>		<b>13-29</b>
<b>ADAM-5000 I/O Module Selection Guide</b>		<b>13-30</b>
<b>ADAM-5000 Controller Selection Guide</b>		<b>13-31</b>
<b>ADAM-5000 Controller Support Table</b>		<b>13-33</b>
<b>ADAM-5000 Remote I/O System Support Table</b>		<b>13-34</b>
<b>ADAM-5560CE/XPE</b>	7-slot PC-based Controller with Intel® Atom™ CPU	<b>13-35</b>
<b>ADAM-5560KW</b>	7-slot Micro PAC with Intel® Atom™ CPU	
<b>ADAM-5560WA</b>	7-slot Compact SCADA Controller with 600 Tags WebAccess	<b>13-36</b>
<b>ADAM-5510 Series</b>	4/8 slots PC-based Controller	<b>13-37</b>
<b>ADAM-5000/485</b>	4-slot Distributed DA&C System for RS-485	<b>13-38</b>
<b>ADAM-5000E</b>	8-slot Distributed DA&C System for RS-485	
<b>ADAM-5000L/TCP</b>	4-slot Distributed DA&C System for Ethernet	<b>13-39</b>
<b>ADAM-5000/TCP</b>	8-slot Distributed DA&C System for Ethernet	

### ADAM-3600 Series

<b>iRTU Overview</b>		<b>13-40</b>
<b>ADAM-3600-C2G</b>	8AI / 8DI / 4DO / 4-Slot Expansion Wireless Intelligent RTU	<b>13-41</b>
<b>ADAM-3600-A1F</b>	16-ch Digital Input, 8-ch Relay Output with 4-Slot Expansion Module	<b>13-43</b>
<b>ADAM-3617-AE</b>	4-ch Analog Input Module	
<b>ADAM-3618-AE</b>	3-ch Thermocouple Module	<b>13-45</b>
<b>ADAM-3622-AE</b>	2-ch Analog Output Module	
<b>ADAM-3651-AE</b>	8-ch Digital Input Module	
<b>ADAM-3656-AE</b>	8-ch Digital Output Module	<b>13-46</b>
<b>ADAM-3664-AE</b>	4-ch Relay Output Module	

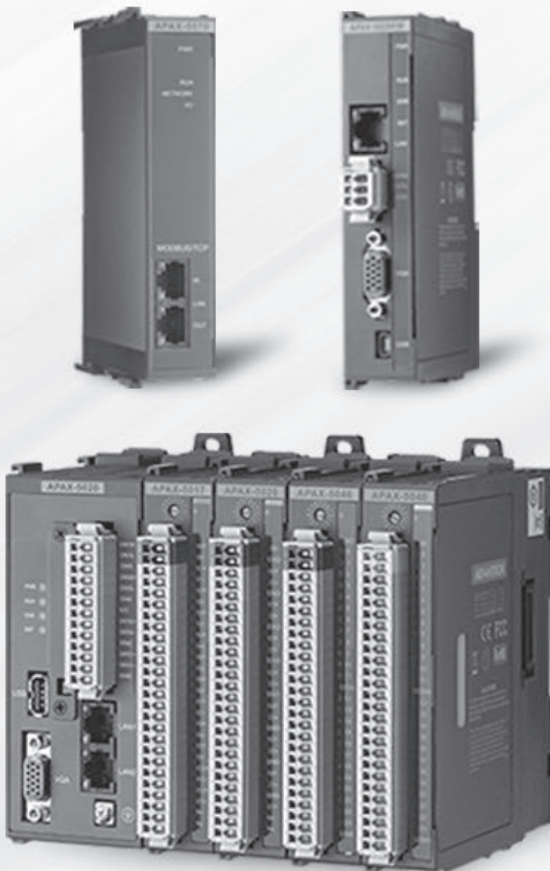

# DIN-Rail IPCs Overview

## Introduction

Advantech offers PAC solutions designed for industrial automation applications which combine the openness and flexibility of PCs with the reliability of traditional automation controllers, such as PLCs. Advantech's offerings include the APAX series, ADAM-5000 series, and Embedded Automation Computers, utilizing sophisticated thermal designs to ensure the system stability. APAX controllers support Windows CE, Windows XP Embedded and Windows 7 operating systems. Advantech's DIN-Rail IPCs are ideal platforms to implement in diverse applications, such as power/energy, transportation, machine automation, factory automation, building automation, facility management system, environment monitoring, and more.

### Real-time DIN-Rail IPCs: APAX Series

APAX series are Ethernet-enabled controllers allowing users to deploy I/O modules in flexible expansion combinations, like direct stack or daisy-chain. The control performance and functionality are not only better than PLCs, but also better than most PC-based controllers. Features including versatile CPU modules, I/O modules designed as reliable as PLC I/Os, high density I/Os with LEDs, hot swap and stackable functionality are delivered. Both C/C++ and .NET library, and IEC 61131-3 languages are provided as programming tools.


### Data Acquisition DIN-Rail IPCs: ADAM-5000 Series

ADAM-5000 series are modularized I/Os to be inserted on backplanes with fixed slot numbers. Leveraging Advantech's rich experience in industrial data acquisition applications, ADAM-5000 offers a compact control system. Inheriting the reliability and robustness of a PLC system, ADAM-5000 offers the openness and flexibility of a PC, including computing power, networking and storage capability. Both C/C++ and .NET libraries and IEC 61131-3 languages are provided as programming tools.

### Automation Controllers

Advantech's Embedded Automation Computers are designed to fulfill the needs of mission critical automation applications. Their embedded design, industrial automation features and advanced computer technology deliver robustness, reliability and flexibility to satisfy customers who are looking for a rugged and compact computing platform. They support various interfaces to integrate with other devices, such as Ethernet, RS-232/422/485, onboard I/O, extension PC card slots, CAN-bus and more. Through standard Ethernet networking, these computers can link to Advantech remote I/O solutions, such as APAX-5000 high density I/O (through APAX-5070 Modbus/TCP coupler module) or ADAM-6000 series compact modules, to get data and perform control tasks.

## Control System Architecture

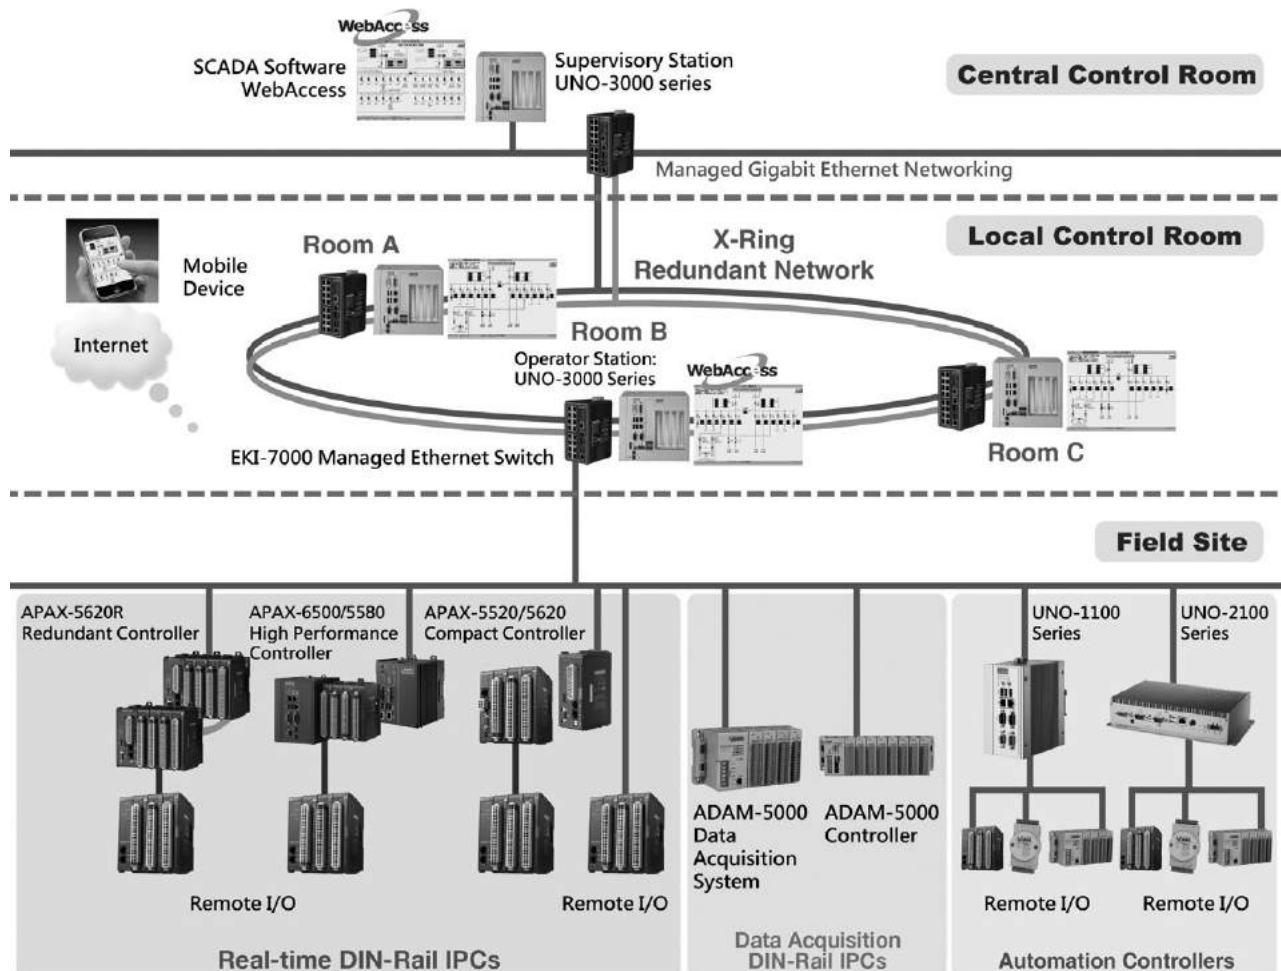

## Real-time I/O Control Suitable for Multiple Domain Applications

Currently most PC-based controllers face one major challenge, especially DIN-Rail IPCs systems, which is real-time I/O control. Performance is severely hampered when I/O points increase because the access time also increases, which impacts control precision as well.

Food and beverage companies face shorter production runs on a wide range of products for different vendors, while automotive companies are dealing with changes in customer preference, aggressive competition and rising fuel costs. These industries require a mix of discrete, batch, process and motion control solution. In the past, these applications forced engineers to use multiple controllers: a PLC for discrete control, a motion controller for multi-axis control, and a distributed control system or loop controller for process applications, which has proven time consuming and costly. Advantech DIN-Rail IPCs feature the ability to handle all these tasks with a single control system.

The result is shortened development time through reusable programming tools, lower maintenance costs through reduced parts, better information sharing among applications, and fewer personnel support throughout the plant.

## Information Processing and Networking Capabilities

Advantech DIN-Rail IPCs not only provide excellent real-time I/O control, but also another key benefit for automation applications, information processing. With the ability to perform field operations, data exchanges and valuable information collection, this series is able to execute efficient decision-making. Information processing includes data logging and analysis with storage devices like SD or CF cards, recipe management for batch control, and database exchanges through SQL and OPC. Furthermore, implementing HMI software enables local operation.

This improves control system networking tremendously, allowing the network to share a common protocol at the device level, control level, and information level. It provides the ability to move information from the device level to executives at the enterprise resource planning (ERP) level without new protocols or drivers.

Advantech DIN-Rail IPCs feature a PC-based architecture, delivering significant networking benefits for manufacturers by USB, RS-232, RS-422/485 and Ethernet interfaces. Users can connect to field devices through serial or USB interface to satisfy any kind of application. The Ethernet interface allows users to effectively manage I/O control and information flow throughout the manufacturing and IT enterprise. Leveraging the high computing power of Advantech DIN-Rail IPCs also allows networks to communicate seamlessly on the factory floor with other common sets of IT capabilities like video, data and telephones. Easy access to such information is critical to making decisions about the capacity of an enterprise.


## Scalability

In the past, many PLCs required users to learn different programming software and specify networks depending on the size and complexity of the application. Advantech DIN-Rail IPCs allow users to more closely match the controller to application needs without compromising functionality or learning a new control system. Such scalability reduces the headaches and high costs associated with system redesign, lack of program re-use, and re-training.

## Software

Advantech DIN-Rail IPCs support software to satisfy both PC-based and PLC-based programmers. Leveraging IEC 61131-3 SoftLogic programming environment, PLC programmers can take PLC operations to the next level in many areas, such as communication, information processing, enterprise level database integration, and user interface development.

For PC-based programmers, Advantech offers an open platform solution, with C/C++ and .NET libraries for I/O control and communication functionality. They can satisfy programmers familiar with high level programming languages like Microsoft Visual Studio .NET. In addition, several convenient utilities are offered to save development time.

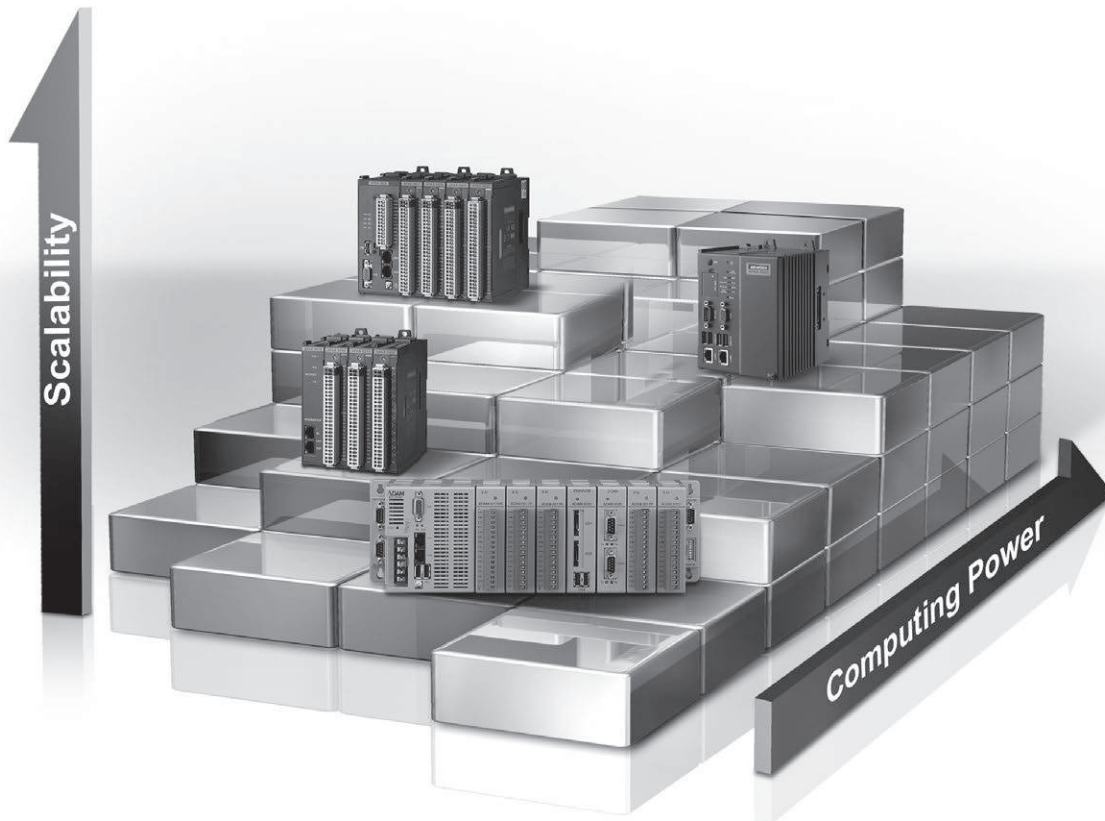

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# SoftLogic Control Software

## SoftLogic Software

For traditional PLC platforms, the development environment will vary depending on the PLC supplier and they are not compatible with each other. PAC platforms adapt the international standard IEC 61131-3, established to standardize multiple languages, sets of instructions and different concepts existing in the field of automation systems. Therefore, these programming languages which comply with the IEC 61131-3 standard, usually called SoftLogic software, enable users to leverage PLC-world typical programming interface. But they can also benefit from a portability of all platforms and reduce costs of building automation systems.

## Advantech SoftLogic Software: KW MultiProg and ProConOS

Advantech delivers KW-Software's MultiProg development environment and ProConOS runtime kernel for various control platforms, including ADAM-5510 series, ADAM-5550 series and APAX series controllers. KW MultiProg supports all IEC-61131-3 programming language as following:

- Instruction List (IL)
- Structured Text (ST)
- Sequential Function Chart (SFC)
- Function Block Diagram (FBD)

```



1 LD %IX0.2
2 AND %IX0.3
3 OR Action_INIT
4 ST IL_VAL
5 LD Input_IX0_0
6 JMP C MANUAL
7
8 (*Timer FB TON*)
9 LD Timer_start
10 ST TON_IL.IN
11 LD PT_TON_IL
12 ST TON_IL.PT
13 CAL TON_IL
14 LD TON_IL.Q
15 ST Action_INIT
16 STN Timer_start
17 LD TON_IL.ET
18 ST Timer_value
19

```


```

1 CASE MODUS OF
2 1: ROBOT_X := ROBOT_X + 200;
3 ROBOT_Z := ROBOT_Z + ADD_ARM ;
4 MODUS:=1;
5 IF ROBOT_X >= RANGE_POS_1 THEN
6 MODUS:=2;
7 END_IF;
8 2: ROBOT_X := ROBOT_X - 200;
9 ROBOT_Z := ROBOT_Z - ADD_ARM ;
10 MODUS:=2;
11 IF ROBOT_X <= RANGE_NEG_1 THEN
12 MODUS:=1;
13 END_IF;
14 END_CASE;
15 ROBOT_Y := ROBOT_X;
16 COUNTER_1 := COUNTER_1+1;
17 IF COUNTER_1 > 1000 THEN
18 COUNTER_1 := 0;
19 FND_TF;
20

```

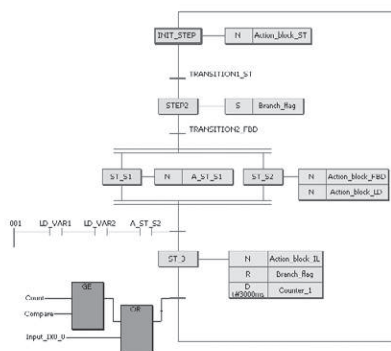

- Ladder Diagram (LD)



### ▪ Graphical Editor

Programmers can work with SFC, FBD, and LD programming languages. The editor supports the mixing of them in a single worksheet. The graphical editor allows the completely free placement of objects. The Edit Wizard helps you when inserting and replacing code elements in worksheets. You can insert keywords and statements, operators, functions and function blocks with the help of the Edit Wizard. In addition, the Wizard simplifies the declaration of own data types.

### ▪ Text Editor

With the text editor, you edit and debug the code in IL and ST programming and define user-defined data types. IntelliSense automatically completes your variable names, structure elements and function block parameters.

### ▪ Variable Grid Editor

In the variables grid, each line represents the declaration of a variable or FB instance. For an optimal overview, variables can be divided into different groups. The attributes of each variable/instance are defined in the respective table columns either by entering or selecting a combo box entry. The variables editor prevents a number of syntactical declaration errors and makes declaration easy and clear.

KW MultiProg has several features which can save your development time and well manage your complicated project:

### ▪ Project Template

A new project can not only be created with the Project Wizard in MultiProg, but also based on a project template. Owing to the practice-orientated template management, you can not only access supplied default templates, but save each own project as template.

### ▪ Cross-Compiling

The basic languages of the IEC 61131-3 standard, i.e. FBD, LD and IL, can be cross-compiled to each other including their comments. Program code which has been written in ST can be compiled to any of the three basic languages.

### ▪ Password Protection

You can protect complete subtrees or individual project nodes in the project tree with a password. Access rights can be restricted for editing the project structure, opening and writing worksheets, downloading to individual configurations or resources and debugging. Each user has to log in using the valid password in order to get full access to a protected project.

### ▪ Multi-user Feature


The Multi-user feature provides safe access to project source files while several users are working on the same project at the same time. In order to provide a safe and fast development environment for multiple users, the project is saved as server project on a server PC in the network. Each user can create a client project on his local PC for editing. The respective nodes in the project tree of the client project must be checked out, which means that no other user has write access for these data any longer.

### ▪ Online Assistance in Multiple Languages

The software includes online help systems and documentation, available in English, German, French, Spanish, Japanese and Chinese.


### ▪ Offline Simulation Tools

Program simulation is the best debug function for software developers. Before the program is downloaded into the controller, programmers can use this function to simulate programs. The easy-to-use 32 bit simulation offers fast and real-time multitasking test environment. The image below is of the simulation tool function and program with I/O status monitoring. Programmers can set the simulation value to AI or DI channels for checking the program before downloading. By simply clicking on a green input point (LED) you activate a simulator input. The output LEDs represent the actuated signal outputs in the same way.

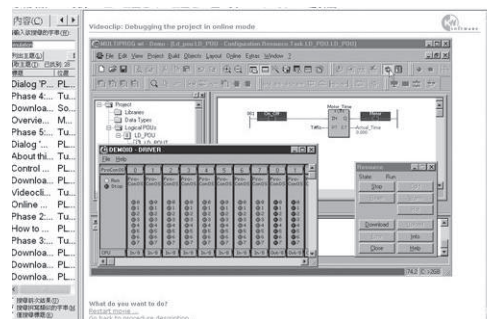

## Logic Analyzer

The Logic Analyzer is a powerful tool for recording variable values in online mode and representing them in a graph. Using the results delivered by the analyzer, you can evaluate if the program runs as expected.

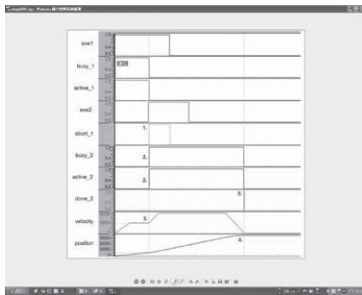


## Advantech Advanced Function Blocks


To satisfy automation applications, Advantech also add some add-on features for various dedicated control and automation applications:

- I/O Function Blocks: Used to control I/O with Advantech DIN-Rail IPCs. Including AI/O read FB, AI/O write FB, DI/O read FB, DI/O write FB, I/O error FB.
- SQL Database Function Blocks: Used for data log and analysis.
- Scheduling Function Blocks: Used for time scheduling control in building automation and devices schedule control applications.
- Email Function Blocks: Used for event notification and remote service applications.
- Modbus Communication Driver:

Advantech has provided an interface to monitor and control tags. This interface is accessible via Modbus/TCP as well as Modbus/RTU. The APAX controller can be treated as a Modbus Slave. The APAX Controller reserves approximately 128K Bytes memory space for Modbus use. This shared memory block can store user's data and exchange the data through Modbus/TCP and Modbus/RTU protocol with a HMI/SCADA software.

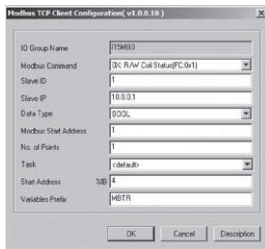

Modbus TCP Input




Modbus/TCP Client General Settings

## Auto-Tuning PID Function Blocks

PID function blocks provide auto-tuning functionality. This function block makes use of Proportion, Integral, and Derivative calculations to provide a control cycle function to implement modulation control, and automatically find the optimized P, I, and D parameters.

Using this control function, user can save more time on process control commissioning duty. The totally recommended PID are 32 loops, depending on customer's process application. For the flow and pressure control applications, we recommended up to 16 PID loops.

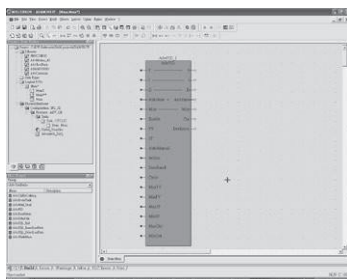


## Online Change

It is not acceptable to stop a machine and shut down processes in order to carry out maintenance work. Not to mention the difficulties that occurs during the debug phase, when constant switching between development and online mode is necessary. Changes of current program can be downloaded to the targeted Advantech DIN-Rail IPCs after compilation and commissioned without having to stop the controller and program execution. This feature enables controller to switch between two process cycles from the "old" to the "new" code after downloading the modified program.

## Backup Function Blocks

APAX-5000 series delivers system backup functionality. To leverage this functionality, two controllers with the same control program, are installed in one system. After both controllers' backup function is enabled, the APAX-5000 system will automatically delegate one of the two controllers as the master controller. The control program should use the function block "AdvRdSysActiveState" to know if its controller is the master controller currently, by the parameter Value. If the Value responses "True", it means the controller is master controller, then the program should execute the control algorithm. If the Value responses "False", it means the controller is backup controller, then its program should do nothing, and simply checking if the master controller is still alive periodically. When it detect the master controller lost, it should executing the control algorithm, making it become the master controller.

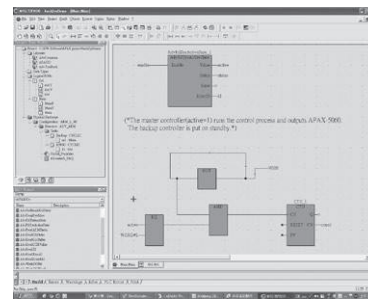

## Ordering Information

- MPROG-PRO535E KW Multiprog Pro v5.35 (128k bytes I/O, Win7 support)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PC-based Programming Software

## PC-based Programming Software

Advantech DIN-Rail IPCs offers the seamless software integration for automation application. Regarded as SoftPLC, Advantech DIN-Rail IPCs not only leverage KW-Software including LD/FBD/IL/ST and SFC, but also empower many application-oriented & practice-oriented function blocks to different domain fields, such as batch control for food/beverage, auto-tuning PID for temperature control in EFMS, PLCOpen-compliant motion control blocks for a variety of trajectory control and positioning purposes in machine automation. Multi-tasking, runtime error reports and operating mode changes are also possible for DIN-Rail IPCs applications.

For PC-based users, Advantech also offers the .NET function library. System integrators can benefit from flexibility to integrate I/O control, motion control, industrial communication protocols and data process/exchange, database access, HMI interface and SCADA. Plenty of C/C++ and .NET examples save programmer learning time, helping save programmers' development effort and shortening time to market.





## .NET and C/C++ Library

Advantech's DIN-Rail IPCs series solution offers a complete PC-based platform with Application Programming Interface (API). With C/C++ libraries and .NET class libraries provided by Advantech, PC-based programmers can develop their own programs for industrial control and automation tasks, involving I/O control, system backup function, communication, SQL and scheduling, even integrated with HMI/SCADA interface.




## Modbus Server

Advantech's PAC series offers Modbus/RTU and Modbus/TCP for data exchange purposes. Advantech offers a series of API, including Modbus server/client configuration, easy data access function and callback function for multithread event handling. Plenty of samples programs can help you to easily set up the Modbus communication. Besides, APAX-5570 series and APAX-5520 controller has built-in Modbus server, so any Modbus client (such as HMI) can access to APAX I/O without writing programming.

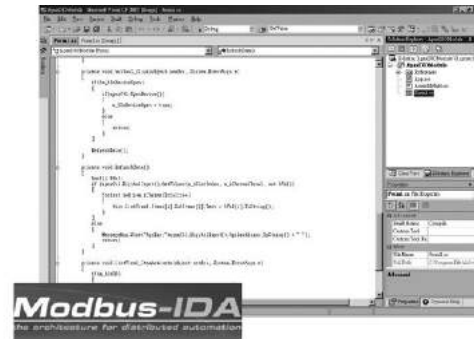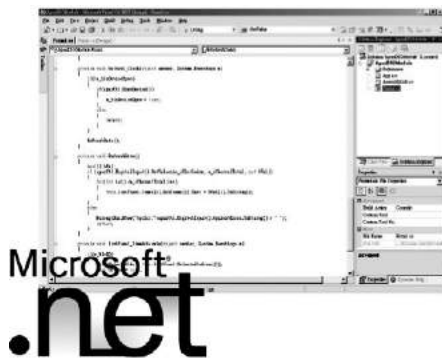

## DiagAnywhere – Remote Maintenance Software

DiagAnywhere, an abbreviation of "Diagnostic Anywhere", is a networking solution for remotely monitoring and controlling APAX controllers through Windows-based operating systems. It includes the utility on the client side and the server on APAX controllers. Any computer installed with the utility can connect to APAX controllers, seeing what's happens on the controller and performing remote control. It is very convenient that the engineer doesn't need use a screen to operate the controller in the field, and allows them to maintain the system on the remote site. One DiagAnywhere client can monitor and control up to 16 target controllers simultaneously. This useful software tool also supports remote screen snapshots, remote screen recording, file upload and download between utility (on the client computer) and server (APAX controller), favorite devices grouping to manage system more easily, and authentication functionality. All these features help users save maintenance cost and effort.

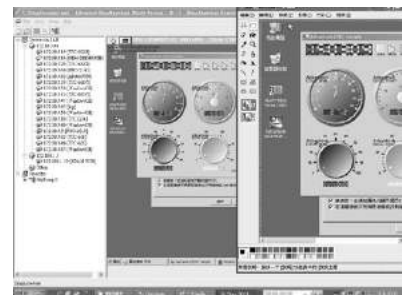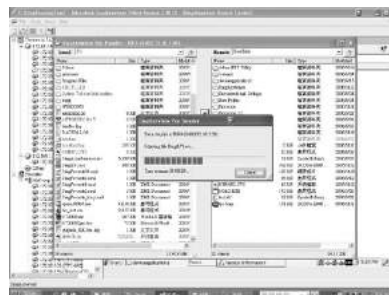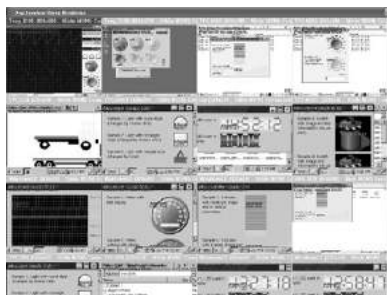

# Batch Control Solution

## Introduction

The batch control process involves a sequence of metal treatment, semiconductor crystal silicon growing, chemical or biological processes for the conversion and transport of material. The manufacturing processes can be classified as continuous and discrete control manufacturing and be processed step by step in each processes equipment. For example, a typical application is a metal heating treatment furnace: in order to convert metal ingredients for an industrial application, the metal heating process is actioned by different temperature control Set Points (SP) by a time-based, ramp/soak pattern of a PID control loop SP and in each heating period, the metal ingredients will be changed by different temperatures and other conditions.

To classify these industry applications, we call them Batch Control Industries. The control application of the manufacturing process is a combination of continuous and discrete controls. All of these manufacturing processes are time-based flow processes. The control functions are included in a PID closed-loop control that is a continuous process control function. The PID SP pattern generation function is a typical batch control function. The other is a discrete control for logic and sequence control function. Some of the applications need recipe controls and report management.

Target Applications Furnace		
Furnace Applications	Chemical Applications	Healthy Applications
<ul style="list-style-type: none"> <li>Silicon Growing Furnace</li> <li>Metal Heat Treatment Furnace</li> <li>Vacuum Furnace</li> <li>Printed Circuit Board Press</li> </ul>	<ul style="list-style-type: none"> <li>Rubber Process</li> <li>Dyeing Machine</li> <li>Plastics Process</li> <li>Glue Process</li> </ul>	<ul style="list-style-type: none"> <li>Pharmaceutical</li> <li>Food &amp; Beverage</li> <li>Bio-chemical Process</li> </ul>

## Batch Control Function Highlight

### Typical Process/Production Line Diagram

Advantech's batch control system focuses on a single path batch manufacturing process equipment, e.g. a heating treatment furnace for the metal used in semiconductors. Plastic and rubber manufacturing equipment, printed circuit board (PCB) manufacturing equipment or reactors for food & beverage applications. Main application functions focus on:

#### Process Control Functions

- Auto-tuning PID Function
- Temperature Control
- Air/Fluid Ratio Function
- Ramp/Soak Control

#### Motion Control


- Position & Speed

#### Recipe Management

- Process Parameter Configuration

#### Batch Report

- Daily, Weekly, Monthly, Yearly

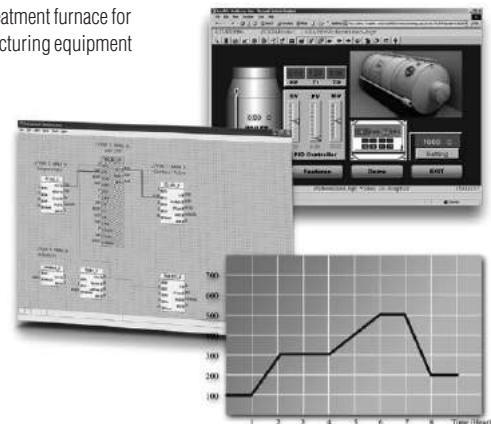

## Key Features



### Guaranteed Real-time Performance

APAX I/O local bus ensures deterministic control. Contributed by the dedicated Digital Signal Processor (DSP) which handles I/O data process without controller's CPU resource, the I/O scan rate can be maintained within 1ms, regardless of the number of I/O points. Programmers can concentrate on their application program development, and the APAX system can perform real-time I/O access automatically.



### Flexible Expansion Architecture

Through expansion ports on backplanes and standard Ethernet cables, a remote expansion with localbus speed can be built, and the distance can be up to 100m. A standard ethernet switch can be used between two backplanes, so line, tree or star topologies can be built for I/O expansion - all with fast local-bus speed. When fiber optic ports are available, the distance can be longer.



### Hot-swappable I/O

APAX backplanes carry communication and power to I/O modules. With a special design, the I/O modules can be hot-swapped when the system is powered-on and running. Engineers can easily change modules without shutting down the system thereby saving system management costs.



### Fail Safe Value

System reliability is critical for batch control applications. APAX output modules feature fail safe value settings, meaning when modules lose communication to the controller, all output channel values will be set as the pre-defined value. This can eliminate risks owing to system communication issues.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# APAX Series Overview

## Advantech's New Generation DIN-Rail IPCs - APAX Series

APAX series, the new DIN-Rail IPCs from Advantech, integrates control, information processing and networking in a single platform. By leveraging the latest automation technology, APAX series offers a unique system architecture, providing dual controllers for different tasks, same I/O with changeable controllers, and flexible I/O expansion with deterministic performance. All these features make Advantech's DIN-Rail IPCs more reliable, scalable and flexible, satisfying various complicated control and automation applications.






## ► Dual Controllers for Different Tasks

Controller for HMI/SCADA




One controller focuses on I/O processing, while another controller can execute other tasks such as HMI/SCADA, database, recipe, image processing, etc. This architecture ensures system reliability since I/O processing won't be affected by other tasks.

## ► Changeable Controllers and Couplers

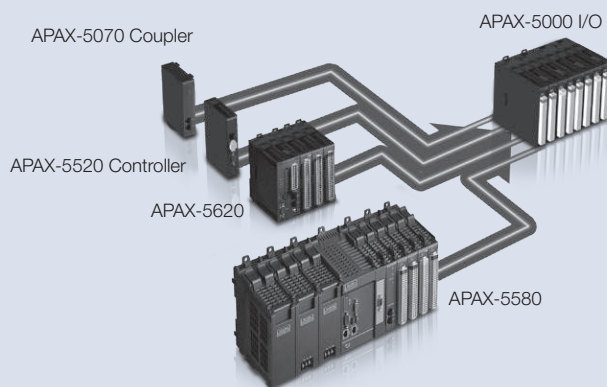

APAX I/O modules can combine different controllers or couplers to satisfy different applications. Using different couplers, I/O modules can link to various real-time Ethernet and fieldbus systems. It saves investment in I/O and offers scalability for future needs.

## ► Flexible Expansion Topology

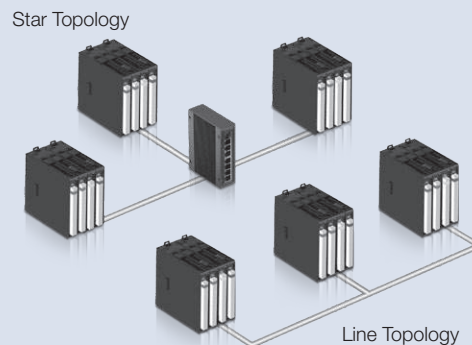

All APAX I/O modules are inserted on the backplane. Through the expansion port and Ethernet cable, this decentralized architecture retains high-speed data transfers, so the distributed I/O modules provide real-time performance. Almost any topology, such as line, tree or star, can be easily established. The hot swap capability is also available for remote expansion I/O modules.

1

WebAccess+ Solution

2

Motion Control

3

Power & Energy Automation

4

Automation Software

5

Intelligent Operator Panel

6

Automation Panels

7

Panel PCs

8

Industrial Wireless Solutions

9

Industrial Ethernet Solutions

10

Industrial Gateway Solutions

11

Serial communication cards

12

Embedded Automation PCs

13

DIN-Rail IPCs

14

CompactPCI Systems

15

IoT Wireless I/O Modules

16

IoT Ethernet I/O Modules

17

RS-485 I/O Modules

18

Data Acquisition Boards


# APAX System Architecture

## Introduction

To simplify the system configuration, Advantech's new APAX-6000 and APAX-5000 series provide easy and flexible way to setup different functions and configurations. There are multiple APAX series system combinations that can be selected to develop reliable control systems as detailed below.


## Application Ready High Performance DIN-Rail IPCs

Advantech's APAX-5580 and 6572 series offers several high performance controllers with Atom and Celeron M grade CPUs. These controllers benefit from the high throughput, openness, flexibility and connectivity brought by PC-based architectures. Contributed by excellent heat dissipation technology with no hard disks, they deliver great system reliability. Various peripheral interfaces such as LAN, USB, DVI, audio, RS-232, RS-422/485, etc, are provided. These high performance DIN-Rail IPCs are suitable for many complex control applications. Besides, its powerful integration ability makes it an ideal platform to integrate video, audio, HMI/SCADA software, database, data processing into one single solution.

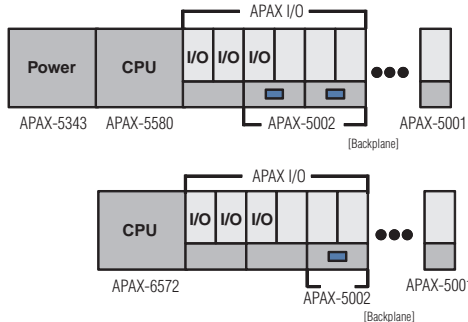



## Robust, Compact DIN-Rail IPCs

APAX-5620 series controllers offer a compact size without fans. These controllers have no rotating parts, helping further increase system reliability. APAX-5520/5620 features a VGA interface, enabling local displays, and its RS-485 and LAN ports offer communication ability with Modbus protocol. CF slot and battery backup RAM can be used for data storage. These features make APAX-5520/5620 as compact and robust as a PLC, but with enhanced displays, connectivity, and storage.

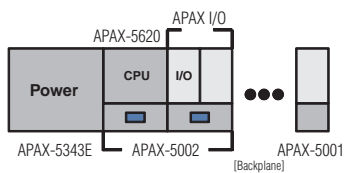


## Redundant System

With the data synchronization, the secondary controller can take over the control tasks at the same position which primary fails within a very short time. Depending on customers request, the power supply can be separated to increase the availability.

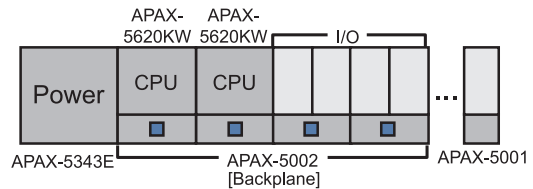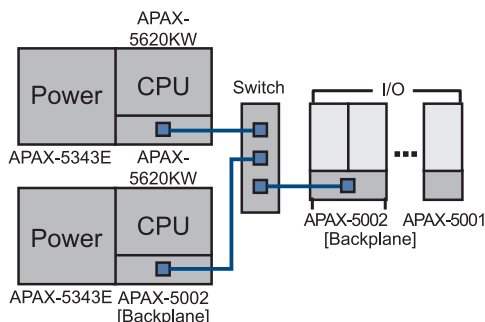

## Scalable Systems with Remote I/O

For different fieldbus or real-time Ethernet networks, such as Modbus/TCP, Ethernet/IP, PROFINET, etc, APAX series offers different kinds of couplers for communication. Controllers, HMI, and computers in the same network can access APAX I/O modules through the coupler. Not having to change I/O modules for different fieldbus or real-time Ethernet networks helps ensuring current I/O modules' investment for future demands. These couplers feature daisy-chain design, making installation easier.

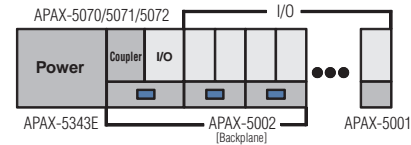


## Reliable Backup System

APAX-5000 series delivers system backup functionality to significantly decrease the risk that the system will fail when the controller crashes. To leverage this, two controllers with the same control program are installed in one system. After both controllers' backup functions are enabled, APAX-5000 will automatically delegate one controller as the master controller.

The master controller will run the control program to execute the control process, while another controller (the backup controller) is put on standby. The master controller periodically sends live messages to the backup controller. If the backup controller does not receive a message from the master controller, it will automatically become the master controller and restart the control process.

If the master controller is switched, it means there was an error happening on the previous master controller. Therefore, engineers can repair or change the previous master controller and re-enable it as the backup controller. Then if the new master controller fails, the new backup controller will automatically take over the control once again. This mechanism ensures the control system will continuously run the control process.

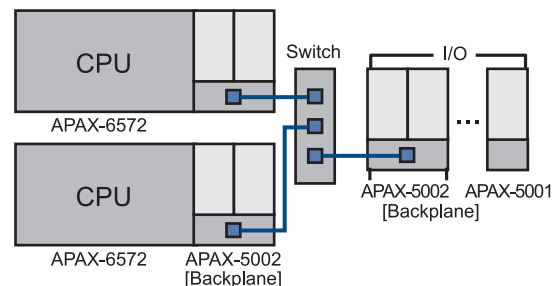

# APAX Controller Selection Guide



System		APAX-5520	APAX-5620	APAX-6572	APAX-5580
CPU		XScale PXA270 520 MHz		Intel Atom D510 1.66 GHz	Intel Core i7-4650U 1.7GHz Dual Core Intel Core i3-4010U 1.7GHz Dual Core Intel Celeron 2980U 1.6GHz Dual Core
Memory		Flash 32 MB, SDRAM 64 MB		2 GB DDR2 DRAM	4GB DDR3L SDRAM
Storage		1 x CF slot		1 x CF slot (internal)	1 x mSATA slot 2 x SD card slots
Local Display		VGA		VGA	VGA
USB Ports		1 x USB 1.1		4 x USB 2.0	2 x USB 2.0, 2 x USB 3.0
Audio		-		Mic in, Line in, Line out	Line Out
Cooling System		Fanless		Fanless	Fanless
Power Input		18 ~ 30 V <sub>DC</sub>		9 ~ 36 V <sub>DC</sub>	24V ± 20%
Diagnostics LED		Power, Battery, Run, Error		Power, IDE, LAN, Serial	PWR, RUN, SATA, UPS, ERR, Over Temp., Abnormal Volt, SYS Recovery
Real-time Clock				Yes	
Watchdog Timer				Yes	
Control Software		C/C++ library and .NET class library for C and .NET programming environment KW IEC 61131-3 SoftLogic programming tool			C/C++ library and .NET class library for C and .NET programming environment CODESYS IEC 61131-3 SoftLogic S/W
Local Real-time I/O Modules				32 (max.)*	
Digital I/O Points				2048 (max.)	
Analog I/O points				512 (max.)	
Communication (Ethernet)	LAN Ports	1	2	3	2
	Speed	10/100 Mbps		10/100/1000 Mbps	10/100/1000Mbps
	Protocol	Modbus/TCP			
Communication (Serial)	COM 1	RS-485	RS-485	RS-232/422/485	RS-232/422/485
	COM 2	-	RS-485	RS-232/422/485	-
	COM 3	-	-	-	-
	CAN Bus	-	2	-	-
Protocol		Modbus/RTU, CANopen (APAX-5620 only)			
Isolation	Communication	2500 V <sub>DC</sub> (RS-485)	2500 V <sub>DC</sub> (CAN & RS-485)	-	-
Environment	Operating Temperature (when mounted vertically)	-10 ~ 55°C		-10 ~ 50°C	-10 ~ 60°C
	Storage Temperature	-40 ~ 70°C			
	Relative Humidity	0 ~ 95 % (non-condensing)			
	Vibration Protection	IEC 60068-2-64/60068-2-6: 1 Grms @ 5 ~ 500 Hz (Random, operating) 2 G @ 5 ~ 500 Hz (Sine, non-operating)		IEC 60068-2-64: 2 Grms @ 5 ~ 500 Hz (Random, operating)	IEC 60068-2-64: 2 Grms @ 5 ~ 500 Hz (Random, operating)
	Shock Protection	IEC 60068-2-27: 20 G @ wall mount		IEC 60068-2-27: 50 G @ wall mount	IEC 60068-2-27: 50 G @ wall mount
Power Supply Module (Optional)		APAX-5343E			
Page		13-19	13-19	13-15	13-16

\*APAX DI/O modules can use ID numbers 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# APAX I/O Module Selection Guide



Module Name		APAX-5013	APAX-5017	APAX-5017H	APAX-5018	APAX-5028
Description		8-ch RTD Module	12-ch AI Module	12-ch High Speed AI Module	12-ch Thermocouple Module	8-ch AO Module
Analog Input	AI Channels	8	12	12	12	-
	Input Type*	RTD (2-wire or 3-wire)	V, mV, mA	V, mV, mA	V, mV, mA, Thermocouple	-
	Sampling Rate (Samples/second)	50 Hz filter: 8 (Total**) 60 Hz filter: 10 (Total**)	12/120 selectable (Total**)	1000 (per channel)	12 (Total**)	-
	Input Resolution	16-bit	16-bit (voltage) 14 ~ 15-bit (current)	12-bit	16-bit (voltage) 14 ~ 15-bit (current, thermocouple)	-
	Input Accuracy	±0.1 % of FSR	±0.1 % of FSR (Voltage) ±0.2 % of FSR (Current)	±0.1 % of FSR (Voltage) ±0.2 % of FSR (Current)	±0.1 % of FSR (Voltage) ±0.2 % of FSR (Current)	-
	Voltage Input	-	±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V	0 ~ 500 mV, ±10 V, 0 ~ 10 V	±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5 V	-
	Current Input	-	±20 mA, 0 ~ 20 mA, 4 ~ 20 mA	0 ~ 20 mA, 4 ~ 20 mA	±20 mA, 0 ~ 20 mA, 4 ~ 20 mA	-
	Direct Sensor Input	RTD (Pt-100, Pt-200, Pt-500, Pt-1000, Balco, Ni 518)	-	-	Thermocouple (Type J, K, T, E, R, S, B)	-
	Wire Burnout Detection	All RTD range	4 ~ 20 mA	4 ~ 20 mA	4 ~ 20 mA and all Thermocouple range	-
Analog Output	AO Channels	-	-	-	-	8
	Output Type*	-	-	-	-	V, mA
	Output Resolution	-	-	-	-	14-bit
	Output Accuracy	-	-	-	-	±0.1 % of FSR
	Output Slew Rate	-	-	-	-	0.7 V <sub>OC</sub> /μs (per channel)
	Voltage Output	-	-	-	-	±2.5 V, ±5 V, ±10 V, 0 ~ 2.5 V, 0 ~ 5 V, 0 ~ 10 V
	Current Output	-	-	-	-	0 ~ 20 mA, 4 ~ 20 mA
	Short Circuit Protection	-	-	-	-	Yes
Fail Safe Value	-	-	-	-	Yes	
General	Weight	170 g	170 g	175 g	170 g	175 g
	Operating Temperature	-10 ~ 60°C (when mounted vertically)				
	Storage Temperature	-40 ~ 85°C				
	Relative Humidity (non-condensing)	5 ~ 95%				
	Power Consumption (typical)	2.5 W @ 24 V <sub>OC</sub>	4 W @ 24 V <sub>OC</sub>	3.5 W @ 24 V <sub>OC</sub>	3.5 W @ 24 V <sub>OC</sub>	3.5 W @ 24 V <sub>OC</sub>
	Isolation between channels and backplane	2500 V <sub>OC</sub>				
	Power Supply Module (optional)	APAX-5343E				
Page	online	online	13-23	online	13-23	

\*Each channel can be configured with different type and range

\*\*Sampling rate value depends on used channel number.

Example: Using 6 channels on APAX-5017, sampling rate for each used channel will be 12/6 = 2 samples/second.

# Selection Guide



Module Name		APAX-5040	APAX-5045	APAX-5046/SO	APAX-5060	APAX-5080
Description		24-ch DI Module	24-ch DI/O Module	24/20-ch DO Module	12-ch Relay Module	4/8-ch Counter Module
Digital Input	DI Channels	24	12	-	-	4
	Input Type	Sink or Source Load	Sink or Source Load	-	-	Source Load
	Rated Input Voltage	24 V <sub>DC</sub>	24 V <sub>DC</sub>	-	-	24 V <sub>DC</sub>
	Input Voltage Range (signal "0")	-5 ~ 5 V <sub>DC</sub>	-5 ~ 5 V <sub>DC</sub>	-	-	0 ~ 3 V <sub>DC</sub>
	Input Voltage Range (signal "1")	15 ~ 30 V <sub>DC</sub> -15 ~ -30 V <sub>DC</sub>	15 ~ 30 V <sub>DC</sub> -15 ~ -30 V <sub>DC</sub>	-	-	10 ~ 30 V <sub>DC</sub>
	Rated Input Current	4.4 mA (typical)	4.4 mA (typical)	-	-	10 mA (typical)
	Input Filter	3 ms	3 ms	-	-	3 ms
	Over Voltage Protection	Yes	Yes	-	-	Yes
Counter Input	Counter Channels	-	-	-	-	8 (Up and Frequency mode) 4 (Pulse/Direction, Up/Down, A/B phase mode)
	Rated Input Voltage	-	-	-	-	24 V <sub>DC</sub>
	Input Voltage Range (signal "0")	-	-	-	-	0 ~ 3 V <sub>DC</sub>
	Input Voltage Range (signal "1")	-	-	-	-	10 ~ 30 V <sub>DC</sub>
	Rated Input Current (signal "1")	-	-	-	-	5 ~ 15 mA (typical)
	Counting Range	-	-	-	-	32-bit + 1-bit overflow/underflow
	Counter Frequency	-	-	-	-	1 MHz (max.)
Digital Output	DO Channels	-	12	24/20	12	4
	Output Type	-	Sink	Sink/Source	Relay (Form A, SPST)	Sink
	Rated Output Voltage	-	24 V <sub>DC</sub>	24 V <sub>DC</sub>	250 V <sub>AC</sub> , 30 V <sub>DC</sub>	24 V <sub>DC</sub>
	Rated Output Current (signal "1")	-	0.5 A	0.5A/1A	5 A	0.5 A
	Short Circuit Protection	-	Yes	Yes	-	Yes
	Thermal Shutdown Protection	-	Yes	Yes	-	Yes
General	Weight	160 g	165 g	165 g	195 g	170 g
	Operating Temperature	-10 ~ 60°C (when mounted vertically)				
	Storage Temperature	-40 ~ 85°C				
	Relative Humidity (non-condensing)	5 ~ 95%				
	Power Consumption (typical)	2 W @ 24 V <sub>DC</sub>	2.5 W @ 24 V <sub>DC</sub>	2.5 W @ 24 V <sub>DC</sub>	2 W @ 24 V <sub>DC</sub>	2.5 W @ 24 V <sub>DC</sub>
	Isolation between channels and backplane	2500 V <sub>DC</sub>				
	Channel Status LED	Yes (per channel)				
	Fail Safe Value	-	Yes (DO channel)	Yes	Yes	Yes (DO channel)
Power Supply Module (optional)	APAX-5343E					
Page	online	online	13-24	13-25	13-25	

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# APAX Communication Module Selection Guide

## Coupler Modules



Module Name		APAX-5070	APAX-5071	APAX-5072
Description		Modbus/TCP Communication Coupler	PROFINET Communication Coupler	EtherNet/IP Communication Coupler
Communication	Protocol	Modbus/TCP	PROFINET RT	EtherNet/IP
	Data Transfer Rates	10/100 Mbps	100 Mbps	10/100 Mbps
	Connected I/O Modules		32 (max.)*	
	Digital Signals		768 (max.)	
	Analog Signals		192 (max.)	
General	Connector	2 x RJ-45 (2-channel switch, share same IP address)		
	Topology	Line or star wiring		
	Operating Temperature	-10 ~ 60°C (when mounted vertically)		
	Storage Temperature	-40 ~ 85°C		
	Relative Humidity	5 ~ 95% (non-condensing)		
Page		13-22	13-22	13-22

\*APAX DI/O modules can use ID number 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15

## Communication Modules



Module Name		APAX-5490	APAX-5495	APAX-5090
Description		4-port RS-232/422/485 Communication Module	2-port CANopen Master Module	4-port RS-232/422/485 Communication Module
Serial Communication	Baud Rate	50 bps ~ 230.4 kbps	-	600 bps ~ 115.2kbps
	Data Bits	5, 6, 7, 8	-	8
	Stop Bits	1, 1.5, 2	-	1, 1.5, 2
	Parity	None, even, odd	-	None, even, odd
CANopen Communication	Data Transfer Rates	-	Max. 1 Mbits/s	-
Motion	Transmission Speed	-	-	-
	Slaves Number	-	-	-
General	Interface	4 x RS-232/422/485	2 x CAN Bus	2 x RS-422/485 2 x RS-232/422/485
	Connector	26-pin clamp-type terminal	DB9	26-pin clamp-type terminal
	Operating Temperature	0 ~ 60°C (when mounted vertically)		
	Storage Temperature	-40 ~ 70°C		
Relative Humidity		5 ~ 95% (non-condensing)		
Page		13-18	13-18	online

Note: APAX-5090P, APAX-5095P and APAX-5202P can only be used by controller with a PCI interface

# APAX-6572

Intel® Atom™ D510 1.66 GHz, 2 GB RAM  
Controller with 3 x LAN, 2 x COM, VGA



## Features

- Intel Atom D510 1.66 GHz CPU
- Onboard 2 GB DDR2 DRAM
- Backup system with two controllers (master and slave) to ensure continuous I/O control
- Expands I/O by connecting with APAX-5000 I/O modules
- Supports Windows WES2009 and Windows CE
- Provides C/C++ and .NET library for I/O control and communication
- Supports real-time control tasks under Windows CE through ProConOS
- 2 x RS-232/422/485 (automatic flow control)
- 3 x 10/100/1000 Mbps LAN, 4 x USB 2.0

## Introduction

The APAX-6572 is a high performance controller with an Intel Atom D510 CPU. By installing Windows WES2009 or Windows CE operating system, it becomes an application ready platform. It is an ideal open control platform which can be combined with APAX I/O modules, and features flexible I/O expansion, real-time I/O control, and powerful computing and networking capability through various interfaces.

## Specifications

### General

- **Certification** CE, FCC Class A
- **Cooling System** Fanless
- **Mounting** DIN-rail, Wall mount (panel mount)
- **Dimensions (W x H x D)** 222 x 155 x 140 mm
- **Enclosure** Aluminum + SECC, ABS + PC (I/O)
- **Weight** 2.6 kg (APAX-6572)
- **Power Consumption** 35 W @ 24 V<sub>DC</sub> (APAX-6572, Typical, Without I/O modules)
- **Power Requirement** 10 ~ 36 V<sub>DC</sub> (e.g +24 V @ 1 A) (Min. 24 W), AT

### System Hardware

- **CPU** Intel Atom D510 1.66 GHz
- **Memory** 2 GB DDR2 DRAM (onboard)
- **Battery Backup SRAM** 1 MB
- **Watchdog Timer** Programmable 7-tier event handler, from 1 ~ 255 seconds for each tier
- **LED Indicators** Power, CF, LAN (Active, Status), Serial (Tx, Rx)
- **Display** VGA (DB15 connector), up to 1600 x 1200 @ 85Hz
- **Audio** Line in, Line out, Mic in
- **Storage** 1 x internal Type I/II CompactFlash card slot

### Software

- **Operating System** Windows WES2009, Windows CE
- **Control Software** C/C++ and .NET library with utility KW MultiProg (development), ProConOS (kernel)
- **Remote Management** Built-in Advantech DiagAnywhere agent Modbus/ASCII master/slave mode KW MultiProg (development), ProConOS (kernel)

### I/O Expansion

- **Accompanied I/O slots** 4 x APAX/PCI combo slots
- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)

### Communication

- **Serial Ports** 2 x RS-232/422/485 (supports automatic RS-485 data flow control)
- **Serial Baud Rate** 50 ~ 115.2 kbps
- **LAN Ports** 3 x RJ-45 Ports, 10/100/1000 Mbps
- **USB Ports** 4 x USB 2.0

### Environment

- **Operating Temperature** -10 ~ 50°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **Vibration Protection** 2 Grms @ 5 ~ 500 Hz (Random, operating, 1hr/axis) (Conforms to IEC 60068-2-64)

## Ordering Information

- **APAX-6572** Intel Atom D510 1.66 GHz, 2 GB RAM Controller
- **PWR-244** Panel Mount Power Supply

### PAC softlogic option (for CTOS only)

- **SQF-P10S2-8G-ETE** Suggested CF 8G CF NR, DMA (-40 ~ 85°C)
- **2070012262** WinCE image with KW support for APAX-6572
- **2010000007** License Agreement for KW ProConOS Embedded

### PC-base controller option (for CTOS only)

- **SQF-P10S2-16G-ETE** Suggested CF 16G CF NR, DMA (-40 ~ 85°C)
- **2070012263** WES2009 MUI for APAX-6572

\*APAX DI/O modules can use ID number 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15

# APAX-5580

## Intel® Core™ i7/i3/Celeron DIN-Rail PC Controller w/ 2 x GbE, 2 x mPCIe, VGA

Preliminary



SUSIAccess RoHS COMPLIANT 2002/95/EC CE FCC

### Features

- 4th Generation Intel® Core™ i7/i3/Celeron Processors up to 1.7 GHz with 4GB/8GB DDR3L Memory
- 2 x GbE, 4 x USB 2.0/3.0, 1 x RS-232 /422/485, 1 x VGA, Audio
- Dual power input and UPS support
- Compact with Fanless Design
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPRS/GPRS/Wi-Fi Communication by mPCIe
- Chassis Grounding Protection
- LAN Redundancy (Teaming)
- Fault-Protected RS-485 Transceivers With Extended Common-Mode Range
- One button system recovery
- 10 year lifetime RTC battery

### Introduction

Advantech's APAX-5580 is a powerful DIN-Rail PC Controller with an Intel Core i7/i3/Celeron CPU. It is the ideal open control platform to be combined with APAX I/O modules, and features flexible I/O expansion, real-time I/O control, network capability through various interfaces, and support dual power input and UPS module for robust power system. It also has a built-in the standard mini PCI express interface for wireless communication and Advantech's iDoor technology. The APAX-5580 is the best solution for data gateway, concentrator and data server applications, its seamless integration with I/O can save your costs and fulfill a diverse range of automation projects.

### Specifications

#### General

- Certification** CE, FCC
- Dimensions (W x D x H)** 128 x 106 x 110 mm
- Form Factor** Regular Size
- Enclosure** Aluminum Housing
- Mounting** DIN-Rail
- Weight (Net)** 1.8 kg (4.0 lbs)
- Power Requirement** 24 V<sub>DC</sub> ± 20%
- Power Consumption** 28 W (Typical), 72 W (Max)
- OS Support** Microsoft® Windows 7/8, Linux Kernel 3.X

#### System Hardware

- BIOS** AMI UEFI 128Mbit Flash BIOS
- Watchdog Timer** Programmable 256 levels timer interval, from 1 to 255 sec
- Processor** Intel® Core™ i7-4650U ULT 1.7GHz Haswell Dual Core, 4MB L2  
Intel® Core™ i3-4010U ULT 1.7GHz Haswell Dual Core, 3MB L2  
Intel® Celeron 2980U ULT 1.6GHz Haswell Dual Core, 2MB L2
- System Chip** Integrated Intel 8 Series Chipset
- Memory** On-board 4GB (8GB optional)
- Graphics Engine** Intel® HD Graphics 5000/4400
- Ethernet** Intel® i210-IT GbE, 802.1Qav, IEEE1588/802.1AS, 802.3az  
Intel® i218-LM GbE, Intel® AMT, IEEE1588/802.1AS, 802.3az
- LED Indicators** LEDs for Power, battery, LAN (Active, Status), Tx/Rx and HDD
- Storage** 1 x mSATA, 1 x SD, 1 x SD (for OS backup)
- Expansion** 1 x Full-size mPCIe slot, 1 x Half-size mPCIe slot, mPCIe 2.0

#### I/O Interfaces

- Serial Ports** 1 x RS-232/422/485, DB9, 50-115.2kbps
- LAN Ports** 2 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- USB Ports** 4 x USB Ports (2 x USB 2.0, 2 x USB 3.0 compliant)  
1 x internal USB
- Display** 1 x VGA, supports 1920 X 1080 @ 60 Hz 24 bpp
- Audio** Line-Out
- Power Connector** Dual power input and UPS support
- Grounding Protection** Chassis Grounding

#### Environment

- Operating Temperature** - 10 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)

### Ordering Information

- APAX-5580-4C3AE** Intel Celeron 1.6 GHz with 4 GB memory, no external expansion slot
- APAX-5580-433AE** Intel Core i3 1.7 GHz with 4 GB memory, no external expansion slot
- APAX-5580-473AE** Intel Core i7 1.7 GHz with 4 GB memory, no external expansion slot

### Accessories

- APAX-5430** APAX Battery Module
- APAX-5343** AC to DC APAX Power Supply
- APAX-5402-E2A1AE** 2 expansion slots with APAX Bus and PCI express
- APAX-5402-E2A0AE** 2 expansion slots with PCI express only
- SQF-SMSM4-XG-S8E** SQFlash 820 series mSATA MLC 16/32/64/128G (-40~85°C)

### Application Software

	<p>Version : V3.0 or above</p> <p>An innovative remote device management software, allowing efficient remote monitoring, quick recovery &amp; backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.</p>
	<p>Version : V7.1 or above</p> <p>WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.</p>



# APAX-5430

# APAX-5435

## SATA HDD module

## mPCIe module to support iDoor



APAX-5430

FCC CE 

### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 165 g
- **Power Consumption** 2.5 W @ 24 V<sub>DC</sub> (typical)

#### Function

- **Interface** SATA
- **RAID** Supports RAID 0/1
- **Power Supply** 5V:2A  
3.3V:2A
- **Support SATA I/II/III 2.5" HDD/SDD**
- **Support Hot swap**

#### Environment

- **Operating Temperature** -10 ~ 60°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5430** SATA HDD Module



APAX-5435

 FCC CE 

### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 165 g
- **Power Consumption** 2.5 W @ 24 V<sub>DC</sub> (typical)

#### Function

- **Interface** mini PCI express 2.0 (Support iDoor)  
mSATA
- **Support Hot Plug**

#### Environment

- **Operating Temperature** -10 ~ 60° C (when mounted vertically)
- **Storage Temperature** -40 ~ 70° C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5435** mPCIe Module to support iDoor

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# APAX-5490

# APAX-5495

## 4-port RS-232/422/485 Communication Module

## 2-port CANopen Communication Module



NEW

APAX-5490

RoHS Compliant CE FCC



NEW

APAX-5495

CANopen RoHS Compliant CE FCC

### Specifications

#### General

- **Certification** CE, FCC class A
- **Interface** COM 1, COM 2: RS-232/422/485  
COM 3, COM 4: RS-232/422/485
- **Connectors** 1 x 26-pin clamp-type terminal
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 180 g
- **Power Consumption** 2 W @ 5 V<sub>DC</sub> (typical)

#### Communications

- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, even, odd
- **Baud Rate** 50 bps ~ 230.4 kbps
- **Data Signals** RS-232: Tx+, RxD, GND  
RS-422: Tx+, Tx-, Rx+, RX-  
RS-485: Data+, Data-
- **FIFO** 256 bytes
- **Flow Control** Xon/Xoff

#### Protection

- **ESD Protection** 15 kV
- **EFT Protection** 2,500 V<sub>DC</sub>
- **Isolation Protection** 2,500 V<sub>DC</sub> (between COM port and backplane)

#### Environment

- **Operating Temperature** 0 ~ 60°C (mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5490-P4AE** Non Isolation 4-port RS-232/422/485 Comm. Module (Isolation is optional)

Note: APAX-5490 can only be used by controllers with a PCI express interface (ex. APAX-5580)

### Specifications

#### General

- **Certification** CE, FCC class A
- **Interface** 2 x CAN Bus
- **Connectors** DB9
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 180 g
- **Power Consumption** 2 W @ 5 V<sub>DC</sub> (typical)

#### Communications

- **Protocol** CANopen
- **Speed** Max. 1 Mbits/s
- **Supports PDO transmission mode**
- **Supports NMT and SDO communication object**
- **Supports Heartbeat producer and consumer**
- **Supports Emergency objects**

#### Protection

- **Isolation Protection** 2,500 V<sub>DC</sub>

#### Environment

- **Operating Temperature** 0 ~ 60°C (mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5495-P2AE** 2-port CANopen Module

Note: APAX-5495 can only be used by controllers with a PCI express interface (ex. APAX-5580)

# APAX-5520CE/KW APAX-5620CE/KW

PAC with Marvel XScale® CPU

PAC with Marvel XScale® CPU and CAN



APAX-5520CE/KW

RoHS  
CE FCC

## Specifications

### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 210 g
- **Power Consumption** 4.5 W @ 24 V<sub>DC</sub> (typical)

### System Hardware

- **CPU** Intel XScale PXA270 520 MHz
- **Memory Flash** 32M bytes, SDRAM 64M bytes
- **Battery Backup Memory** 256 KB file system, 256 KB direct access
- **Real-time Clock** Yes
- **Watchdog Timer** Yes
- **VGA** DB15 connector
- **SB Ports** 1 x USB 1.1
- **Storage** 1 x Type II CompactFlash card slot

### Software

- **OS Support** Windows CE
- **Control Software** C/C++ and .NET library  
KW Multiprog (development tool)  
KW ProConOS (runtime kernel)

### I/O Expansion

- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)

### Communication (Ethernet)

- **LAN Ports** 1 x RJ-45 Port, 10/100 Mbps
- **Offers Modbus/TCP Server and Client APIs**

### Communication (Serial)

- **Medium** 1 x Isolated RS-485 (2-wire, isolated)
- **Offers Modbus/RTU Master and Slave APIs**

### Environment

- **Operating Temperature** -10 ~ 55°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

## Ordering Information

- **APAX-5520CE** PAC with Marvel XScale CPU, WinCE
- **APAX-5520KW** PAC with Marvel XScale CPU, KW

### Accessories

- **APAX-5002** 2-slot Backplane Module
- **APAX-5343E** Power Supply for APAX Expansion Module

\*APAX DI/O modules can use ID number 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15



APAX-5620CE/KW

RoHS  
CE FCC

## Specifications

### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 60 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 310 g
- **Power Consumption** 5 W @ 24 V<sub>DC</sub> (typical)
- **Redundancy** 25ms data sync, 20ms changeover time and 14kbytes for data sync

### System Hardware

- **CPU** Intel XScale PXA270 520 MHz
- **Memory Flash** 32M bytes, SDRAM 64M bytes
- **Battery Backup Memory** 256 KB file system, 256 KB direct access
- **Real-time Clock** Yes
- **Watchdog Timer** Yes
- **VGA** DB15 connector
- **USB Ports** 1 x USB 1.1
- **Storage** 1 x Type II CompactFlash card slot

### Software

- **OS Support** Windows CE
- **Control Software** C/C++ and .NET library  
KW Multiprog (development tool), KW ProConOS (runtime kernel)

### I/O Expansion

- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)

### Communication (Ethernet)

- **LAN** 2 x RJ-45 Port, 10/100 Mbps
- **Offers Modbus/TCP Server and Client APIs**
- **Modbus/TCP under KW** Server : 64 connections  
Client : 128 connections

### Communication (Serial)

- **Medium** 2 x Isolated RS-485 (2-wire, isolated)
- **Offers Modbus/RTU Master and Slave APIs**

### Communication (CAN)

- **Medium** 2 x Isolated CAN
- **Protocol** CANopen (DS301/302)
- **Speed maximum** 1 Mbit/s

### Environment

- **Operating Temperature** -10 ~ 55°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

## Ordering Information

- **APAX-5620CE** PAC with Marvel XScale CPU, CAN, WinCE
- **APAX-5620KW** PAC with Marvel XScale CPU, CAN, KW

### Accessories

- **APAX-5002** 2-slot Backplane Module
- **APAX-5343E** Power Supply for APAX Expansion Module

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# APAX-5522PE

## Linux based RTU Controller

NEW



RoHS  
Compliant  
2002/95/EC

CE FCC

### Features

- IEC 61850-3 and IEEE-1613 certified for substation automation application
- XScale PXA270 520 MHz processor
- Wide temperature support (-20 ~ 70°C)
- Supports up to 32 APAX I/O modules
- Time-stamp function support
- Linux OS support
- 2 x LAN ports support

### Introduction

IEC 61850-3 standards specify a number of "hardened" characteristics that network products should meet to withstand the potentially electromagnetically harsh substation environment: such as immunity to electrical surge, electrostatic discharges and other phenomena that would cause non-hardened devices to fail. The APAX-5000PE series modules are IEC 61850-3 compliant and can be used in power & energy applications e.g. smart substation for good protection features.

### Specifications

#### General

- **Certification** CE, FCC class A  
Dielectric Strength and Impulse Tests: IEC60255-5:2000  
EMC Immunity: Electronic Discharge: IEC 61000-4-2:2001, level3  
Radiated RF Immunity: IEC 61000-4-3:2002, 10 V/m  
IEEE C37.90.2-1995, 35 V/m  
Fast Transient, Burst Immunity: IEC 61000-4-4:1995 + A1:2001, 4kV @ 2.5KHz  
Surge Immunity: IEC 61000-4-5:2001, 2kV line to line, 4kV line to earth  
Conducted RF Immunity: IEC 61000-4-6:2004, 10 Vrms  
Magnetic Field Immunity: IEC 61000-4-8:2001, 1000 A/m for 3 seconds, 100 A/m for 1 minute  
DOMF: IEC 61000-4-10:2001, 30 A/m @ 100KHz and 1 MHz  
EMC Emissions  
Conducted Emissions: EN 55011: 2002, Class A  
Radiated Emissions: EN 55011: 2002, Class A
- **Dimensions (W x H x D)** 60 x 139 x 100 mm (without backplane)
- **Enclosure** ABS+PC
- **Weight** 180 g
- **Connectors** DB-9
- **Power Consumption** 2 W @ 5 V<sub>DC</sub> (typical)

#### System Hardware

- **CPU** Intel XScale PXA270 520 MHz
- **Memory Flash** 32 M bytes, SDRAM 64 M bytes
- **Battery Backup Memory** 256 KB file system, 256 KB direct access
- **Real-time Clock** Yes
- **Watchdog Timer** Yes
- **Storage** 1 x Type II CompactFlash card slot

#### Software

- **OS Support** Linux Kernel 2.6 RT, KW software on WinCE
- **Control Software** API library / MultiProg KW

#### I/O Expansion

- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)

#### Communication (Ethernet)

- **LAN** 2 x RJ-45 Port, 10/100 Mbps

#### Communication (Serial)

- **Medium** 2 x Isolated RS-232

#### Environment

- **Operating Temperature** -20 ~ 70°C (mounted vertically)
- **Storage Temperature** -40 ~ 85°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5522PELX** IEC 61850-3 Compliant PAC
- **APAX-5522PEKW** IEC 61850-3 Compliant PAC, KW softlogic on WinCE

#### Accessories

- **APAX-5002L** 2-slot Backplane Module
- **APAX-5350** APAX Power Filter for APAX PE modules

\*APAX DI/O modules can use ID number 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15

# APAX-5343/E APAX-5001/5002/5002L

## Power Supply for APAX-5570 Series/ APAX Expansion Modules

### 1/2/2-slot Backplane Modules



APAX-5343

APAX-5343E



## Specifications

### Input

- **Rated Voltage** 115/230 V<sub>AC</sub>
- **Voltage Range** 90 ~ 264 V<sub>AC</sub>
- **Rated Input Current** 1.5 A (at rated load)
- **Rated Input Frequency** 50/60 Hz
- **Input Frequency Range** 47 ~ 63 Hz
- **Inrush Current Limit** < 50 A

### Output

- **Output Power** 72 W
- **Power Loss** about 8~9 W (at rated load)
- **Efficiency** > 88% (at rated load)
- **Rated Voltage** 24 V<sub>DC</sub>
- **Rated Output Current** 3 A
- **Output Current Limit** 3.5 ~ 4.3 A
- **Residual Ripple** < 240 mVpp
- **Startup Delay** < 3 second
- **Voltage Rise** 60 ms (typical)

### Protection


- **Isolation Protection (In/Out)** 42/42 V<sub>DC</sub>
- **Output Over Voltage Protection** shutdown as approximate 25 ~ 27 V<sub>DC</sub>, latch off mode
- **Over Load Protection** auto-recovery mode
- **Short Circuit Protection** auto-recovery mode

### General

- **Certification** CE, FCC class A, UL 508, Energy Star
- **Dimensions (W x H x D)** 75 x 151 x 115 mm
- **Enclosure** PC
- **Operating Temperature** 0 ~ 50°C (mounted vertically)
- **Storage Temperature** -20 ~ 75°C
- **Relative Humidity** 5 ~ 95% (non-condensing)
- **Mounting** DIN-rail, wall mount (panel mount)

## Ordering Information

- **APAX-5343** Power Supply for APAX-5570 Series
- **APAX-5343E** Power Supply for APAX Expansion Module

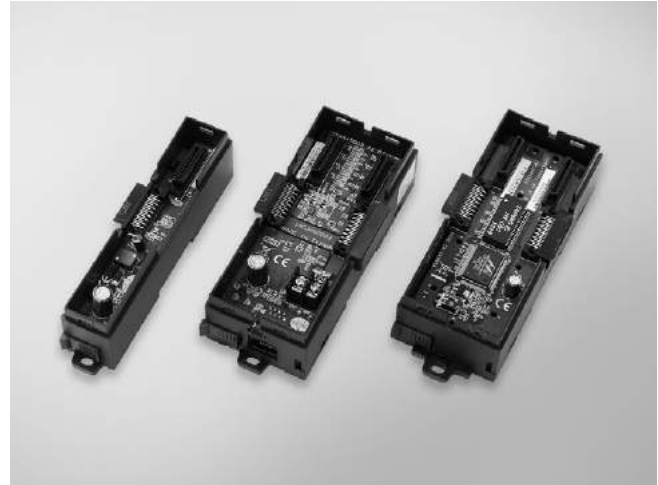

APAX-5001

APAX-5002/L

APAX-5004L



## Specifications

### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 28 x 151 x 38 mm (APAX-5001)  
54 x 151 x 38 mm (APAX-5002, APAX-5002L)  
105 x 151 x 38 mm (APAX-5004L)
- **Enclosure** ABS+PC
- **Weight** 70 g (APAX-5001)  
120 g (APAX-5002, APAX-5002L)
- **Mounting** DIN-rail, Wall mount (panel mount)
- **Power Consumption** 0.3 W @ 24 V<sub>DC</sub> (APAX-5001)  
1.3 W @ 24 V<sub>DC</sub> (APAX-5002, APAX-5002L)
- **Power Input** 18 ~ 30 V<sub>DC</sub>
- **Slot Number** 1 (APAX-5001)  
2 (APAX-5002, APAX-5002L)

### Environment

- **Operating Temperature** APAX-5001\*/APAX-5002\*: 0 ~ 60°C  
APAX-5002L\*: -20 ~ 70°C
- **Storage Temperature** -25 ~ 75°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

\*when mounted vertically

## Ordering Information

- **APAX-5001** 1-slot Backplane Module
- **APAX-5002L** 2-slot Backplane Module
- **APAX-5002** 2-slot Backplane Module with RJ-45 Port and 24V<sub>DC</sub> input

	Slot Number	Expansion Port (RJ-45)	Power Input Terminal
APAX-5001	1	N/A	N/A
APAX-5002L	2	N/A	N/A
APAX-5002	2	Yes	Yes

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# APAX-5070 APAX-5072 APAX-5071

## Modbus/TCP Communication Coupler

## EtherNet/IP Communication Coupler

## PROFINET Communication Coupler



### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 190 g
- **Connector** 2 x RJ-45 (2-channel switch, share same IP address)
- **Power Consumption** 2 W @ 5 V<sub>DC</sub> (typical)

#### Communication

- **Protocol** Modbus/TCP
- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)
- **Data Transfer Rates** 10/100 Mbps
- **Topology** Line or star
- **Isolation Protection** 1,500 V<sub>AC</sub>

#### Environment

- **Operating Temperature** -10 ~ 60°C (mounted vertically)
- **Storage Temperature** -40 ~ 85°C
- **Relative Humidity** 5 ~ 95% (non-condensing)
- **Shock Protection** 10 G @ wall mount, half sine, 11 ms (Confirms to IEC 60068-2-27)
- **Vibration Protection** 1 Grms @ 5 ~ 500 Hz (Random, operating, 1 hr/axis)  
2 G @ 5 ~ 500 Hz (Sine, non-operating, 1 hr/axis) (Confirms to IEC 60068-2-64 and IEC 60068-2-6)

### Ordering Information

- **APAX-5070** Modbus/TCP Communication Coupler

### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 180 g
- **Connectors** 2 x RJ-45 (2-channel switch, share same IP address)
- **Power Consumption** 2 W @ 5 V<sub>DC</sub> (typical)

#### Communications

- **Protocol** EtherNet/IP
- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)
- **Data Transfer Rates** 10/100 Mbps
- **Topology** line or star
- **Isolation Protection** 1,500 V<sub>AC</sub>

#### Environment

- **Operating Temperature** -10 ~ 60°C (mounted vertically)
- **Storage Temperature** -40 ~ 85°C
- **Relative Humidity** 5 ~ 95% (non-condensing)
- **Shock Protection** 10 G @ wall mount, half sine, 11 ms (Confirms to IEC 60068-2-27)
- **Vibration Protection** 1 Grms @ 5 ~ 500 Hz (Random, operating, 1 hr/axis)  
2 G @ 5 ~ 500 Hz (Sine, non-operating, 1 hr/axis) (Confirms to IEC 60068-2-64 and IEC 60068-2-6)

### Ordering Information

- **APAX-5072** EtherNet/IP Communication Coupler

### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 180 g
- **Connector** 2 x RJ-45 (2-channel switch, share same IP address)
- **Power Consumption** 2 W @ 5 V<sub>DC</sub> (typical)

#### Communication

- **Protocol** PROFINET RT V2.2
- **Connected I/O Modules** 32 (max.)\*
- **Digital Signals** 768 (max.)
- **Analog Signals** 192 (max.)
- **Data Transfer Rates** 10/100 Mbps
- **APAX IO Topology** Line or Star

#### Environment

- **Operating Temperature** -10 ~ 60°C (mounted vertically)
- **Storage Temperature** -40 ~ 85°C
- **Relative Humidity** 5 ~ 95% (non-condensing)
- **Shock Protection** 10 G @ wall mount, half sine, 11 ms (Confirms to IEC 60068-2-27)
- **Vibration Protection** 1 Grms @ 5 ~ 500 Hz (Random, operating, 1 hr/axis)  
2 G @ 5 ~ 500 Hz (Sine, non-operating, 1 hr/axis) (Confirms to IEC 60068-2-64 and IEC 60068-2-6)

### Ordering Information

- **APAX-5071** PROFINET Communication Coupler

#### Accessories

- **APAX-5002** 2-slot Backplane Module
- **APAX-5343E** Power Supply for APAX Expansion Module

\*APAX DI/O modules can use ID number 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15

# APAX-5017H

# APAX-5028

## 12-ch High Speed Analog Input Module

## 8-ch Analog Output Module



APAX-5017H

RoHS  
Compliant  
2002/95/EC

CE FCC

### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 175 g
- **Power Consumption** 3.5 W @ 24 V<sub>DC</sub> (typical)

#### Analog Input

- **Channels** 12
  - **Input Impedance** 2 MΩ (Voltage), 120 Ω (Current)
  - **Input Type** V, mV, mA
  - **Input Range** 0 ~ 500 mV, ±10 V, 0 ~ 10 V, 0 ~ 20 mA, 4 ~ 20 mA
  - **Configure Different Range for Each Channel**
  - **Resolution** 12-bit with accuracy ±0.1% or better of Full Scale Range (Voltage), ±0.2% or better of Full Scale Range (Current)
  - **Sampling Rate** 1,000 sample/second (per channel)
- \* Support Integration function to eliminate field site noise at sample rate: 100 sample/second
- **Span Drift** ±25 ppm/°C
  - **Zero Drift** ±6 μV/°C
  - **Wire Burn-out Detection** Yes (4~20 mA only)

#### Protection

- **Over Voltage Protection**
- **2,500 V<sub>DC</sub> Isolation Between Channels and Backplane**

**Note:** The voltage between any two pins must not exceed 15 V

#### Environment

- **Operating Temperature** -10 ~ 60°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5017H** 12-ch High Speed Analog Input Module



APAX-5028

RoHS  
Compliant  
2002/95/EC

CE FCC

### Specifications

#### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 175 g
- **Power Consumption** 3.5 W @ 24 V<sub>DC</sub> (typical)

#### Analog Output

- **Channels** 8
- **Output Type** V, mA
- **Output Range** ±2.5 V, ±5 V, ±10 V, 0 ~ 2.5 V, 0 ~ 5 V, 0 ~ 10 V, 0 ~ 20 mA, 4 ~ 20 mA
- **Configure Different Range for Each Channel**
- **Resolution** 14-bit with accuracy ±0.1% or better of Full Scale Range
- **Settling time** about 500 μs
- **Slew Rate** 0.7 V<sub>DC</sub>/μs (per channel)
- **Span Drift** ±60 ppm/°C
- **Zero Drift** ±275 mV/°C (Voltage), ±250 mV/°C (Current)
- **Drive Voltage (Current Mode)** 15 V<sub>DC</sub>
- **Load (Current Mode)** 0 ~ 500Ω

#### Protection

- **Short Circuit Protection**
- **2,500 V<sub>DC</sub> Isolation Between Channels and Backplane**

#### Environment

- **Operating Temperature** -10 ~ 60°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5028** 8-ch Analog Output Module

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# APAX-5046

# APAX-5046SO

24-ch Digital Output Module

20-ch Source Type DO Module



APAX-5046

FCC CE 



APAX-5046SO

FCC CE 

## Specifications

### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 165 g
- **Power Consumption** 2.5 W @ 24 V<sub>DC</sub> (typical)
- **Status Display** LED per channel  
On: Logic level 1  
Off: Logic level 0

### Digital Output

- **Channels** 24 (Sink Type)
- **Voltage Range** 8 ~ 35 V<sub>DC</sub>
- **Rated Current Output** 0.5 A (per channel, at signal "1")
- **Leakage Current** 0.1 mA (at signal "0")
- **Switch Rate:** Resistive load: 300 Hz (max.)  
Inductive load: 20 Hz (max.)  
Lamp load: 200 Hz  
(max. at 5W lamp and under 50 Ω, 24 V)

### Protection

- 2,500 V<sub>DC</sub> Isolation Between Channels and Backplane
- Short Circuit Protection
- Thermal Shutdown Protection

### Environment

- **Operating Temperature** -10 ~ 60°C  
(when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

## Ordering Information

- **APAX-5046** 24-ch Digital Output Module
- **APAX-5001** 1-slot Backplane Module
- **APAX-5002** 2-slot Backplane Module
- **APAX-5343E** Power Supply for APAX Expansion Module

## Specifications

### General

- **Certification** CE, FCC class A
- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Enclosure** ABS+PC
- **Weight** 165 g
- **Power Consumption** 2.5 W @ 24 V<sub>DC</sub> (typical)
- **Status Display** LED per channel  
On: Logic level 1  
Off: Logic level 0

### Relay Output

- **Channels** 20 (Source Type)
- **Voltage Range** 10~35V<sub>DC</sub>
- **Rated Current Output** 1A(per channel, at signal "1")
- **Leakage Current** 0.1 mA (at signal "0")
- **Switch Rate** Resistive load : 300 Hz (max.)  
Inductive load: 20 Hz (max.)  
Lamp load: 200 Hz  
(max., at 5W amp and under 50 Ω, 24V)

### Protection

- 2,500 V<sub>DC</sub> Isolation Between Channels and Backplane
- Short Circuit Protection
- Thermal Shutdown Protection

### Environment

- **Operating Temperature** -10 ~ 60° C  
(when mounted vertically)
- **Storage Temperature** -40 ~ 70° C
- **Relative Humidity** 5 ~ 95% (non-condensing)

## Ordering Information

- **APAX-5046SO** 20-ch Source-Type DO Module
- **APAX-5001** 1-slot Backplane Module
- **APAX-5002** 2-slot Backplane Module
- **APAX-5343E** Power Supply for APAX Expansion Module



# APAX-5060

# APAX-5080

## 12-ch Relay Output Module

## 4/8-ch High/Low Speed Counter Module

NEW



APAX-5060

FCC CE RoHS

### Specifications

#### General

- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Weight** 195 g
- **Power Consumption** 2 W @ 24 V<sub>DC</sub> (typical)
- **Status Display** LED per channel  
On: Logic level 1  
Off: Logic level 0

#### Relay Output

- **Channels** 12
- **Relay Type** Form A (SPST)
- **Switching Capacity and Lifetime of the Contact (For Resistive Load)**  
VDE: 30,000 operations (5 A @ 250 V<sub>AC</sub>, 10 operations/minute at 8°C)  
70,000 operations (5 A @ 30 V<sub>DC</sub>, 10 operations/minute at 85°C)  
UL: 60,000 operations (5 A @ 250 V<sub>AC</sub>)  
100,000 operations (5 A @ 30 V<sub>DC</sub>)  
Mechanism: 20,000,000 operations (no load, 300 operations/min)
- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60 Hz)
- **Contact Resistance** 30 mΩ (maximum)
- **Insulation Resistance** 1 GΩ (minimum) at 500 V<sub>DC</sub>

#### Protection

- **Isolation Between Channels and Backplane** 2,500 V<sub>DC</sub>

#### Environment

- **Operating Temperature** -10 ~ 60°C (when mounted vertically)  
-20 ~ 70°C (for PE version)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non-condensing)

### Ordering Information

- **APAX-5060** 12-ch Relay Output Module
- **APAX-5060PE** 12-ch Relay Output Module with Wide Temperature

NEW



APAX-5080

FCC CE RoHS

### Specifications

#### General

- **Dimensions (W x H x D)** 30 x 139 x 100 mm
- **Weight** 170 g
- **Power Consumption** 2.5 W @ 24 V<sub>DC</sub> (typical)
- **Status Display** LED per channel (for DI/O only)  
On: Logic level 1; Off: Logic level 0

#### Counter/Frequency Input

- **Channels & Mode** 8 (Up Counter, High/Low Freq. and Wave Width mode)  
4 (Pulse and Direction, Up/Down Pulse, A/B Phase)  
32-bit + 1-bit overflow
- **Counting Range** 1 μs for High Freq. mode; 1 ms for Low Freq. mode
- **Minimum Pulse Width** 0.1 Hz ~ 10 Hz for Low Freq. mode and Wave Width mode
- **Counter Frequency** 10 Hz ~ 1M Hz for High Freq. mode and other modes
- **Input Voltage** For "0" signal: 0 ~ 3 V<sub>DC</sub>; For "1" signal: 10 ~ 30 V<sub>DC</sub>
- **Accuracy** 0.1% for Low Freq. mode
- **Input Filter** 0.1 us ~ 40 ms

#### Digital Input

- **Channels** 4
- **Type** Sink (Wet contact)
- **Input Voltage** For "0" signal: 0 ~ 3 V<sub>DC</sub>; For "1" signal: 10 ~ 30 V<sub>DC</sub>

#### Digital Output

- **Channels** 4 (Sink Type)
- **Output Voltage Range** 8 ~ 35 V<sub>DC</sub>
- **Normal Output Current** 0.5 A (per channel)

#### Protection

- **Isolation Between Channels and Backplane** 2,500 V<sub>DC</sub>
- **Short Circuit Protection (For DO channel)**
- **Thermal Shutdown Protection (For DO channel)**

#### Environment

- **Operating Temperature** -10 ~ 60°C (when mounted vertically)
- **Storage Temperature** -40 ~ 70°C
- **Relative Humidity** 5 ~ 95% (non condensing)

### Ordering Information

- **APAX-5080** 4/8-ch High Speed Counter Module

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# APAX Controller Support table

Type		Performance PAC			Compact PAC			Coupler		
System		APAX-6572	APAX-5580	APAX-5620	APAX-5520	APAX-5522PE	APAX-5070	APAX-5071	APAX-5072	
Function	I/O module	PAC with Intel ATOM™ D510 1.66 GHz	PAC with Intel Core i CPU	PAC with Marvel Xscaler CPU and CAN	PAC with Marvel Xscaler CPU	IEC 61850-3 Certified PAC with Marvel Xscaler CPU	Modbus/TCP Communication Coupler	PROFINET Communication Coupler	EtherNet/IP Communication Coupler	
Analog I/O	APAX-5013	•	•	•	•	•	•	•	•	
	APAX-5017	•	•	•	•	•	•	•	•	
	APAX-5017H	•	•	•	•	•	•	•	•	
	APAX-5018	•	•	•	•	•	•	•	•	
	APAX-5028	•	•	•	•	•	•	•	•	
Digital I/O	APAX-5040	•	•	•	•	•	•	•	•	
	APAX-5045	•	•	•	•	•	•	•	•	
	APAX-5046	•	•	•	•	•	•	•	•	
	APAX-5060	•	•	•	•	•	•	•	•	
	APAX-5080	•	•	•	•	•	•	•	•	
Communication (Serial/CAN/AMAX)	APAX-5090P	•	•	-	-	-	-	-	-	
	APAX-5095P	•	•	-	-	-	-	-	-	
	APAX-5202P	•	•	-	-	-	-	-	-	
Backplane Modules	APAX-5001	•	•	•	•	•	•	•	•	
	APAX-5002/L	•	•	•	•	•	•	•	•	
Power Supply Modules	APAX-5343	-	•	-	-	-	-	-	-	
	APAX-5343E	-	-	•	•	-	•	•	•	
IEC-61850 Certified I/O	APAX-5017PE	•	•	•	•	•	•	-	-	
	APAX-5040PE	•	•	•	•	•	•	-	-	
	APAX-5060PE	•	•	•	•	•	•	-	-	

# ADAM-5000 Series



## Open Network and Fieldbus Solutions for Device Networking

## Introduction

The Fieldbus concept will change the control environment and device characteristics of future control systems in both processing and manufacturing. Compared with traditional systems, the Fieldbus system reduces cost of cabling, commissioning, and installation. In addition, the Fieldbus system has greater reliability.

The ADAM-5000 series, a compact distributed data acquisition and control system, supports the shift toward Fieldbus-based systems. Based on popular Fieldbus data communication structures such as RS-485 and Modbus, the ADAM-5000 series now offers two different DA&C systems that allow field I/O devices to easily connect to PC network applications: the ADAM-5000 DA&C systems and the ADAM-5510 series of PC-based controllers.



## Distributed I/O Systems

### Ethernet-based Data Acquisition and Control System

With the ADAM-5000/TCP as your Ethernet I/O data processing center, you can monitor and control field signals at a speed of 10/100 Mbps. The best field-proven communication performance that can be reached in industrial network environments. Additionally, the popular Modbus/TCP protocol is supported as well.

### RS-485 based Data Acquisition and Control System

The ADAM-5000/485 system is a data acquisition and control system that can acquire, monitor and control data through multi-channel I/O modules. It communicates with a network master over a twisted-pair, multi-drop RS-485 network. Both ADAM ASCII and Modbus/RTU protocols are supported.

## PC-based Controllers

### Ethernet-enabled PC-based Controllers

The ADAM-5510 series of PC-based programmable controllers includes ADAM-5510M, ADAM-5510E, ADAM-5510/TCP and ADAM-5510E/TCP. They feature Intel x86-based CPUs running Datalight ROM-DOS.

Users can use Borland C 3.0 to develop the application program and then download it by Windows-based ADAM-5510 series utility. The Ethernet-enabled feature of ADAM-5510/TCP and ADAM-5510E/TCP enables features like:FTP server, web server, TCP/UDP connections and email alarm. The ADAM-5510 controllers also have high expansion capability by supporting Modbus/RTU master/slave and Modbus/TCP client/server functions.

ADAM-5550CE features AMD GX2 CPU running Windows CE operating system. Users can use Microsoft Visual Studio .NET to develop the application program.

ADAM-5550KW and ADAM-5510KW series allow users leverage IEC 61131-3 SoftLogic programming environment to complete their automation task.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Distributed I/O Systems & PC-based Controllers

## Maximum System Design Flexibility

The ADAM-5000's modular design allows users to tailor solutions based on their own requirements. Built-in programmable I/O ranges and alarm outputs enhance flexibility in system design. A variety of communication media such as twisted-pair wiring, radio modems and fiber optics are supported.

## System Maintenance and Troubleshooting

The ADAM-5000 series uses hardware self-test and software diagnosis to monitor system problems. Also included is a watchdog timer that monitors the microprocessor. If the system crashes, the watchdog automatically resets the system. Node ID setting is easily accomplished by setting a DIP switch on the front of the system.

## Easy Installation and Networking


The ADAM-5000 series can be easily mounted on a DIN-rail or on a panel. Signal connections, network modifications and maintenance are simple and quick. Building a multi-drop network only requires a single twisted pair of wires.

## Proven for Industrial Environments

The ADAM-5000 series can operate in industrial environments at temperatures between -10 and 70°C, and can use unregulated power sources between 10 and 30 V<sub>DC</sub>. These units are protected against accidental power supply reversals. A 3-way isolation design (I/O, power & communication) prevents ground loops and reduces the effect of electrical noise in the system.

## Extensive Software Support

The ADAM-5000 series is supported by most standard process controls and HMI software. .NET Class LIB is provided for use with Windows applications. OPC drivers provide links to a wide range of HMI/SCADA software packages such as InTouch, FIX and ICONICS. Advantech data acquisition software and Advantech Studio SCADA/HMI software are both tightly integrated with the ADAM-5000 systems.

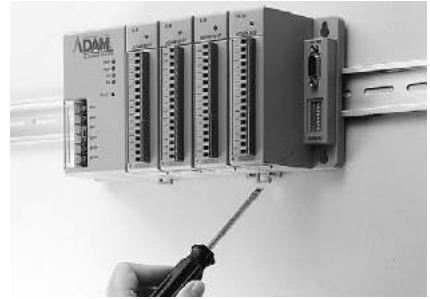

DIN-rail Mounting  
Installed on industrial standard DIN-rails



Panel/Wall Mounting  
Flat surface system mounting




Node ID Setting  
8-pin dip switch configuration



Connection  
Pre-wired plug-in terminals with I/O modules

## Simple & Low Cost Network

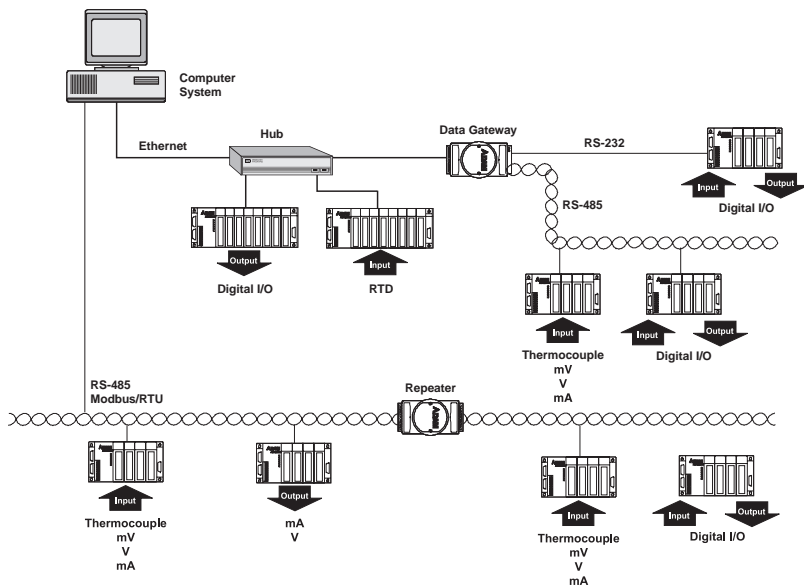


# ADAM-5000 Controller Selection Guide



System		ADAM-5510M ADAM-5510KW	ADAM-5510E	ADAM-5510/TCP ADAM-5510KW/TCP	ADAM-5510E/TCP ADAM-5510EKW/TP	ADAM-5560
CPU		80188				Intel Atom Z510P 1.1 GHz
RAM		640 KB				1 GB DDR2 SDRAM
Flash ROM		256 KB				-
Flash Memory		256 KB				-
Flash Disk		1 MB				-
OS		ROM-DOS				WinCE5.0/XP embedded
Control Software		ADAM-5510M: Borland C ADAM-5510KW: KW SoftLogic	Borland C	ADAM-5510/TCP: Borland C ADAM-5510KW/TCP: KW SoftLogic	ADAM-5510E/TCP: Borland C ADAM-5510EKW/TP: KW SoftLogic	ADAM-5560CE: C/C++ and .NET ADAM-5560KW: KW SoftLogic
Real-time Clock		Yes				
Watchdog Timer		Yes				
COM1		RS-232	RS-232/485	RS-232	RS-232/RS-485	RS-232/485
COM2		RS-485				
COM3 (Programming)		RS-232 (TX, RX, GND)				RS-232/485
COM4		RS-232/485				
I/O Slots		4	8	4	8	7
Power Consumption		4 W				17 W
Isolation	Communication	2,500 V <sub>DC</sub> (COM2 RS-485)				2,500 V <sub>DC</sub> (COM2 RS-485) 1,500 V <sub>DC</sub> (COM1, COM3, COM4 RS-485)
	Communication Power	3,000 V <sub>DC</sub>				
	I/O Module	3,000 V <sub>DC</sub>				
Diagnosis	Status Display	Power, CPU, Communication, Battery				Power, User Define
	Self Test	Yes, while ON				
	Software Diagnosis	Yes				
Communication	Interface	RS-232/485		Ethernet (RJ-45)		Ethernet (2 x RJ-45)
	Speeds	1,200 bps ~ 115.2 kbps		10/100 Mbps		10/100 Mbps
	Max. Distance	4,000 feet (1.2 km)		100 m		100 m
	Data Format	N, 8, 1, 1		-		-
	Max. Nodes	32	32	256 for Ethernet, 32 for RS-485	256 for Ethernet, 32 for RS-485	256 for Ethernet, 32 for RS-485
	Protocol	User Defined, Modbus/RTU	User Defined, Modbus/RTU	User Defined, Modbus/RTU, Modbus/TCP	User Defined, Modbus/RTU, Modbus/TCP	Modbus/RTU, Modbus/TCP
	Remote I/O	Modbus Device				
	Power Requirements	10 ~ +30 V <sub>DC</sub>				
Environment	Operating Temperature	-10 ~ 70°C (14 ~ 158°F)				0 ~ 55°C (32 ~ 131°F)
	Storage Temperature	-25 ~ 85°C (-13 ~ 185°F)				
	Humidity	5 ~ 95%				
Dimensions (mm)		231 x 110 x 75	355 x 110 x 75	231 x 110 x 75	355 x 110 x 75	355 x 110 x 75
Page		13-37	13-37	online	online	13-35

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-5000 I/O Module Selection Guide



System		ADAM-5000/485	ADAM-5000E	ADAM-5000L/TCP	ADAM-5000/TCP
CPU		80188	80188	RISC CPU	
RAM		-	-	4 MB	
Flash ROM (User AP)		-	-	512 KB	
Flash Memory (Data Storage)		-	-	-	
Flash Disk		-	-	-	
OS		-	-	real-time OS	
Timer BIOS		-	-	-	
Real-time Clock		-	-	-	
Watchdog Timer		Yes			
I/O Slots		4	8	4	8
Power Consumption		3 W		4.0 W	5.0 W
Isolation	Communication	2,500 V <sub>DC</sub>		3,000 V <sub>DC</sub>	
	Communication Power	RS-485: 1,500 V <sub>DC</sub>			
	I/O Module	3,000 V <sub>DC</sub>			
Diagnosis	Status Display	Power, CPU, Communication		Power, CPU, Error Diagnostic, Communication	
	Self Test	Yes, while ON			
	Software Diagnosis	Yes			
Communication	Interface	RS-232/485 (2-wire)	RS-232/485 (2-wire)	Ethernet	
	Speeds (bps)	1,200, 2,400, 4,800, 9,600, 19.2 K, 38.4 K, 57.6 K, 115.2 K	1,200, 2,400, 4,800, 9,600, 19.2 K, 38.4 K, 57.6 K, 115.2 K	10 M, 100 M	
	Max. Distance	4,000 feet (1.2 km)	4,000 feet (1.2 km)	100 m without repeater	
	Data Format	Advantech protocol: N, 8, 1 Modbus protocol: N, 8, 1 N, 8, 2 E, 8, 1 O, 8, 1	Advantech protocol: N, 8, 1 Modbus protocol: N, 8, 1 N, 8, 2 E, 8, 1	TCP/IP	
	Max. Nodes	128	128	Depend on IP address	
	Protocols	ADAM ASCII/Modbus Protocol	ADAM ASCII/Modbus Protocol	Modbus/TCP	
	Remote I/O	-	-	20 nodes Modbus devices	
	Power Requirements	+10 ~ +30 V <sub>DC</sub>			
Environment	Operating Temperature	-10 ~ 70°C (14 ~ 158°F)			
	Storage Temperature	-25 ~ 85°C (-13 ~ 185°F)			
	Humidity	5 ~ 95%			
Dimensions (mm)		231 x 110 x 75	355 x 110 x 75	231 x 110 x 75	355 x 110 x 75
Page		13-38	13-38	13-39	13-39

## Analog Input/Output Modules



Module		ADAM-5013	ADAM-5017	ADAM-5017P	ADAM-5017UH	ADAM-5018
Analog Input	Resolution	16 bit	16 bit	16 bit	12 bit	16 bit
	Input Channel	3	8	8	8	7
	Sampling Rate	10 (total*)	10 (total*)	10 (total*)	200K**	10 (total*)
	Voltage Input	-	±150 mV, ±500 mV ±1 V, ±5 V, ±10 V	±150 mV, ±500 mV ±15V, ±10V, ±5 V, ±1 V 0 ~ 150mV, 0 ~ 500mV 0 ~ 1V, 0 ~ 5V, 0 ~ 10V 0 ~ 15V	±10 V, 0 ~ 10 V	±15 mV, ±50 mV ±100 mV, ±500 mV ±1 V, ±2.5 V
	Current Input	-	±20 mA	±20 mA, 4 ~ 20mA	0 ~ 20 mA, 4 ~ 20 mA	±20 mA
	Direct Sensor Input	Pt or Ni RTD	-	-	-	J, K, T, E, R, S, B
Isolation		3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>
Page		online	online	online	online	online

\*Sampling rate value depends on used channel number.

Example: Using 5 channels on ADAM-5017, sampling rate for each used channel will be 10/5 = 2 samples/second.

\*\*The sampling rate vary with the controller.



Module		ADAM-5018P	ADAM-5024	ADAM-5050	ADAM-5051/ ADAM-5051D/ ADAM-5051S	ADAM-5052	ADAM-5053S
Analog Input	Resolution	16 bit	-	-	-	-	-
	Input Channel	7	-	-	-	-	-
	Sampling Rate	10 (total*)	-	-	-	-	-
	Voltage Input	±15 mV, ±50 mV ±100 mV, ±500 mV ±1 V, ±2.5 V	-	-	-	-	-
	Current Input	4 ~ 20 mA	-	-	-	-	-
	Direct Sensor Input	J, K, T, E, R, S, B	-	-	-	-	-
Analog Output	Output Channels	-	4	-	-	-	-
	Resolution	-	12 bit	-	-	-	-
	Voltage Output	-	0 ~ 10 V	-	-	-	-
	Current Output	-	0 ~ 20 mA 4 ~ 20 mA	-	-	-	-
Digital Input and Digital Output	Digital Input Channels	-	-	16 DI/O (bit-wise selectable)	16 (ADAM-5051) 16w/LED (5051D/5051S)	8	32
	Digital Output Channels	-	-		-	-	-
Isolation		3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	-	2,500 V <sub>DC</sub> (5051S)	5,000 V <sub>RMS</sub>	2,500 V <sub>DC</sub>
Page		online	online	online	online	online	online

\*Sampling rate value depends on used channel number.

Example: Using 6 channels on ADAM-5017, sampling rate for each used channel will be 12/6 = 2 samples/second.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-5000 I/O Module Selection Guide

## Digital Input/Output Modules



Module		ADAM-5055S	ADAM-5056/ ADAM-5056D	ADAM-5056S/ ADAM-5056SO	ADAM-5057S	ADAM-5060
Digital Input and Digital Output	Digital Input Channels	8 w/LED	-	-	-	-
	Digital Output Channels	8 w/LED	16 (ADAM-5056) 16 w/LED (ADAM-5056D)	16 w/LED	32	6 relay (2 form A/4 form C)
Isolation		2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-
Page		online	online	online	online	online



Module		ADAM-5069	ADAM-5080	ADAM-5081	ADAM-5090/ ADAM-5091	ADAM-5095
Digital Input and Digital Output	Digital Input Channels	-	-	-	-	-
	Digital Output Channels	8 power relay (form A)	-	-	-	-
Counter (32-bit)	Channels	-	4	4/8	-	-
	Input Frequency	-	0.3 ~ 1000 Hz max. (frequency mode) 5000 Hz max. (counter mode)	5 Hz ~ 1 MHz max. (frequency mode) 1 MHz max. (counter mode)	-	-
	Mode	-	Frequency, Up/Down Counter, Bi-direction Counter	Frequency, Counter (Up/Down, Bi-direction, Up, A/B Phase)	-	-
Communication	Channels	-	-	-	4	2
	Type	-	-	-	RS-232	CAN
Isolation		-	1,000 V <sub>RMS</sub>	2,500 V <sub>DC</sub>	-	1,000 V <sub>DC</sub>
Page		online	online	online	online	online



# ADAM-5000 Controller Support Table

Type		PAC			PC-based Controller		
System		ADAM-5560KW	ADAM-5510KW ADAM-5510EKW	ADAM-5510KW/TCP ADAM-5510EKW/TP	ADAM-5560CE	ADAM-5510/TCP ADAM-5510E/TCP	ADAM-5510M ADAM-5510E
Function	I/O Module	7-slot Micro PAC with Atom™ CPU	4/8-slot Softlogic Controller w/ RS-485	4/8-slot Softlogic Controller w/ Ethernet	7-slot PC-based Controller with Atom™ CPU	4/8-slot PC-based Controller with Ethernet	4/8-slot PC-based Controller with RS-485
Analog Input (AI)	ADAM-5013	•	•	•	•	•	•
	ADAM-5017	•	•	•	•	•	•
	ADAM-5017P	•	-	-	•	•	•
	ADAM-5017H	-	•	•	-	•	•
	ADAM-5017UH	•	-	-	•	•	•
	ADAM-5018	•	•	•	•	•	•
	ADAM-5018P	•	-	-	•	•	•
Analog Output (AO)	ADAM-5024	•	•	•	•	•	•
Digital Input (DI)	ADAM-5051	•	•	•	•	•	•
	ADAM-5051D	•	•	•	•	•	•
	ADAM-5051S	•	•	•	•	•	•
	ADAM-5052	•	•	•	•	•	•
	ADAM-5053S	•	-	-	•	-	-
Digital Output (DO)	ADAM-5056	•	•	•	•	•	•
	ADAM-5056D	•	•	•	•	•	•
	ADAM-5056S	•	•	•	•	•	•
	ADAM-5056SO	•	•	•	•	•	•
	ADAM-5057S	•	-	-	•	-	-
Digital I/O	ADAM-5050	•	•	•	•	•	•
	ADAM-5055S	•	•	•	•	•	•
Relay Output	ADAM-5060	•	•	•	•	•	•
	ADAM-5069	•	•	•	•	•	•
Counter/Frequency	ADAM-5080	-	•	•	-	•	•
	ADAM-5081	•	-	-	•	•	•
Comm.	ADAM-5090	-	•	•	-	•	•
	ADAM-5095	•	-	-	•	-	-
Motion	ADAM-5202	•	-	-	•	-	-
	ADAM-5240	•	-	-	•	-	-
SD	ADAM-5030	•	-	-	•	-	-

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# ADAM-5000 Remote I/O System Support Table

Remote I/O System			ADAM-5000/485	ADAM-5000E	ADAM-5000L/TCP	ADAM-5000/TCP
Function	I/O Module	Description	4-slot Distributed DA&C for RS-485	8-slot Distributed DA&C for RS-485	4-slot Distributed DA&C for Ethernet	8-slot Distributed DA&C for Ethernet
Analog Input (AI)	ADAM-5013	3-ch RTD Input	•	•	•	•
	ADAM-5017	8-ch AI	•	•	•	•
	ADAM-5017P	8-ch AI w/ Independent Input Range	•	•	•	•
	ADAM-5017H	8-ch high Speed (1K) AI	•	•	•	•
	ADAM-5017UH	8-ch Ultra high Speed (200K) AI	•	•	•	•
	ADAM-5018	7-ch Thermocouple Input	•	•	•	•
	ADAM-5018P	7-ch Thermocouple Input w/ Independent Input Range	•	•	•	•
Analog Output (AO)	ADAM-5024	4-ch AO	•	•	•	•
Digital Input (DI)	ADAM-5051	16-ch DI	•	•	•	•
	ADAM-5051D	16-ch DI w/ LED	•	•	•	•
	ADAM-5051S	16-ch Isolated DI w/ LED	•	•	•	•
	ADAM-5052	8-ch Isolated DI	•	•	•	•
Digital Output (DO)	ADAM-5056	16-ch DO	•	•	•	•
	ADAM-5056D	16-ch DO w/ LED	•	•	•	•
	ADAM-5056S	16-ch Isolated DO w/ LED	•	•	•	•
	ADAM-5056SO	16-ch Source Type Isolated DO w/ LED	•	•	•	•
Digital I/O	ADAM-5050	16-ch Universal Digital I/O	•	•	•	•
	ADAM-5055S	16-ch Isolated Digital I/O w/ LED	•	•	•	•
Relay Output	ADAM-5060	6-ch Relay Output	•	•	•	•
	ADAM-5069	8-ch Power Relay Output w/ LED	•	•	•	•
Counter/Frequency	ADAM-5080	4-ch Counter/Frequency	•	•	•	•
	ADAM-5081	4-ch High Speed Counter/Frequency	•	•	•	•

# ADAM-5560CE/XPE ADAM-5560KW

## 7-slot PC-based Controller with Intel® Atom™ CPU

## 7-slot Micro PAC with Intel® Atom™ CPU

**NEW**



RoHS  
CE FCC

### Features

- Optional SCADA software WebAccess through CTOS
- Integrated VGA port for local display of HMI software
- Can be operated with or without display/ keyboard/ mouse
- Remote monitoring through Web Server
- Remote maintenance via FTP Server
- Supports .NET class library in Windows CE and XP embedded
- Supports IEC-61131-3 SoftLogic Control Software
- Supports Modbus/RTU (Master/Slave) and Modbus/TCP (Server/Client)
- Supports SD Storage I/O Module
- Remote I/O expansion
- Supports ADAM-5000 I/O Modules

### Introduction

The ADAM-5560 is a Programmable Automation Controller designed for control tasks which require Industrial PC computing performance with a PLC's robustness. The ADAM-5560 offers an Intel Atom CPU along with control specific features such as watchdog timer, battery backup RAM and deterministic I/O. The ADAM-5560KW features 5 standard IEC 61131-3 programming languages in Windows CE, so PLC users can develop control strategies with their own familiar programming languages. The powerful Multiprog KW Software and stable ProConOS have caused the ADAM-5560KW to become the best choice for a Programmable Automation Controller on the market today. Besides, the ADAM-5560CE offers an open platform that helps users to develop their own program using the common eVC and .NET programming environments to build compact and reliable control solutions. With the optional HMI Software and built-in VGA port, users no longer need to build additional SCADA PC's into their applications. This compact and powerful PAC is ideal for a variety of applications ranging from machine automation to SCADA applications.

### Specifications

#### Control System

- **CPU** Intel Atom Z510P
- **I/O Capacity** 7 slots
- **LED Indicators** Power, User defined
- **Memory** 1 GB DDR2 SDRAM  
1 MB Battery Backup  
1 x CompactFlash® Card (Internal, 4GB)
- **Operating System** Windows® CE5.0/Windows XP Embedded
- **Real-time Clock** Yes
- **Watchdog Timer** Yes
- **Control Software** ADAM-5560CE: eVC and .NET library  
ADAM-5560XPE: .NET library  
ADAM-5560KW: KW Multiprog (development tool)  
ProConOS (runtime Kernel)

#### Communications

- **Comm. Protocol** Modbus/RTU and Modbus/TCP
- **Medium** 2 x 10/100 Base-T w/ RJ-45  
4 x RS-485 w/ DB9

#### Protection

- **Communication** RS-485 Isolation 1.5kV for COM1, COM3 and COM4  
RS-485 Isolation 2.5kV for COM2
- **Power Reversal** Yes

#### Power

- **Power Consumption** 17w @ 24 V<sub>DC</sub> (Not include I/O modules)
- **Power Input** 12 ~ 24 V<sub>DC</sub>, ± 20%

#### General

- **Certification** CE, FCC Class A
- **Connectors** 1 x RS-232/485 (COM1)  
1 x RS-485 (COM2)  
1 x RS-232/485 (COM3)  
1 x RS-232/485 (COM4)  
2 x USB 2.0 ports (KB/Mouse via USB Ports)  
1 x VGA (1024 x 768 Resolution)
- **Dimensions** 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall mount (panel mount)
- **Plug-in Screw Terminal** Accepts 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup>, 1 - #12 or 2 - #14 to #22 AWG

#### Environment

- **Humidity** 5% to 95%, non-condensing
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **Open Platform Solution**  
ADAM-5560 7-slot PC-based Controller with Intel ATOM CPU  
SQF-P10S2-16G-ETE Suggested 16G CF NR, DMA (-40 ~ 85°C)  
2070012906 WES2009 Eng. for ADAM-5560
- **ADAM-5560CE** 7-slot PC-based Controller with Intel ATOM CPU (WinCE5.0)
- **ADAM-5560KW** 7-slot Micro PAC with Intel Atom CPU

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-5560WA

## 7-slot Compact SCADA Controller with 600 Tags WebAccess

NEW



WebAccess



### Features

- Bundled with Advantech WebAccess, browser based HMI/SCADA software
- Built-in Windows XP Embedded
- Fanless design with no internal cabling
- Remote monitoring through Web Server
- Remote maintenance via FTP Server
- Supports .NET class library in Windows XP embedded
- Supports more than 200 industrial protocols by 4 isolated comports and 2 LANs
- Onboard system status LED indicators
- Front-accessible design
- Remote I/O expansion
- Supports ADAM-5000 I/O Modules

### Introduction

The ADAM-5560WA is a compact SCADA controller with 7-slots. It is built on Advantech's solid platform and comes pre-installed with WebAccess SCADA software and pre-configured with Windows XP Embedded and the IIS environment. Just plug in the power and a network cable and the web enabled browser-based controller is ready for users to start configuring the SCADA system and IO from a computer. This compact SCADA controller is powered by an Intel Atom Z510P processor. It provides excellent computing power with low power consumption. It also has a direct I/O connection to form a space saving controller system.

### WebAccess Professional Version

- **I/O Tag Number** 600
- **Internal Tag Number** 600
- **Web Client** 1024
- **Alarm Logs** 5000
- **Action Logs** 5000
- **Node** SCADA Node
- **Graphics** Unlimited Number of Graphic Pages, Global Tag Source
- **Number of data logs** Number of I/O Tag Licenses x 2
- **Others** SCADA Redundancy  
TelScript / VBScript / Jscript Language  
Data Transfer and Reporting  
ODBC and SQL Query  
Device Redundancy

### Specifications

#### Control System

- **CPU** Intel Atom Z510P
- **I/O Capacity** 7 slots
- **LED Indicators** Power, User defined
- **Memory** 1 GB DDR2 SDRAM
- **Storage** 1 x CompactFlash® Card (Internal, 4GB)
- **Operating System** Windows XP Embedded (WES2009)
- **Real-time Clock** Yes
- **Watchdog Timer** OS and Application

#### Protection

- **Communication** RS-485 Isolation 1.5kV for COM1, COM3 and COM4  
RS-485 Isolation 2.5kV for COM2
- **Power Reversal** Yes

#### Power

- **Power Consumption** 17W @ 24 V<sub>DC</sub> (Not include I/O modules)
- **Power Input** 12 ~ 24 V<sub>DC</sub>, ± 20%

#### General

- **Certification** CE, FCC Class A
- **Dimensions** 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall mount (panel mount)
- **Plug-in Screw Terminal** Accepts 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup>, 1 – #12 or 2 – #14 to #22 AWG

#### I/O Interfaces

- **Serial Ports** 1 x RS-485, Terminal, 50~115.2kbps  
3 x RS-232/485, DB9, 50~115.2kbps
- **LAN Ports** 2 x RJ-45, 10/100Mbps
- **USB Ports** 2 x USB2.0
- **Displays** 1 x VGA, support 1024 x 768

#### Environment

- **Humidity** 5% to 95%, non-condensing
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **ADAM-5560WA-T600E** 7-slot Compact SCADA Controller with 600 Tags WebAccess (Traditional Chinese)
- **ADAM-5560WA-C600E** 7-slot Compact SCADA Controller with 600 Tags WebAccess (Simplified Chinese)
- **ADAM-5560WA-E600E** 7-slot Compact SCADA Controller with 600 Tags WebAccess (English)

# ADAM-5510 Series

## 4/8 slots PC-based Controller



ADAM-5510E

ADAM-5510



### Features

- Supports Modbus/RTU, Modbus/TCP Master and Slave function libraries
- Windows-based utility
- Optional support C Programming and IEC-61131-3 standard
- Complete set of I/O modules
- Built-in real-time clock and watchdog timer
- ROM-DOS operating system
- 4 serial communication ports
- Optional support Ethernet Interface with network function, such as Web Server, FTP Server and Email Alarm.
- 4 or 8 I/O slot expansion

### Introduction

The ADAM-5510 Series are ideal for PC-based data acquisition and control applications. They are compact, controllers with an Intel x86- based CPU running Datalight ROM-DOS. Built-in battery backup SRAM is the best choice for complex logic or data storage applications. For professional C/C++ programmers, the ADAM-5510 Series application programs may be written and compiled in Borland C++ 3.0, and downloaded to the controller.

For user who familiar with PLC programing environment, we provide the option for customer to use the KW softlogic which supports 5 standard IEC 61131-3 programming languages, including LD/FB/SFC/IL/ST.

### Specifications

#### Control System

- **CPU** 80188, 16-bit microprocessor
- **I/O Slots** Optional 8 or 4 slots
- **LED Indicators** Power, CPU, communications and battery
- **Memory** Flash disk: 1 MB (960 KB for user applications)  
Flash memory: 256 KB  
Flash ROM: 256 KB  
RAM: 640 KB (up to 384 KB with battery backup)
- **Memory (Softlogic version)** Flash disk: 512KB  
Flash memory: 768KB  
Flash ROM: 256KB  
RAM: 640KB SRAM, 32KB with battery backup (ADAM-5510KW)  
RAM: 768KB SRAM, 17KB with battery backup (ADAM-5510KW/TCP, ADAM-5510EKW/TP)  
ROM-DOS (MS-DOS 6.22 Compatible)
- **Operating System** Yes
- **Real-time Clock** Yes
- **Watchdog Timer** Yes

#### Serial Communication

- **Max. Nodes** 256 (in RS-485 daisy-chain network)
- **Distance** 1.2 km (4,000 feet)
- **Speed** 1,200 bps ~ 115.2 kbps (9600, 19200, 38400 bps for Softlogic version)
- **Isolation** 2500 V<sub>DC</sub> (COM2 only)

#### Ethernet Communication

- **Medium** Cat.5 cable with RJ-45 connector
- **Distance** 100 m
- **Speed** 10/100Base-T

#### Power

- **Power Consumption** 4 W @ 24 V<sub>DC</sub> (not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Isolation** 3000 V<sub>DC</sub>
- **Reverse Protection** Yes

#### Software

- **ROM DOS version** C library for Borland C++ 3.0
- **Softlogic version** Development tool : KW Multiprog  
Runtime kernel : ProConOS

#### General

- **Certification** CE, FCC Class A
- **Connectors** COM1 : DB9-M  
COM2 : Screw terminal(RS-485)  
COM3 : DB9-F (RS-232/Programming)  
COM4 : DB9-M (RS-232/485)  
Power : Screw terminal  
LAN : RJ-45 (option)
- **Dimensions** 4-slot: 231 x 110 x 75 mm  
8-slot: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, stack, wall

#### Environment

- **Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storing Temperature** -25 ~ 85°C (-13 ~ 185°F)


### Ordering Information

- **ADAM-5510M** 4-slot PC-based Controller
- **ADAM-5510E** 8-slot PC-based Controller
- **ADAM-5510/TCP** 4-slot PC-based Controller with Ethernet
- **ADAM-5510E/TCP** 8-slot PC-based Controller with Ethernet
- **ADAM-5510KW** 4-slot Softlogic Controller
- **ADAM-5510KW/TCP** 4-slot Softlogic Controller with Ethernet
- **ADAM-5510EKW/TP** 8-slot Softlogic Controller with Ethernet
- **MPROG-PRO535E** KW Multiprog Pro v5.35 (128k bytes I/O, Win7 support)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-5000/485 ADAM-5000E

## 4-slot Distributed DA&C System for RS-485 8-slot Distributed DA&C System for RS-485

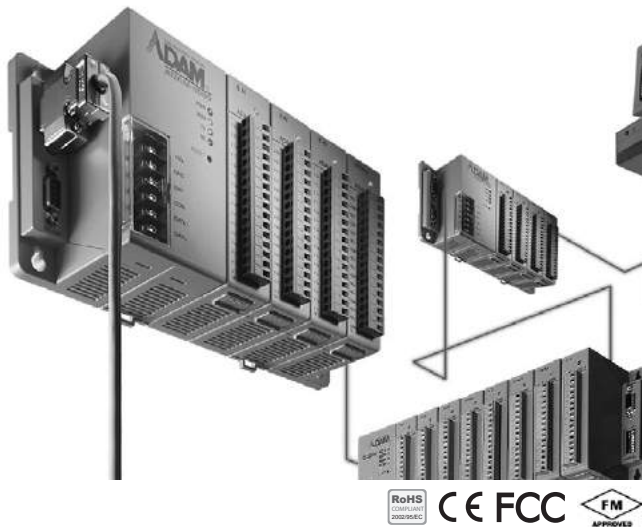

### Features

- RS-485 communication for easy installation and networking
- 4 or 8 slots for up to 128 points data monitoring card control in one module
- Extensive software support, includes windows DLL drivers, OCX drivers, OPC server and popular HMI/SCADA software drivers
- Seamlessly integrated with easy-to-use ADAMView data acquisition software
- Supports ADAM ASCII protocol or Modbus®/RTU protocol
- Supports Modbus/RTU protocol with user-defined Modbus address

### Introduction

The ADAM-5000/485 and ADAM-5000E systems conform to the EIA RS-485 communication standard. This is the industry's most widely used, balanced, bidirectional transmission line standard. RS-485 was specifically developed for industrial applications to transmit and receive data at high rates over long distances.

### Specifications

#### Control System

- **CPU** 16-bit 80188 microprocessor
- **I/O Slots** ADAM-5000/485: 4  
ADAM-5000E: 8
- **LED Indicators** Power, CPU, communications
- **Watchdog Timer** 1.6 sec. (System)

#### Communications

- **Command Format** ASCII command/response protocol, Modbus/RTU
- **Communication Distance** RS-485: 1.2 km (4000 feet)
- **Data Format** Asynchronous. 1 start bit, 8 data bits, 1 stop bit, no parity
- **Network Protocols** Programming link: RS-232 (3-wire: TX, RX, GND)  
Communication: RS-485 (2-wire)
- **Reliability Check** Communication error checking with checksum
- **Max. Nodes** 128 (in RS-485 daisy-chain network)
- **Speeds (kbps)** 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6, and 115.2

#### Power

- **Power Consumption** 3 W @ 24 V<sub>DC</sub> (ADAM-5000/485)  
(not including I/O modules)  
4.0 W @ 24 V<sub>DC</sub> (ADAM-5000E)  
(not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>

#### Software

- **Driver Support Windows DLL, OPC Server, Wonderware InTouch, Intellution, iFIX, Citect, Advantech Studio, ADAMView**
- **C and .NET Class Library**

#### Protection

- **Communication Line Isolation** 2,500 V<sub>DC</sub> (ADAM-5000/485)  
3,000 V<sub>DC</sub> (ADAM-5000E)
- **I/O Module Isolation** 3,000 V<sub>DC</sub>
- **Transient Protection** RS-485 communication lines, power input
- **Power Reversal Protection** Yes

#### General

- **Certification** CE, FM
- **Connectors** 1 x DB9-M/DB9-F/screw terminal for RS-485 (communication)  
1 x DB9-F for RS-232 (configuration)  
1 x Screw-terminal for power input
- **Dimensions (WxHxD)** 4-slot: 231 x 110 x 75 mm  
8-slot: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall, rack (with mounting kit)

#### Environment

- **Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storing Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **ADAM-5000/485** 4-slot Distributed DA & C System for RS-485
- **ADAM-5000E** 8-slot Distributed DA & C System for RS-485

# ADAM-5000L/TCP ADAM-5000/TCP

## 4-slot Distributed DA&C System for Ethernet 8-slot Distributed DA&C System for Ethernet



ADAM-5000/TCP    ADAM-5000L/TCP



### Features

- Cortex M4 CPU
- 10/100Base-T auto-negotiation high-speed communication port
- Supports Modbus/TCP for easy integration
- Supports UDP event handling function
- Up to 100 m communication distance w/o repeater
- Allows remote configuration via Ethernet
- Allows concurrent access for 16 host PCs
- 4 I/O slots for up to 64 points and 8 I/O slots for up to 128 points data monitoring and control
- 1500 V<sub>DC</sub> isolation for Ethernet communication
- Built-in watchdog timer for system auto-reset
- Windows utility
  - I/O modules configuration and calibration
  - Network auto searching
  - Data stream setting
  - Current status monitoring and alarm trigger
- Provides C and .NET class library to develop applications
- Support GCL function for easy IO interlocking logic

### Introduction

The ADAM-5000L/TCP and ADAM-5000/TCP are both Ethernet-based I/O systems. Without a repeater, the ADAM-5000L/TCP and ADAM-5000/TCP can cover a communication distance up to 100 m. This allows remote configuration via Ethernet and sixteen PCs can simultaneously access the data. The ADAM-5000L/TCP and ADAM-5000/TCP are the solutions for easy configuration and efficient management. It is an ideal and cost-effective solution for eAutomation architecture.

### Specifications

#### Control System

- **CPU** Cortex M4
- **I/O Slots** ADAM-5000L/TCP: 4  
ADAM-5000/TCP: 8
- **Memory** Flash ROM: 1 MB
- **Operating System** Real-time OS
- **LED Indicators** Power (3.3 V)  
RUN  
Communication (Link, Active, 10/100 Mbps, Tx, Rx)
- **Storage** 1 x MicroSD slot

#### Communications (Ethernet)

- **Data Transfer Rate** Up to 100 Mbps
- **Event Response Time** < 5 ms
- **Interface** 2 x RJ-45 sharing one MAC Address
- **Wiring** UTP, category 5 or greater

#### Communications (Serial)

- **Comm. Distance** RS-485: 1.2 km (4000 feet)  
RS-232: 15 m
- **Comm. Protocol** Modbus/RTU
- **Data Transfer Rate** Up to 115.2 kbps
- **Interface** 1 x DB9-M for RS-485  
1 x DB9-F for RS-485  
1 x DB9-F for RS-232 (System Monitoring)
- **Max. Nodes** 15 (in RS-485 daisy-chain network for Remote I/O connection)

#### Power

- **Power Consumption** 4.0 W @ 24 V<sub>DC</sub> (ADAM-5000L/TCP) (not including I/O modules)  
5.0 W @ 24 V<sub>DC</sub> (ADAM-5000/TCP) (not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>

#### Software

- **API** VS.NET Class Library
- **Windows Utility** Network setting, I/O configuration & calibration, data stream, alarm setting
- **Modbus/TCP OPC Server**

#### Protection

- **Communication Line Isolation** 3.000 V<sub>DC</sub>
- **I/O Module Isolation** 3.000 V<sub>DC</sub>
- **LAN Communication** 1.500 V<sub>DC</sub>
- **Overvoltage Protection** Yes
- **Power Reversal Protection** Yes

#### General

- **Certification** CE, FCC class A
- **Connectors** 1 x DB9-M/DB9-F/screw terminal for RS-485 (communication)  
1 x DB9-F for RS-232 (internal use)  
1 x Screw-terminal for power input  
2 x RJ-45 for LAN
- **Dimensions (W x H x D)** ADAM-5000L/TCP: 231 x 110 x 75 mm  
ADAM-5000/TCP: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall

#### Environment

- **Operating Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** - 10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** - 25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **ADAM-5000L/TCP** 4-slot Ethernet-based Distributed DA & C System
- **ADAM-5000/TCP** 8-slot Ethernet-based Distributed DA & C System

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# iRTU Overview

## Introduction

The ADAM-3600 is a new ADAM series for RTU application by leveraging IoT technology. They not only have high environmental adaptability to work in the far and wide remote station. But also the new form factor is very friendly for the installation in control cabinet. The domain focused on-board IO design and the 4 slots IO expansion capability provides the maximum flexibility to serve the application with less IO requirements.

## TagLink, Core Technology for Big-data Application in IoT Era



TagLink is a new technology embedded in ADAM-3600 series product. It is a technology to help user to access data easily and intuitively as a tag. In the IoT Era, data is what customer mainly concern. But for traditional RTU device, user needs to take care about the IO source, scaling, unit translation and communication with other software. With TagLink, user can access the data direct to the ADAM-3600 by the tag name which is with engineering meaning and it will return the physical unit which is well scaled in the ADAM-3600. To achieve it, we provide a configuration utility for user to mapping the IO to configuration easily.

## Vertical Driven Product Development

ADAM-3600 as an intelligent RTU is a terminal unit in every application field. It mainly executes the programmed tasks locally and reports all the status back to the center which could be in the cloud.

To fit in every vertical application, the unit needs to be with certain vertical features such as the domain protocols or algorithm. It is also a trusted embedded platform can carry user's domain intelligence. User can use familiar programming language to do the programming such as C or 5 kinds of PLC language defined by IEC-61131-3.

ADAM-3600-C2G series is designed for Oil&Gas and water market and focus on monitoring the gathering and transmission process in the wide area. It equips the on-board IO which could fulfill most of the application scenario on the field. The modularized expansion IO and communication module provide user maximum flexibility to adapt to the field application. It can also easily integrate to the Advantech WebAccess SCADA software and provide user a complete solution to the target application.

ADAM-3600-A1F series focus on realizing Smart City vision by leveraging IoT technology. Through it, user can access the data from cloud directly by IT oriented language. To secure user's data, it can log data in the SD/USB storage. It also provides user a friendly interface for user to monitor, maintain and upgrade the device.

ADAM-3600 development team will continue cultivating vertical market, and provide new models or firmware upgrade to service the more and more requirement for IoT applications. For any customization requirement, due to the flexible and open system architecture, we can also fulfill rapidly.



# ADAM-3600-C2G

## 8AI / 8DI / 4DO / 4-Slot Expansion Wireless Intelligent RTU

Preliminary



### Features

- High Performance CPU Cortex A8 600MHz
- Low Power DDR3L 256MB RAM
- Embedded Real-time Linux Kernel
- Domain Focused Onboard IO -8AI / 8DI / 4DO
- 4-Slot I/O Expansion
- High I/O Flexibility with 4-slot I/O Expansion
- Multiple wireless options for Zigbee/ Wi-Fi/ 3G/ 4G/ GPRS
- IEC61131-3&C Programming Language
- Modbus & DNP3 Protocol
- Operation Temperature -40~70°C

### Introduction

The ADAM-3600-C2G is an intelligent Remote Terminal Unit with multiple wireless function capability, multiple I/O selection, wide temperature range and support flexible communication protocol for oil, Gas and Water application. In the oil, gas and water application environments the ADAM-3600 is ideal for any other remote inhospitable regions with many devices to be managed remotely

### Features

#### Wide Array of Flexible I/Os

Wide array of on-board I/O and flexible expansion I/O modules supporting different acquisition requirements giving it a high cost performance.



#### Wireless Communication & Protocols

The ADAM-3600 simultaneously supports two mini-PCIe cards (a half-size and a full-size) for Wi-Fi/ 3G/ GPRS/ Zigbee communication which is flexible for wiring in the field. Modbus RTU/TCP and DNP3 protocol support that integrates the ADAM-3600 with more SCADA systems.




#### Wide Temperature Range

A -40~70°C operating temperature allows the ADAM-3600 to work in harsh environments and reduces the maintenance costs for customers.



#### Remote Firmware Update

The ADAM-3600 can use a USB drive and an SD card to automatically update the firmware so there's no need to bring a computer and execute the configuration program in the field.

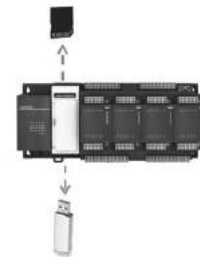

#### Intelligent Connectivity Diagnosis Manager (iCD Manager)

Remotely monitor the serial and Ethernet ports status and send the alarm information, during the communication failure, to improve the intelligent monitoring.



#### Node ID for Batch Configuration

Each ADAM-3600 has a node ID as its name to support batch configuration (max.64) with the configuration utility. When an alarm is displayed on the utility, customers can directly find the fault source with the node ID.



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

## Specifications

### Control System

- **CPU** Cortex-A8 AM3352
- **Memory** RAM 256MB  
Battery Backup RAM 32KB
- **OS** RT-Linux
- **Storage** MicroSD card / 1GB included for system  
SD card slot / Optional
- **Programming** IEC-61131-3/ Linux C
- **Watchdog** Yes
- **Real-time Clock** Yes
- **Power Consumption** 24V @5W

### Communication

- **Protocol** Modbus/ DNP3
- **Serial Port** 1 x RS232/485- DB9  
2 x RS485- Terminal Block
- **Ethernet Port** 2 x RJ-45 10/100Mbps
- **USB Port** 1 x USB 2.0
- **VGA Port** 1 x D-SUB15
- **LED** System LEDs/ IO LEDs

### Analog Input

- **Channel** 8 differential
- **Resolution** 16-bit
- **Input Type** ±10V, ±2.5V, 0~20mA, 4~20mA
- **Isolation** 2,000 V<sub>DC</sub>

### Digital Input

- **Channel** 8
- **Input Type** Wet Contact Input (Sink)
- **Protection Voltage** +40 V<sub>DC</sub>
- **Insolation** 2,000 V<sub>DC</sub>

### Digital Output

- **Channel** 4
- **Output Type** Open Collector (Sink)
- **Rated Voltage** 8~30V<sub>DC</sub>

### Wireless Communication(Selectable)

- **Interface** Mini-PCIe (1 x Half-Size/ 1 x Full-Size)
- **Wireless Type** Zigbee- UART Signal  
Wi-Fi/3G/GPRS- USB Signal


### General

- **Certification** CE/FCC/C1D2
- **Operating Temp.** -40~70°C
- **Storage Temp.** -40~85°C
- **Humidity** 5~95%(no-condensation)
- **Mounting** DIN 35 rail/ Wall Mount


## Ordering Information

- **ADAM-3600-C2GL1AE** 8AI/8DI/4DO/4-Slot Expansion Wireless Intelligent RTU

## Pin Assignment

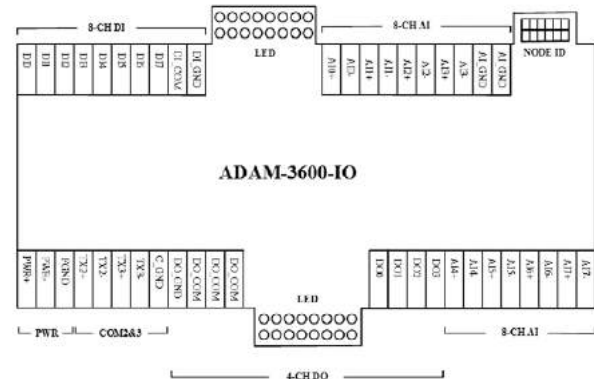

## Layout

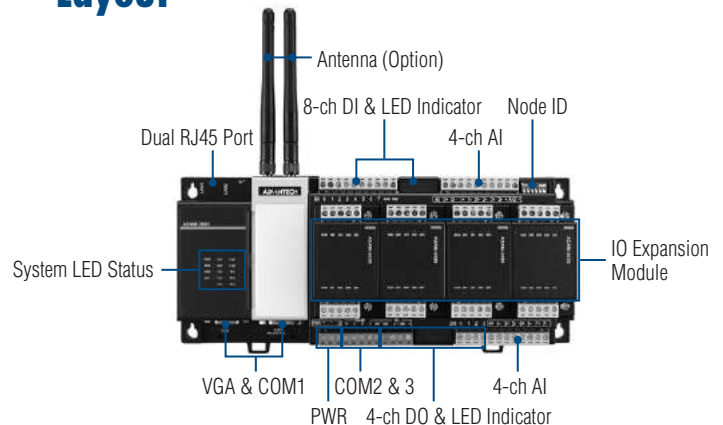

### Wi-Fi Solution (Antenna is not included)

- **EWM-W150H02E** Half-size mini card, Support 802.11bgn
- **1750006043** SMA(M) cable, 15cm

### 3G/GPRS Solution (Antenna and SIM card are not included)


- **EWM-C109F601E** 6-band HSPA Cellular Module with SIM holder
- **1750006264** SMA(F) cable, 15cm

### I/O Expansion Module Selection Table

Unit: Channels

Expansion Module	AI	T.C.	AO	DI	DO	RO
ADAM-3617	4					
ADAM-3618		3				
ADAM-3622			2			
ADAM-3651				8		
ADAM-3656					8	
ADAM-3664						4

## Dimensions

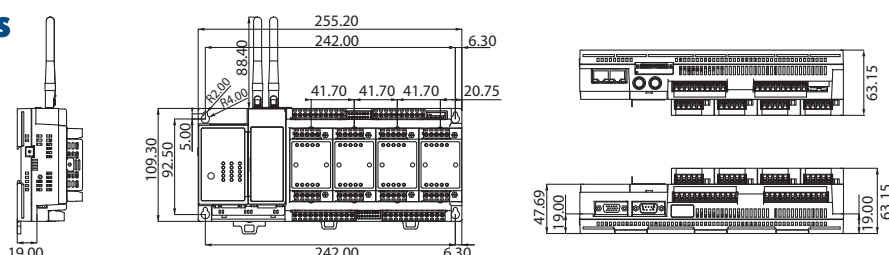

Unit: mm

# ADAM-3600-A1F

## 16-ch Digital Input, 8-ch Relay Output with 4-Slot Expansion Module

### Preliminary



### Features

- 16-ch Digital Input, 8-ch Relay Output on board I/O
- Flexible I/O deployment by 4-slot expansion module
- Datalog by internal memory, SD card, USB
- Support the Access Control function
- Remote monitor, control and configure through a Web browser
- Supports built-in web server and RESTful Web service

### Introduction

The ADAM-3600-A1F is an intelligent I/O module which provides 16 digital inputs, 8 relay outputs and 4 I/O expansion slots to approach different scenarios. With the data log and the data process functions, it can transmit truly useful data to the user. In addition, ADAM-3600-A1F has been built in a Web server. Users could remotely acquire I/O data in any Web service of smart device without routing from SCADA system.

### Features


#### Flexible I/O deployment

The ADAM-3600 can approach different scenarios by switching I/O expansion modules. Users can easily change and expand ADAM-3600's I/O deployment by applying on board I/O and switching the I/O expansion modules.




#### Datalog by either a USB storage device or a SD card

The ADAM-3600 is able to log its data either a USB storage device or a SD card for preventing data losses and providing data for analysis.

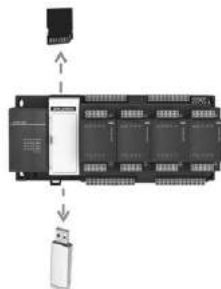

#### Built-in Switch


The ADAM-3600 can apply Daisy Chain topology, which can save the wiring costs and space.

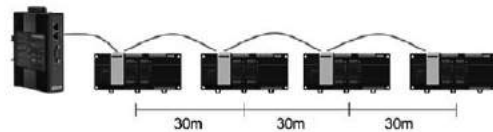

#### Remote monitor, control and configure through a Web browser

ADAM-3600-A1F I/O module feature a built-in Web server that can be accessed by using a common Web browser, such as IE, Safari, Chrome, and Firefox. There is a default Web page that is developed by HTML 5 and follow the REST software style. Users who are using remote computers or mobile devices can configure, monitor and control ADAM-3600-A1F module remotely through the Web page. This feature will bring obvious benefit to users in maintenance anywhere over the Ethernet in the local field. Moreover, it could allow programmers to create powerful, custom Web pages by using HTML5 and Java Script.

### Layout

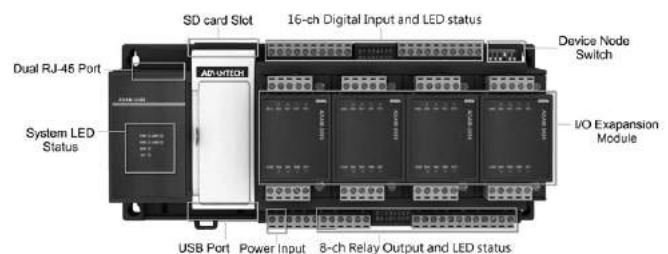

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automations Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

## Specifications

### Digital Input

- Channel 16
- Wet Contact Logic level 0: 0~5 V  
Logic level 1: 10~30 V
- Max. Input Frequency 3 kHz
- Max. Counter Frequency 3 kHz
- Isolation Protection 2500 V<sub>DC</sub>

### Relay Output

- Channel 8
- Input type Form A
- Contact rating 250 V<sub>AC</sub> @ 5A  
30 V<sub>DC</sub> @ 3A
- Relay on time 10 ms
- Relay off time 5 ms
- Insulation Resistance 1 GΩ
- Maximum Switching 20 operations/minute
- Isolation Protection 2500 V<sub>DC</sub>

### General

- Protocol Modbus/TCP, TCP/IP, UDP, HTTP, DHCP
- LAN 2 x RJ-45 ports , built-in switch
- Watchdog System (1.6 second)  
Communication (programmable)
- Power Input 10V ~ 30V
- LED Indicator System LEDs
- Mounting DIN 35 rail, Wall Mount
- USB Port 1 x USB 2.0
- SD card 1 x Standard SD card slot


### I/O Expansion

- Accompanied I/O slots 4 x expansion modules
- Digital Signals 56 points (max)
- Analog Signals 16 points (max)

### Environment

- Operating Temperature -40~70°C (-40~150°F)
- Storage Temperature -40~85°C (-40~185°F)
- Operating Humidity 20 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

## Pin Assignment

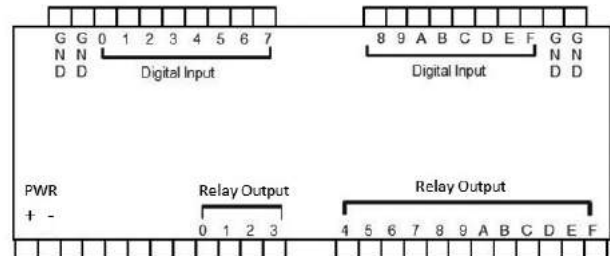

## Ordering Information

- ADAM-3600-A1FNOAE 16-ch Digital Input and 8-ch Relay Output Module with 4 slot Expansion Module


### I/O Expansion Module Selection Table

Unit: Channels

Expansion Module	AI	T.C.	AO	DI	DO	RO
ADAM-3617	4					
ADAM-3618		4				
ADAM-3622			2			
ADAM-3651				8		
ADAM-3656					8	
ADAM-3664						4

## Dimensions

Unit: mm

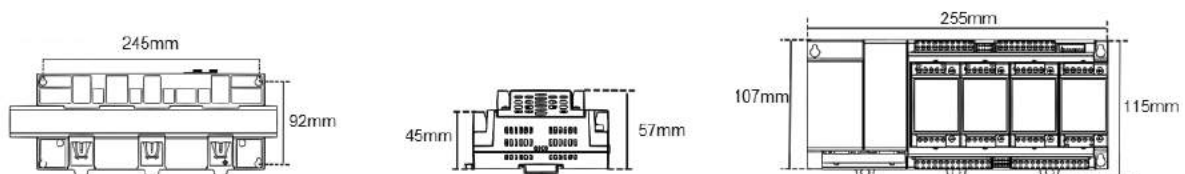

# ADAM-3617-AE

# ADAM-3618-AE

# ADAM-3622-AE

4-ch Analog Input Module

3-ch Thermocouple Module

2-ch Analog Output Module



ADAM-3617-AE

## Specifications

### General

- Power Consumption 1W (Max)
- Certification CE/FCC C1D2

### Analog Input

- Channel 4, differential
- Input Type Voltage, Current
- Voltage/Current Range  $\pm 10V$ ,  $\pm 2.5V$ , 0~20mA, 4~20mA
- Sampling rate 10 sample/second (total)
- Input Impedance 10M $\Omega$
- Accuracy  $\pm 0.2\%$  or better of FSR (Voltage)  
 $\pm 0.2\%$  or better of FSR (Current)
- CMR @ 50/60 Hz 120 dBs
- NMR @ 50/60 Hz 100 dBs
- Span Drift  $\pm 50$  ppm/ $^{\circ}C$
- Zero Drift  $\pm 6$   $\mu V/^{\circ}C$ ,  $\pm 6$   $\mu A/^{\circ}C$
- Isolation Voltage 2000 V<sub>DC</sub>
- Burn-out detection Yes (Current-only)

### Environment

- Operating Temp. -40 ~ 70 $^{\circ}C$
- Storage Temp. -40 ~ 85 $^{\circ}C$
- Humidity 5 ~ 95% (no-condensation)

## Ordering Information

- ADAM-3617-AE 4-ch Analog Input Module



ADAM-3618-AE

## Specifications

### General

- Power Consumption 1W (Max)
- Certification CE/FCC C1D2

### Thermocouple Input

- Channel 3, differential
- Input Type J, K, T, E, R, S, B Type Thermocouple
- Resolution 16-bit
- Sampling rate 10 sample/second (total)
- Input Impedance 2M $\Omega$
- Accuracy  $\pm 0.2\%$  or better of FSR (Voltage)  
 $\pm 0.2\%$  or better of FSR (Current)
- CMR @ 50/60 Hz 90 dBs
- NMR @ 50/60 Hz 60 dBs
- Span Drift  $\pm 50$  ppm/ $^{\circ}C$
- Zero Drift  $\pm 6$   $\mu V/^{\circ}C$ ,  $\pm 6$   $\mu A/^{\circ}C$
- Isolation Voltage 2000 V<sub>DC</sub>
- Burn-out detection Yes (Current-only)

### Environment

- Operating Temp. -40 ~ 70 $^{\circ}C$
- Storage Temp. -40 ~ 85 $^{\circ}C$
- Humidity 5 ~ 95% (no-condensation)

## Ordering Information

- ADAM-3618-AE 3-ch Thermocouple Module



ADAM-3622-AE

## Specifications

### General

- Power Consumption 1W (Max)
- Certification CE/FCC C1D2

### Analog Input

- Channel 2
- Output Impedance 2.1  $\Omega$
- Output Settling Time 20  $\mu s$
- Driving Load Voltage: 2k $\Omega$   
Current: 500  $\Omega$
- Output Type Voltage, Current
- Output Range 0 ~ 10 V<sub>DC</sub>  
0 ~ 20 mA  
4 ~ 20 mA
- Resolution 12-bit
- Accuracy  $\pm 0.3\%$  of FSR (Voltage) at 25 $^{\circ}C$   
 $\pm 0.5\%$  of FSR (Current) at 25 $^{\circ}C$
- Current Load Resistor 0~500 $\Omega$
- Drift  $\pm 50$  ppm/ $^{\circ}C$
- Isolation Voltage 2000 V<sub>DC</sub>

### Environment

- Operating Temp. -40 ~ 70 $^{\circ}C$
- Storage Temp. -40 ~ 85 $^{\circ}C$
- Humidity 5 ~ 95% (no-condensation)

## Ordering Information

- ADAM-3622-AE 2-ch Analog Output Module

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# ADAM-3651-AE

# ADAM-3656-AE

# ADAM-3664-AE

8-ch Digital Input Module

8-ch Digital Output Module

4-ch Relay Output Module



ADAM-3651-AE



ADAM-3656-AE



ADAM-3664-AE

## Specifications

### General

- **Power Consumption** 1W (Max.)
- **Certification** CE/FCC C1D2

### Digital Input

- **Channel** 8
- **Input Type** Sink (Wet Contact)/Counter
- **Rated Input** >5mA @ 12 V<sub>DC</sub>
- **Current** >10mA @ 24 V<sub>DC</sub>
- **Input Filter** Programmable, Default: 3ms
- **Pulse Input Frequency** 150Hz
- **Over Voltage Protection** +40 V<sub>DC</sub>

### Environment

- **Operating Temp.** -40 ~ 70°C
- **Storage Temp.** -40 ~ 85°C
- **Humidity** 5 ~ 95% (no-condensation)

## Ordering Information

- **ADAM-3651-AE** 8-ch Digital Input Module

## Specifications

### General

- **Power Consumption** 1W (Max.)
- **Certification** CE/FCC C1D2

### Digital Output

- **Channel** 8
- **Output Type** Open Collector (Sink)
- **OC Output**
  - Rated Voltage 8 ~ 30 V<sub>DC</sub>
  - Rated Current 200mA (max load)
- **Over Voltage Protection** +40 V<sub>DC</sub>
- **Pulse Output Frequency** 1KHz
- **Isolation Voltage** 2000 V<sub>DC</sub>

### Environment

- **Operating Temp.** -40 ~ 70°C
- **Storage Temp.** -40 ~ 85°C
- **Humidity** 5 ~ 95% (no-condensation)

## Ordering Information

- **ADAM-3656-AE** 8-ch Digital Output (Sink type) Module

## Specifications

### General

- **Power Consumption** 1W (Max.)
- **Certification** CE/FCC C1D2

### Relay Output

- **Channel** 4
- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60 Hz)
- **Contact Rating**
  - AC: 125 V @ 0.6 A
  - 250 V @ 0.3 A
  - DC: 30 V @ 2 A
  - 110 V @ 0.6 A
- **Insulation Resistance** 1 GΩ min. @ 500 V<sub>DC</sub>
- **Relay Off Time (Typical)** 2 ms
- **Relay On Time (Typical)** 3 ms
- **Total Switching Time** 10 ms

### Environment

- **Operating Temp.** -40 ~ 70°C
- **Storage Temp.** -40 ~ 85°C
- **Humidity** 5 ~ 95% (no-condensation)

## Ordering Information

- **ADAM-3664-AE** 4-ch Relay Output Module

## CompactPCI Systems


<b>Advantech CompactPCI Introduction</b>		<b>14-2</b>
<b>CompactPCI Chassis</b>		
<b>MIC-3106</b>	4U CompactPCI With 2 Peripheral Slots	<b>14-4</b>
<b>MIC-3111</b>	4U CompactPCI With 7 Peripheral Slots	
<b>MIC-3121</b>	4U CompactPCI With 7 Peripheral Slots	<b>14-6</b>
<b>MIC-3001</b>	4U CompactPCI® Enclosure with 8-Slot 3U Backplane	<b>14-8</b>
<b>MIC-3321</b>	3U CompactPCI® Intel Celeron® M 1GHz / Pentium® M 2 GHz Controller	<b>14-9</b>
<b>MIC-3323</b>	3U CompactPCI® Intel Core® 2 Duo 1.66GHz / Atom™ D510 1.66GHz Controller	<b>14-10</b>
<b>CompactPCI Cards</b>		
<b>MIC-3611</b>	4-port RS-422/485 3U CompactPCI® Card with Surge and Isolation Protection	<b>14-11</b>
<b>MIC-3612</b>	4-port RS-232/422/485 3/6U CompactPCI® Card	
<b>MIC-3620</b>	8-port RS-232 3U CompactPCI® Card	
<b>MIC-3621</b>	8-Port RS-232/422/485 6U CompactPCI® Card with Surge Protection	<b>14-12</b>
<b>MIC-3680</b>	2-Port CAN-bus 3U CompactPCI® Card	
<b>MIC-3716</b>	250 kS/s, 16-bit, 16-ch Multifunction 3U CompactPCI® Card	<b>14-13</b>
<b>MIC-3723</b>	16-bit, 8-ch Analog Output 3U CompactPCI® Card	
<b>MIC-3758</b>	128-CH Isolated Digital I/O 3U CompactPCI® Card	
<b>MIC-3761</b>	8-CH Relay & 8-CH Isolated Digital Input 3U CompactPCI® Card	<b>14-14</b>
<b>MIC-3780</b>	8-CH, 16-bit Counter/Timer 3U CompactPCI® Card	

To view all of Advantech's CompactPCI Systems, please visit [www.advantech.com/products](http://www.advantech.com/products).



# Advantech CompactPCI

## Introduction

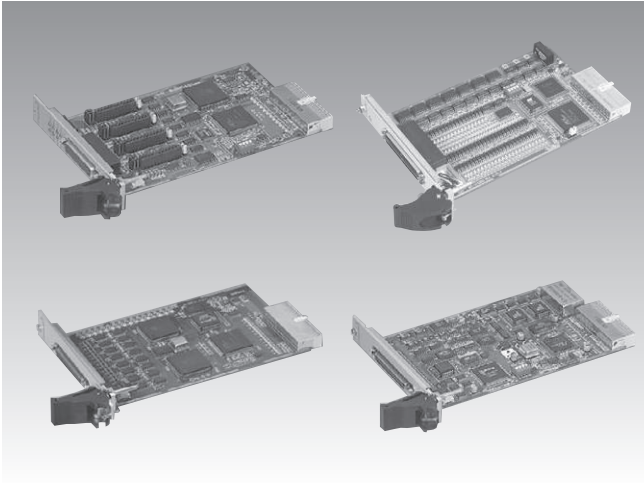

### Features

- Commercial standard PCI chips provide high performance at a low price
- Up to 8 slots in one bus segment. Expandable using PCI-to-PCI bridge chips
- Eurocard form factor
- Airtight, high density, 2 mm pin-and-socket connectors
- Front loading and removal
- Vertical card orientation for better cooling
- Staged power pins for hot-swap capability
- Excellent shock and vibration characteristics

## Introduction

Engineers have been trying to apply high-performance, low-cost PC technologies to critical applications such as telecommunications and industrial automation for quite some time. Unfortunately, the characteristics of desktop PC technologies do not readily lend themselves to critical applications where high serviceability, vibration & shock resistance, and good ventilation are required. CompactPCI may be the answer.

### What is CompactPCI?

CompactPCI is a small, rugged, high-performance industrial computer architecture based on the standard PCI bus specification. It was developed by the PCI Industrial Computers Manufacturers Group (PICMG) in late 1994, and is ideal for embedded applications.

Three important technologies form the core of CompactPCI: PCI local bus, Eurocard mechanics, and airtight pin-and-socket connectors.

### PCI Local Bus


PCI stands for Peripheral Component Interconnect. It was published by Intel® in 1992, and soon became popular in commercial PC designs. It is a high-performance, processor-independent data bus, and most importantly, it is very inexpensive. The PCI local bus specification defines two data widths: 32-bit and 64-bit operating at a speed up to 66 MHz. This provides theoretical throughput up to 264 MB/s at 32-bit or 528 MB/s at 64-bit. Most computer systems and operating systems support the PCI bus. For example, Pentium, Alpha, PowerPC, Windows, Unix, and MacOS. Because PCI components are manufactured in large quantities, they are inexpensive and readily available. With these advantages, the PCI bus is very suitable for high speed computing and high speed data communication applications.

### Eurocard Mechanics

Eurocard is an industrial-grade packaging standard popularized by VMEbus. CompactPCI allows the use of 3U and 6U Eurocards. The dimensions of a 3U CompactPCI board are 160 mm deep x 100 mm high, while the dimensions of a 6U CompactPCI board are 160 mm deep x 233.35 mm high. The front panels of CompactPCI boards are IEEE 1101.1 and IEEE 1101.10 compliant, and may include optional EMC gaskets to minimize electromagnetic interference. Typically, the front panel contains I/O connectors, LED indicators, and switches. CompactPCI also supports rear panel I/O, which is compliant with IEEE 1101.11. Rear panel I/O is popular for telecommunication equipment because of its easy-to-maintain characteristics. If all the wiring is done on rear transition boards (passive boards), the front CompactPCI boards (active boards), which may require maintenance, are "clean" without any connected wiring. The front CompactPCI boards can then simply be replaced without the need for rewiring.

### Airtight Pin-and-Socket Connectors


CompactPCI uses airtight, high-density pin-and-socket connectors as specified in the IEC-1076 international standard. These 2 mm "hard metric" connectors have low inductance and controlled impedance, which reduce signal reflections caused by the high speed PCI bus. They enable CompactPCI systems to have up to eight slots in one bus segment.

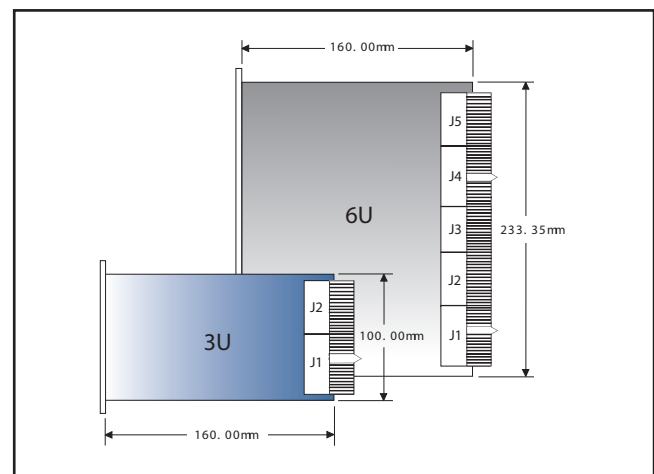

**Eurocard Form Factor**

The CompactPCI specification defines five connectors, designated as J1 through J5. The 3U CompactPCI board has two connectors labeled J1 and J2, while the 6U CompactPCI board has five connectors labeled J1 through J5. J1 and J2 are defined identically on both 3U and 6U CompactPCI boards, so 3U and 6U CompactPCI boards are electrically interchangeable.



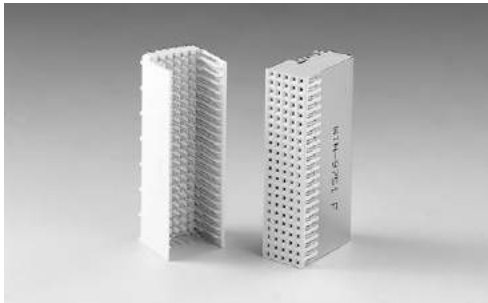

**Pin-and-Socket Connector**

## CompactPCI versus Conventional Industrial PCs

### Serviceability

Replacement of a card from a conventional industrial PC system is always time-consuming. Users need to unfasten the chassis cover, disconnect all wiring from the card, replace the card, reconnect the wiring, and refasten the chassis cover. It is a process prone to error because there can be internal cabling between cards and peripheral devices, and it is necessary to remove all cabling before a card can be replaced. The serviceability of conventional industrial PC systems is not as simple and fast as CompactPCI systems.

CompactPCI is designed to be a front loading and removable system. The replacement of a CompactPCI board is very simple, with no need to remove the chassis cover. In addition, if the I/O is cabled through the back of the system, the front CompactPCI boards are "clean" without any connected wiring, and the replacement of a CompactPCI board is quick and easy. The maintenance time can be reduced from a matter of hours (conventional industrial PCs) to a matter of minutes, yielding a lower Mean Time To Repair (MTTR).



**4U 8-Slot CompactPCI Enclosure**



**4U 8-Slot CompactPCI Enclosure**

### Vibration and Shock Resistance

Conventional industrial PCs do not provide reliable and secure support for peripheral cards in the system. Cards inside conventional industrial PCs are screwed down at one point only, and the top and bottom card edges are not supported by guide rails. Therefore, the connecting edge of a card is prone to shift under shock and vibration.

CompactPCI boards are firmly mounted in the system. Guide rails support the top and bottom edges of the boards. Front panel retaining mechanisms securely lock the front panel to the surrounding mechanical frame. The connecting edge of the board is held tightly in place by the pin-and-socket connectors. With all four sides of the board firmly held in place, it is much less prone to suffer loss of electrical contact in high vibration and shock environments.

### Ventilation

Conventional industrial PC systems cannot provide regular airflow paths, resulting in uneven cooling within the chassis. Airflow is blocked by backplanes, card brackets, and disk drives. Cooling air cannot circulate over all the cards, and hot air is not immediately forced out of the chassis. Electronic devices and circuit boards deteriorate because of these cooling related problems: warped circuit boards, bad connections, broken traces, and shortened component lives.

CompactPCI systems provide clear paths for airflow over all active, heat-producing boards in the system. Cooling air easily flows through the spaces between cards, and carries heat out of the spaces. A fan system can be integrated at the bottom of the boards to provide forced air to each slot. CompactPCI systems are therefore much less susceptible to cooling problems because of the even cooling pattern inherent in their mechanical design.

## The Complete Offering for Mission-Critical Applications

The MIC-3000 series is an industrial CompactPCI solution which features front-end access, high shock and vibration tolerance characteristics, automatic cooling system, fault resilient and hot swappable capabilities. These features make MIC-3000 the most reliable PC-based computing platform, for mission-critical applications. Advantech leverages 3U CompactPCI as the industrial high-end computing platform, providing Pentium 4-grade CPU modules, 8-slot chassis, high-speed I/O and serial communication modules, to become a total solution provider for industrial CompactPCI solutions. Target applications include military defense, transportation, traffic control, test and measurement (T&M) and critical data acquisition & control markets.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# MIC-3106

# MIC-3111

4U CompactPCI With 2 Peripheral Slots

4U CompactPCI With 7 Peripheral Slots

Preliminary



MIC-3106

MIC-3111

## Features

- 4U CompactPCI supports 2 or 7 peripheral slots
- High performance or low power consumption CPU selectable
- Lockable power on/off switch prevents inadvertent access
- 40dB Ultra low system noise for working environments
- Easy-accessible cooling fan and air filter for system maintenance
- Robust design, Anti-Vibration up to 2G with SSD

## Introduction

The MIC-3106 and 3111 are Advantech's latest IPC's and the first to use the CompactPCI standard. CompactPCI is an open standard that gives users the flexibility to add the components that they need. The small footprint of MIC-3106 and 3111 makes it the smallest CPCI system available and offers either 2 or 7 expansion slots to give users the flexibility to build the system they require. For improved access and configuration, the MIC-3106 and 3111 are front accessible and the highly reliable nature of CompactPCI makes it the perfect choice for industrial applications. The three available models in the MIC-3106 and 3111 offer a choice of either high power or low power CPUs and therefore a range of prices to suit the requirements of specific companies.

## Specifications

		MIC-3106	MIC-3111
<b>Power Supply</b>	Power Type	ATX	ATX
	Input Voltage	100 ~ 240 V <sub>AC</sub>	100 ~ 240 V <sub>AC</sub>
	Wattage	180W	180W
	ON/OFF Switch	Lockable Toggle Switch	Lockable Toggle Switch
<b>Backplane</b>	System Slot	1, on the right	1, on the right
	Peripheral Slot	2 Slots	7 Slots
	PCI Bus	32-bit 33MHz	32-bit 33MHz
<b>Physical</b>	Dimensions (W x H x D mm)	134 x 177 x 238	234 x 177 x 258
	Weight (kg)	4.33 Kg	6.14 Kg
<b>Environment</b>	Temperature	Operating	0 ~ 50°C
		Non-Operating	-20 ~ 60°C
	Humidity (non-condensing)	Operating	10 ~ 85% @ 40°C
		Non-Operating	10 ~ 95% @ 40°C
	Vibration (5 ~ 500 Hz)	Operating	2Grms (without HDD)
		Non-Operating	2G
Shock (11ms)	Operating	10G	
	Non-Operating	30G	
<b>Compliance</b>	Regulatory	CE, FCC, CCC, UL, RoHS	CE, FCC, CCC, UL, RoHS
	Compliance	PICMG 2.0 Rev. 3.0	PICMG 2.0 Rev. 3.0

## Ordering Information

Part Number	Description
MIC-3106-00-AE	Modular Industrial Chassis 4U, 2 slots, w/ 180W
MIC-3111-00-AE	Modular Industrial Chassis 4U, 7 slots, w/ 180W
MIC-3106-L1-AE	4U, 2 slots, w/ 180W, MIC-3325N
MIC-3106-L2-AE	4U, 2 slots, w/ 180W, MIC-3325D
MIC-3106-H1-AE	4U, 2 slots, w/ 180W, MIC-3328 w/ 3217UE
MIC-3111-L1-AE	4U, 7 slots, w/ 180W, MIC-3325N
MIC-3111-L2-AE	4U, 7 slots, w/ 180W, MIC-3325D
MIC-3111-H1-AE	4U, 7 slots, w/ 180W, MIC-3328 w/ 3217UE
MIP-3104-AE	MIC-3100 PCI Hybrid Box
MIC-3106-H2-AE	4U, 2 slots, w/ 180W, MIC-3328 w/ 3517UE
MIC-3111-H2-AE	4U, 7 slots, w/ 180W, MIC-3328 w/ 3517UE

## Optional Accessories

Part Number	Description
1990024035N000	Fan filter 130 x 10 x 12 mm <sup>3</sup> (for MIC-3106)
1990024034N000	Fan filter 230 x 10 x 10 mm <sup>3</sup> (for MIC-3111)
1750002440	Bottom side fan 60 x 60 x 13 mm <sup>3</sup>
1750007398-01	Up side blower 51 x 51 x 15 mm <sup>3</sup>
1960064154N001	4HP bracket cover
1960064193N001	Wall Mount Kit for MIC-3106
1960064192N001	Wall Mount Kit for MIC-3111
1960064183N001	Table Mount for MIC-3106
1960064184N001	Table Mount for MIC-3111

## CPU Options

L1	Processor	CPU	Intel Atom N455, 1.66GHz
		Memory	2 GB Onboard
		Storage	1 x CompactFlash Type II 1 x 2.5" SATA HDD
	Front I/O	VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
		USB 2.0	3 x Type A
		Serial	2 x RS-232, DB9 connector
		PS/2	1
	Operating System	Windows	XP, XPE, 7
	L2	Processor System	CPU
Memory			2GB On board
Storage			1 x CompactFlash Type II 1 x 2.5" SATA HDD
Front I/O		VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
		USB 2.0	3 x Type A
		Serial	2 x RS-232, DB9 connector
		PS/2	1
Operating System		Windows	XP, XPE, 7

H1	Processor	CPU	Intel 3rd Gen. Core i3-3217UE, 1.6GHz
		Memory	4GB On board
		Storage	1 x CFast 1 x 2.5" SATA HDD
	Front I/O	VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
		USB 2.0	2 x Type A
		Serial	2 x RS-232, RJ45 connector
		PS/2	1
	Operating System	Windows	XP, 7
	H2	Processor	CPU
Memory			4GB On board
Storage			1 x CFast 1 x 2.5" SATA HDD
Front I/O		VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connectors
		USB 3.0	2 x Type A
		Serial	2 x RS-232, RJ45 connector
		PS/2	1
Operating System		Windows	XP, 7

## PCI Hybrid Box

MIP-3104			
Backplane	CPCI interface to chassis		1 for chassis
	PCI Slot		4 Slots
	PCI Slot Power (4 Slot)		12V @ 2.4A, -12V @ 0.8A, +5V @ 7.5A, +3.3V @ 10A
Physical	Dimensions (W x H x D mm)		142 x 131 x 213
	Weight (g)		725
	Temperature	Operating	0~50°C
		Non-operating	-20~60°C
	Humidity (non-condensing)	Operating	10~85% @40°C
		Non-operating	10~95% @40°C
	Vibration (5~500 Hz)	Operating	1 Grms (with MIC-3100 chassis)
		Non-operating	1G
Shock (11 ms)	Operating	10G (with MIC-3100 chassis)	
	Non-operating	30G	
Compliance	Regulatory	CE, FCC	
	Compliance	PICMG 2.0 Rev. 3.0	



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# MIC-3121

## 4U CompactPCI With 7 Peripheral Slots

**Preliminary**



### Features

- 4U height rackmount CompactPCI supports 7 peripheral slots
- Optional 4-slot PCI hybrid box for flexible configuration
- Selectable high performance or low power consumption CPU
- Lockable power on/off switch prevents accidental access
- Very low noise cooling fan for quiet environments
- Easily-accessible cooling fan and air filter for system maintenance
- All front-accessible connectors/cables for easy wall mounting

### Introduction

The MIC-3121 CompactPCI is Advantech's new generation IPC to meet the CompactPCI standard, it offers a 4U height rackmount platform, with compact features, and is the most compact device in its price range. The MIC-3121 measures 482 x 177 x 310 mm, which is the standard 4U height rackmount CPCI system. With seven CPCI expansion slots or three CPCI expansion slots plus an optional four slot PCI hybrid box, users have the flexibility to configure their own system. With all these features the MIC-3121 is an open platform with a front access modular design, and high reliability which makes it the perfect choice for industrial applications where high availability matters.

The MIC-3121 has two levels of CPU choice. One is the Intel Core i3-3217UE CPU for high performance applications, and the other is the Intel Atom N455 CPU which is the most cost effective for low power consumption applications.

### Specifications

<b>Power Supply</b>	Power Type	ATX
	Input Voltage	100-240 V <sub>AC</sub>
	Wattage	300W
	On/Off Switch	Lockable Toggle Switch
<b>Backplane</b>	System Slot	1 on the right
	Peripheral Slot	7 slots
	PCI Bus	32-bit 33 MHz
<b>Dimensions (W x H x D mm)</b>	482 x 177 x 310	
<b>Weight (kg)</b>	9.65 Kg	
<b>Temperature</b>	Operating	0-50°C
	Non-operating	-20-60°C
<b>Humidity (non-condensing)</b>	Operating	10-85% @ 40°C
	Non-operating	10-95% @ 40°C
<b>Vibration (5-500 Hz)</b>	Operating	2Grms (without HDD)
	Non-operating	2G
<b>Shock (11ms)</b>	Operating	10G
	Non-operating	30G
<b>Certification</b>	CE, FCC, CCC, UL, RoHS	
<b>Compliance</b>	PICMG 2.0 Rev. 3.0	

### Ordering Information

Part Number	Description
MIC-3121-00-AE	Modular Industrial Chassis 4U, 7 slots, w/ 300W
MIC-3121-L1-AE	4U, 7 slots, w/ 300W, MIC-3325N
MIC-3121-L2-AE	4U, 7 slots, w/ 300W, MIC-3325D
MIC-3121-H1-AE	4U, 7 slots, w/ 300W, MIC-3328 w/ 3217UE
MIP-3104-AE	MIC-3100 PCI Hybrid Box
MIC-3121-H2-AE	4U, 7 slots, w/ 300W, MIC-3328 w/ 3517UE

### Optional Accessories

Part Number	Description
1990024038N000	Fan filter 430 x 10 x 10 mm3 (for MIC-3121 only)
1750002440	Bottom side fan 60 x 60 x 13 mm3
1750007398-01	Top blower 51 x 51 x 15 mm3
1960064154N001	4HP bracket cover
1960064155N001	8HP bracket cover

## CPU Options

L1	Processor	CPU	Intel Atom N455, 1.66GHz
		Memory	2GB Onboard
		Storage	1 x CompactFlash Type II 1 x 2.5" SATA HDD
	Front I/O	VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
		USB 2.0	3 x Type A
		Serial	2 x RS-232, DB9 connector
		PS/2	1
	Operating System	Windows	XP, XPE, 7
	L2	Processor System	CPU
Memory			2GB On board
Storage			1 x CompactFlash Type II 1 x 2.5" SATA HDD
Front I/O		VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
		USB 2.0	3 x Type A
		Serial	2 x RS-232, DB9 connector
		PS/2	1
Operating System		Windows	XP, XPE, 7

H1	Processor	CPU	Intel 3rd Gen. Core i3-3217UE, 1.6GHz
		Memory	4GB On board
		Storage	1 x CFast 1 x 2.5" SATA HDD
	Front I/O	VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connector
		USB 2.0	2 x Type A
		Serial	2 x RS-232, RJ45 connector
		PS/2	1
	Operating System	Windows	XP, 7
	H2	Processor	CPU
Memory			4GB On board
Storage			1 x CFast 1 x 2.5" SATA HDD
Front I/O		VGA	1 x DB15 port
		Ethernet	2 x 10/100/1000 Mbps, RJ45 connectors
		USB 3.0	2 x Type A
		Serial	2 x RS-232, RJ45 connector
		PS/2	1
Operating System		Windows	XP, 7

## PCI Hybrid Box

MIP-3104			
Backplane	CPCI interface to chassis		1 for chassis
	PCI Slot		4 Slots
	PCI Slot Power (4 Slot)		12V @ 2.4A, -12 V@ 0.8A, +5V @ 7.5A, +3.3V @ 10A
Physical	Dimensions (W x H x D mm)		142 x 131 x 213
	Weight (g)		725
	Temperature	Operating	0-50°C
		Non-operating	-20-60°C
	Humidity (non-condensing)	Operating	10-85% @40°C
		Non-operating	10-95% @40°C
	Vibration (5-500 Hz)	Operating	1 Grms (with MIC-3100 chassis)
		Non-operating	1G
	Shock (11 ms)	Operating	10G (with MIC-3100 chassis)
		Non-operating	30G
Compliance	Regulatory		CE, FCC
	Compliance		PICMG 2.0 Rev. 3.0



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# MIC-3001

## 4U CompactPCI® Enclosure with 8-Slot 3U Backplane



### Features

- 8-slot 3U CompactPCI®
- Easy installation: rack or panel mount
- Hot swap compliant backplane
- Hot swap fan tray module
- Optional fault detection and alarm notification
- Logic ground and chassis ground can be isolated or common



### Specifications


<b>Backplane</b>	Slots	8									
	Bus	32-bit/33 MHz									
	Vio Voltage	3.3 V/5 V (short-bar selectable)									
<b>Device Bay</b>	HDD or CD-ROM	Yes									
<b>Cooling</b>	Fan	2 (2 x 113 CFM)									
<b>Power</b>	Input	90 ~ 132 V <sub>AC</sub> /180 ~ 264 V <sub>AC</sub> @ 47 ~ 63 Hz.									
	Output	400 W									
	Loading (A)	Model	Load	+3.3 V	+5 V	-5 V	+12 V	-12 V	+5 Vsb		
		MIC-3001	Max.	20	42	1	14	1	0.75		
			Min.	0.2	2.5	0	0.5	0	0		
<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F)									
	Storage Temperature	-40 ~ 80°C (-40 ~ 176°F)									
	Storage Humidity	10 ~ 90% @ 40°C, non-condensing									
<b>Physical</b>		MIC-3001/8						MIC-3001AR/8			
	Dimensions (W x H x D)	440 x 178 x 240 mm					440 x 178 x 283 mm				
	Weight	7 kg (15.4 lb)					10 kg (22 lb)				
	Operating Vibration	1.0 Grms w/CF disk 0.5 Grms w/3.5" HDD									
	Shock	10 G peak-to-peak, 11ms duration									
<b>Reliability</b>	MTBF (hours)	71174 hours									
<b>Compliance</b>	PICMG Compliance	PICMG 2.0, R 2.1 CompactPCI Specification PICMG 2.1, R 1.0 Hot Swap Specification									

### Ordering Information

Part Number	Description
MIC3001AR801E-ES	4U CompactPCI chassis with 8-slot backplane, fan tray module, rear I/O and AC ATX power supply

# MIC-3321

## 3U CompactPCI® Intel Celeron® M 1GHz / Pentium® M 2 GHz Controller

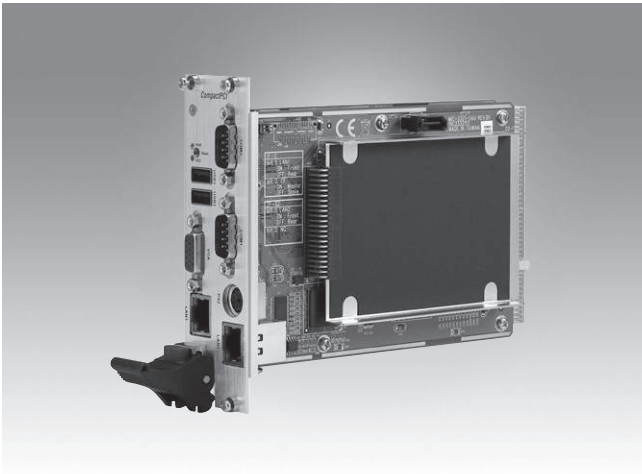

### Features

- Built-in Intel® Pentium® M 760 2.0 GHz processor/ Celeron® M Ultra Low Voltage 373 1.0GHz processor
- Mobile Intel® 915GM express chipset
- Supports up to 1GB DDR2 533/400 SDRAM soldered on board
- Extended operating temp: -25 ~ 70°C ( -13 ~ 158°F) (Optional: MIC-3321C only)
- Dual Giga LAN on PCI-Express
- High-performance Intel Graphics Media Accelerator 900 VGA display
- Onboard CompactFlash® disk socket
- Onboard 2.5" HDD support
- Rear I/O signal support for easy wiring (Only for MIC-3321D-DE)

### Introduction

The MIC-3321D is a 3U CompactPCI system controller board that combines the performance of Intel's Mobile Pentium M 760 2.0GHz processor with the high integration of the 915GM chipset and the I/O Controller Hub ICH6. The MIC-3321C with the low power of the Intel Mobile Celeron M makes it possible to work with high extended temperature ranges. The directly soldered CPU and memory provides less weight and a higher shock/vibration resistance than socket devices. In all, MIC-3321 is a powerful 3U CompactPCI Controller that fulfills requirements in mission critical applications, such as military defense, transportation, traffic control, test and measurement (T&M) as well as critical data acquisition & control applications.

### Specifications

<b>CPU</b>	MIC-3321D: Intel Pentium M 760 2.0 GHz with 2 MB L2 cache
	MIC-3321C: Intel Celeron M Ultra Low Voltage 373 1.0 GHz with 512 KB L2 cache
<b>Chipset</b>	Intel 915 GM (GMCH) + Intel 82801FBM (ICH6-M)
<b>BIOS</b>	Award 4 MB Flash
<b>Bus</b>	Front Side Bus 533 MHz (Intel Pentium M 760 2.0 GHz CPU) 400 MHz (Intel Celeron M Ultra Low Voltage 373 1.0 GHz CPU) PCI-to-PCI Bridge: PERICOM PITC8150
	PCI Bus 7 x 32-bit/33MHz CompactPCI bus Master interface 3.3 V/5 V VIO adjustable
<b>Memory</b>	Directed Soldered 512 MB DDR2 SDRAM
<b>Graphics</b>	Controller: Intel Graphics Media Accelerator 900
	VRAM: DVMT3.0 128MB
	Resolution: Up to 2048 x 1536 with 32-bit color at 75 Hz
<b>Ethernet</b>	Interface: 10/100/1000 Mbps Gigabit Ethernet
	Controller: 2 x Intel 82573E/L PCI Express Gigabit Ethernet Controllers
	Connector: 2 x RJ-45
	Supports Pre-boot Execution Environment (PXE)
<b>Serial</b>	Interface: RS-232
	Controller: 2 x 16C550 Compatible
	Data Bits: 5, 6, 7, 8
	Stop Bits: 1, 1.5, 2
	Parity: None, Even, Odd
	Speed (bps): 50 ~ 115.2K
	Data Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
	Connector: 2 x DB9 male
Two as front I/O, one as rear I/O	
<b>P-IDE</b>	One channel P-IDE
	Supports PIO mode 4 (16.67MB/s data transfer rate) and ATA 33/66/100 (33/66/100MB/s data transfer rate)
	1 x CompactFlash Socket Type II 1 x 44-pin 2.5" HDD connector
<b>USB</b>	4 x USB 2.0 channels up to 480Mbps, 2 as front I/O, 2 as rear I/O

<b>PS/2</b>	PS/2 for keyboard and mouse legacy support
<b>Watchdog Timer</b>	0 ~ 64s, 0.25s step, generate reset signal
<b>Hot Swap</b>	Support for all signals to allow peripheral boards to be hot swapped. The individual clocks for each slot and access to the backplane ENUM# signal comply with the PICMG 2.1 Hot Swap specification. (PCI to PCI bridge GPIO3)
<b>Front Panel Functions</b>	4HP Board 1 x VGA-CRT 15-pin D-SUB connector Ethernet: 1 x RJ-45 connector with integrated LEDs USB: 2 x 4-pin connectors Reset: Reset button, guarded LED: Power, HDD
	8HP Board (Additional to 4HP) COM1: 1 x DB9 RS-232 connector COM3: 1 x DB9 RS-232 connector PS/2: 1 x PS/2 connector for keyboard and mouse Ethernet: 1 x RJ-45 connector with integrated LEDs
<b>Rear I/O via J2 (Only for MIC-3321D-DE)</b>	2 x USB 2.0 channels
	2 x Gigabit Ethernet channels with LED (shared with front I/O)
	1 x COM port
	1 x VGA-CRT channel (shared with front I/O) 1 x PS/2 keyboard/mouse channel (shared with front I/O)
<b>Compliance</b>	PICMG 2.0 Rev. 3.0 compatible CompactPCI Hot Swap Specification PICMG 2.1 R2.0
<b>Environment</b>	Operating Temperature 0 ~ 50°C/ 32 ~ 122°F (Pentium M 2.0G / Celeron M 1.0G CPU) -25 ~ 70°C/ -13 ~ 158°F (Optional: Celeron M 1.0G CPU only)
	Storage Temperature -40 ~ 80°C/ -40 ~ 176°F
<b>Physical</b>	Dimensions (L x H) 160 x 100 mm (3U)
	Weight 0.6 kg


### Ordering Information

Part Number	Description
MIC-3321D-CE	Pentium M 2.0 GHz, 2MByte L2 cache, 512 MByte soldered DDR2 SDRAM, 8 HP width
MIC-3321C-CE	Celeron M 1.0 GHz, 512KByte L2 cache, 512 MByte soldered DDR2 SDRAM, 8 HP width

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# MIC-3323

## 3U CompactPCI® Intel Core® 2 Duo 1.66GHz / Atom™ D510 1.66GHz Controller

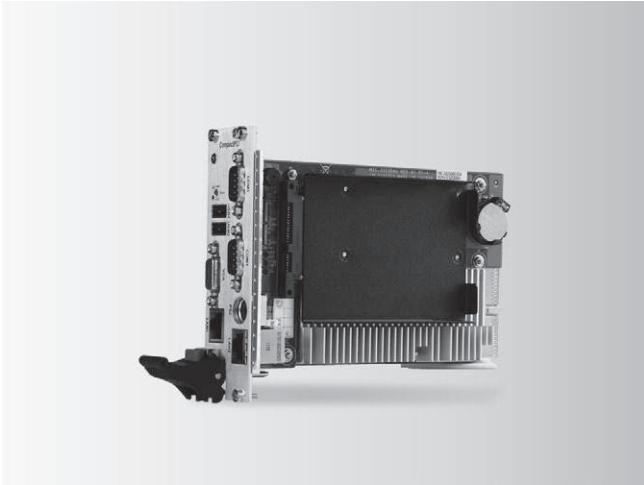

### Features

- Supports two different CPU types
  - Intel® Core® 2 Duo or Atom™ D510 Processor
  - Intel® GME965 GMCH /ICH8M
- Supports up to 4GB DDR2 533/667 MHz SDRAM
- Dual Giga LAN ports
- High-performance Intel 965GME Graphics Media Accelerator
- Internal CompactFlash Slot or Supports SATA 2.5" HDD
- Supports Rear I/O Connections

### Introduction

The MIC-3323 is a 3U CompactPCI® system control board, which support two different CPU grade, one adapts high performances Intel® Core® 2 Duo 1.66GHz processor and highly integrated Intel® 965GM Express chipset, and the other one adapts Intel® Atom™ Processor D510 1.66GHz and ICH8M chipset. In addition to 4MB L2 Cache, it supports 2GB DDR2 SDRAM up to 4GB and dual Gigabit Ethernet.

The MIC-3323 is a powerful 3U CompactPCI Controller that fulfills your requirements in mission critical applications, such as military defense, transportation, traffic control, test and measurement (T&M) as well as critical data acquisition & control application.

### Specifications

<b>CPU</b>	Intel® Core® 2 Duo 1.66GHz/Atom™ D510 1.66 GHz (Note 1)
<b>L2 Cache</b>	4 MB L2 Cache/1MB L2Cache
<b>Chipset</b>	Intel® 965GM GMCH/ICH8M
<b>BIOS</b>	AWARD™ 4 Mbit /AMI 16Mbit Flash BIOS
<b>BUS</b>	Front Side Bus 533MHZ (Intel® Core® 2 Duo 1.66GHz CPU)
	Side Bus 533MHZ (Intel® Atom™ D510 1.66 GHz CPU)
	PCI Bus PCI-PCI bridge PERICOM PI7C8150 7 x 32bit/33MHz Compact PCI bus master interface 3.3V VIO
<b>Memory</b>	SDRAM, DDR2 533/667 MHz Support 2G (Note 2) Socket: 2 x 200-pin SODIMM sockets
<b>Graphics</b>	Chipset: Intergated Intel 965GME Chipset/Intel Atom D510 Resolution: Up to 1920 x 1080
<b>Ethernet</b>	Interface: 1000/100/10M Base-TX Gigabit Ethernet
	Controller: PCI-Expressx1 Intel@82574L Ethernet Controller
	Connector: RJ-45 x 2 Optional Front End or Rear End Ethernet (Selected with Switch)
<b>Serial</b>	Interface: RS-232
	UART: 3 x 16C550 compatible
	Data bits: 5,6,7,8
	Stop Bits: 1,1.5,2
	Parity: None, Even, Odd
	Speed: 50~115.2Kbps
	Data Signal: TXD, RXD, RTS, CTS, DTR, DSR, DCD, RI GND Connector: 3 X DB-9 (Two in Front Panel and one in Rear I/O)
<b>SATA</b>	1 x SATA interface, data transfer rate up to 300MB/S( Note 3)
<b>USB</b>	4 x USB 1.1 channels up to 480Mbps, 2 as front I/O, 2 as rear I/O (doesn't support USB 2.0)
<b>PS/2</b>	Used for Keyboard and mouse
<b>Watchdog Timer</b>	256 levels timer interval, from 0 to 255 sec or min setup by software, jumper less selection, generates system reset

<b>Hot-swap</b>	Supports for all signal to allow peripheral boards to be Hot swapped
<b>Compliance</b>	PICMG®2.0 Rev.3.0 Compatible
	Compact PCI Hot-swap PICMG® 2.1 Rev.2.0
<b>Environment</b>	Humidity: 5~95% (non-condensing )
	Working Temp: 0 ~ 50°C
	Storage Temp: -40°C~80°C
<b>Physical</b>	Dimensions (W X H): 160 X 100mm (3U)
	Weight: 0.8Kg
<b>Front panel Function(8HP) (MIC-3323)</b>	COM1/3: 2X DB9, RS-232
	PS/2: 1 for Keyboard and Mouse
	Ethernet: 2 x RJ-45 connectors with LEDs
	VGA: 1 x 15 pin D-SUB connector
	USB: 2 x USB1.1, 4 pin Connector
	Button: Reset Button LED: Power, HDD
<b>Rear I/O Panel Function (8HP)</b>	COM2: 1 x DB9,RS-232
	PS/2: 1 for keyboard and Mouse (Shared with Front PS2)
	Ethernet: 2 x RJ-45 connectors with LED (Shared with Front I/O, selected with switch)
	VGA: 1 x 15 pin D-SUB connectors (shared fornt VGA) USB: 2 x USB2.0,4 pin connector
Note 1: Select different CPU grade by order number	
Note 2: Supports 2GB, up to 4GB	
Note 3: Support SATA or CF Card by order number	

### Ordering Information

- MIC-3323D01-D23E** 3U CompactPCI® Intel® Core® 2 Duo 1.66GHz Controller with SATA HDD/8HP
- MIC-3323D01-A33E** 3U CompactPCI® Intel® Atom D510 1.66G Controller with SATA HDD/8HP




# MIC-3611 MIC-3612 MIC-3620

4-port RS-422/485 3U CompactPCI® Card  
with Surge and Isolation Protection


4-port RS-232/422/485 3/6U CompactPCI®  
Card

8-port RS-232 3U CompactPCI® Card

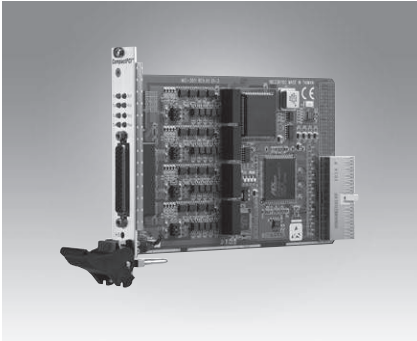


MIC-3611/3

CE FCC

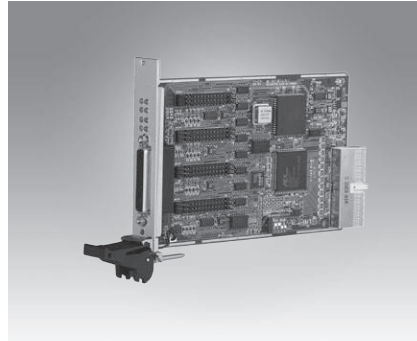

MIC-3612/3

CE

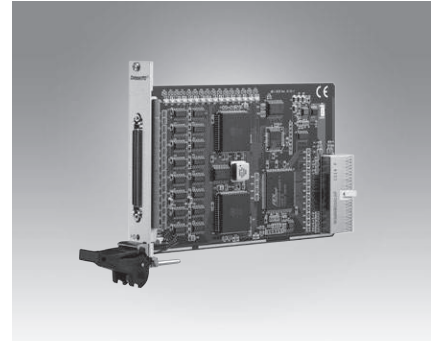

MIC-3620/3

CE FCC

## Features

- PCI Specification 2.1x compliant
- Speeds up to 921.6Kbps
- 16C954 UARTs with 128-byte standard
- Standard Industrial 3U/6U sized CPCI Board size
- I/O address automatically assigned by PCI Plug-and-Play
- OSs supported: Windows 98/2000/XP
- Surge protection: 2,000 V<sub>DC</sub>
- Isolation protection: 2,500 V<sub>DC</sub>
- Interrupt status register for increased performance
- Space reserved for termination resistors(for RS-422/485)
- Automatic RS-485 data flow control

## Specifications

### Communications

- **Communication** BUS controller: PLX9030 Controller UART: 16C954 UART with 128-byte FIFOs
- **IRQ** All ports use the same IRQ assigned by PCI Plug-and-Play
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** none, even, odd
- **Speed** 50bps ~ 921.6 Kbps
- **Data Signals** TxD, RxD, RTS, CTS (for RS-422/485)
- **Surge Protection** 2,000 V<sub>DC</sub>
- **Isolation Protection** 2,500 V<sub>DC</sub>

### General

- **Bus Type** CompactPCI bus specification 2.1 compliant
- **I/O Connectors** DB44 and four RS422/485 DB9 male
- **Dimensions (L x H)** 160 x 100 mm (6.3" x 3.9"), 3U bracket
- **Power Consumption** +5 V @ 600 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 5 ~ 95% Relative Humidity, non-condensing
- **Certification** CE, FCC

## Ordering Information

- **MIC-3611/3-AE** 4-port RS-422/485 3U CompactPCI communication card w/isolation & surge protection

## Features

- PCI Specification 2.1 compliant
- Speeds up to 921.6 kbps
- 4-port RS-232/422/485
- Surge protection
- 16C954 UARTs with 128-byte standard
- Standard Industrial CompactPCI® 3U Board size
- I/O address automatically assigned by PCI Plug & Play
- OSs supported: Windows® 98/2000/XP, Linux 2.4
- Interrupt status register for increased performance
- Automatic RS-485 data flow control
- Tx/Rx LED indicator

## Specifications

### Communications

- **Communication** BUS controller: PLX9030 Controller UART: 16C954 5, 6, 7, 8
- **Data Bits** TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND (for RS-232)
- **Data Signals** TxD, RxD, RTS, CTS (for RS-422) DATA+, DATA- (for RS-485)
- **IRQ** All ports use the same IRQ assigned by PCI Plug & Play
- **Parity** None, even, odd
- **Speed (bps)** 50 ~ 921.6 k
- **Stop Bits** 1, 1.5, 2

### General

- **PICMG Compliance** CompactPCI V2.0, R 3.0 Hot swap V2.1, R 2.0 CompactPCI V2.1
- **Bus Type** DB 44pin female
- **I/O Connectors** 160 x 100 mm (6.3" x 3.9"), 3U bracket
- **Dimensions (L x H)** 3U bracket
- **Power Consumption**

	Typical	Max.
+5 V	220 mA	285 mA
+3.3 V	100 mA	200 mA
+12 V	60 mA	80 mA

- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F) (IEC68-2-1, 2)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 5 ~ 95% RH, non-condensing (IEC 68-2-1, 2)

## Ordering Information

- **MIC-3612/3-AE** 3U CompactPCI 4-port RS-232/422/485 Card
- **MIC-3612/6-AE** 6U CompactPCI 4-port RS-232/422/485 Card

## Features

- PCI Specification 2.1 compliant
- Speeds up to 921.6 kbps
- 16C954 UARTs with 128-byte standard
- 8-port RS-232
- Standard Industrial CompactPCI 3U Board size
- I/O address automatically assigned by PCI Plug & Play
- OSs supported: Windows 98/2000/XP, Linux 2.4
- Interrupt status register for increased performance

## Specifications

### Communications

- **Communication** PIC9030 + 16C954 Controller
- **Data Bits** 5, 6, 7, 8
- **Data Signals** TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- **IRQ** All ports use the same IRQ assigned by PCI Plug & Play
- **Parity** None, even, odd
- **Speed (bps)** 50 ~ 921.6 k
- **Stop Bits** 1, 1.5, 2

### General

- **PICMG Compliance** CompactPCI V2.0, R 3.0 Hot swap V2.1, R 2.0
- **Bus Type** CompactPCI bus specification 2.1 compliant
- **I/O Connectors** SCSI 68-pin female
- **Dimensions (L x H)** 160 x 100 mm (6.3" x 3.9"), 3U Bracket
- **Power Consumption** +5 V, +3.3 V, +12 V
- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F) (refer to IEC68-2-1, 2)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Storage Humidity** 5 ~ 95% Relative Humidity, non-condensing (IEC 68-2-1, 2)

## Ordering Information

- **MIC-3620/3-AE** 3U CompactPCI 8-port RS-232 Card


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# MIC-3621

# MIC-3680

## 8-Port RS-232/422/485 6U CompactPCI® Card with Surge Protection

## 2-Port CAN-bus 3U CompactPCI® Card

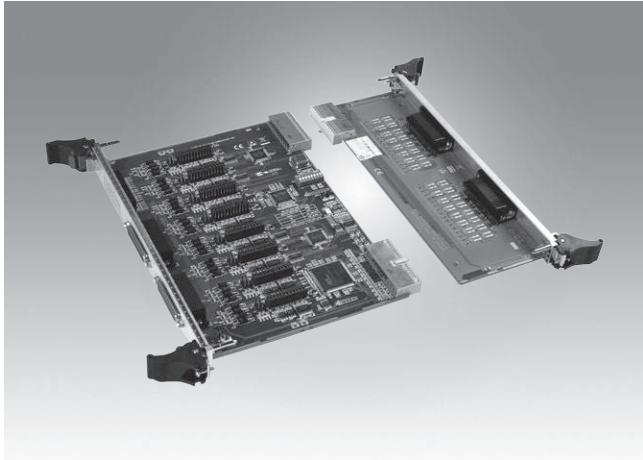

MIC-3621



### Features

- CPCI Specification 2.1 compliant
- Speeds up to 921.6 kbps
- 16C954 UARTs with 128-byte standard
- 8-port RS-232/485/422
- Standard Industrial CompactPCI 6U Board size
- I/O address automatically assigned by PCI Plug & Play
- Interrupt status register for increased performance
- Automatic RS-485 data flow control
- OS support: Windows 2000/XP

### Specifications

#### Communications


- **Communication Controller** BUS Controller: PC19030 UART:16C954 Controller
- **Data Signals -**
  - RS-232** TXD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
  - RS-422** TX+, TX-, RX+, RX-, RTS+, RTS-, CTS+, CTS-, GND
  - RS-485** DATA+, DATA-, GND
- **Speed (bps)** 50-921.6k
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, even, odd
- **IRQ** All ports use the same IRQ assigned by PCI plug & play
- **Surge Protection** 2,500 V<sub>DC</sub>

#### General

- **PICMG Compliance** CompactPCI V2.0, R 2.1 Hot swap V2.1, R 2.0
- **Bus Type** CompactPCI bus specification 2.1 compliant
- **Hotswap Support** Yes
- **I/O Connectors** 2 x DB44 (female)
- **Dimensions (LxH)** 233.35 x 160 mm (9.19" x 6.3"), 6U Bracket
- **Power Consumption** +5V, +3.3V, +12V
- **Operating Temperature** 0-70°C (32-158°F) (refer to IEC68-2-1, 2)
- **Storage Temperature** -20-80°C (-4-176°F)
- **Storage Humidity** 5-95%, Relative Humidity, non-condensing (refer to IEC 68-1, -2, -3)

### Ordering Information

- **MIC-3621RE** 6U CompactPCI 8-port RS-232/485/422 Front I/O Card and Rear I/O Support
- **MIC-3621RIOE** 6U CompactPCI Rear I/O Module for MIC-3621RE

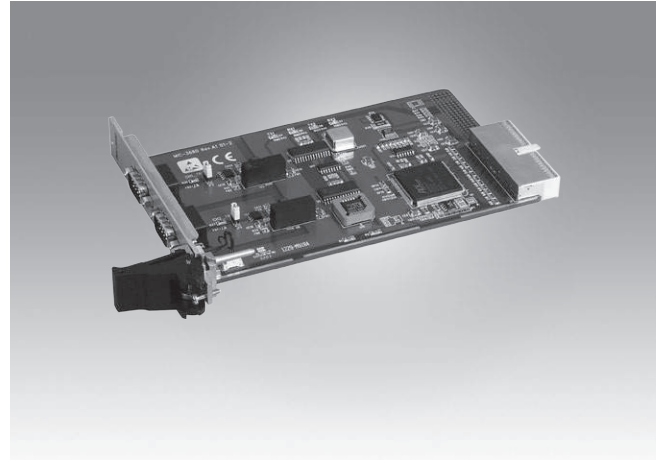

MIC-3680/3



### Features

- CompactPCI specification PICMG 2.0 R3.0 compatible
- Hot swap support
- Two individual CAN ports
- Supports CAN2.0 A/B
- High speed transmission up to 1 Mbps
- 16 MHz CAN controller frequency
- Optical isolation up to 2,500 V<sub>DC</sub>
- Microsoft Windows DLL library and examples included
- Supports Windows 98/2000/XP drivers and utility
- Supports Rear I/O

### Specifications

#### Communications

- **CAN Controller Frequency** 16 MHz
- **CAN Transceiver** 82C250
- **Communication Controller** SJA-1000
- **Ports** 2
- **Protocol** CAN 2.0 A/B
- **Signal Support** CAN\_H, CAN\_L, GND
- **Speed (bps)** Up to 1 Mbps programmable transfer rate
- **Isolation Protection** 2,500 V<sub>DC</sub>

#### General

- **PICMG Compliance** CompactPCI V2.0, R 3.0 Hot swap V2.1, R 2.0
- **Bus Type** CompactPCI
- **I/O Connectors** 2 x DB9-M
- **Dimensions (L x H)** 160 x 100 mm (6.3" x 3.9")
- **Power Consumption** 5 V @ 400 mA (Typical)
- **Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **MIC-3680/3-AE** 3U CompactPCI 2-port Isolated CAN Communication Card

# MIC-3716


# MIC-3723

# MIC-3758

## 250 kS/s, 16-bit, 16-ch Multifunction 3U CompactPCI® Card

## 16-bit, 8-ch Analog Output 3U CompactPCI® Card

## 128-CH Isolated Digital I/O 3U CompactPCI® Card

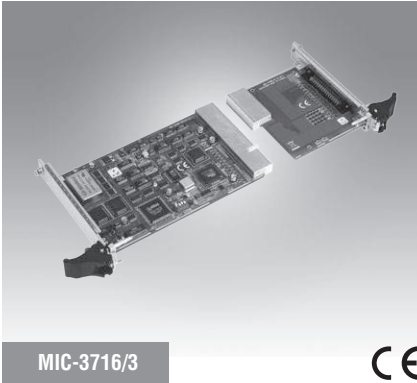

MIC-3716/3



### Specifications

#### Analog Input

- Channels: 16 single-ended, 8 differential, or combination
- Resolution: 16 bits
- Max. Sampling Rate: 250 kS/s
- FIFO Size: 1024 samples/ch
- Overvoltage Protection: 30 Vp-p
- Input Impedance: 100 M $\Omega$ /10 pF (Off); 100 M $\Omega$ /100 pF (On)
- Sampling Modes: Software, pacer, or external
- Input Range: Bipolar, Unipolar

	Bipolar	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
Unipolar	-	0 - 10	0 - 5	0 - 2.5	0 - 1.25	0 - 0.625
Accuracy (% of FSR $\pm 1$ LSB)		0.15	0.03	0.03	0.05	0.1

#### Analog Output

- Channels: 2
- Resolution: 16 bits
- Output Rate: Static update
- Output Range: Bipolar, Unipolar

Internal Reference	Bipolar	Unipolar	$\pm 5$ , $\pm 10$
			0 - 5, 0 - 10
External Reference	0 - +x V @ +x V (-10 $\leq$ x $\leq$ 10) -x - +x V @ +x V (-10 $\leq$ x $\leq$ 10)		

- Slew Rate: 20 V/ $\mu$ s
- Driving Capability:  $\pm 20$  mA
- Output Impedance: 0.1  $\Omega$  max.
- Operation Mode: Single output
- Accuracy: Relative:  $\pm 1$ LSB

#### Digital Input/Output

- Channels: 16, 5V/TTL
- Input Voltage: Logic 0: 0.4 V max. Logic 1: 2.4 V min.
- Output Voltage: Logic 0: 0.4 V max. Logic 1: 2.7 V min.
- Output Capability: Sink: 0.4 V max. @ +8 mA Source: 2.4 V min. @ -0.4 mA

#### Counter/Timer


- Channels: 3
- Compatibility: 5 V/TTL
- Resolution: 16 bits
- Max. Input Frequency: 1 MHz
- Reference Clock: Internal 10 MHz External Clock Frequency 10 MHz External Voltage Range TTL (Low: 0.8, High: 2 V)

#### General

- PICMG Compliance: CompactPCI V2.0, R 2.1 Hot-Swap V2.1, R 2.0
- Bus Type: CompactPCI
- I/O Connector Type: 68-pin SCSI-II female
- Dimensions (L x H): 160 x 100 mm (6.9" x 3.9") with 3U Bracket
- Power Consumption: Typical: +5 V @ 850 mA, +12 V @ 600 mA Max.: +5 V @ 1 A, +12 V @ 700 mA
- Certification: CE

### Ordering Information

- MIC-3716/3-AE: 3U, 250 kS/s, 16-bit, 16-ch High-Resolution Multifunction Card Industrial Wiring Terminal Board with CJC circuit for DIN-rail Mounting. (cable not included)
- PCLD-8710-AE: 68-pin SCSI-II cable with male connectors on both ends and special shielding for noise reduction, 1 and 2 m
- PCL-10168-1E/2E: 68-pin SCSI-II Wiring Terminal Board for DIN-rail Mounting
- ADAM-3968-AE: 68-pin SCSI-II Wiring Terminal Board for DIN-rail Mounting

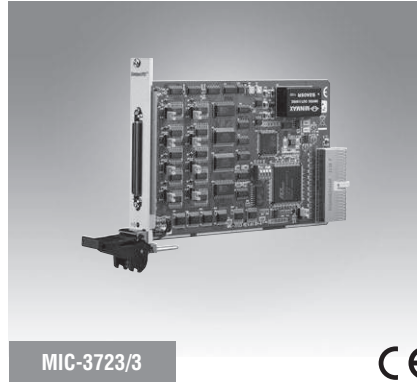

MIC-3723/3



### Specifications

#### Analog Output

- Channels: 8
- Resolution: 16 bits
- Output Rate: Static update
- Output Range: (V, software programmable)

Internal Reference	Unipolar	$\pm 10$ V
	Current Loop	0 - 20 mA, 4 - 20 mA

- Slew Rate: 20 V/ $\mu$ s
- Driving Capability: 5 mA
- Output Impedance: 0.1  $\Omega$  max.
- Operation Modes: Single output, synchronized output

#### Digital Input/Output

- Channels: 16, 5V/TTL
- Input Voltage: Logic 0: 0.8 V max. Logic 1: 2.0 V min.
- Output Voltage: Logic 0: 0.5 V max. @ 24 mA Logic 1: 2.4 V min. @ -15 mA
- Output Capability: Sink: 0.5 V max. @ 24 mA Source: 2.4 V min. @ -15 mA

#### General

- PICMG Compliance: CompactPCI V2.0, R 2.1 Hot-Swap V2.1, R 2.0
- Bus Type: CompactPCI
- I/O Connector Type: 68-pin SCSI-II female
- Dimensions (L x H): 160 x 100 mm (6.9" x 3.9") with 3U Bracket
- Power Consumption: Typical: 5 V @ 850, 12 V @ 600 mA
- Certification: CE

### Ordering Information

- MIC-3723/3-AE: 3U CompactPCI 16-bit, 8-ch non-isolated analog output card
- PCL-10168-1E: 68-pin SCSI-II cable with male connectors on both ends and special shielding for noise reduction, 1 and 2 m
- PCL-10168-2E: 68-pin SCSI-II Wiring Terminal Board for DIN-rail mounting
- ADAM-3968-AE: 68-pin SCSI-II Wiring Terminal Board for DIN-rail mounting



MIC-3758/3



### Specifications

#### Isolated Digital Input

- Channels: 64
- Input Voltage: Logic 0: 2.5 V max. Logic 1: 5 V min. (25 V max)
- Interrupt Capable Ch.: 64
- Isolation Protection: 2,500 V<sub>DC</sub>
- Opto-Isolator Response: 50  $\mu$ s
- Input Resistance: 3 k $\Omega$

#### Isolated Digital output

- Channels: 64
- Output Type: Sink (NPN)
- Isolation Protection: 2500 V<sub>DC</sub>
- Output Voltage: 5 ~ 40 V<sub>DC</sub>
- Sink Current: 90 mA max./Channel
- Opto-isolator Response: 50  $\mu$ s

#### General

- Bus Type: CPCI bus spec. 2.1 compliant
- I/O Connectors: 1 x MINI-SCSII HDRA-E100 Female
- Dimensions (L x H): 160 x 100 mm (6.9" x 3.9") with 3U Bracket
- Power Consumption: Typical : +5 V @ 800 mA, +3.3 V @ 600 mA Max : +5 V @ 1 A, +3.3 V @ 1 A
- Operating Temperature: 0 ~ 60°C (32 ~ 140°F) (IEC 68-2-1,2)
- Storage Temperature: -20° ~ 70°C (-4° ~ 158°F)
- Storage Humidity: 5 ~ 95% (IEC 68-2-3) non-condensing

### Ordering Information

- MIC-3758/3-AE: 3U CompactPCI 128-ch isolated Digital I/O card
- PCL-101100S-1: 100-pin SCSI Cable, 1 m
- ADAM-39100: 100-pin SCSI wiring terminal, DIN-rail mounting


- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Wireless I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# MIC-3761

# MIC-3780

## 8-CH Relay & 8-CH Isolated Digital Input 3U CompactPCI® Card

## 8-CH, 16-bit Counter/Timer 3U CompactPCI® Card

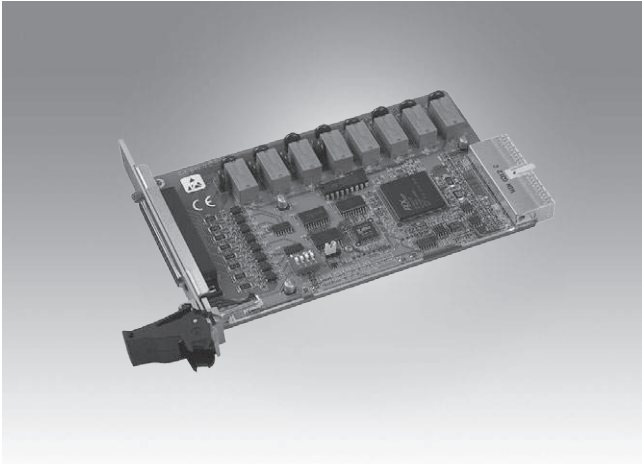

MIC-3761/3



### Specifications

#### Isolated Digital Input

- Channels 8
- Input Voltage Logic 0: 3 V max.  
Logic 1: 10 V min.  
(50 V max.)
- Input Current\* 10 V<sub>DC</sub> 1.6 mA (typical)  
12 V<sub>DC</sub> 1.9 mA (typical)  
24 V<sub>DC</sub> 4.1 mA (typical)  
48 V<sub>DC</sub> 8.5 mA (typical)  
50 V<sub>DC</sub> 8.9 mA (typical)
- Interrupt Capable Ch. ID0 ~ ID7
- Isolation Protection 2,500 V<sub>DC</sub>
- Overvoltage Protection 70 V<sub>DC</sub>
- Opto-Isolator Response 25 µs
- Input Resistance 560 Ω

#### Relay Output


- Channels 8
- Relay Type SPDT  
(4 Form A, and 4 Form C)
- Contact Rating 3 A @ 250 V<sub>AC</sub> or  
3 A @ 24 V<sub>DC</sub>
- Relay on Time 15 ms max.
- Relay off Time 5 ms max.
- Life Span Mechanical  
2 x 10<sup>7</sup> ops. min.  
Electrical  
2 x 10<sup>6</sup> ops. min. (contact rating)
- Resistance 1 GΩ min. (at 500 V<sub>DC</sub>)

#### General

- PICMG Compliance CompactPCI V2.0, R 3.0  
Hot-Swap V2.1, R 2.0, R 2.1
- Bus Type CompactPCI
- I/O Connectors 1 x 37-pin D-type female connector
- Dimensions (L x H) 160 x 100 mm (6.9" x 3.9") with 3U Bracket
- Power Consumption Typical: +5 V @ 220 mA  
Max.: +5 V @ 750 mA
- Certification CE

### Ordering Information

- MIC-3761/3-AE 3U 8-ch Relay Actuator and 8-ch Isolated D/I Card
- PCL-10137-1E/2E/3E DB-37 cable assembly, 1, 2 and 3 m
- ADAM-3937-BE DB-37 Wiring Terminal for DIN-rail Mounting
- PCLD-780-BE Universal Screw Terminal Board

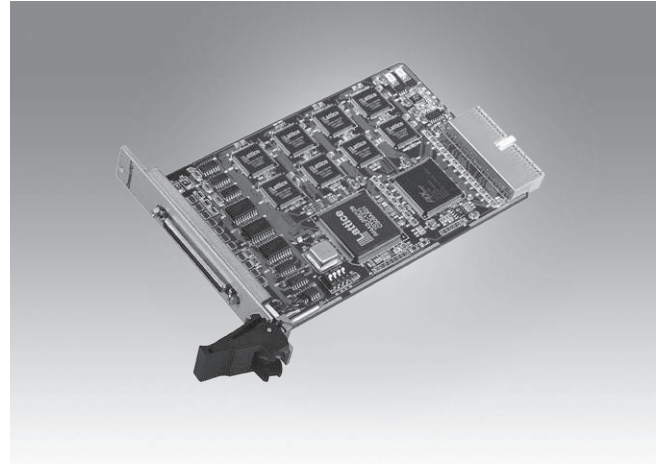

MIC-3780/3



### Specifications

#### Digital Input

- Channels 8
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.  
Logic 1: 2.4 V min.
- Interrupt Capable Ch. 1 (channel 0)

#### Digital Output

- Channels 8
- Compatibility 5 V/TTL
- Output Voltage Logic 0: 0.5 V max. @ 24 mA  
Logic 1: 2.4 V min. @ -15 mA  
Sink: 0.5 V max. @ 24 mA  
Source: 2.4 V min. @ -15 mA
- Output Capability

#### Counter/Timer

- Channels 8 (independent)
- Resolution 16 bits
- Compatibility 5 V/TTL
- Max. Input Frequency 20 MHz
- Reference Clock Internal: 20 MHz
- Counter Modes 12 (programmable)
- Interrupt Capable Ch. 8

#### General

- PICMG Compliance CompactPCI V2.0, R 3.0  
Hot-Swap V2.1, R 2.0
- Bus Type CompactPCI V2.1
- I/O Connectors 68-pin SCSI-II female
- Dimensions (L x H) 160 x 100 mm (6.3" x 3.9") with 3U Bracket
- Power Consumption Typical: +5 V @ 900 mA  
Max: +3.3 V @ 1.2 A
- Operating Temperature 0 ~ 60°C (32 ~ 140°F) (refer to IEC 68-2-1, 2)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
- Relative Humidity 5 ~ 95 % RH non-condensing (refer to IEC 68-2-3)
- Certification CE, FCC Class A

### Ordering Information

- MIC-3780/3-A1E 3U Compact PCI 8-ch, 16 bit counter/timer card
- PCL-10168-1E/2E 68-pin SCSI-II cable with male connectors on both ends and special shielding for noise reduction, 1 and 2 m
- ADAM-3968-AE 68-pin SCSI-II Wiring Terminal Board for DIN-rail mounting

## IoT Wireless I/O Modules

<b>IoT Wireless I/O Modules Overview</b>		<b>15-2</b>
<b>IoT Wireless I/O Modules Features: Wireless Ethernet Interface</b>		<b>15-5</b>
<b>IoT Wireless I/O Modules Features: File-based Cloud Logger and Local Data Storage</b>		<b>15-6</b>
<b>IoT Wireless I/O Modules Selection Guide</b>		<b>15-7</b>
<b>WISE-4012</b>	4-ch Universal Input and 2-ch Relay Output IoT Wireless I/O Module	
<b>WISE-4050</b>	4-ch Digital Input and 4-ch Digital Output IoT Wireless I/O Module	<b>15-9</b>
<b>WISE-4060</b>	4-ch Digital Input and 4-ch Relay Output IoT Wireless I/O Module	
<b>WISE-4012E</b>	6-ch Universal Input/Output IoT Wireless I/O Module for IoT Developers	<b>15-10</b>
<b>M2M I/O Modules Overview</b>		<b>15-12</b>
<b>M2M I/O Modules Selection Guide</b>		<b>15-16</b>
<b>ADAM-2510Z</b>	Wireless Router	
<b>ADAM-2520Z</b>	Wireless Modbus RTU Gateway	<b>15-18</b>
<b>ADAM-2031Z</b>	Wireless Temperature & Humidity Sensor Node	
<b>ADAM-2017PZ</b>	Wireless 6-ch Analog Input Node with Power Amplifier	<b>15-19</b>
<b>ADAM-2051Z</b>	Wireless Sensor Network 8-ch Digital Input Node	
<b>ADAM-2051PZ</b>	Wireless Sensor Network 8-ch Digital Input Node with Power Amplifier	<b>15-20</b>

To view all of Advantech's IoT Wireless I/O Modules, please visit [www.advantech.com/products](http://www.advantech.com/products).



# IoT Wireless I/O Modules Overview



## Wireless Solution for IoT

According to an IoT trend report, there will be 25 billion devices connected by the end of 2015, and 50 billion by 2020. Devices can be connected with various interfaces, however the most popular interface is likely to be wireless because of its reduced number of cables and speed of installation. As mobile devices are widely used to access cloud services via Wi-Fi, 3G, LTE, etc., wireless solutions have become one of the most common ways to provide service in the IoT era. Advantech's WISE (Wireless IoT Sensing Embedded) series are designed as sensing devices which use a wireless interface under the IoT framework.

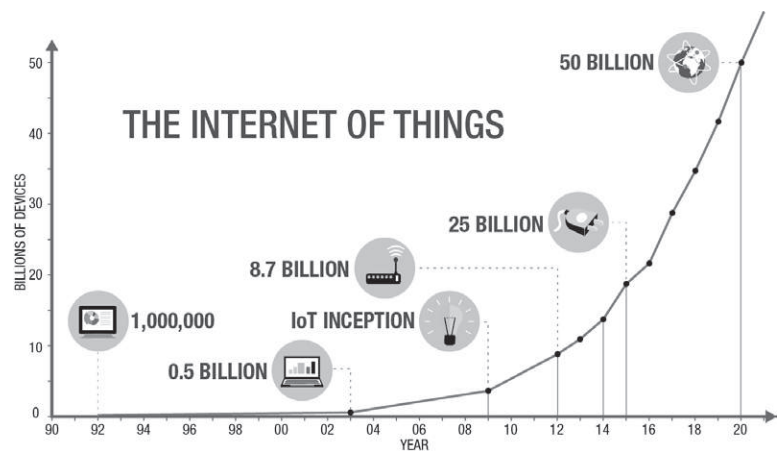


Image Source: The Connectivist

## Embedded Sensing Devices


With the advances in silicon technology, more and more embedded chipsets are able to be implemented in our daily life. System on a Chip (SoC) can serve not only as a Micro Control Unit (MCU), it can provide wireless connectivity even on a single SoC. This means the wireless interface can now be easily embedded in all the devices. As well as connectivity, sensors are also developed in silicon. In the past, people used thermometers to measure the temperature of field devices regardless of whether they are inside or outside. With the help of Microelectromechanical System (MEMS) technology, the size of a thermometer can now be reduced to a single silicon chip. Advantech's WISE series will offer more choices with various wireless connectivity solutions and with more kinds of MEMS sensor solutions, for more applications in different vertical domains.

## Data Acquisition and Sensing in IoT


### IoT Architecture

There are two different ways to get the devices to the cloud. For legacy devices, an IoT gateway can be used to perform protocol translation and data aggregation. A gateway then publishes the aggregated data to the cloud. For IoT devices which support Ethernet, it can be directly connected to the cloud to provide further service if there are not many devices in the system, or the devices are widely deployed in different areas. Otherwise, an IoT gateway can be used to manage the data before publishing to the cloud to reduce the connections between cloud and devices, or reducing the network bandwidth.

**IoT Architecture with Legacy Device**

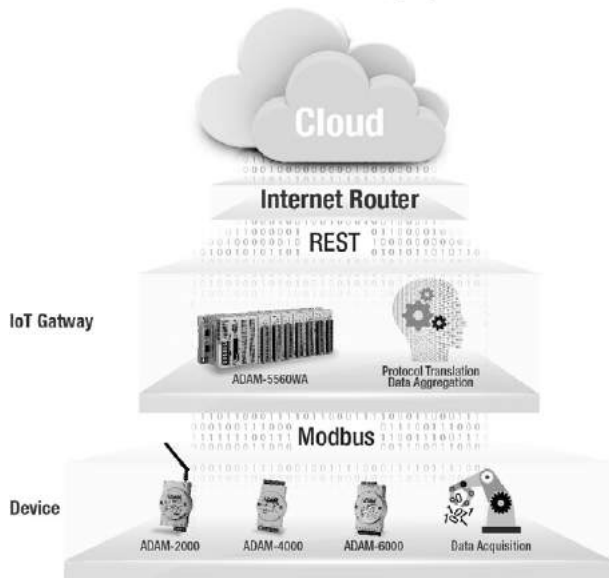

**IoT Architecture with IoT Device**

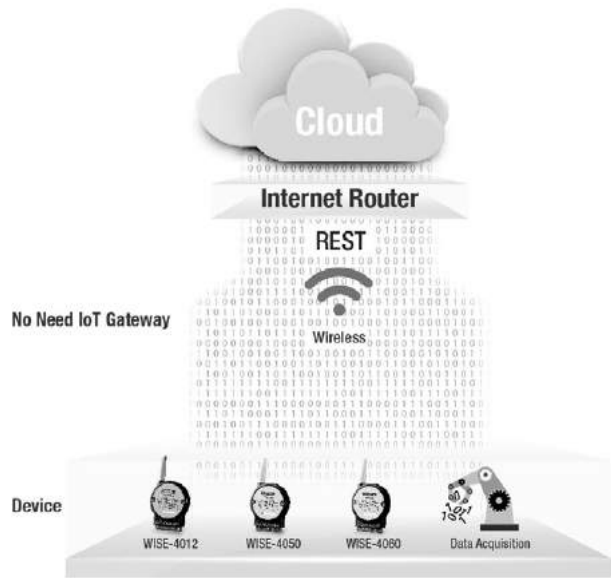

### RESTful API

Representational State Transfer (REST) is a software architecture style and widely used for creating scalable web services. With the advantage of scalability, simplicity and performance, it's already adopted in IoT applications. It is based on Hypertext Transfer Protocol (HTTP) and uses verbs, like GET, POST, PUT, DELETE, etc., for web browsers to get web pages or retrieve data with remote servers. The data can be retrieved by internet media like HTML, XML, or JSON. REST is a uniform resource identifier (URI) to identify the data. Like using "http://10.0.0.1/analoginput/ch0" to identify the analog input value of channel 0. Then the web server may retrieve a JSON file analog input value of channel 0.

### Secure Socket

Compared to Modbus/TCP which is also based on TCP, RESTful API provides higher scales to be used in wide area network (WAN). Modbus/TCP does not support security, so it can only be used in local area networks (LAN). However, RESTful which uses HTTP for data retrieval, can support HTTPS (HTTP over SSL (Secure Socket Layer)) or TLS (Transport Layer Secure). For developing IoT applications, RESTful API will be a better option for publishing data to the cloud or retrieving data between devices.

#### Automation Protocol

Modbus/TCP Master



Polling



Modbus/TCP Slave

#### RESTful Web API

Web Client



Post

JSON

Get



Web Server



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IoT Wireless I/O and Sensing Devices

## DNA of IoT I/O and Sensing Devices

Advantech's new generation of remote I/O is designed with IT oriented spirit, provides versatile product offerings to the market. With the advanced concepts of data Acquisition, data Processing to data Publishing, fulfilling mobile monitoring and controlling needs under a IoT framework.

Broad adoptability has made WISE a reliable source of big data which benefits users in identifying their next steps and which action to take. With intelligent processing and publishing features, the time it takes to generate insightful reports can be shortened. Thus users can quickly notice and identify possible issues and system downtime can be minimized or even avoided.



## DNA 1 ▶ Data Acquisition



### Broad Adoptability

The WISE-4000 series adopts major sensors in different formats with different I/O channel types and amounts



### Robust Protection

The wide operating temperature with isolation protection ensures it can be deployed in even more environments



### Easy Installation


New industrial design for quick hardware installation and also software configuration

## DNA 2 ▶ Data Processing



### Data log

Data can be buffered with a time stamp, which can then be queried or automatically pushed



### Data Conditioning

Built-in local intelligence includes filtering, scaling and other several logic rules



### Web Configuration

With an HTML5 web server, all devices with a browser can access modules for configuration and troubleshooting

## DNA 3 ▶ Data Publishing



### Cloud Access

Data can be transmitted to the cloud in a secure socket without using a gateway



### RESTful Web Service

With the RESTful web service, I/O modules can seamlessly integrate with IT systems



### Direct Mobile Connectivity

Mobile devices can connect to WISE-series via Wi-Fi, to get the data and module configuration without needing other devices in between



# IoT Wireless I/O Modules Features


## Wireless Ethernet Interface

### IEEE 802.11 b/g/n and Wi-Fi

The 802.11 specification is a standard for wireless LAN (WLAN) that was ratified by the Institute of Electrical and Electronics Engineers (IEEE) in the year 1997. Like all IEEE 802 standards, the 802.11 standards focus on the bottom two levels the ISO model, the physical layer and link layer. The name Wi-Fi (short for "Wireless Fidelity") corresponds to the name of the certification given by the Wi-Fi Alliance, the group which ensures compatibility between hardware devices that use the 802.11 standard. Due to misuse of the terms, the name of the standard is often confused with the name of the certification. A Wi-Fi network, in reality, is a network that complies with the 802.11 standard.

### 2.4 GHz Interface Comparison

2.4 GHz radio band is one of the industrial, scientific and medical (ISM) radio bands. And it is the most widely used band for short-range, low power communications systems, which including Bluetooth, near field communication (NFC), wireless sensor networks (like Zigbee), and wireless LAN (Wi-Fi). WLAN provides most widely bandwidth and is also the the widest used standard that each vendor's WLAN devices able to communicate with others. Bluetooth provides low power consumption and is widely applied to mobile devices as WLAN. In this case, the new standard of Bluetooth can automatically avoid radio band interference with WLAN by frequency hopping. ZigBee also provides low energy consumption, it also has various network topologies. However, ZigBee cannot be used in environments with other 2.4GHz radio wireless devices. And it need its own gateway to organize the ZigBee network, and it is not compatible with other vender's ZigBee devices.

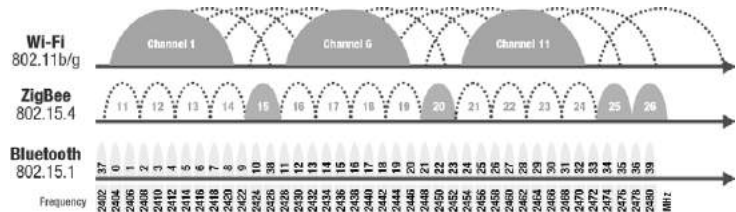


### WLAN Infrastructure

The WLAN infrastructure is organized by WLAN Access Point (AP) and WLAN Stations. The wireless client, which is the end device like a smart phone, connects to a wireless access point to join the network is call WLAN station. The wireless server which provides the wireless network, and organizes the network for WLAN stations is called a WLAN access point (AP), or wireless adapter. WLAN APs sometime provides the function of a DHCP server with dynamically assigned IP address for WLAN stations. This kind of AP usually act a as a network router, so it can also be called a wireless router.

### Ethernet Architecture

WLAN is the easiest interface to implement in an existing Ethernet network, users just need to add an access point in to an existing network to extend the wireless connectivity. Usually all the network devices don't need to be provided from same vendor. So it is also widely been accepted by different application scenarios.

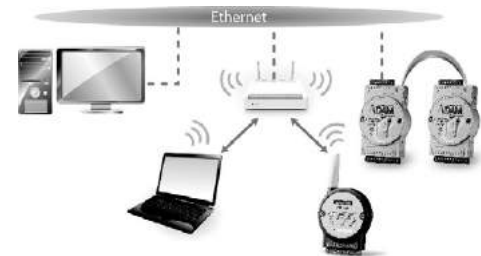

### HTML5 Web configuration

A web interface is the most common interface that can be accessed by almost all devices. Compared with .NET programmed utilities or mobile apps, a web interface has much less limitations compared to platform or operating system. WISE modules provide web interface configuration, and web pages in HTML5.

By using browsers which support HTML5, like Microsoft IE, Google Chrome, Mozilla Firefox, or Apple Safari, users can access WISE using any devices or platforms.

The new web configuration interface can automatically change its layout when using different kinds of device, for mobile device which have vertical screens, it will automatically adjust the layout to fit the screen of the mobile device and switch to horizontal layout when using a laptop. Before entering the page or web configuration, WISE modules provide an authorization process, meaning that users need to login with different accounts for different authorizations, which ensures the security of the module.

### Wireless Operation Mode

#### Infrastructure Mode

In general, WISE modules stay connected to access point (AP) to be online. Users who want to connect their mobile devices to WISE modules will need to connect to the same AP as WISE modules connect to. In this case, that access point act as a wireless switch for both Ethernet devices.



#### Limited AP Mode

For configuration or doing module diagnostic, it is not necessary to have a wireless switch. WISE-4000 series offer another network mode: Limited AP Mode. Users can connect the mobile devices to access WISE module directly without an AP. When WISE-4000 work in Limited AP mode, user can find the SSID for WISE module, and connecting to it as a wireless switch. It makes the configuration and diagnostic of WISE module much easier.



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# IoT Wireless I/O Modules Features

## File-based Cloud Logger and Local Data Storage



### Up to 10,000 samples of local data storage

The internal flash of the WISE module can log up to 10,000 samples of data with a time stamp. The I/O data can be logged periodically, and also when the I/O status changes. Once the memory is full, users can choose to overwrite the old data to ring log or just stop the log function. When the module is powered-off, data can be kept in the module. When restarting, users can decide whether to clear all data or continue logging.



### Reduce the communication time and bandwidth

In the IoT communication architecture, periodic polling takes lots of time and bandwidth. Once the data can be logged in the module, users can poll a batch of data at the same time, instead of polling each piece of data individually. In this case, user can simplify the polling mechanism and also reduce the communication interface fee.



### Cloud Logger function with file-based cloud or private cloud

The internal flash of the WISE module can log up to 10,000 samples of data with time stamps. The I/O data can be logged periodically, and also be logged when the I/O status changes. Once the memory is full, users can choose to overwrite the old data to perform ring logging or just stop the log function. When the module is powered-off, data can be kept in the module. When restarting, users can decide whether to clear all data again or continue logging.



### Data storage with time stamps

The definition of data in the IoT is not only the status of everything, but also includes time or location information. With a built-in Real Time Clock (RTC), WISE modules log data with a time stamp and the MAC address of the WISE module. The internal RTC can be calibrated by SNTP with time server. Once the module been powered-off, the internal time can also be saved using the time backup battery. When users poll the data from the data logger, the time stamp will always be attached to the data.



### Reducing the concerns of a wireless interface

WISE-4000 Wireless IoT Ethernet I/O Modules focus on wireless connectivity. Even though new a new generation of Wi-Fi interface could be stable, users are concerned that the wireless signal maybe reduced or nonexistent. In this situation, WISE modules provide local data storage. The I/O data and system events are logged in the internal flash memory of the WISE module. So now users can fetch this logged data when communication is restored.

## Quick Installation and Easy Maintenance



### Changeable Antenna

For flexibility the wireless antenna of the WISE module is not fixed. Users can replace the antenna by unscrewing it counterclockwise. Please note that Advantech only ensure the performance of the default antenna. And performance is decided by the application's environment.

### LED Indicator for Diagnostics

WISE modules have an LED indicator on the front of the module, the name plate of the module. Besides the Status and Communication indicator, users can instantly see the network mode by an LED indicator. The LED will be ON when working in AP mode. During infrastructure mode, the LED will be OFF and the signal strength LED will be on to indicate the signal quality between the WISE module and wireless access point.



### External Switches and Detailed Product Label


The I/O input setting switches are on the back of the WISE module. Users don't need to open the device to configure the I/O type. For example, users can configure the digital input contact to be dry or wet by the switch. The details of the switch will be shown on the product label for the user's reference. The MAC address of the module is also on the label.

### Initial Switch

There is a DIP switch on the back of the device for restoring the WISE module to the default factory communication settings. If the user forgets the IP address of the WISE module, or wireless communication password they can configure this switch to the OFF position for the default factory communication settings.

### New Mounting Kit

WISE modules come with a new type of mounting kit. Users can use this kit for DIN-rail and wall mounting (panel mount). The new mounting kit provides fast mounting for to DIN-rails, users just need to switch the hook for the mounting kit to lock or release the module on the DIN-rail. WISE modules also support stack mounting as used on Advantech's other I/O modules.

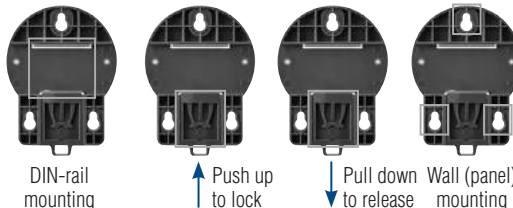

## Power Supply



### Power Input

The WISE-4000 is designed for a standard industrial unregulated 24 V<sub>DC</sub> power supply. For further applications, it can also accept 10–30 V<sub>DC</sub> of power input, 200mV peak to peak of power ripple.




### USB Power Input (WISE-4012E Only)

For the IoT Developer Kit, easy power is a very important feature to quickly experience the module. So a micro-B USB power connector is provided for powering the WISE module via the computer's USB port, mobile device's USB power adapter, or USB power bank. (WISE modules are not battery chargeable, the USB port is only for powering up the module, not for USB communication)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Selection Guide

Preliminary

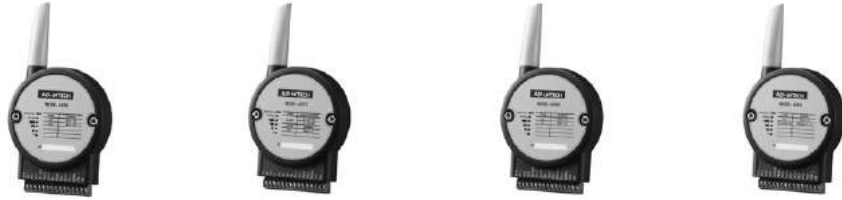

Model		WISE-4012E	WISE-4012	WISE-4050	WISE-4060
Description		6-ch Input/Output Wireless IoT Ethernet I/O Module for IoT Developer	4-ch Universal Input and 2-ch Relay Output Wireless IoT Ethernet I/O Module	4-ch Digital Input and 4-ch Digital Output Wireless IoT Ethernet I/O Module	4-ch Digital Input and 4-ch Relay Output Wireless IoT Ethernet I/O Module
Wireless Network	IEEE Standard	IEEE 802.11b/g/n			
	Frequency Band	2.4GHz			
	Network Mode	Limited AP, Infrastructure			
	Wireless Security	WPA2 Personal, WPA2 Enterprise			
	Antenna Connector	Reverse SMA			
	Outdoor Range	100m			
Analog I/O	Channels	2	4	-	-
	Resolution	12-bit	16-bit	-	-
	Accuracy	1% of FSR	0.1% of FSR	-	-
	Sampling Rate	10Hz/Channel	100Hz/Total	-	-
	Voltage Input	0~10V	0~5V, 0~10V, ±5V, ±10V	-	-
	Current Input	-	0~20mA, 4~20mA	-	-
	Digital Input	-	Dry Contact	-	-
Digital I/O	Input Channel	2 (Dry Contact)	-	4	4
	Output Channel	2 (Form A Relay)	2 (Form A Power Relay)	4	4 (Form A Power Relay)
	Counter Input	-	-	3k Hz	3k Hz
	Frequency Input	-	-	3k Hz	3k Hz
	Pulse Output	-	1 Hz	1k Hz	1 Hz
Isolation Protection		No	3,000 V <sub>rms</sub>	3,000 V <sub>rms</sub>	3,000 V <sub>rms</sub>
LED Indicator		Status, Comm, Mode, Wireless Signal			
Power Requirement		5V <sub>DC</sub> Micro-B USB	10~30V <sub>DC</sub> (24V <sub>DC</sub> Standard)		
Power Consumption		2.5W @ 24V <sub>DC</sub>	2.5W @ 24V <sub>DC</sub>	2.2W @ 24V <sub>DC</sub>	2.5W @ 24V <sub>DC</sub>
Operating Temperature		-25 ~ 70°C (-13~158°F)			
Storage Temperature		-40 ~ 85°C (-40~185°F)			
Operating Humidity		20 ~ 95% RH (non-condensing)			
Storage Humidity		0 ~ 95% RH (non-condensing)			
Page		15-12	15-11	15-11	15-11

# WISE-4012

# WISE-4050

# WISE-4060

4-ch Universal Input and 2-ch Relay Output  
IoT Wireless I/O Module

4-ch Digital Input and 4-ch Digital Output  
IoT Wireless I/O Module

4-ch Digital Input and 4-ch Relay Output  
IoT Wireless I/O Module



WISE-4012 CE FCC R&TTE SRRCC RoHS

## Specifications

### Universal Input

- Channel 4
- Resolution 16-bit
- Sampling Rate 100 Hz (Total)
- Accuracy  $\pm 0.1\%$  of FSR (Voltage, Current)
- Input Type and Range
  - Analog Input 0~10 V, 0~20 mA, 4~20mA
  - Digital Input Dry Contact
  - 0: Open,
  - 1: Close to GND
- Burn-out Detection Yes (4~20 mA only)
- Supports Data Scaling and Averaging

### Relay Output

- Channels 2 (Form A)
- Contact Rating 250 V<sub>AC</sub> @ 5 A (Resistive Load) 30 V<sub>DC</sub> @ 3A
- Isolation 3,000 V<sub>rms</sub> (b/w coil & contacts)
- Relay On Time 10 ms
- Relay Off Time 5 ms
- Insulation Resistance 1 G $\Omega$  min. @ 500 V<sub>DC</sub>
- Maximum Switching 60 operations/minute
- Supports 1 Hz Pulse Output
- Supports High-to-Low and Low-to-High Delay Output



WISE-4050 CE FCC R&TTE SRRCC RoHS

## Specifications

### Digital Input

- Channels 4
- Logic level Dry Contact
- 0: Open
- 1: Close to DI COM
- Wet Contact
- 0: 0 ~ 3 V<sub>DC</sub>
- 1: 10 ~ 30 V<sub>DC</sub> (3 mA min.)
- Isolation 3,000 V<sub>rms</sub>
- Support 32-bit Counter Input Function (Maximum signal frequency 3 kHz)
- Keep/Discard Counter Value when Power-off
- Support Frequency Input Function (Maximum frequency 3 kHz)
- Supports Inverted DI Status

### Digital Output

- Channels 4 (Open collector to 30 V, 500 mA max. for resistance load)
- Isolation 3,000 V<sub>rms</sub>
- Supports 1 kHz Pulse Output
- Supports High-to-Low and Low-to-High Delay Output



WISE-4060 CE FCC R&TTE SRRCC RoHS

## Specifications

### Digital Input

- Channels 4
- Logic level Dry Contact
- 0: Open
- 1: Close to DI COM
- Wet Contact
- 0: 0 ~ 3 V<sub>DC</sub>
- 1: 10 ~ 30 V<sub>DC</sub> (3 mA min.)
- Isolation 3,000 V<sub>rms</sub>
- Support 32-bit Counter Input Function (Maximum signal frequency 3 kHz)
- Keep/Discard Counter Value when Power-off
- Support Frequency Input Function (Maximum frequency 3 kHz)
- Supports Inverted DI Status

### Relay Output

- Channels 4 (Form A)
- Contact Rating 250 V<sub>AC</sub> @ 5 A (Resistive Load) 30 V<sub>DC</sub> @ 3A
- Isolation 3,000 V<sub>rms</sub> (b/w coil & contacts)
- Relay On Time 10 ms
- Relay Off Time 5 ms
- Insulation Resistance 1 G $\Omega$  min. @ 500 V<sub>DC</sub>
- Maximum Switching 60 operations/minute
- Supports 1 Hz Pulse Output
- Supports High-to-Low and Low-to-High Delay Output

## Common Specifications

### General

- WLAN IEEE 802.11b/g/n 2.4GHz
- Connectors Plug-in screw terminal block (I/O and power)
- Watchdog Timer System (1.6 second) and Communication (programmable)
- Certification CE, FCC, R&TTE, NCC, SRRCC, RoHS
- Dimensions (W x H x D) 80 x 139 x 25 mm
- Enclosure PC
- Mounting DIN 35 rail, wall, and stack

- Power Input 10 ~ 30 V<sub>DC</sub>
- Power Consumption WISE-4012: 2.0 W @ 24 V<sub>DC</sub>  
WISE-4050: 2.2 W @ 24 V<sub>DC</sub>  
WISE-4060: 2.5 W @ 24 V<sub>DC</sub>
- Power Reversal Protection
- Supports User Defined Modbus Address
- Supports Data Log Function Up to 10000 samples with RTC time stamp
- Supported Protocols Modbus/TCP, TCP/IP, UDP, DHCP, and HTTP
- Supports RESTful Web API in JSON format
- Supports Web Server in HTML5 with JavaScript & CSS3
- Supports System Configuration Backup and User Access Control

### Environment

- Operating Temperature -25 ~ 70°C (-13~158°F)
- Storage Temperature -40 ~ 85°C (-40~185°F)
- Operating Humidity 20 ~ 95% RH (non-condensing) 0 ~ 95% RH (non-condensing)
- Storage Humidity

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules

16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# WISE-4012E

## 6-ch Input/Output IoT Wireless I/O Module for IoT Developers



### Features

- 2.4 GHz IEEE 802.11b/g/n WLAN
- 2-ch 0-10V Input, 2-ch DI, and 2-ch Relay Output
- Includes WebAccess with demo project for developer
- Includes extension board for simulating sensor status
- Includes micro USB cable for power input
- Supports Modbus/TCP with RESTful web service
- Supports wireless client and server mode that can be accessed directly without AP or router
- Supports mobile device web configuration with HTML5 without the platform limitation
- Supports file-based cloud storage (preliminary) and local logging with time stamp

### Introduction

The Advantech WISE IoT Developer Kit is a complete hardware & software solution to help users develop IoT applications and simulate their projects in the simplest way. The WISE IoT Developer Kit provides everything you need to get going: a WISE-4012E 6-ch universal input or output wireless Ethernet I/O module, and developer kit including: WebAccess 8.0 with open interfaces for intelligent application developer, extension board for simulating sensor status, a micro USB cable for power input, and a screwdriver for wiring. The WISE-4012E has an integrated Wi-Fi interface with AP mode and web configuration which can be accessed by mobile device directly. Data can be logged in the I/O module and then automatically pushed to the file-based cloud.



### Product Concept: Data A-P-P



Data Acquisition




Data Processing



Data Publishing


### IoT Developer Kit

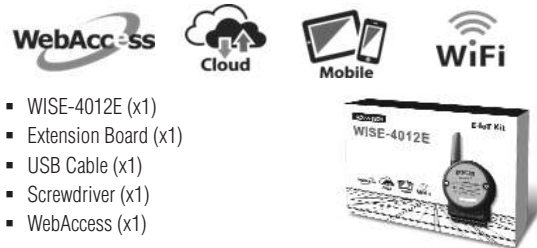

- WISE-4012E (x1)
- Extension Board (x1)
- USB Cable (x1)
- Screwdriver (x1)
- WebAccess (x1)


### Application Scenario 1

Connect to end devices

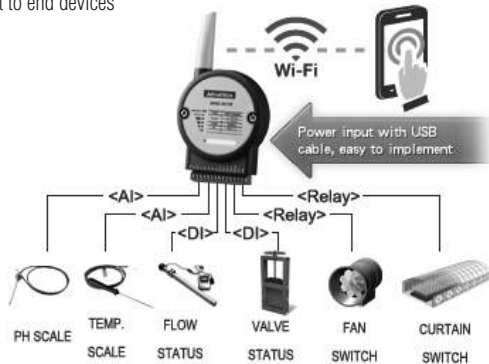

### Application Scenario 2

Connect to an extension board

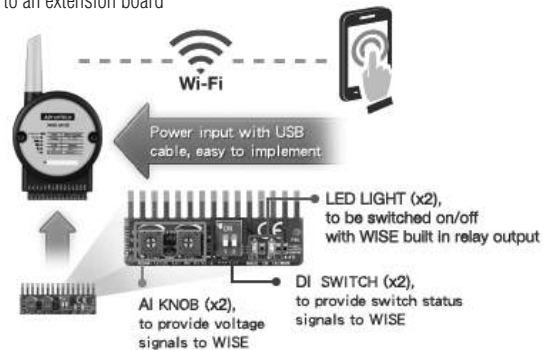

## Specifications

### Voltage Input

- **Channel** 2
- **Resolution** 12-bit
- **Sampling Rate** 10 Hz (Total)
- **Accuracy**  $\pm 0.1 V_{DC}$
- **Input Type and Range** 0~10 V
- **Input Impedance** 100 k $\Omega$

### Digital Input

- **Channels** 2
- **Logic level** Dry Contact 0: Open  
1: Close to GND
- **Supports 3 kHz Counter Input (32-bit + 1-bit overflow)**
- **Keep/Discard Counter Value when Power-off**
- **Supports 3 kHz Frequency Input**
- **Supports Inverted DI Status**

### Relay Output

- **Channels** 2 (Form A)
- **Contact Rating** 120 V<sub>AC</sub> @ 0.5 A  
(Resistive Load) 30 V<sub>DC</sub> @ 1 A
- **Isolation** (b/w coil & contacts) 1,500 V<sub>rms</sub>
- **Relay On Time** 10 ms
- **Relay Off Time** 7 ms
- **Insulation Resistance** 1 G $\Omega$  min. @ 500 V<sub>DC</sub>
- **Maximum Switching** 60 operations/minute
- **Supports Pulse Output**
- **Supports High-to-Low and Low-to-High Delay Output**

### Environment

- **Operating Temperature** -25 ~ 70°C (-13~158°F)
- **Storage Temperature** -40 ~ 85°C (-40~185°F)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

### General

- **WLAN** IEEE 802.11b/g/n 2.4GHz
- **Connectors** Plug-in screw terminal block (I/O and power)
- **Watchdog Timer** System (1.6 second) and Communication (programmable)
- **Certification** CE, FCC, R&TTE, NCC, SRRC, RoHS
- **Dimensions (W x H x D)** 80 x 139 x 25 mm
- **Enclosure** PC
- **Power Input** Micro USB 5 V<sub>DC</sub>
- **Power Consumption** 1.5 W @ 5 V<sub>DC</sub>
- **Supports User Defined Modbus Address**
- **Supports Data Log Function** Up to 10000 samples with time stamp
- **Supported Protocols** Modbus/TCP, TCP/IP, UDP, DHCP, and HTTP
- **Supports RESTful Web API in JSON format**
- **Supports Web Server in HTML5 with JavaScript & CSS3**
- **Supports System Configuration Backup and User Access Control**

## Ordering Information

- **WISE-4012E** 6-ch Input/Output IoT Wireless I/O Module for IoT Developer

## WebAccess 8.0

### WebAccess Cloud Architecture

WebAccess is a 100% web based HMI and SCADA software with private cloud software architecture. WebAccess can provide large equipment vendors, SIs, and Enterprises access to and manipulation of centralized data to configure, change/update, or monitor their equipment, projects, and systems all over the world using a standard web browser. Also, all the engineering works, such as: database configuration, graphics drawing and system management and the troubleshooting can be operated remotely. This can significantly increase the efficiency of maintenance operations and reduce maintenance costs.

### Business Intelligence Dashboard

WebAccess 8.0 provides an HTML5 based Dashboard as the next generation of WebAccess HMI. System integrators can use Dashboard Editor to create the customized information page by using analysis charts and diagrams which are called widgets. Ample widgets have been included in the built-in widget library, such as trends, bars, alarm summary, maps... etc. After the dashboard screens have been created, end user can view the data by Dashboard Viewer in different platforms, like Explorer, Safari, Chrome, and Firefox for a seamless viewing experience across PCs, Macs, tablets and smartphones.

### Open Interfaces

WebAccess has three interfaces for different uses. First, WebAccess provides a Web Service interface for partners to integrate WebAccess data into APPs or application system. Second, a pluggable widget interface has been opened for programmer to develop their widget and run on WebAccess Dashboard. Last, WebAccess API, a DLL interface for programmer to access WebAccess platform and develop Windows applications. With these interfaces, WebAccess can act as an IoT platform for partners to develop IoT applications in various vertical markets.

### Google Maps and GPS Tracking Integration

WebAccess integrates real-time data on each geographical site with Google Maps and GPS location tracking. For remote monitoring, users can intuitively view the current energy consumption on each building, production rate on each field or traffic flow on the highway together with alarm status. By right-clicking on Google Maps or entering the coordinate of the target, users can create a marker for the target and associate the real-time data of three sites with a display label. Furthermore, this function also integrates with GPS modules to track the location of the marker in Google Maps and allows it to be used in vehicle systems.

### Ample Driver Support

WebAccess supports hundreds of devices. In addition to Advantech I/Os and controllers, WebAccess also supports all major PLCs, controllers and I/Os, like Allen Bradley, Siemens, LonWorks, Mitsubishi, Beckhoff, Yokogawa etc. WebAccess can easily integrate all devices in one SCADA. All of these device drivers are integrated into WebAccess and free of charge. For a complete list of WebAccess drivers, refer to [webaccess.advantech.com](http://webaccess.advantech.com).

### Distributed SCADA Architecture with Central Database Server

SCADA nodes run independent of any other node. Each SCADA node communicates to automation equipment using communication drivers supplied with Advantech WebAccess. The Project Node is a centralized database server of configuration data. A copy of the database and graphics of all SCADA nodes is kept on the Project Node. The historical data is also stored in the database in project node.

### Open Data Connectivity


Advantech WebAccess exchanges online data with 3rd party software in real-time by supporting OPC UA/DA, DDE, Modbus and BACnet Server/Client. It supports SQL, Oracle, MySQL, and MS Access for offline data sharing.

### Software Requirements

- **Operating System** Windows XP (SCADA Node Only), Windows 7 SP1, Windows 8 Professional, Windows Server 2008 R2 or later
- **Hardware** Intel Atom or Celeron. Dual Core processors or higher recommended  
2GB RAM minimum, more recommended  
30GB or more free disk space



# M2M I/O Modules Overview

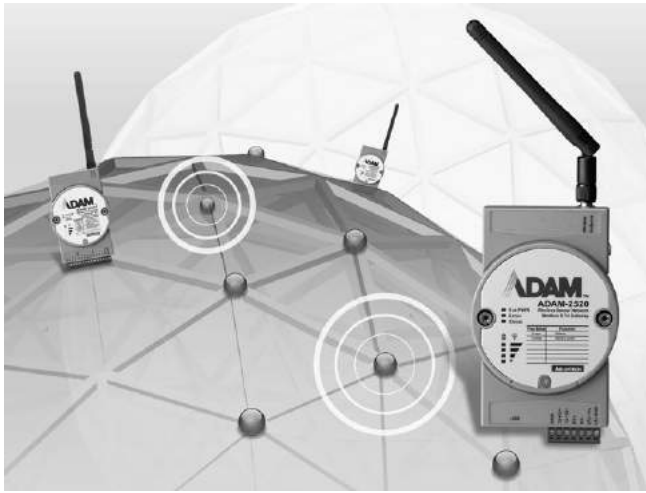

## Introduction


The Internet of Things (IoT) is a new design paradigm, rapidly gaining wide global attention from academia, industry, and government. The fundamental concept is to emphasize ubiquitous computing among global networked machines and physical objects, denoted as things, such as sensors, actuators, machine-to-machine (M2M) devices, wireless sensor network (WSN) devices etc..

## Machine To Machine (M2M) Technology

Machine To Machine (M2M) technology is now sufficiently mature that large numbers of companies are confident enough in its potential to launch their own projects that include innovation in services and products. The use of M2M technology is particularly well-suited to interaction with a large number of remote, and possibly mobile, devices, usually acting as the interface with an end-user.

## Wireless Sensor Networks

The IoT is composed of four layers, an application layer, service layer, network layer and device layer. The application layer is the real application system, the service layer is now defined as cloud computing and the network layer is the wired/wireless network infrastructure. The device layer connects everything to the internet and is the key infrastructure of the IoT. One of the most important technologies is the Wireless Sensor Network, which is the wireless I/O and sensor solution/interface to collect and transmit analog/digital signals to the internet. The WSN is composed of two major parts; the wireless technology is based on IEEE 802.15.4 and the I/O technology. With different types of I/Os and sensors, signals can be measured in every situation. For instance, bridges can be measured through strain gauges, and buildings can be measured for energy usage. WSN is the next generation of wireless data acquisition solution.

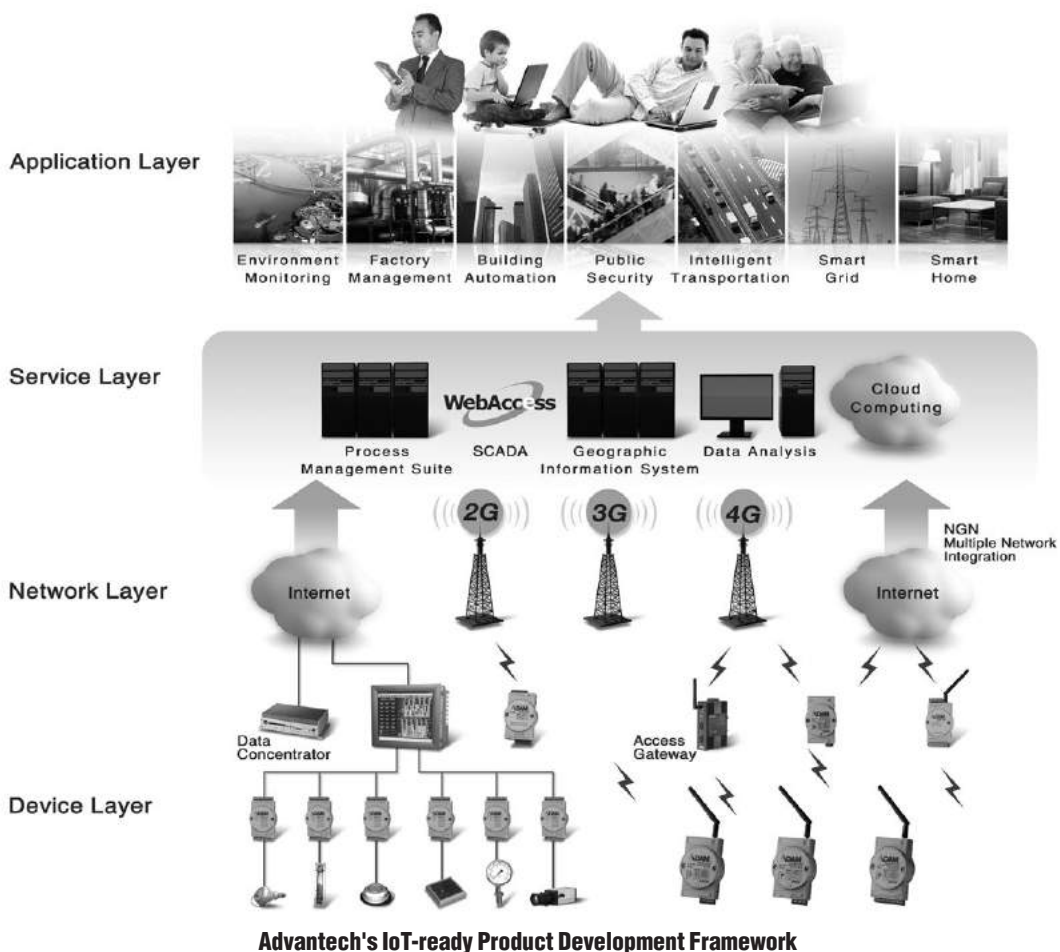




## IEEE 802.15.4

IEEE 802.15.4 is defined and maintained by the IEEE organization. The standard intends to offer fundamental lower network layers of low-rate wireless personal area networks (WPANs) which focuses on low-data rates, low-power consumption ubiquitous wireless communication between devices. IEEE 802.15.4 conforming devices may use one of three possible unlicensed frequency bands for operation:

- 868.0-868.6 MHz: Europe, allows one communication channel.
- 902-928 MHz: North America, up to ten channels, extended to thirty.
- 2400-2483.5 MHz: worldwide use, up to sixteen channels.

IEEE 802.15.4 defines the Wireless Medium Access Control (MAC) and Physical Layer (PHY) for WPANs only, upper layer stacks can be implemented by users for variety of applications. One example of the known protocols is ZigBee.

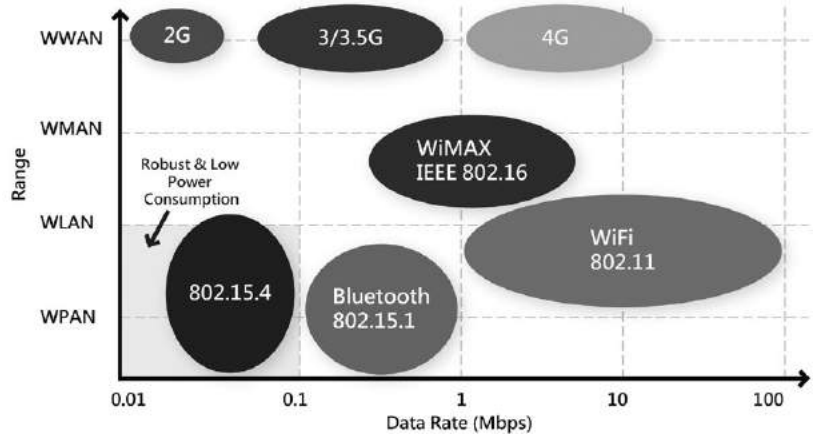

## Network Topologies

Wireless Sensor Networks (WSN) can be built using a few or a lot of “nodes”. Each node can be connected to one or several sensors; the network topology is composed of three typical components, PAN Coordinator/Gateway, Router and End Device (or called End Node), which can be built to Star, Tree and Mesh network topologies.

### Three components of a wireless sensor network

#### ▪ PAN Coordinator/Gateway

A coordinator is the data collection center and also exists as a gateway to transfer and translate wireless data to other interfaces.

#### ▪ Router


A router enhances the wireless signal and a wireless router is used to select the optimal path for wireless communication between the coordinator and the end nodes.

#### ▪ End Node/Device

An end node is a wireless remote I/O for data acquisition.

Data is acquired from sensors or devices which are then transmitted through it.


The end node communicates with the coordinator directly or via a router to a coordinator.

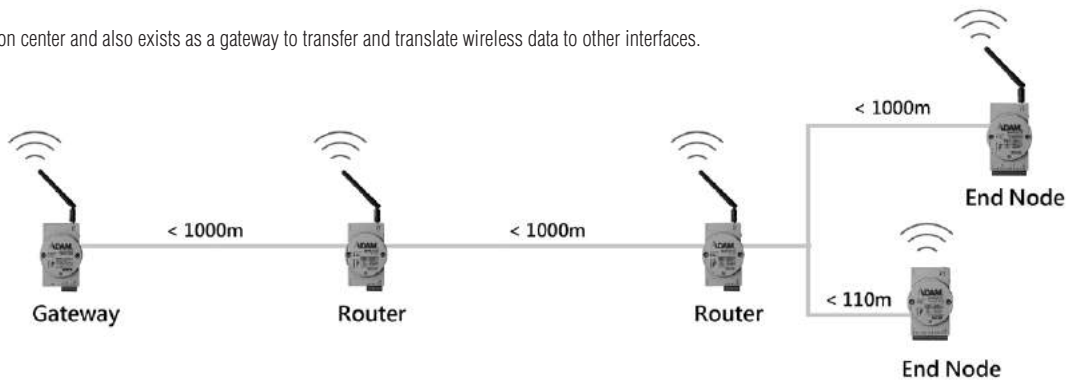

### Three Network Topologies

#### ▪ Star Topology


It's the simplest way to construct a network with a gateway and end nodes. The benefit of the topology is that it operates as a low-latency communication network. But has the limitation of low wireless signal coverage.



● WSN End Node  
● WSN Gateway

#### ▪ Tree Topology

Using a tree topology, the network can be extended through routers making it flexible enough to locate the end nodes in specified locations. Latency is increased with the number of routers hopping.



● WSN End Node  
● WSN Gateway  
● WSN Router


#### ▪ Mesh Topology

When routers connect to each other in a mesh topology they have the following benefits.

1. Wide network coverage.
2. Robust routing mechanism with self-healing.
3. Multi-hopping mechanism.

But also the following limitations:

1. More power consumption than the other topologies.
2. Routing path and hop counts affect the latency and performance.



● WSN End Node  
● WSN Gateway  
● WSN Router

## Comparison of Topologies

Topology	Star	Tree	Mesh
Power Consumption	Low	Medium	High
Installation Fee	Low	Medium	High
Network Coverage	Small	Large	Large
Network Capability	Small	Large	Large
Reliability	Low	Low	High

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards


# M2M I/O Modules Overview

## ADAM-2000 Series

Advantech provides ADAM-2000 series industrial grade Wireless Sensor Network I/O solutions for low-power consumption, cost-efficient and reliable networking for remote monitoring applications. It utilizes IEEE 802.15.4 wireless technology and supports star, tree and mesh topologies. Once the modules are configured, the ADAM-2000 series will automatically construct the most suitable network topology for your control system without further configuration.

The ADAM-2000 series contains several models, including coordinator (gateway), router, analog input, digital input, and sensor modules. To perform as a Wireless Sensor Network, a gateway ADAM-2520Z is essential for collecting data from end nodes. With the Modbus RTU protocol, the ADAM-2000 series can be easily integrated into any SCADA or Modbus RTU compliant system.

- **ADAM-2520Z:** Wireless Modbus RTU Gateway
- **ADAM-2510Z:** Wireless Router
- **ADAM-2017PZ:** Wireless 6-ch Analog Input Node with Power Amplifier
- **ADAM-2031Z:** Wireless Temperature & Humidity Sensor Node
- **ADAM-2051Z:** Wireless Sensor Network 8-ch Digital Input Node
- **ADAM-2051PZ:** Wireless Sensor Network 8-ch Digital Input Node with Power Amplifier

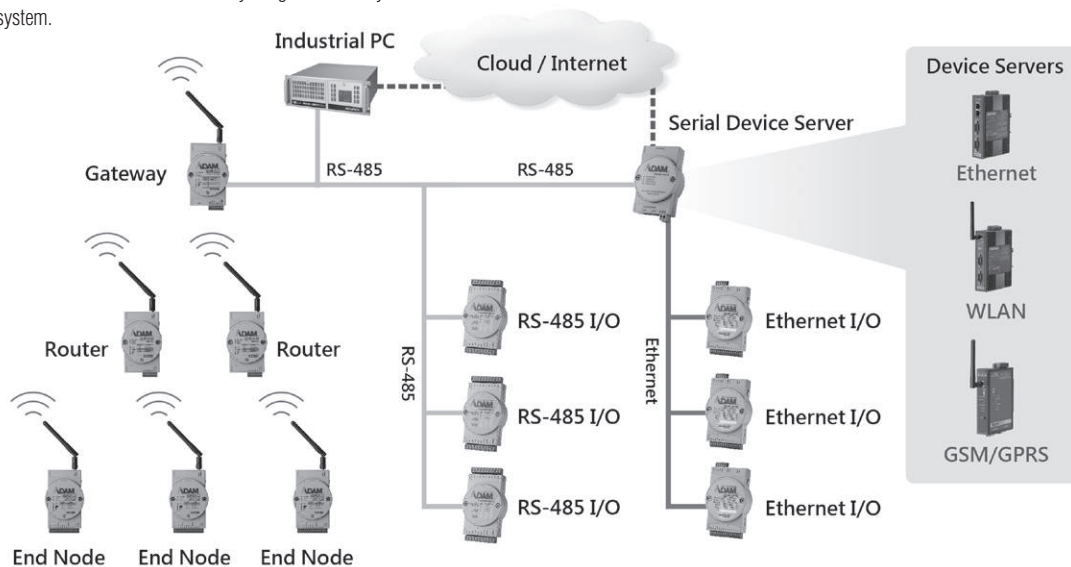

## Features

Advantech's ADAM-2000 Series are wireless I/O devices designed for industrial systems and applications.



2.4GHz IEEE 802.15.4

### Global Deployable ISM 2.4GHz IEEE 802.15.4 Standard

The standard has the following benefits.


- With the global deployable ISM 2.4 GHz RF band, the ADAM-2000 series can be installed worldwide.
- Compared to a wired solution, wireless technology makes the network easily extendible and can be installed in almost any location, especially in distributed construction applications.
- Enhances transmission power and high gain antennas can expand network coverage.
- Enlarges highly effective network structure to reduce development costs and maintainable complexity in harsh applications.
- Provides self-forming and self-healing ability to cope with communication failures or node failures conditions.
- Low data rates and low duty cycles make it possible to act as standalone devices with batteries for a long term operation without maintenance.



Low-power Consumption

### Low Power Consumption Design

The ADAM-2000 series is designed for applications that require long-time operation without maintenance. Therefore power consumption is taken into consideration during its design. The ADAM-2000 series not only follows the IEEE 802.15.4 standard for low-power consumption wireless communication, but also optimizes the peripheral hardware and firmware design to achieve uA-level power consumption. This allows ADAM-2000 input/output and sensor modules to be powered by 2 AA Alkaline batteries\*.

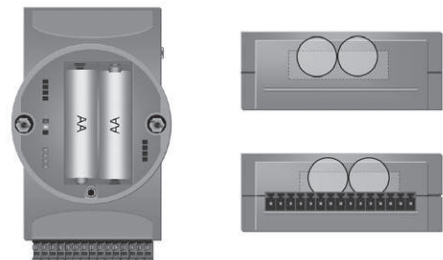

### Modbus Industrial Communication and I/O Interfaces

The popular industrial communication protocol Modbus makes the ADAM-2000 series easy to integrate with industrial systems and is also compliant with ADAM-4000 and ADAM-6000 wired solutions. Multiple I/O interface selection provides users plentiful sensor options.

\* We suggest using Energizer L91 Ultimate Lithium AA batteries.  
\* Only the ADAM-2031Z and ADAM-2051Z support low power consumption. For other modules batteries can still be used as back-up power.



SCADA Software Support


## Advantech and Industrial SCADA Software Support

The ADAM-2000 series can be configured through the Adam/Apax .NET Utility. Only a few steps are required, and wireless networks can be built up quickly. Due to the Modbus protocol design, the ADAM-2000 series can support any third-party SCADA software and HMI, including Advantech SCADA software, WebAccess.




## Ensured Data Design

The ADAM-2000 family has an acking mechanism feature to ensure data communicating processes can be successfully transferred between the coordinator and end device before device entering sleep mode.

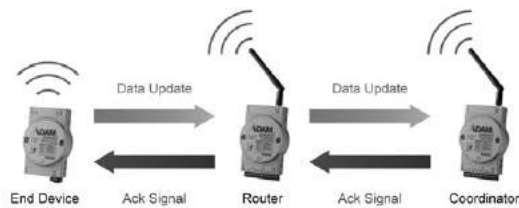


## Over The Air (OTA) Firmware Update

The ADAM-2000 modules with strengthened firmware maintenance technique, which integrates a stable backup buffer and secure mechanism allowing wireless module firmware updates during operation.

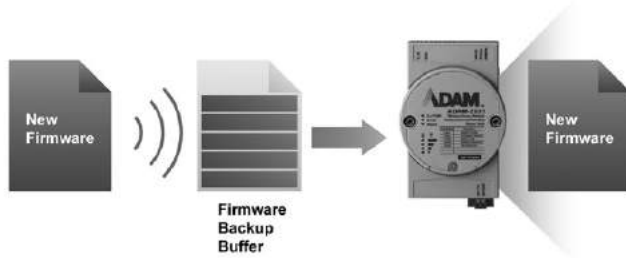


## Event Triggering

ADAM-2000 digital input modules are empowered with an Event Triggering function. When receiving DI status change, ADAM-2000 digital input modules will wake up immediately from sleep mode and send I/O data to a coordinator. This avoids the missing of events during operation.

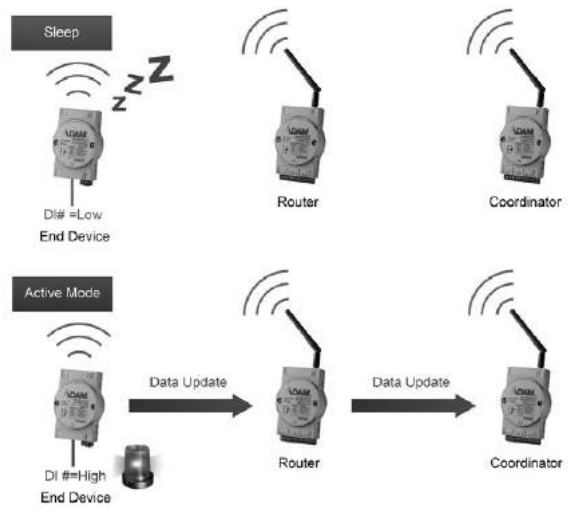

## Site Survey Monitoring

ADAM-2000 modules provide a useful site survey tool in Adam/Apax .Net utility to help users to achieve network setup and major remote maintenance tasks to avoid try and error network processes. The topology monitoring of an ADAM-2000 network adopts an easy place and drag action allowing users to choose the working field image for monitoring backgrounds, and lists the relations among ADAM-2000 modules then illustrated in a single page. Through site survey monitoring, users can comprehensively know each device location, current status, and information in customized background.

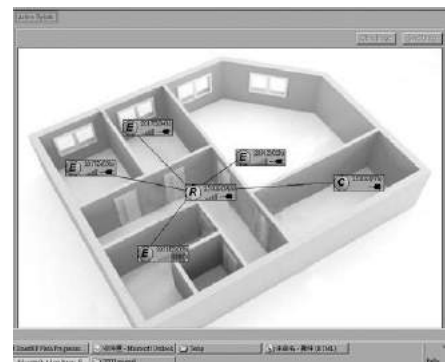

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# M2M I/O Modules Selection Guide



Model		ADAM-2510Z	ADAM-2520Z	ADAM-2031Z
Description		Wireless Router	Wireless Modbus RTU Gateway	Wireless Temperature & Humidity Sensor Node
Wireless Network	IEEE Standard	IEEE 802.15.4		
	Modulation Type	DSSS (OQPSK)		
	Frequency Band	ISM 2.4 GHz (2.4 GHz ~ 2.4835 GHz)		
	Channels	11 - 26		
	Topology	Star / Tree / Mesh		
	Transmit Power	19 ± 1 dBm	19 ± 1 dBm	3 ± 1 dBm
	Receiver Sensitivity	-97 dBm		
	Outdoor Range *	1000 m (with 2 dBi Antenna)		110 m
	RF Data Rate	250 Kbps		
Function	Router	Coordinator	End Device	
Network	Interface	-	RS-485/USB	-
	Communication Protocol	-	Modbus RTU	-
Analog Input	Resolution	-	-	-
	Channels	-	-	-
	Sampling Rate	-	-	-
	Voltage Input	-	-	-
	Current Input	-	-	-
Thermocouple Type		-	-	-
Digital Input and Digital Output	Input Channels	-	-	-
	Output Channels	-	-	-
Sensor Input	Temperature	-	-	-20°C ~ 70°C (-4°F ~ 157.9°F)
	Humidity	-	-	0 ~ 100% RH
	CO2	-	-	-
LED Indicator		External PWR/Error/Status/Level Index		
Power Requirement		Power Input: Unregulated 10 ~ 30 V <sub>DC</sub> Battery Input: 2 x AA Alkaline 3 V <sub>DC</sub>		
Operating Temperature	External Power	-20°C ~ 70°C (-4°F ~ 157.9°F)		
	Battery Power	0°C ~ 50°C (32°F ~ 122°F)		
Power Consumption	Power Supply	0.8 W @ 24 V <sub>DC</sub>		0.3 W @ 24 V <sub>DC</sub>
	USB	-	0.5 W @ 5 V <sub>DC</sub>	-
	Battery AA * 2	0.3 W @ 3 V <sub>DC</sub>		420 uW @ 3 V <sub>DC</sub> (1 minute Tx Interval) 240 uW @ 3 V <sub>DC</sub> (2 minute Tx Interval) 150 uW @ 3 V <sub>DC</sub> (5 minute Tx Interval)
Storage Temperature		-40°C~ 85°C (-40°F ~ 184°F)		
Operating Humidity		20~95% RH		
Storage Humidity		0~95% RH		
Page		15-20	15-20	15-21

## M2M I/O Modules Selection Guide

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

**NEW**



ADAM-2017PZ	ADAM-2051Z	ADAM-2051PZ
Wireless 6-ch Analog Input Node with Power Amplifier	Wireless 8-ch Digital Input Node	Wireless 8-ch Digital Input Node with Power Amplifier
	IEEE 802.15.4	
	DSSS (OQPSK)	
	ISM 2.4 GHz (2.4 GHz ~ 2.4835 GHz)	
	11 - 26	
	Star / Tree / Mesh	
15 ± 1 dBm	3 ± 1 dBm	19 ± 1 dBm
	-97 dBm	
1000 m	110 m	1000 m
	250 Kbps	
	End Device	
-	-	-
-	-	-
16-bit	-	-
6 Non-Isolation (Differential)	-	-
12 samples/second (total)	-	-
±150mV,±500mV ±1V,±5V,±10V	-	-
±20mA,0~20mA,4~20 mA	-	-
-	-	-
-	8	8
-	-	-
-	-	-
-	-	-
	External PWR/Error/Status/Level Index	
	Power Input:Unregulated 10 ~ 30 V <sub>DC</sub>	
	Battery Input: 2 x AA Alkaline 3 V <sub>DC</sub>	
	-20°C ~ 70°C (-4°F ~ 157.9°F)	
	0°C ~ 50°C (32°F ~ 122°F)	
0.5 W @ 24 V <sub>DC</sub>		0.3 W @ 24 V <sub>DC</sub>
-	-	-
	380 uW @ 3 V <sub>DC</sub> (1 minute Tx Interval)	
	220 uW @ 3 V <sub>DC</sub> (2 minute Tx Interval)	
	130 uW @ 3 V <sub>DC</sub> (5 minute Tx Interval)	
	-40°C~ 85°C (-40°F ~ 184°F)	
	20~95% RH	
	0~95% RH	
15-21	15-22	15-22

\* Outdoor Range is estimated with line of sight, and please perform site survey to determine the set up range of wireless network.  
 \*\* ADAM-2017PZ's power consumption will be higher than other end devices to shorten the battery life, therefore, we suggest providing external power for its main power and batteries for power backup.

# ADAM-2510Z

# ADAM-2520Z

## Wireless Router

## Wireless Modbus RTU Gateway



ADAM-2510Z



### Features

- Easy maintenance and field installation
- Low duty wireless communication
- Smart and simple indicator design
- Extends network range and coverage

### Specifications

#### Wireless Communication

- **IEEE Standard** IEEE 802.15.4
- **Modulation Type** DSSS (OQPSK)
- **Frequency Band** ISM 2.4 GHz (2.4 GHz ~ 2.4835 GHz)
- **Channels** 11 - 26
- **RF Data Rate** 250 Kbps
- **Transmit Power** Typ. 19 ± 1 dBm
- **Receiver Sensitivity** -97 dBm
- **Topology** Star / Tree / Mesh
- **Outdoor Range** 1000 m with line of sight (with 2 dBi Antenna)
- **Function** Router

#### General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG)
- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Battery Input** 2 x AA Alkaline
- **Power Consumption** 0.8 W @ 24 V<sub>DC</sub>  
0.3 W @ 3 V<sub>DC</sub> (Battery AA \* 2)

### Common Specifications

#### Environment

- **Operating Temperature**  
External Power -20°C ~ 70°C (-4°F ~ 157.9°F)  
Battery Power 0°C ~ 50°C (32°F ~ 122°F)
- **Storage Temperature** -40°C ~ 85°C (-40°F ~ 184°F)
- **Operating Humidity** 20~95% RH
- **Storage Humidity** 0~95% RH

### Ordering Information

- **ADAM-2510Z** Wireless Router



ADAM-2520Z



### Features

- 2.4 GHz IEEE 802.15.4 compliant RF
- Provides RS-422/485 and USB interfaces
- Multiple power input design

### Specifications

#### Wireless Communication

- **IEEE Standard** IEEE 802.15.4
- **Modulation Type** DSSS (OQPSK)
- **Frequency Band** ISM 2.4 GHz (2.4 GHz ~ 2.4835 GHz)
- **Channels** 11 - 26
- **RF Data Rate** 250 Kbps
- **Transmit Power** Typ. 19 ± 1 dBm
- **Receiver Sensitivity** -97 dBm
- **Topology** Star / Tree / Mesh
- **Outdoor Range** 1000 m with line of sight (with 2 dBi Antenna)
- **Network Capacity** 32 nodes (Routers & End Devices)\*

#### Range Extenders

- **Function** Maximum 5 Hops

#### Coordinator

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG)  
1 x USB-type A connector (type A to B cable provided)
- **Protocol** Modbus RTU
- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Battery Input** 2 x AA Alkaline
- **Power Consumption** 0.8 W @ 24 V<sub>DC</sub>  
0.5 W @ 5 V<sub>DC</sub> (USB)  
0.3 W @ 3 V<sub>DC</sub> (Battery AA \* 2)

### Common Specifications

#### Environment

- **Operating Temperature**  
External Power -20°C ~ 70°C (-4°F ~ 157.9°F)  
Battery Power 0°C ~ 50°C (32°F ~ 122°F)
- **Storage Temperature** -40°C ~ 85°C (-40°F ~ 184°F)
- **Operating Humidity** 20~95% RH
- **Storage Humidity** 0~95% RH

### Ordering Information

- **ADAM-2520Z** Wireless Modbus RTU Gateway

# ADAM-2031Z

# ADAM-2017PZ

## Wireless Temperature & Humidity Sensor Node

## Wireless 6-ch Analog Input Node with Power Amplifier



ADAM-2031Z



### Features

- IEEE 802.15.4 Wireless Standard
- Supports Star/Tree/Mesh Network Topologies
- Modbus Communication Protocol
- Low Power Consumption
- LED Indicators
- Embedded Sensor

### Specifications

#### Temperature Sensor Input

- Operating Range** -20°C ~ 70°C (-4°F ~ 157.9°F)
- Resolution** 0.02°C (0.04°F)
- Accuracy** ±2.0°C (Battery Mode) ±1.0°C @ 25~40°C
- Response Rate** ±1°C/min.
- Long Term Drift** < 0.04°C/Year (0.07°F/Year)

#### Humidity Sensor Input

- Operating Range** 0 ~ 100% RH
- Resolution** 0.15% RH
- Accuracy** ±8.0% RH (Battery Mode) ±6.0% RH @ 40~60% RH
- Response Time** 8 seconds (Achieving 63% of a step function)
- Long Term Drift** 0.5% RH/Year

### Ordering Information

- ADAM-2031Z Wireless Temperature & Humidity Sensor Node



ADAM-2017PZ



### Features

- IEEE 802.15.4 Wireless Standard
- Supports Star/Tree/Mesh Network Topologies
- Modbus Communication Protocol
- LED Indicators

### Specifications

#### Analog Input

- Channels** 6 Non-Isolation (Differential)
- Input Max Voltage** +/-15V
- Common Mode Volts** 10 V<sub>DC</sub>
- Input Impedance** >10 MΩ (Voltage), 120Ω (Current)
- Input Type** mV, V, mA
- Input Range** ±150mV, ±500mV, ±1V, ±5V, ±10V, ±20mA, 0~20mA, 4~20 mA
- Accuracy** Voltage: +/-0.1% or better (Current) at 25°C Current: +/-0.2% or better (Current) at 25°C
- Span Drift** ±25 ppm/°C
- Zero Drift** ±6 μV/°C
- Resolution** 16-bit
- Sampling Rate** 12 samples/second (total)
- CMR @ 50/60 Hz** 100 dB
- NMR @ 50/60 Hz** 65 dB

### Ordering Information

- ADAM-2017PZ Wireless 6-ch Analog Input Node with Power Amplifier

### Common Specifications

#### Wireless Communication

- IEEE Standard** IEEE 802.15.4
- Modulation Type** DSSS (OQPSK)
- Frequency Band** ISM 2.4 GHz (2.4 GHz ~ 2.4835 GHz)
- Channels** 11 - 26
- RF Data Rate** 250 Kbps
- Transmit Power** 3 ± 1 dBm (ADAM-2031Z) 15 ± 1dBm (ADAM-2017PZ)
- Receiver Sensitivity** -97 dBm
- Topologies** Star / Tree / Mesh
- Outdoor Range** 110 m with line of sight (ADAM-2031Z) 1000 m with line of sight (ADAM-2017PZ)
- Function** End Device

#### General

- Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG)
- Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- Battery Input** 2 x AA Alkaline
- Power Consumption** 0.3 W @ 24 V<sub>DC</sub> Battery AA \* 2 420 uW @ 3 V<sub>DC</sub> (1 minute Tx Interval) 240 uW @ 3 V<sub>DC</sub> (2 minute Tx Interval) 150 uW @ 3 V<sub>DC</sub> (5 minute Tx Interval)

#### Environment

- Operating Temperature** External Power -20°C ~ 70°C (-4°F ~ 157.9°F) Battery Power 0°C ~ 50°C (32°F ~ 122°F)
- Storage Temperature** -40°C ~ 85°C (-40°F ~ 184°F)
- Operating Humidity** 20~95% RH
- Storage Humidity** 0~95% RH

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-2051Z

# ADAM-2051PZ

## Wireless Sensor Network 8-ch Digital Input Node

## Wireless Sensor Network 8-ch Digital Input Node with Power Amplifier



ADAM-2051Z



### Features

- IEEE 802.15.4 Wireless Standard
- Supports Star/Tree/Mesh Network Topologies
- Modbus Communication Protocol
- Low Power Consumption
- LED Indicators
- Event Triggering

### Specifications

#### Digital Input

- **Channels** 8
  - **Input Resistance** 10 K $\Omega$
  - **Input Level**
    - Dry contact: Logic level 0: Close to GND  
Logic level 1: Open
    - Wet contact: Logic level 0: 0-0.8 V max  
Logic level 1: 2.0 ~ 5.0 V
- (Note: The Digital Input Level 0 and 1 status can be inverted)

### Ordering Information

- **ADAM-2051Z\*** Wireless 8-ch Digital Input Node



ADAM-2051PZ



### Features

- IEEE 802.15.4 Wireless Standard
- Supports Star/Tree/Mesh Network Topologies
- Modbus Communication Protocol
- LED Indicators
- Event Triggering

### Specifications

#### Digital Input

- **Channels** 8
  - **Input Resistance** 10 K $\Omega$
  - **Input Level**
    - Dry contact: Logic level 0: Close to GND  
Logic level 1: Open
    - Wet contact: Logic level 0: 0-0.8 V max  
Logic level 1: 2.0 ~ 5.0 V
- (Note: The Digital Input Level 0 and 1 status can be inverted)

### Ordering Information

- **ADAM-2051PZ\*** Wireless 8-ch Digital Input Node with Power Amplifier

## Common Specifications

### Wireless Communication

- **IEEE Standard** IEEE 802.15.4
- **Modulation Type** DSSS (OQPSK)
- **Frequency Band** ISM 2.4 GHz  
(2.4 GHz ~ 2.4835 GHz)
- **Channels** 11 - 26
- **RF Data Rate** 250 Kbps
- **Transmit Power Typ.** 3  $\pm$  1 dBm (ADAM-2051Z)  
19  $\pm$  1 dBm (ADAM-2051PZ)
- **Receiver Sensitivity** -97 dBm
- **Topologies** Star / Tree / Mesh
- **Outdoor Range** 110 m with line of sight (ADAM-2051Z)  
1000 m with line of sight (ADAM-2051PZ)
- **Function** End Device

### General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG)
- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Battery Input** 2 x AA Alkaline
- **Power Consumption** 0.3 W @ 24 V<sub>DC</sub>  
(ADAM-2051Z/PZ) Battery AA \* 2  
380  $\mu$ W @ 3 V<sub>DC</sub> (1 minute Tx Interval)  
220  $\mu$ W @ 3 V<sub>DC</sub> (2 minute Tx Interval)  
130  $\mu$ W @ 3 V<sub>DC</sub> (5 minute Tx Interval)

### Environment

- **Operating Temperature**
  - External Power -20 $^{\circ}$ C ~ 70 $^{\circ}$ C (-4 $^{\circ}$ F ~ 157.9 $^{\circ}$ F)
  - Battery Power 0 $^{\circ}$ C ~ 50 $^{\circ}$ C (32 $^{\circ}$ F ~ 122 $^{\circ}$ F)
- **Storage Temperature** -20 $^{\circ}$ C ~ 70 $^{\circ}$ C (-4 $^{\circ}$ F ~ 157.9 $^{\circ}$ F)
- **Operating Humidity** 20~95% RH
- **Storage Humidity** 0~95% RH

\*If want to operate in a wider temperature (-40 $^{\circ}$ C~ 85 $^{\circ}$ C (-4 $^{\circ}$ F ~ 157.9 $^{\circ}$ F) ), contact our sales team.



# IoT Ethernet I/O Modules: ADAM-6000

## Ethernet I/O Modules

<b>ADAM-6000 Series</b>	Ethernet I/O System Introduction	<b>16-2</b>
<b>ADAM-6000 Features: GCL</b>		<b>16-3</b>
<b>ADAM-6000 Features: Peer-to-Peer</b>		<b>16-4</b>
<b>ADAM-6000 Series Selection Guide</b>		<b>16-5</b>
<b>ADAM-6015</b>	7-ch Isolated RTD Input Modbus TCP Module	
<b>ADAM-6017</b>	8-ch Isolated Analog Input Modbus TCP Module with 2-ch DO	<b>16-6</b>
<b>ADAM-6018</b>	8-ch Isolated Thermocouple Input Modbus TCP Module with 8-ch DO	
<b>ADAM-6022</b>	Ethernet-based Dual-loop PID Controller	
<b>ADAM-6024</b>	12-ch Isolated Universal Input/Output Modbus TCP Module	<b>16-7</b>
<b>ADAM-6050</b>	18-ch Isolated Digital I/O Modbus TCP Module	
<b>ADAM-6051</b>	14-ch Isolated Digital I/O Modbus TCP Module with 2-ch Counter	<b>16-8</b>
<b>ADAM-6052</b>	16-ch Source-type Isolated Digital I/O Modbus TCP Module	
<b>ADAM-6060</b>	6-ch Digital Input and 6-ch Relay Modbus TCP Module	
<b>ADAM-6066</b>	6-ch Digital Input and 6-ch Power Relay Modbus TCP Module	<b>16-9</b>

## ADAM-6000 Series Common Specifications

**16-9**

## Intelligent Ethernet I/O Modules

<b>ADAM-6200 Series</b>	Introduction	<b>16-10</b>
<b>ADAM-6200 Key Features</b>		<b>16-11</b>
<b>ADAM-6200 Series Selection Guide</b>		<b>16-12</b>
<b>ADAM-6217</b>	8-ch Isolated Analog Input Modbus TCP Module	
<b>ADAM-6218</b>	6-ch Thermocouple Input Modbus TCP Module	<b>16-13</b>
<b>ADAM-6224</b>	4-ch Isolated Analog Output Modbus TCP Module	
<b>ADAM-6250</b>	15-ch Isolated Digital I/O Modbus TCP Module	
<b>ADAM-6251</b>	16-ch Isolated Digital Input Modbus TCP Module	<b>16-14</b>
<b>ADAM-6256</b>	16-ch Isolated Digital Output Modbus TCP Module	
<b>ADAM-6260</b>	6-ch Relay Output Modbus TCP Module	
<b>ADAM-6266</b>	4-ch Relay Output Modbus TCP Module with 4-ch DI	<b>16-15</b>


## Real-time Ethernet I/O Modules

<b>EtherNet/IP I/O Module Introduction</b>		<b>16-16</b>
<b>ADAM-6100 Series Selection Guide</b>		<b>16-17</b>
<b>ADAM-6117</b>	8-ch Isolated Analog Input Real-time Ethernet Module	
<b>ADAM-6160</b>	6-ch Relay Real-time Ethernet Module	<b>16-18</b>
<b>ADAM-6150</b>	15-ch Isolated Digital I/O Real-time Ethernet Module	
<b>ADAM-6151/6156</b>	16-ch Isolated Digital Input/ Digital Output Real-time Ethernet Module	<b>16-19</b>

To view all of Advantech's Ethernet I/O Modules: ADAM-6000, please visit [www.advantech.com/products](http://www.advantech.com/products).



# ADAM-6000 Series

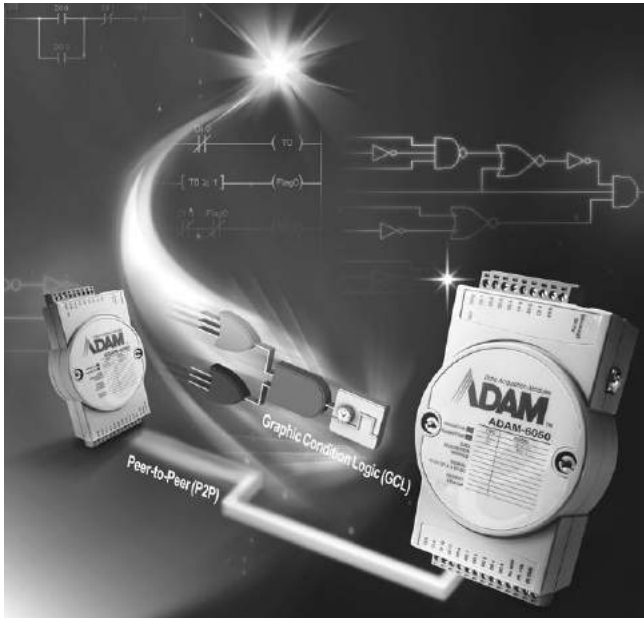

## Features

- Ethernet-based smart I/O
- Mixed I/O in single module
- Pre-built HTTP server and web pages in each module
- Web language support: XML, HTML 5, Java Script
- Remote monitoring and control with smart phone/pad
- Active I/O message by data stream or event trigger function
- Industrial Modbus/TCP protocol
- Easily update firmware through Ethernet
- ADAM.NET Class Library for .NET application
- Intelligent control ability by Peer-to-Peer and GCL function
- Group configuration capability for multiple module setup
- Flexible user-defined Modbus address
- System configuration backup
- User Access Control

## The Path to Seamless Integration

The integration of automation and enterprise systems requires a change in the architecture of open control systems. From Advantech's point of view, the level of integration between automation and enterprise systems can only be accomplished through Internet technology. It is believed that IP/Ethernet protocols will progress beyond the control layer, into the field layers. Placing remote I/O with IP/Ethernet connections on the shop floor is economical. Advantech believes that over the next five years, Internet protocols over Ethernet will dominate major field connections. The Advantech ADAM-6000 series offers ideal remote I/O solutions with Internet protocols for industrial automation environments.


ADAM-6000 firmware features a built-in Modbus/TCP server. Advantech provides the ADAM.NET Utility, ADAM.NET class library and OPC Server for the ADAM-6000 series to support these functions as well. Users can configure DA&C systems via ADAM.NET Utility and integrate it with an HMI software package via Modbus/TCP driver or Modbus/TCP OPC Server. Furthermore, users can easily use the ADAM.NET class library to develop their own applications.

## Web-enabled Technology Becomes Popular on Factory Floors

As Internet technologies and standards have rapidly developed over the past decade, Web-based control methodologies now obviously represent a powerful opportunity for extending efficient network-based management techniques to encompass non-IT real-world assets.

The ADAM-6000 series is equipped with a built-in web server so that its data can be viewed, anytime-anywhere via the Internet. Moreover, the ADAM-6000 series allows users to configure user-defined web pages to meet the diverse needs in various applications. With this powerful function, the ADAM-6000 series breaks the boundary of traditional multi-layer automation architecture and allows users to access field data directly in real time, which enables seamless integration between the plant floor and the front office.

HMI has provided a friendly operator interface for discrete control and sharply reduced the cost and complexity of automation systems. A web server has been added to most HMI software and a browser allows access to HMI displays from remote locations via the network. The end user is able to see and use an identical HMI from any Internet connected computer anytime, anywhere. ADAM-6000 series can be fully integrated with standard HMI software which supports Modbus/TCP.

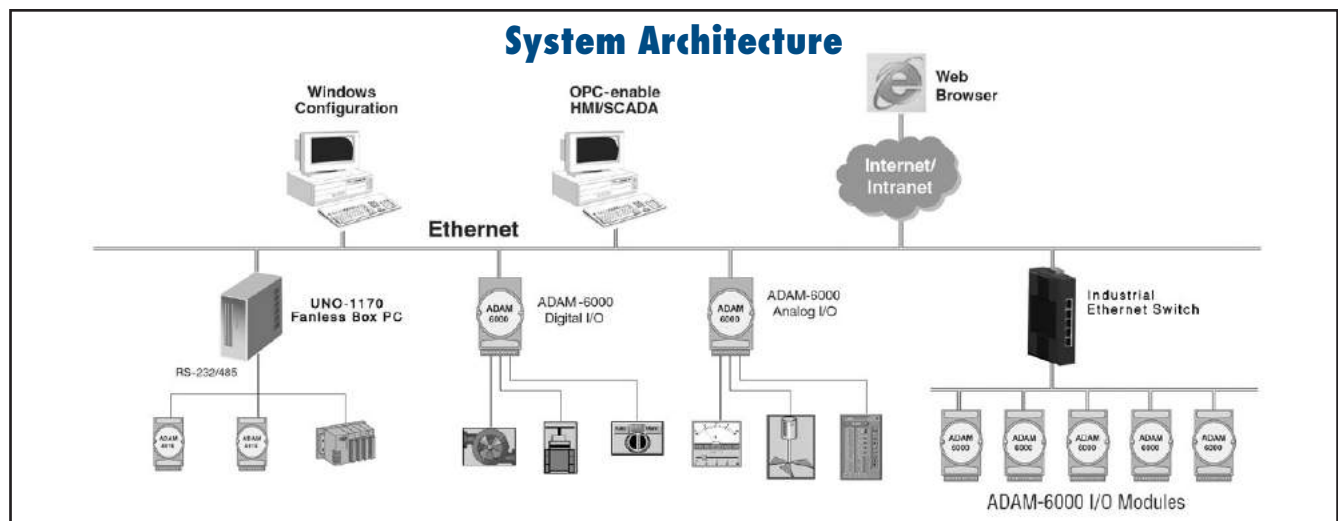


# ADAM-6000 Features: GCL

## Using Ethernet I/O Modules as Controllers

### What is GCL?

GCL (Graphic Condition Logic) gives Ethernet I/O modules control ability. Users can define the control logic rules using the graphic configuration environment in the ADAM.NET Utility, and download defined logic rules to ADAM-6000 Ethernet I/O modules. Then, that Ethernet I/O module will execute the logic rules automatically just like a standalone controller.

For each Ethernet I/O module, 16 logic rules can be defined. In the configuration environment of ADAM.NET Utility, four graphic icons shows the four stages of one logic rule: Input, Logic, Execution and Output (Refer to figure below). Users can simply click on each icon and one dialog window will pop-up for users to configure each stage. After completing all configurations, users can click one button to download the defined logic rules to the specific Ethernet I/O module.

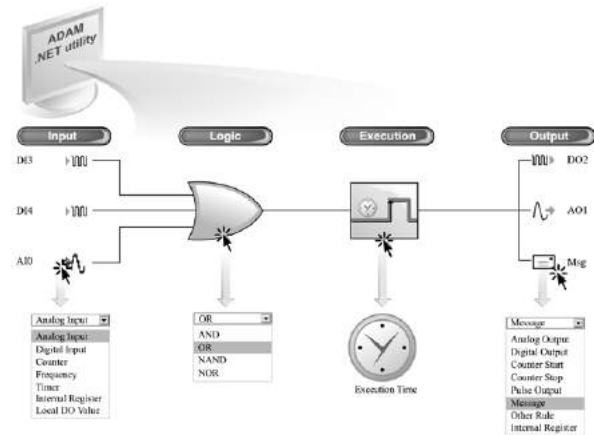


## ADAM-6000 GCL is the Simplest Logic Ethernet I/O

### Complete Graphic Configuration Environment

Unlike other text-based logic configuration utilities, Advantech GCL provides a complete graphic configuration utility, which is very intuitive to use. By simply clicking the icons, all related configurations can be done through the pop-up dialog window. GCL is not only easy-to-use, but is also features very powerful functionality.


### Supports Both Local and Remote Output

When users define the destination of Output stage (such as digital output, analog output, counter and pulse output), users can choose either the local module or another remote module as the target.

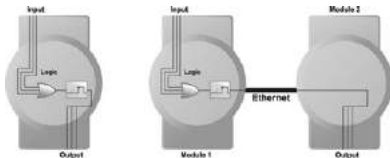


### Cascade Logic

The output of one logic rule can be another rule. Therefore, different rules can be combined together. GCL provides this kind of functionality called Cascade Logic. It helps to create more input numbers of logic rule. For example, if users combine rule 1 and rule 2 with rule 3, the maximum inputs become seven. (Two inputs of rule 3 will be rule 1 and rule 2. Refer to figure below.) So users can define complex logic architecture to satisfy various application requirements.

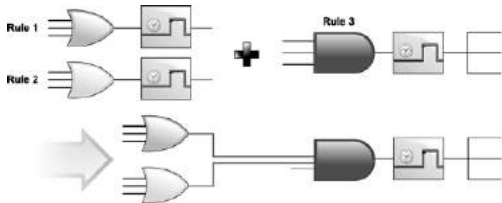


### Distributed Cascade Logic

Users can assign other rules as the output of one logic rule. In fact, that "Other Rule" can be on the same module, or on another remote module. So, one GCL logic architecture can operate across different modules. Several Ethernet I/O modules can be integrated into one complete logic system.

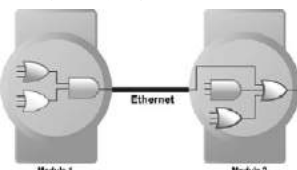

### Feedback

Users can assign input and output of logic rule to the same internal register. This gives GCL feedback ability. No hardware wiring is needed.

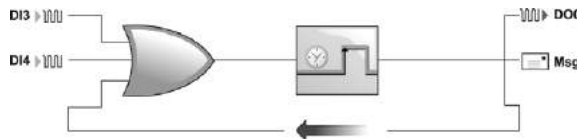

### Rich I/O Options

Analog Input	Thermocouple, RTD, Voltage, Current
Analog Output	Voltage, Current
Digital Input	Dry Contact, Wet Contact, Counter/Frequency input
Digital Output	Sink, Source, Relay output, Pulse output

### Fast Execution Time

Advantech GCL features extremely short logic rule execution time in the market. When users choose local output (input and output channel are on the same module), the processing time (including hardware input delay time, one logic rule execution time and hardware output delay time) is less than 1 millisecond. When users choose remote output (input and output channel are on different modules), the total time needed (including processing and communication time) is less than 3 milliseconds.

### Analog Input Scaling

When configuring analog input condition, GCL provides linear scaling function to convert measured voltage/current value to its engineer unit value (such as temperature or pressure unit). Then users can use the engineer unit value to define the logic condition, and it is more intuitive for users.

### Online Monitoring

After users complete all GCL configurations in ADAM.NET Utility, they can simply click the "Run Monitoring" button. Then users can see real-time execution workflow of logic rule on ADAM-6000 modules. Besides, current input values will also be displayed. This helps users to maintain the system easily.

### Sending Messages

In GCL, you can define your customized message. When conditions are satisfied, message, module's IP and I/O status will be sent to defined PC or device.

### Local DO Status Can be Input Condition

In GCL, you can read the local DO channel value and use it in the input condition. So you can define logic rule based on the local DO status.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-6000 Features: Peer-to-Peer

## Requirements


One of our clients has three branches across multiple countries. For each branch, cameras were installed near the gates. At the headquarters, people in the control room can monitor each gate via the Intranet. Now they want to enhance the system to remotely control each gate, so that each gate can be controlled from inside the control room of the headquarters. Since the distance between the headquarters and each branch is thousands of miles away, it may be very difficult to establish extra communication network for this purpose.

## Solution

Through three pairs of Advantech ADAM-6000 Peer-to-Peer Ethernet I/O modules (without any additional hardware), this application has been easily solved. For each pair of ADAM-6000 modules, one module is inside the headquarter's control room, and another is located at each branch. When the module in headquarters is activated, it will notify its paired module at the branch to open or close the gate. The communication is Ethernet-based, so that our clients can leverage their existing Ethernet infrastructure.

### What is Peer-to-Peer?

Unlike client / server mode, Peer-to-Peer enabled modules will actively update input channel status to specific output channel. There will be a pair of module: one input module and one output module. Users can define the mapping between input channel and output channel. Then the input value will be transferred to the output channel actively.



## What Benefits Do Peer-to-Peer Modules Provide?

### No Controller Required


For Ethernet I/O modules without Peer-to-Peer functionality, a controller is needed to read data from the input module and then send data to the output module. With Peer-to-Peer solutions, the controller can be removed since data will automatically transfer. This not only simplifies the process, but also helps save system hardware costs.

### No Programming Required

To utilize Peer-to-Peer modules, the only thing required is to configure related setting through the ADAM .NET Utility. No additional programming effort is needed, therefore reducing system development time.

### Simple and Flexible System Wiring

Long distance wiring can be difficult. For some automation applications, if the PLC and the sensors are far away, one remote I/O module needs to be located near the sensors, and a proprietary communication network needs to connect the PLC and the remote I/O module, and the communications distance is severely limited. Moreover, networks provided by PLC manufacturers are rarely open. Peer-to-Peer modules can replace limited and closed networks with no limitations since they leverage the most open and flexible Ethernet networks.

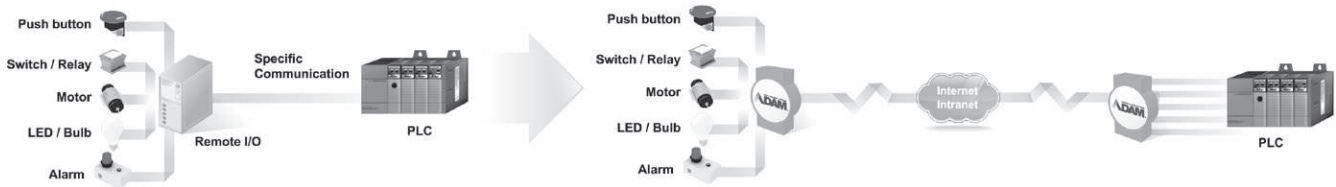

## Why is Advantech's Peer-to-Peer Technology the Best Choice?

### Flexible Channel Mapping

ADAM-6000 Peer-to-Peer modules provide two modes: Basic and Advanced. For Basic mode, channels on one input module are directly mapped to channels on another single output module. For Advanced mode, channels on one input module can be mapped to channels on different output modules. (Refer to figure below)

### Fast Response Time

Advantech Peer-to-Peer modules feature excellent execution performance in market. The execution time to transfer data from input to output module is less than 1.2 millisecond.


### Advanced Security

When engineers use Peer-to-Peer modules, they don't want it to be controlled by non-authorized computers or devices. ADAM-6000 Peer-to-Peer module lets users decide which IP or MAC address has control authority. This can make sure the output module is only controlled by its paired input module.


### Advanced Reliability

When communication between a pair of ADAM-6000 Peer-to-Peer modules is broken, the digital output module can generate pre-defined value to ensure safety.

ADAM-6000 P2P Mode: Basic Mode

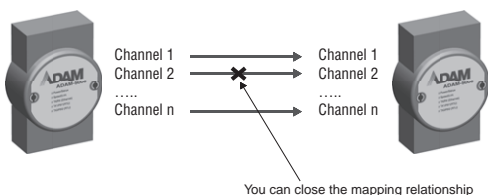

ADAM-6000 P2P Mode: Advanced Mode

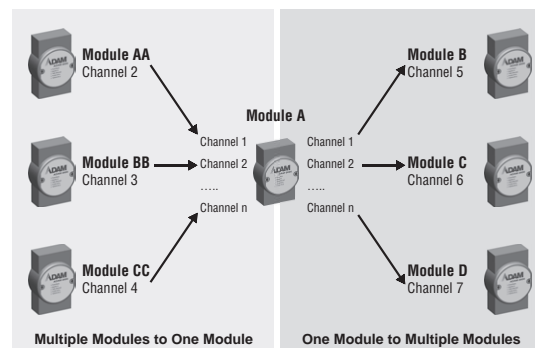

# ADAM-6000 Series Selection Guide



Spec.		Model	ADAM-6015	ADAM-6017	ADAM-6018	ADAM-6022	ADAM-6024	
Interface			10/100 Mbps Ethernet					
Peer-to-Peer <sup>1</sup>			Yes		No		Receiver Only <sup>2</sup>	
GCL <sup>1</sup>			Yes		No		Receiver Only <sup>2</sup>	
Resolution			16 bit		16 bit for AI 12 bit for AO		16 bit for AI 12 bit for AO	
Analog Input	Channels		7	8	8	6	6	
	Sampling Rate		10 S/s					
	Voltage Input		-	±150mV, ±500mV, ±1 V, ±5V, ±10V, 0~150mV, 0~500mV, 0~1V, 0~5V, 0~10V	-	±10 V		±10 V
	Current Input		-	0~20mA 4~20mA ±20mA	-	0 ~ 20 mA 4 ~ 20 mA		0 ~ 20 mA 4 ~ 20 mA
	Direct Sensor Input		Pt, Balco and Ni RTD	-	J, K, T, E, R, S, B Thermocouple	-		-
	Burn-out Detection		Yes	-	Yes	-		-
Math. Functions			Max. Min. Avg.	Max. Min. Avg.	Max. Min. Avg.	-		-
Analog Output	Channels		-	-	-	2	2	
	Current Output		-	-	-	0 ~ 20 mA, 4 ~ 20 mA with 15 V <sub>DC</sub>	0 ~ 20 mA, 4 ~ 20 mA with 15 V <sub>DC</sub>	
	Voltage Output		-	-	-	0 ~ 10 V <sub>DC</sub> with 30 mA	0 ~ 10 V <sub>DC</sub> with 30 mA	
Digital Input/Output	Input Channels		-	-	-	2	2	
	Output Channels		-	2 (Sink)	8 (Sink)	2 (Sink)	2 (Sink)	
	Extra Counter Channels		-	-	-	-	-	
	Counter Input		-	-	-	-	-	
	Frequency Input		-	-	-	-	-	
	Pulse Output		-	-	-	-	-	
	High/Low Alarm Settings		Yes	Yes	Yes	-		-
Isolation Protection			2,000 V <sub>DC</sub>		2,000 V <sub>DC</sub> <sup>3</sup>		2,000 V <sub>DC</sub> <sup>3</sup>	
Remark			-	-	-	Built-in Dual Loop PID Control Algorithm		-
Page			16-6	16-6	16-6	16-7	16-7	



Spec.		Model	ADAM-6050	ADAM-6051	ADAM-6052	ADAM-6060	ADAM-6066
Interface			10/100 Mbps Ethernet				
Peer-to-Peer <sup>1</sup>			Yes				
GCL <sup>1</sup>			Yes				
Digital Input/Output	Input Channels		12	12	8	6	6
	Output Channels		6 (Sink)	2 (Sink)	8 (Source)	6-channel relay	6-channel power relay
	Extra Counter Channels		-	2	-	-	-
	Counter Input		3 kHz	4.5 kHz	3 kHz	3 kHz	3 kHz
	Frequency Input		3 kHz	4.5 kHz	3 kHz	3 kHz	3 kHz
	Pulse Output		-	-	Yes	-	-
High/Low Alarm Settings			-	-	-	-	-
Isolation Protection			2,000 V <sub>DC</sub>				
Page			16-8	16-8	16-8	16-9	16-9

Note 1: Peer-to-Peer and GCL cannot run simultaneously, only one feature is enabled at one time.

Note 2: ADAM-6024 can only act as a receiver and generate analog output when using Peer-to-Peer or GCL.

Note 3: Only for analog input and analog output channels.


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-6015


# ADAM-6017

# ADAM-6018

7-ch Isolated RTD Input Modbus TCP Module  
 8-ch Isolated Analog Input Modbus TCP Module with 2-ch DO  
 8-ch Isolated Thermocouple Input Modbus TCP Module with 8-ch DO

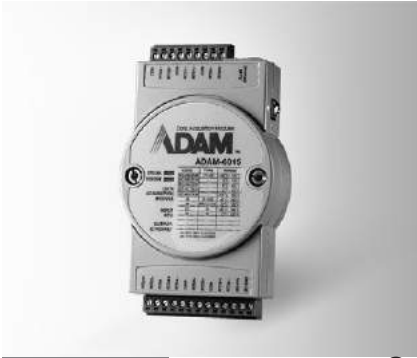

ADAM-6015 FCC CE RoHS UL US

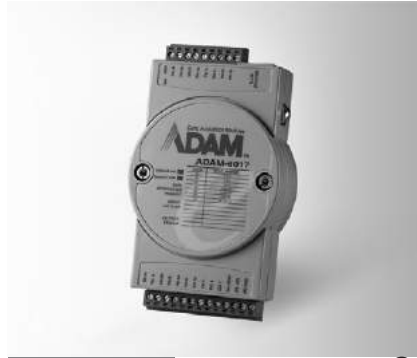

ADAM-6017 FCC CE RoHS UL US



ADAM-6018 FCC CE RoHS UL US

## Specifications

### Analog Input

- Channels 7 (differential)
- Input Impedance > 10 MΩ
- Input Connections 2 or 3 wire
- Input Type Pt, Balco and Ni RTD
- RTD Types and Temperature Ranges
  - Pt 100 -50°C ~ 150°C
  - 0°C ~ 100°C
  - 0°C ~ 200°C
  - 0°C ~ 400°C
  - 200°C ~ 200°C
  - Pt 1000 -40°C ~ 160°C
 Supports both IEC 60751 ITS90 (0.03851 W/W/°C) and JIS C 1604 (0.03916 W/W/°C)
  - Balco 500 -30°C ~ 120°C
  - Ni 518 -80°C ~ 100°C
  - 0°C ~ 100°C
- Accuracy ±0.1%
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C
- Resolution 16-bit
- Sampling Rate 10 sample/ second (total)  
CMR @ 50/60 HZ 90dB  
NMR @ 50/60 HZ 60dB
- Wire Burn-out Detection

## Ordering Information

- ADAM-6015 7-ch Isolated RTD Input Modbus TCP Module

## Specifications

### Analog Input

- Channels 8 (differential)
- Input Impedance > 10 MΩ (voltage)  
120 Ω (current)
- Input Type mV, V, mA
- Input Range ±150mV, ±500mV, ±1 V, ±5V, ±10V, 0~150mV, 0~500mV, 0~1V, 0~5V, 0~10V, 0~20mA, 4~20mA, ±20mA
- Accuracy ±0.1% (voltage)  
±0.2% (current)
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C
- Resolution 16-bit
- Sampling Rate 10 sample/ second (total)  
CMR @ 50/60 HZ 90dB  
NMR @ 50/60 HZ 67CMR @ 50/60 HZ 90dBdB  
350 V<sub>DC</sub>
- Common-Mode Voltage
- Digital Output
  - Channels 2, open collector to 30 V, 100 mA max. load
  - Output Delay On: 100 μs  
Off: 150 μs
  - Power Dissipation 300 mW for each module

## Ordering Information

- ADAM-6017 8-ch Isolated AI with 2-ch DO Modbus TCP Module

## Specifications

### Analog Input

- Channels 8 (differential)
- Input Impedance > 10 MΩ
- Input Type Thermocouple
- Thermocouple Type and Range:
 

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		
- Accuracy ±0.1%
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C
- Resolution 16-bit
- Sampling Rate 10 sample/ second (total)  
CMR @ 50/60 HZ 90dB  
NMR @ 50/60 HZ 60dB
- Wire Burn-out Detection

### Digital Output

- Channels 8, open collector to 30 V, 100 mA max. load
- Power Dissipation 300 mW for each module

## Ordering Information

- ADAM-6018 8-ch Isolated Thermocouple Input Modbus TCP Module w/ 8-ch DO

## Common Specifications

### General

- LAN 10/100Base-T(X)
- Power Consumption 2 W @ 24 V<sub>DC</sub>  
2.7 W @ 24 V<sub>DC</sub> (ADAM-6017)
- Connectors 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- Watchdog System (1.6 second) and Communication (programmable)

- Power Input 10 ~ 30 V<sub>DC</sub>
- Supports Peer-to-Peer
- Supports GCL
- Supports Modbus/TCP, TCP/IP, UDP and HTTP Protocols

### Protection

- Isolation Protection 2,000 V<sub>DC</sub>
- Built-in TVS/ESD Protection
- Power Reversal Protection

### Environment

- Operating Temperature -10 ~ 70°C (14 ~ 158°F)  
-20 ~ 70°C (-4 ~ 158°F) (ADAM-6017)
- Storage Temperature -20 ~ 80°C (-4 ~ 176°F)  
-30 ~ 80°C (-22 ~ 176°F) (ADAM-6017)
- Operating Humidity 20 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

# ADAM-6022

# ADAM-6024

## Ethernet-based Dual-loop PID Controller

## 12-ch Isolated Universal Input/Output Modbus TCP Module



ADAM-6022



### Specifications

#### General

- **Loop Number** 2 (3 AI, 1 AO, 1 DI, 1 DO for each control loop)

#### Analog Input

- **Channels** 6 (differential)
- **Input Range**  $\pm 10 V_{DC}$ , 0 ~ 20 mA, 4 ~ 20 mA

#### Analog Output

- **Channels** 2
- **Output Type** V, mA
- **Output Range** 0 ~ 10  $V_{DC}$ , 4 ~ 20 mA, 0 ~ 20 mA

#### Digital Input

- **Channels** 2
- **Dry Contact** Logic level 0: close to GND  
Logic level 1: open
- **Wet Contact** Logic level 0: 0 ~ 3  $V_{DC}$   
Logic level 1: 10 ~ 30  $V_{DC}$

#### Digital Output

- **Channels** 2, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module

### Ordering Information

- **ADAM-6022** Ethernet-based Dual-loop PID Controller



ADAM-6024



### Specifications

#### Analog Input

- **Channels** 6 (differential)
- **Input Range**  $\pm 10 V_{DC}$ , 0 ~ 20 mA, 4 ~ 20 mA

#### Analog Output

- **Channels** 2
- **Output Type** V, mA
- **Output Range** 0 ~ 10  $V_{DC}$ , 4 ~ 20 mA, 0 ~ 20 mA

#### Digital Input

- **Channels** 2
- **Dry Contact** Logic level 0: close to GND  
Logic level 1: open
- **Wet Contact** Logic level 0: 0 ~ 3  $V_{DC}$   
Logic level 1: 10 ~ 30  $V_{DC}$

#### Digital Output

- **Channels** 2, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module

#### Supports

- **Peer-to-Peer (Receiver only)**
- **GCL (Receiver only)**

### Ordering Information

- **ADAM-6024** 12-ch Isolated Universal I/O Modbus TCP Module

### Common Specifications

#### General

- **LAN** 10/100Base-T(X)
- **Power Consumption** 4 W @ 24  $V_{DC}$
- **Connectors** 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- **Watchdog** System (1.6 second) and Communication (programmable)
- **Power Input** 10 ~ 30  $V_{DC}$
- **Supports Modbus/TCP, TCP/IP, UDP and HTTP Protocols**

#### Analog Input

- **Input Impedance** 20 M $\Omega$
- **Accuracy**  $\pm 0.1\%$  of FSR
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/second
- **CMR @ 50/60 Hz** 90 dB
- **NMR @ 50/60 Hz** 60 dB
- **Span Drift**  $\pm 25$  ppm/ $^{\circ}$  C
- **Zero Drift**  $\pm 6$   $\mu$ V/ $^{\circ}$  C

#### Analog Output

- **Accuracy**  $\pm 0.1\%$  of FSR
- **Resolution** 12-bit
- **Drift**  $\pm 50$  ppm/ $^{\circ}$  C
- **Current Load Resistor** 0 ~ 500 $\Omega$

#### Protection

- **Isolation Protection** 2,000  $V_{DC}$
- **Built-in TVS/ESD Protection**
- **Over Voltage Protection**  $\pm 35 V_{DC}$
- **Power Reversal Protection**

#### Environment

- **Operating Temperature** -10 ~ 50 $^{\circ}$  C (14 ~ 122 $^{\circ}$  F)
- **Storage Temperature** -20 ~ 80 $^{\circ}$  C (-4 ~ 176 $^{\circ}$  F)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-6050

# ADAM-6051

# ADAM-6052


**18-ch Isolated Digital I/O Modbus TCP Module**

**14-ch Isolated Digital I/O Modbus TCP Module with 2-ch Counter**

**16-ch Source-type Isolated Digital I/O Modbus TCP Module**



ADAM-6050

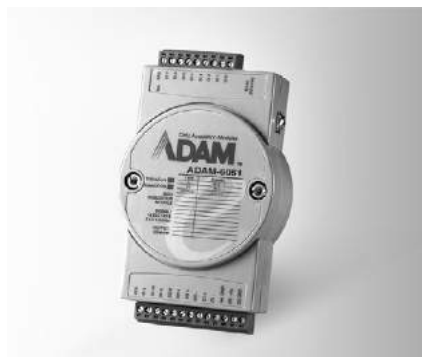

ADAM-6051



ADAM-6052



## Specifications

### Digital Input

- **Channels** 12
- **Dry Contact** Logic level 0: close to GND  
Logic level 1: open
- **Wet Contact** Logic level 0: 0 ~ 3 V<sub>DC</sub>  
Logic level 1: 10 ~ 30 V<sub>DC</sub>
- Supports 3 kHz Counter Input (32-bit + 1-bit overflow)
- Keep/Discard Counter Value when Power-off
- Supports 3 kHz Frequency Input
- Supports Inverted DI Status

### Digital Output

- **Channels** 6 (sink type), open collector to 30 V, 100 mA maximum load
- Supports 5 kHz Pulse Output
- Supports High-to-Low and Low-to-High Delay Output

## Ordering Information

- **ADAM-6050** 18-ch Isolated DI/O Modbus TCP Module

## Specifications

### Digital Input

- **Channels** 12
- **Dry Contact** Logic level 0: close to GND  
Logic level 1: open
- **Wet Contact** Logic level 0: 0 ~ 3 V<sub>DC</sub>  
Logic level 1: 10 ~ 30 V<sub>DC</sub>
- Supports 3 kHz Counter Input (32-bit + 1-bit overflow)
- Keep/Discard Counter Value when Power-off
- Supports 3 kHz Frequency Input
- Supports Inverted DI Status

### Counter Input

- **Channels** 2
- **Mode** Counter, Frequency
- **Keep/Discard Counter Value when Power-off** 4,294,967,295 (32-bit + 1-bit overflow)
- **Maximum Count**
- **Input Frequency** Frequency Mode: 0.2 ~ 4500 Hz  
Counter Mode: 0 ~ 4.5 kHz

### Digital Output

- **Channels** 2 (sink type), open collector to 30 V, 100 mA maximum load
- Supports 5 kHz Pulse Output
- Supports High-to-Low and Low-to-High Delay Output

## Ordering Information

- **ADAM-6051** 16-ch Isolated DI/O with Counter Modbus TCP Module

## Specifications

### Digital Input

- **Channels** 8
- **Dry Contact** Logic level 0: close to GND  
Logic level 1: open
- **Wet Contact** Logic level 0: 0 ~ 3 V<sub>DC</sub>  
Logic level 1: 10 ~ 30 V<sub>DC</sub>
- Supports 3 kHz Counter Input (32-bit + 1-bit overflow)
- Keep/Discard Counter Value when Power-off
- Supports 3 kHz Frequency Input
- Supports Inverted DI Status

### Digital Output

- **Channels** 8 (Source Type)
- **Voltage Range** 10 ~ 35 V<sub>DC</sub>
- **Current** 1 A (per channel)
- Supports 5 kHz Pulse Output
- Supports High-to-Low and Low-to-High Delay Output
- Supports Over Current Protection

## Ordering Information

- **ADAM-6052** 16-ch Source-type Isolated DI/O Modbus TCP Module

## Common Specifications

### General

- **LAN** 10/100Base-T(X)
- **Power Consumption** 2 W @ 24 V<sub>DC</sub>
- **Connectors** 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- **Watchdog** System (1.6 second) and Communication (programmable)

- **Power Input** 10 ~ 30 V<sub>DC</sub>
- Supports Peer-to-Peer, GCL
- Supports User Defined Modbus Address
- Supports Modbus/TCP, TCP/IP, UDP, DHCP and HTTP Protocol

### Protection

- **Power Reversal Protection**
- **Isolation Protection** 2,000 V<sub>DC</sub>

### Environment

- **Operating Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)



# ADAM-6060

# ADAM-6066

6-ch Digital Input and 6-ch Relay  
Modbus TCP Module

6-ch Digital Input and 6-ch Power Relay  
Modbus TCP Module



ADAM-6060

ADAM-6066



## Specifications

### General

- LAN 10/100Base-T(X)
- Power Consumption 2 W @ 24 V<sub>DC</sub> (ADAM-6060)  
2.5 W @ 24 V<sub>DC</sub> (ADAM-6066)
- Connectors 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- Watchdog Timer System (1.6 second) and Communication (programmable)
- Power Input 10 ~ 30 V<sub>DC</sub>
- Supports Peer-to-Peer, GCL
- Supports User Defined Modbus Address
- Supports Modbus/TCP, TCP/IP, UDP, DHCP and HTTP Protocols

### Digital Input

- Channels 6
- Dry Contact Logic level 0: close to GND  
Logic level 1: open
- Wet Contact Logic level 0: 3 V<sub>DC</sub>  
Logic level 1: 10 ~ 30 V<sub>DC</sub>
- Supports 3 kHz Counter Input (32-bit + 1-bit overflow)
- Keep/Discard Counter Value when Power-off
- Supports 3 kHz Frequency Input
- Supports Inverted DI Status

### Relay Output (Form A)

- Channels 6
- Contact Rating (Resistive) ADAM-6060: 120 V<sub>AC</sub> @ 0.5 A  
30 V<sub>DC</sub> @ 1 A  
ADAM-6066: 250 V<sub>AC</sub> @ 5 A  
30 V<sub>DC</sub> @ 3 A
- Breakdown Voltage 500 V<sub>AC</sub> (50/60 Hz)
- Relay On Time 7 ms
- Relay Off Time 3 ms
- Total Switching Time 10 ms
- Insulation Resistance 1 GΩ min. at 500 V<sub>DC</sub>
- Maximum Switching Rate (at rated load) 20 operations/minute
- Supports Pulse Output

### Protection

- Isolation Voltage 2,000 V<sub>DC</sub>
- Power Reversal Protection

### Environment




- Operating Temperature -20 ~ 70°C (-4 ~ 158°F)
- Storage Temperature -30 ~ 80°C (-22 ~ 176°F)
- Operating Humidity 20 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

## Ordering Information

- ADAM-6060 6-ch DI and 6-ch Relay Modbus TCP Module
- ADAM-6066 6-ch DI and 6-ch Power Relay Modbus TCP Module

## ADAM-6000 Series Dimensions

Unit: mm

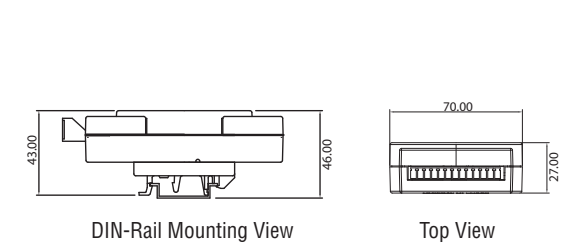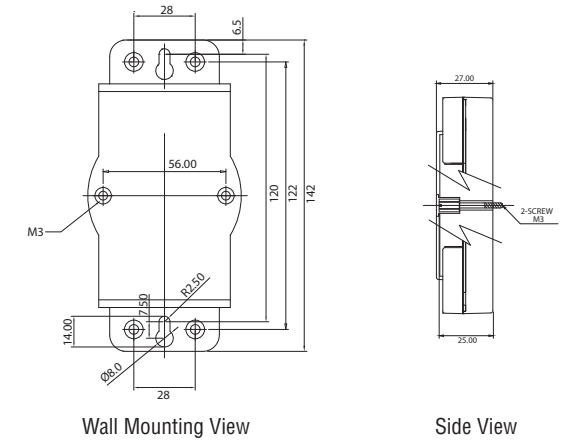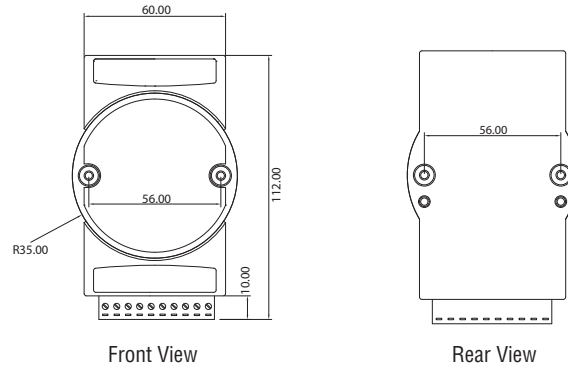

## ADAM-6000 Series Common Specifications

### General

- Dimensions (W x H x D) 70 x 122 x 27 mm
- Enclosure ABS+PC/ PC
- Mounting DIN 35 rail, stack, wall

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-6200 Series



## Feature

- Daisy chain connection with auto-bypass protection
- Remote monitoring and control with smart phone/pad
- Group configuration capability for multiple module setup
- DI/O LED indication
- Flexible user-defined Modbus address
- Intelligent control ability by Peer-to-Peer and GCL function
- Multiple protocol support: Modbus TCP, TCP/IP, UDP, HTTP, DHCP
- Web language support: XML, HTML 5, Java Script
- System configuration backup
- User Access Control


## Transition and Vision on Remote DAQ Device

In 2002, Advantech released its first Ethernet I/O module, ADAM-6000 series, which aims to provide ideal remote Ethernet I/O solution for industrial automation environments. It could work as a standalone station to conduct data acquisition, processing and delivery reliably in diverse of automation applications such as factory automation, EFMS and building automation.

However, as of today, the information technologies and network infrastructure are getting well-developed in the world. More and more enterprises not only face the requirement of enhancing their existing automation systems for greater overall equipment effectiveness (OEE), but also need up-to-date information integration, plant management and business systems. In the same way, the remote DAQ modules should be evolved to make it more effective, interoperable, and smarter than before to meet new requirements.

In the future, there are plenty of potential key elements like intelligence, energy-efficiency, cloud computing, cyber-security and mobile communication technologies being progressively leveraged in automation market. We believe that these will also contribute to ideal remote DAQ devices in IoT world.

In order to fulfill the transition of requirements and future applications, Advantech releases ADAM-6200 series, a new selection of Ethernet I/O family comprised of analog I/O, digital I/O and relay modules. ADAM-6200 series module possesses plenty of advanced features whatever the evolution of hardware design and what's worth expecting for user is a variety of useful software functions to make it effective in the application field. With new design and strong capabilities, ADAM-6200 can be a well-integrated I/O solution in Ethernet control systems.

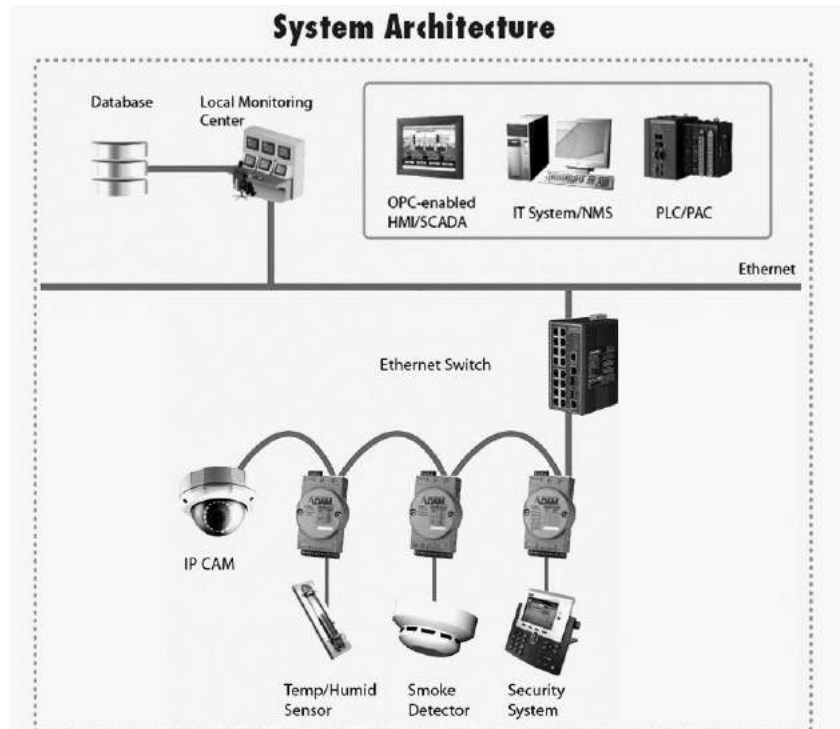

# ADAM-6200 Key Features

## Flexible Deployment with Daisy Chain Networking and Auto-Bypass Protection

ADAM-6200 module has built-in Ethernet switches to allow daisy chain connections in an Ethernet network, making it easier to deploy, saving wiring costs, and helping improve scalability. The two Ethernet ports are fully compliant with IEEE 802.3u 10/100Mbps through standard RJ-45 connectors.

Although daisy chain topology brings attractive benefits for user, it still comes with the risk that once any device in the daisy-chain network suffers power outage, it will cause the disconnection of all devices data stream

### Auto-bypass Protection

To prevent this critical issue from happening, Advantech especially refines the hardware design of ADAM-6200 so that it can rapidly recover the network connection in about 2.5 seconds. Therefore, the damage will be greatly minimized.




## Remote Monitoring and Control with Smart Phone/Pad

In early stage of automation, it's hard to access or obtain the data of equipments online when conducting on-site inspection. Mostly, the possible way to do that is communicating with engineers in branch or central control room where the SCADA program is running. It always takes extra efforts to complete an on-site checking or debugging.

The ADAM-6200 series module integrates the latest Web language HTML 5, allowing users to remotely monitor the status of all online modules without bridging SCADA system and to perform basic I/O configurations on any built-in HMI devices such as Smart Phone, Smart Pad over the Internet. Moreover, users can further develop its extended applications based on the default HTML 5 file embedded in the module.

### HTML 5

HTML is a markup language popularly used to program the content for Web page over the Internet. The fifth revision (HTML 5) is the latest version which enhances its syntax structure and additionally mixes up with rich Web technologies like CSS, JavaScript to implement more Web service, API, interactive applications in mobile communications.

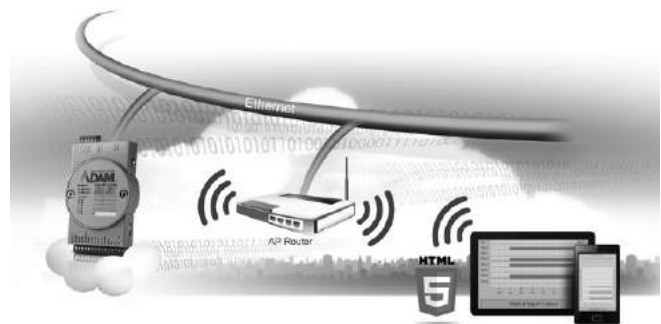

## Group Configuration Capability for Multiple Module Setup

In certain application scenario, it requires to set multiple modules with the same settings because these modules are doing the same tasks on different sites. Users have to set configurations of module one after another before onsite deployment. After the modules are installed and the system is running, it will still require repetitive efforts in maintenance when doing firmware update.

ADAM-6200 series modules are equipped with group configuration capability to reduce the repetitive efforts and quickly finish the multiple module setups, including firmware upgrade, configuration and HTML 5 file at one time. Users can finish the module installation faster than before as the configuration time tremendously reduced.



- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-6200 Series Selection Guide

NEW



NEW



NEW



NEW



NEW



NEW



NEW



NEW



Model	ADAM-6217	ADAM-6218	ADAM-6224	ADAM-6250	ADAM-6251	ADAM-6256	ADAM-6260	ADAM-6266	
Interface	10/100Mbps Ethernet								
Analog Input	Channels	8	6	-	-	-	-	-	
	Input Impedance	>10M $\Omega$ (voltage) 120 $\Omega$ (current)	>1M $\Omega$ (voltage) 120 $\Omega$ (current)	-	-	-	-	-	
	Voltage Input	$\pm$ 150mV, $\pm$ 500mV, $\pm$ 1V, $\pm$ 5V, $\pm$ 10V	$\pm$ 50mV, $\pm$ 100mV, $\pm$ 500mV, $\pm$ 1V, $\pm$ 2.5V	-	-	-	-	-	
	Current Input	0 ~ 20 mA, 4 ~ 20mA, $\pm$ 20mA	0 ~ 20mA, 4 ~ 20mA, $\pm$ 20mA	-	-	-	-	-	
	Sampling Rate (sample/second)	10	10	-	-	-	-	-	
	Direct Sensor Input	-	J, K, T, E, R, S, B Thermocouple	-	-	-	-	-	
	Burn-out Detection	Yes (4~20 mA)	Yes (TC, 4~20 mA)	-	-	-	-	-	
	Resolution	16-bit	16-bit	-	-	-	-	-	
Accuracy	$\pm$ 0.1% of FSR (Voltage) at 25°C $\pm$ 0.2% of FSR (Current) at 25°C		-	-	-	-	-		
Analog Output	Channels	-	-	4	-	-	-	-	
	Voltage Output	-	-	0 ~ 5V, 0 ~ 10V, $\pm$ 5V, $\pm$ 10V	-	-	-	-	
	Current Output	-	-	0 ~ 20mA, 4 ~ 20mA	-	-	-	-	
	Resolution	-	-	12-bit	-	-	-	-	
Digital Input/Output	Input Channels	-	-	4 (Dry contact only)	8	16	-	4	
	Output Channels	-	-	-	7 (Sink)	-	16 (Sink)	-	
	Relay Output	-	-	-	-	-	-	6 (5 Form C + 1 Form A)	4 (Form C)
	Contact Rating	-	-	-	-	-	-	250 V <sub>AC</sub> @ 5A 30 V <sub>DC</sub> @ 5A	
	Counter Input	-	-	-	3kHz	3kHz	-	-	3kHz
	Frequency Input	-	-	-	3kHz	3kHz	-	-	3kHz
	Pulse Output	-	-	-	5kHz	-	5kHz	5kHz	5kHz
LED Indicator	-	-	-	8 DI, 7 DO	16 DI	16 DO	6 RL	4 DI, 4 RL	
Power Consumption	3.5W	3.5W	6W	3W	2.7W	3.2W	4.5W	4.2W	
Isolation Voltage	2,500 V <sub>DC</sub>								
Watchdog Timer	System (1.6 seconds) Communication (Programmable)								
Communication Protocol	Modbus TCP, TCP/IP, UDP, HTTP, DHCP								
Power Requirements	10 - 30 V <sub>DC</sub> (24 V <sub>DC</sub> standard)								
Operating Temperature	-10 ~ 70°C (14 ~ 158°F)								
Storage Temperature	-20 ~ 80°C (-4 ~ 176°F)								
Operating Humidity	20 ~ 95% RH (non-condensing)								
Storage Humidity	0 ~ 95% RH (non-condensing)								
Page	16-13	16-13	16-13	16-14	16-14	16-14	16-15	16-15	

# ADAM-6217


# ADAM-6218

# ADAM-6224

## 8-ch Isolated Analog Input Modbus TCP Module

## 6-ch Thermocouple Input Modbus TCP Module

## 4-ch Isolated Analog Output Modbus TCP Module

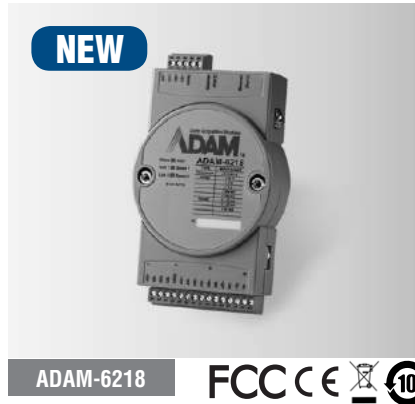

### Specifications

#### Analog Input

- Channels** 8 (differential)
- Input Impedance** > 10 MΩ (voltage)  
120 Ω (current)  
mV, V, mA
- Input Type**
- Input Range** ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, 0~20 mA, 4~20 mA, ±20 mA
- Span Drift** ± 30 ppm/°C
- Zero Drift** ± 6 μV/°C
- Resolution** 16-bit
- Accuracy** ± 0.1% of FSR (Voltage) at 25°C  
± 0.2% of FSR (Current) at 25°C
- Sampling Rate** 10 sample/second (total)
- CMR @ 50/60 Hz** 92 dB
- NMR @ 50/60 Hz** 67 dB
- Common Mode** 200 V<sub>DC</sub>

### Ordering Information

- ADAM-6217** 8-ch Isolated Analog Input Modbus TCP Module

### Specifications

#### Analog Input

- Channels** 6 (differential)
- Input Impedance** > 1 MΩ (voltage)  
120 Ω (current)  
mV, V, mA, Thermocouple
- Input Type**
- Temperature Range**

<b>J</b>	-210 ~ 1,200°C	<b>R</b>	0 ~ 1,768°C
<b>K</b>	-270 ~ 1,372°C	<b>S</b>	0 ~ 1,768°C
<b>T</b>	-270 ~ 400°C	<b>B</b>	200 ~ 1,820°C
<b>E</b>	-270 ~ 1,000°C		
- Voltage/Current Input Range** ±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5 V, ±20 mA, 0~20 mA, 4~20 mA
- Span Drift** ± 30 ppm/°C
- Zero Drift** ± 6 μV/°C
- Resolution** 16-bit
- Accuracy** ± 0.1% of FSR (Voltage) at 25°C  
± 0.2% of FSR (Current) at 25°C
- Sampling Rate** 10/100 sample/second (total)
- CMR @ 50/60 Hz** 92 dB
- NMR @ 50/60 Hz** 67 dB
- High Common Mode** 350 V<sub>DC</sub>

### Ordering Information

- ADAM-6218** 6-ch Isolated Thermocouple Input Modbus TCP Module

### Specifications

#### Analog Output

- Channels** 4
- Output Impedance** 2.1 Ω
- Output Settling Time** 20 μs
- Driving Load** Voltage: 2kΩ  
Current: 500 Ω  
0.125 ~ 128 mA/sec  
0.0625 ~ 64 V/sec
- Programmable Output Slope** V, mA
- Output Type** 0 ~ 5 V, 0 ~ 10 V, ± 5 V, ± 10 V, 0 ~ 20 mA, 4 ~ 20 mA
- Output Range**
- Accuracy** ± 0.3% of FSR (Voltage) at 25°C  
± 0.5% of FSR (Current) at 25°C
- Resolution** 12-bit
- Current Load Resistor** 0 ~ 500 Ω
- Drift** ± 50 ppm/°C
- Digital Input**
- Channels** 4 (Dry Contact only)
- Dry Contact** Logic 0: Open  
Logic 1: Closed to DGND
- Support DI Filter**
- Support Inverted DI Status**
- Support Trigger to Startup or Safety Value**

### Ordering Information

- ADAM-6224** 4-ch Isolated Analog Output Modbus TCP Module

### Common Specifications

#### General

- Ethernet** 2-port 10/100 Base-TX (for Daisy Chain)
- Protocol** Modbus/TCP, TCP/IP, UDP, HTTP, DHCP
- Connector** Plug-in 5P/15P screw terminal blocks
- Power Input** 10 ~ 30 V<sub>DC</sub> (24 V<sub>DC</sub> standard)
- Watchdog Timer** System (1.6 seconds)  
Communication (Programmable)
- Dimensions** 70 x 122 x 27 mm
- Protection** Built-in TVS/ESD protection  
Power Reversal protection  
Over Voltage protection: +/- 35V<sub>DC</sub>  
Isolation protection: 2500 V<sub>DC</sub>
- Power Consumption** ADAM-6217: 3.5W @ 24 V<sub>DC</sub>  
ADAM-6218: 3.5W @ 24 V<sub>DC</sub>  
ADAM-6224: 6W @ 24 V<sub>DC</sub>

#### Features

- Daisy chain connection with auto-bypass protection
- Remote monitoring and control with smart phone/pad
- Group configuration capability for multiple module setup
- Flexible user-defined Modbus address
- Intelligent control ability by Peer-to-Peer and GCL function
- Multiple protocol support: Modbus TCP, TCP/IP, UDP, HTTP, DHCP
- Web language support: XML, HTML 5, JavaScript
- System configuration backup
- User Access Control

#### Environment

- Operating Temperature** -10 ~ 70°C (14 ~ 158°F) ADAM-6224  
-20 ~ 70°C (-4 ~ 158°F) ADAM-6217, ADAM-6218
- Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- Operating Humidity** 20 ~ 95% RH (non-condensing)
- Storage Humidity** 0 ~ 95% RH (non-condensing)



# ADAM-6250

# ADAM-6251

# ADAM-6256

**15-ch Isolated Digital I/O Modbus TCP Module**

**16-ch Isolated Digital Input Modbus TCP Module**

**16-ch Isolated Digital Output Modbus TCP Module**



**NEW**

ADAM-6250



**NEW**

ADAM-6251



**NEW**

ADAM-6256



## Specifications

### Digital Input

- **Channels** ADAM-6250: 8  
ADAM-6251: 16
- **Dry Contact** Logic 0: Open  
Logic 1: Closed to DGND
- **Wet Contact** Logic 0: 0 ~ 3 V<sub>DC</sub> or 0 ~ -3 V<sub>DC</sub>  
Logic 1: 10 ~ 30 V<sub>DC</sub> or -10 ~ -30 V<sub>DC</sub>  
(Dry/Wet Contact decided by Switch)
- **Input Impedance** 5.2 kΩ (Wet Contact)
- **Transition Time** 0.2 ms
- **Frequency Input Range** 0.1 ~ 3kHz
- **Counter Input** 3kHz (32 bit + 1 bit overflow)
- **Keep/Discard Counter Value when power off**
- **Supports Inverted DI Status**

### Digital Output

- **Channels** ADAM-6250: 7 (Sink Type)  
ADAM-6256: 16 (Sink Type)
- **Output Voltage Range** 10 ~ 30 V<sub>DC</sub>
- **Normal Output Current** 100 mA (per channel)
- **Pulse Output** Up to 5kHz
- **Delay Output** High-to-Low and Low-to-High

## Ordering Information

- **ADAM-6250** 15-ch Isolated Digital I/O Modbus TCP Module
- **ADAM-6251** 16-ch Isolated Digital Input Modbus TCP Module
- **ADAM-6256** 16-ch Isolated Digital Output Modbus TCP Module

## Common Specifications

### General

- **Ethernet** 2-port 10/100 Base-TX (for Daisy Chain)
- **LED Indication** ADAM-6250: 8 DI + 7 DO  
ADAM-6251: 16 DI  
ADAM-6256: 16 DO
- **Protocol** Modbus/TCP, TCP/IP, UDP, HTTP, DHCP
- **Connector** Plug-in 5P/15P screw terminal blocks
- **Power Input** 10 ~ 30 V<sub>DC</sub> (24 V<sub>DC</sub> standard)
- **Watchdog Timer** System (1.6 seconds)  
Communication (Programmable)
- **Dimensions** 70 x 122 x 27 mm
- **Protection** Built-in TVS/ESD protection  
Power Reversal protection  
Over Voltage protection: +/- 35V<sub>DC</sub>  
Isolation protection: 2500 V<sub>DC</sub>
- **Power Consumption** ADAM-6250: 3 W @ 24 V<sub>DC</sub>  
ADAM-6251: 2.7 W @ 24 V<sub>DC</sub>  
ADAM-6256: 3.2 W @ 24 V<sub>DC</sub>

### Features

- Daisy chain connection with auto-bypass protection
- Remote monitoring and control with smart phone/pad
- Group configuration capability for multiple module setup
- DI/O LED Indication
- Flexible user-defined Modbus address.
- Intelligent control ability by Peer-to-Peer and GCL function
- Multiple protocol support: Modbus TCP, TCP/IP, UDP, HTTP, DHCP
- Web language support: XML, HTML 5, Java Script
- System configuration backup
- User Access Control

### Environment

- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

# ADAM-6260

# ADAM-6266

## 6-ch Relay Output Modbus TCP Module

## 4-ch Relay Output Modbus TCP Module with 4-ch DI

NEW



ADAM-6260



NEW



ADAM-6266



### Specifications

#### Relay Output

- **Channels** ADAM-6260: 5 Form C and 1 Form A  
ADAM-6266: 4 Form C
- **Contact Rating** 250 V<sub>AC</sub> @ 5A  
30 V<sub>DC</sub> @ 5A
- **Max. Switching Voltage** 400 V<sub>AC</sub>  
300 V<sub>DC</sub>
- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60Hz)
- **Max. Breakdown Capacity** 1250 VA
- **Frequency of Operation** 360 operations/hour with load  
72,000 operations/hour without load
- **Set/Reset Time** 8 ms/8 ms
- **Mechanical Endurance** > 15 x 10<sup>6</sup> operations
- **Isolation between Contact** 1000 V<sub>ms</sub>
- **Insulation Resistance** > 10 GΩ @ 500 V<sub>DC</sub>

#### Digital Input

- **Channels** ADAM-6266: 4
- **Dry Contact** Logic 0: Open  
Logic 1: Closed to DI COM
- **Wet Contact** Logic 0: 0 ~ 3 V<sub>DC</sub> or 0 ~ -3 V<sub>DC</sub>  
Logic 1: 10 ~ 30 V<sub>DC</sub> or -10 ~ -30 V<sub>DC</sub>  
(Dry/Wet Contact decided by Switch)
- **Input Impedance** 5.2 kΩ (Wet Contact)
- **Transition Time** 0.2 ms
- **Frequency Input Range** 0.1 ~ 3kHz
- **Counter Input** 3kHz (32 bit + 1 bit overflow)
- **Keep/Discard Counter Value when power off**
- **Supports Inverted DI Status**

### Ordering Information

- **ADAM-6260** 6-ch Relay Output Modbus TCP Module
- **ADAM-6266** 4-ch Relay Output Modbus TCP Module with 4-ch DI

### Common Specifications

#### General

- **Ethernet** 2-port 10/100 Base-TX (for Daisy Chain)
- **LED Indication** ADAM-6260: 6 RL  
ADAM-6266: 4 RL + 4 DI
- **Protocol** Modbus/TCP, TCP/IP, UDP, HTTP, DHCP
- **Connector** Plug-in 5P/15P screw terminal blocks
- **Power Input** 10 - 30 V<sub>DC</sub> (24 V<sub>DC</sub> standard)
- **Watchdog Timer** System (1.6 seconds)  
Communication (Programmable)
- **Dimensions** 70 x 122 x 27 mm
- **Protection** Built-in TVS/ESD protection  
Power Reversal protection  
Over Voltage protection: +/- 35V<sub>DC</sub>  
Isolation protection: 2500 V<sub>DC</sub>  
ADAM-6260: 4.5 W @ 24 V<sub>DC</sub>  
ADAM-6266: 4.2 W @ 24 V<sub>DC</sub>
- **Power Consumption**

#### Features

- Daisy chain connection with auto-bypass protection
- Remote monitoring and control with smart phone/pad
- Group configuration capability for multiple module setup
- DI/O LED Indication
- Flexible user-defined Modbus address.
- Intelligent control ability by Peer-to-Peer and GCL function
- Multiple protocol support: Modbus TCP, TCP/IP, UDP, HTTP, DHCP
- Web language support: XML, HTML 5, Java Script
- System configuration backup
- User Access Control

#### Environment

- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# EtherNet/IP I/O Module Introduction



Real-time distributed control systems are an important technology for reliable industrial Ethernet and automation applications. A number of techniques are used to adapt the Ethernet protocol for industrial processes, which must provide reliable service to ensure stable operation. Through modern protocols, automation systems from different manufacturers can be interconnected throughout a plant. Industrial Ethernet takes advantage of the relatively larger marketplace for computer interconnections to reduce cost and improve performance of communications between industrial controllers.

## Real-time Systems

A real-time system is one in which the correctness of a result not only depends on correct calculations, but also upon correct timing.

In computing, real-time refers to a time frame that is very brief, appearing to be immediate. When a computer processes data in real time, it reads and handles data as it is received, producing results without delay. A non real-time computer process does not have a deadline. Such a process can be considered non-real-time, even if fast results are preferred. A real-time system, on the other hand, is expected to respond not just quickly, but also within a predictable period of time. In an automation control system, real time technology provides multiple advantages, such as improved safety, quality, and efficiency.


To build a real-time distributed control system, it is critical to establish reliable and real-time communication among the controllers and targets. Distributed processors must be able to intercommunicate via real-time protocols. There is now increasing interest in the use of Ethernet as the link-layer protocol, such as EtherNet/IP, PROFINET, EtherCAT, Ethernet PowerLink, SERCOS III.

## EtherNet/IP


EtherNet/IP was developed in the late 1990's by Rockwell Automation for use in process control and other industrial automation applications, ensuring multi-vendor system interoperability. EtherNet/IP is a lot like standard office Ethernet, using the same TCP/IP messaging but with a new application layer added where data is arranged. This is known as Object-Orientated Organization, and allows ordinary office Ethernet to become a more versatile system. Today, EtherNet/IP is commonly used in industrial automation applications, such as water processing, manufacturing, and utilities.

## Feature Highlights

### Daisy Chain Connections




Each ADAM-6100 module has two built in Ethernet switches to allow daisy chain connections in an Ethernet network, making it easier to deploy, helping improve scalability and improving resistance against interference common in factory settings.




### 2,500 V<sub>DC</sub> Isolation Protection

With triple isolation, including power supply, input/output, and Ethernet communication, ADAM-6100 series ensures I/O data to be controlled correctly, and prevents devices from breaking down.

### Ethernet-based Configuration Tool



ADAM.NET Utility comes bundled with each ADAM-6100 module. With ADAM.NET Utility, users can configure, set and test ADAM-6100 modules through Ethernet.



### Multiple Mounting Mechanisms

Advantech provides versatile mounting methods to fit various demands in the field. ADAM-6100 series supports DIN-rail mounting, wall mounting and piggybacking.



# ADAM-6100 Series Selection Guide



Model	ADAM-6117	ADAM-6150	ADAM-6151	ADAM-6156	ADAM-6160	
Interface	10/100 Mbps Ethernet					
Support Protocol	ADAM-6100E: EtherNet/IP					
Analog Input	Resolution	16-bit	-	-	-	
	Channels	8	-	-	-	
	Sampling Rate (sample/second)	10	-	-	-	
	Voltage Input	±150 mV ±500 mV ±1 V ±5 V ±10 V	-	-	-	-
	Current Input	0 ~ 20 mA 4 ~ 20 mA ±20 mA	-	-	-	-
	Direct Sensor Input	-	-	-	-	-
Analog Output	Resolution	-	-	-	-	
	Channels	-	-	-	-	
	Current Output	-	-	-	-	
	Voltage Output	-	-	-	-	
Digital Input/Output	Input Channels	-	8	16	-	
	Output Channels	-	7	-	16	6-ch power relay
Isolation Protection	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	
Connectors	2 x RJ-45 LAN (Daisy Chain) Plug-in screw terminal block (I/O and power)					
Page	16-18	16-19	16-19	16-19	16-18	

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-6117

# ADAM-6160

## 8-ch Isolated Analog Input Real-time Ethernet Module

## 6-ch Relay Real-time Ethernet Module



ADAM-6117

FCC CE RoHS COMPLIANT PRODUCT

### Specifications

#### Analog Input

- Channels 8 (differential)
- Input Impedance > 10 M $\Omega$  (voltage)  
120  $\Omega$  (current)
- Input Type mV, V, mA
- Input Range  $\pm 150$  mV,  $\pm 500$  mV,  $\pm 1$  V  
 $\pm 5$  V,  $\pm 10$  V, 0–20 mA,  
4–20 mA,  $\pm 20$  mA
- Span Drift  $\pm 30$  ppm/ $^{\circ}$ C
- Zero Drift  $\pm 6$   $\mu$ V/ $^{\circ}$ C
- Resolution 16-bit
- Accuracy  $\pm 0.1\%$  of FSR (Current) at 25 $^{\circ}$ C  
 $\pm 0.2\%$  of FSR (Current) at 25 $^{\circ}$ C
- Sampling Rate 10 sample/second (total)
- CMR @ 50/60 Hz 92 dB
- NMR @ 50/60 Hz 67 dB
- High Common Mode 200 V<sub>DC</sub>

### Ordering Information

- ADAM-6117EI 8-ch Isolated AI EtherNet/IP Module



ADAM-6160

FCC CE RoHS COMPLIANT PRODUCT

### Specifications

#### Relay Output

- Channels 5 Form C and 1 Form A
- Contact Rating 250 V<sub>AC</sub> @ 5A  
30 V<sub>DC</sub> @ 5A
- Max. Switching Voltage 400 V<sub>AC</sub>  
300 V<sub>DC</sub>
- Breakdown Voltage 500 V<sub>AC</sub> (50/60Hz)
- Max. Breakdown Capacity 1250 VA
- Frequency of Operation 360 operations/hour with load  
72,000 operations/hour without load
- Set/Reset Time 8 ms/8 ms
- Mechanical Endurance > 15 x 10<sup>6</sup> operations
- Isolation between Contact 1000 V<sub>rms</sub>
- Insulation Resistance > 10 G $\Omega$  @ 500 V<sub>DC</sub>

### Ordering Information

- ADAM-6160EI 6-ch Relay EtherNet/IP Module

### Common Specifications

#### General

- LAN 10/100Base-T(X)
- Power Consumption ADAM-6117: 3.5 W @ 24 V<sub>DC</sub>  
ADAM-6160: 4.5 W @ 24 V<sub>DC</sub>
- Connectors 2 x RJ-45 LAN (Daisy Chain)  
Plug-in screw terminal block (I/O and power)
- Watchdog System (1.6 second)
- Power Input 10 ~ 30 V<sub>DC</sub>

#### Protection

- Isolation Protection 2,500 V<sub>DC</sub>
- Built in TVS/ESD Protection
- Power Reversal Protection

#### Environment

- Operating Temperature -10 ~ 70 $^{\circ}$ C (14 ~ 158 $^{\circ}$ F)
- Storage Temperature -20 ~ 80 $^{\circ}$ C (-4 ~ 176 $^{\circ}$ F)
- Operating Humidity 20 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

# ADAM-6150

## ADAM-6151/6156

15-ch Isolated Digital I/O Real-time Ethernet Module

16-ch Isolated Digital Input/ Digital Output Real-time Ethernet Module



ADAM-6150

FCC CE RoHS COMPLIANT

### Specifications

#### Digital Input

- Channels 8
- Dry Contact Logic level 0: open  
Logic level 1: close to DGND
- Wet Contact Logic level 0: 0 ~ 3 V<sub>DC</sub> or 0 ~ -3 V<sub>DC</sub>  
Logic level 1: 10 ~ 30 V<sub>DC</sub> or -10 ~ -30 V<sub>DC</sub>  
(Dry/Wet Contact decided by switch)
- Input Impedance 5.2 kΩ (Wet Contact)
- Transition Time From logic level 0 to 1: 0.2 ms  
From logic level 1 to 0: 0.2 ms

#### Digital Output

- Channels 7
- Output Voltage Range 8 ~ 35 V<sub>DC</sub>
- Normal Output Current 100 mA (per channel)

### Ordering Information

- ADAM-6150EI 15-ch Isolated DI/O EtherNet/IP Module



ADAM-6151/6156

FCC CE RoHS COMPLIANT

### Specifications

#### Digital Input (ADAM-6151)

- Channels 16
- Dry Contact Logic level 0: open  
Logic level 1: close to DGND
- Wet Contact Logic level 0: 0 ~ 3 V<sub>DC</sub> or 0 ~ -3 V<sub>DC</sub>  
Logic level 1: 10 ~ 30 V<sub>DC</sub> or -10 ~ -30 V<sub>DC</sub>  
(Dry/Wet Contact decided by switch)
- Input Impedance 5.2 kΩ (Wet Contact)
- Transition Time From logic level 0 to 1: 0.2 ms  
From logic level 1 to 0: 0.2 ms

#### Digital Output (ADAM-6156)

- Channels 16
- Output Voltage Range 8 ~ 35 V<sub>DC</sub>
- Normal Output Current 100 mA (per channel)

### Ordering Information

- ADAM-6151EI 16-ch Isolated DI EtherNet/IP Module
- ADAM-6156EI 16-ch Isolated DO EtherNet/IP Module

### Common Specifications

#### General

- LAN 10/100Base-T(X)
- Power Consumption ADAM-6150: 3 W @ 24 V<sub>DC</sub>  
ADAM-6151: 2.7 W @ 24 V<sub>DC</sub>  
ADAM-6156: 3.2 W @ 24 V<sub>DC</sub>
- Connectors 2 x RJ-45 LAN, (Daisy Chain)  
Plug-in screw terminal block (I/O and power)
- Watchdog System (1.6 second)
- Power Input 10 ~ 30 V<sub>DC</sub>

#### Protection

- Over Voltage Protection ±35 V<sub>DC</sub>
- Isolation Protection 2,500 V<sub>DC</sub>
- Power Reversal Protection

#### Environment

- Operating Temperature -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature -20 ~ 80°C (-4 ~ 176°F)
- Operating Humidity 20 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards



## RS-485 I/O Modules: ADAM-4000

### RS-485 I/O Modules

<b>ADAM-4000 Series</b>	Remote Data Acquisition and Control Modules Overview	17-2
<b>Communication and Controller Module Selection Guide</b>		17-4
<b>I/O Module Selection Guide</b>		17-5

### Analog Input Modules

<b>ADAM-4011</b>	1-ch Thermocouple Input Module	
<b>ADAM-4012</b>	1-ch Analog Input Module	17-8
<b>ADAM-4013</b>	1-ch RTD Input Module	
<b>ADAM-4015</b>	6-ch RTD Module with Modbus	
<b>ADAM-4015T</b>	6-ch Thermistor Module with Modbus	17-9
<b>ADAM-4016</b>	1-ch Analog Input/Output Module	
<b>ADAM-4017+</b>	8-ch Analog Input Module with Modbus	
<b>ADAM-4018+</b>	8-ch Thermocouple Input Module with Modbus	17-10
<b>ADAM-4019+</b>	8-ch Universal Analog Input Module with Modbus	

### Analog Output Modules

<b>ADAM-4021</b>	1-ch Analog Output Module	
<b>ADAM-4022T</b>	2-ch Serial Based Dual Loop PID Controller with Modbus	17-11
<b>ADAM-4024</b>	4-ch Analog Output Module with Modbus	

### Digital Input/Output Modules

<b>ADAM-4050</b>	15-ch Digital I/O Module	
<b>ADAM-4051</b>	16-ch Isolated Digital Input Module with Modbus	17-12
<b>ADAM-4052</b>	8-ch Isolated Digital Input Module	
<b>ADAM-4055</b>	16-ch Isolated Digital I/O Module with Modbus	
<b>ADAM-4056S/4056SO</b>	12-ch Sink/Source Type Isolated Digital Output Modules with Modbus	17-13
<b>ADAM-4080</b>	2-ch Counter/Frequency Module	
<b>ADAM-4060</b>	4-ch Relay Output Module	
<b>ADAM-4068</b>	8-ch Relay Output Module with Modbus	17-14
<b>ADAM-4069</b>	8-ch Power Relay Output Module with Modbus	

### Communication & Controller Modules

<b>ADAM-4510/S</b>	RS-422/485 Repeater	
<b>ADAM-4520</b>	Isolated RS-232 to RS-422/485 Converter	17-15
<b>ADAM-4521</b>	Addressable RS-422/485 to RS-232 Converter	
<b>ADAM-4541</b>	Multi-mode Fiber Optic to RS-232/422/485 Converter	
<b>ADAM-4542+</b>	Single-mode Fiber Optic to RS-232/422/485 Converter	17-16
<b>ADAM-4561/4562</b>	1-port Isolated USB to RS-232/422/485 Converter	

### Advanced Communication & I/O Modules

<b>ADAM-4100 Series</b>	Robust Remote Data Acquisition and Control Modules Overview	17-17
<b>Robust RS-485 I/O Module Selection Guide</b>		17-18
<b>ADAM-4510I</b>	Robust RS-422/485 Repeater	
<b>ADAM-4520I</b>	Robust RS-232 to RS-422/485 Converter	17-19
<b>ADAM-4117</b>	Robust 8-ch Analog Input Module with Modbus	
<b>ADAM-4118</b>	Robust 8-ch Thermocouple Input Module with Modbus	
<b>ADAM-4150</b>	Robust 15-ch Digital I/O Module with Modbus	17-20
<b>ADAM-4168</b>	Robust 8-ch Relay Output Module with Modbus	

To view all of Advantech's RS-485 I/O Modules: ADAM-4000, please visit [www.advantech.com/products](http://www.advantech.com/products).



# ADAM-4000 Series



## Applications

- Remote data acquisition
- Process monitoring
- Industrial process control
- Energy management
- Supervisory control
- Security systems
- Laboratory automation
- Building automation
- Product testing
- Direct digital control
- Relay control

## Introduction

The ADAM-4000 series modules are compact, versatile sensor-to-computer interface units designed specifically for reliable operation in harsh environments. Their built-in microprocessors, encased in rugged industrial grade plastic, independently provide intelligent signal conditioning, analog I/O, digital I/O, data display and RS-485 communication. The ADAM-4000 series can be categorized into three groups: controllers, communication modules, and I/O modules.



## General Features

### RS-485

The ADAM-4000 series of modules use the EIA RS-485 communication protocol, the industry's most widely used bi-directional, balanced transmission line standard. The EIA RS-485 was specifically developed for industrial applications. It lets ADAM-4000 modules transmit and receive data at high rates over long distances. All modules use optical isolators to prevent ground loop problems and reduce damages caused by power surges.

### Modbus Communication Protocol

Since Modbus is one of the most popular communication standards in the world, Advantech has applied it as the major communication protocol for eAutomation product development. The new-generation ADAM-4000 modules now also support the Modbus/RTU protocol as the remote data transmission mechanism. Featuring the Modbus-support capacity, the new ADAM-4000 series becomes universal remote I/O modules, which work with any Modbus systems. The HMI server or controller can read/write data via standard Modbus command instead of complex ASCII code.

### Watchdog Timer

A watchdog timer supervisory function will automatically reset the ADAM-4000 series modules if required, which reduces the need for maintenance. It also provides great reliability to the system.

## Flexible Networking

ADAM-4000 series modules need just two wires to communicate with their controlling host computer over a multidrop RS-485 network. Their ASCII-based command/response protocol ensures compatibility with virtually any computer system.

## Modular Industrial Design

You can easily mount modules on a DIN-rail, a panel or modules can piggyback on top of each other. You make signal connections through plug-in screw-terminal blocks, ensuring simple installation, modification and maintenance.

## Controller Features

### Alternative Standalone Control Solution

A standalone control solution is made possible when the ADAM-4000 series modules are controlled by the ADAM-4501 or ADAM-4502 PC-based communication controller. The ADAM-4501 and ADAM-4502 allow users to download an application (written in a high-level programming language) into its Flash ROM. This allows customization for your applications.

# Remote Data Acquisition and Control Modules Overview

## I/O Module Features

### Remotely Programmable Input Ranges

The ADAM-4000 series modules stand out because of their ability to accommodate multiple types and ranges of analog input. The type and range can be remotely selected by issuing commands from a host computer. One type of module satisfies many different tasks, which greatly simplifies design and maintenance. A single kind of module can handle the measurement needs of a whole plant. Since all modules are remotely configured by the host computer, physical adjustments are unnecessary.

### Easy Plug-in System Integration

With ADAM-4000's Modbus I/O, and built-in Modbus/RTU protocol, any controller using the Modbus/RTU standard can be integrated as part of an ADAM-4000 control system. Any Modbus Ethernet data gateway can upgrade these I/O Modules up to the Modbus/TCP Ethernet layer. Most HMI software is bundled with a Modbus driver, and can access the ADAM-4000 I/O directly. Moreover, Advantech provides Modbus OPC Server and Modbus/TCP OPC Server as data exchange interfaces between the ADAM-4000 Modbus I/O and any Windows Applications.

## Communication Module Features

### Ethernet

ADAM-4570 and ADAM-4571 are designed for the connection between serial devices (RS-232/422/485) and Ethernet. With ADAM-4570 or ADAM-4571, you can use graphical control software to monitor and control I/O modules. With existing devices, you can connect to an Ethernet network with the benefits of enhanced host performance and convenience.


### Fiber Optics

If users need to transmit over long distances without noise interference, ADAM-4541 and ADAM-4542+ are designed for this task. The ADAM-4541 is a multi-mode converter, which carries signals from fiber optics to RS-232/422/485. It offers a transmission distance of up to 2,500 m with a total immunity to electromagnetic noise. The ADAM-4542+ is a single-mode converter, which carries signals from fiber to optics to RS-232/422/485. It offers a transmission distance of up to 15 km with total immunity to electromagnetic noise.

### USB Communications

ADAM-4561/4562 is an one-port isolated USB to RS-232/422/485 converter. ADAM-4561 can convert USB to RS-232/422/485 with plug-in terminal. The major features of ADAM-4562 are the capability to use 9-wire RS-232, and to get power from the USB port. With 9-wire RS-232 capability, this converter meets the requirements of PLCs, modems, and controller equipment. As a USB-to-serial converter, ADAM-4562 supports Plug & Play, and hot-swapping, which simplifies the configuration process, and it also acts as a power supply for the module. It is no longer necessary to have an external power supply.

## ADAM-4000 Remote Data Acquisition and Control System

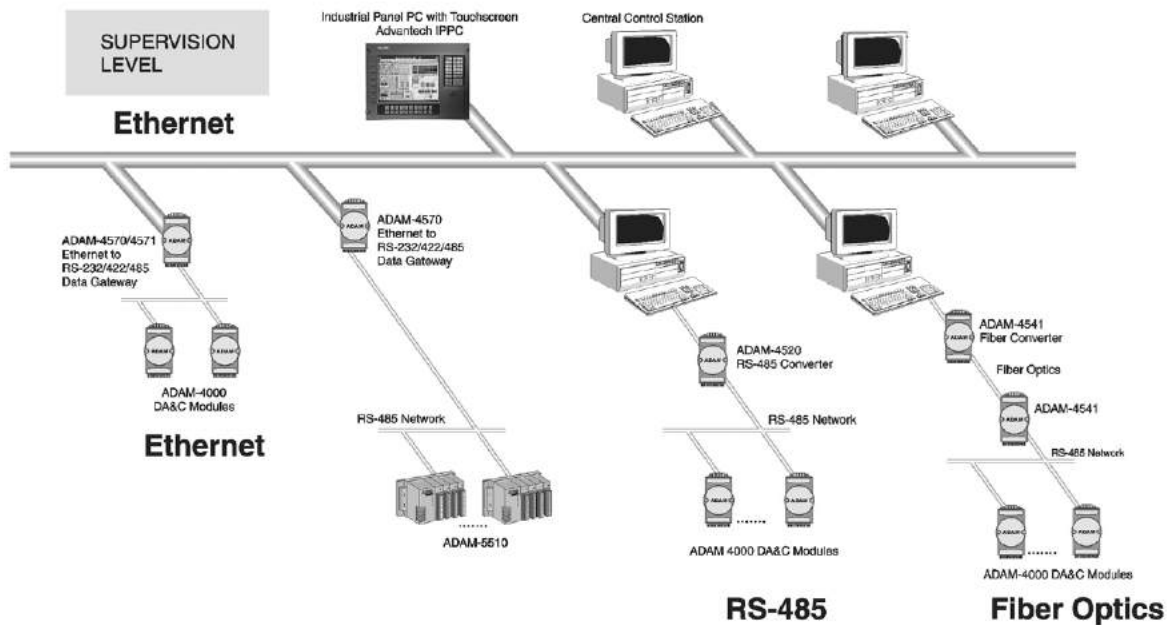

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Communication and Controller Module Selection Guide

## Controllers



## Repeaters



Model	ADAM-4501	ADAM-4502	ADAM-4022T	ADAM-4510 ADAM-4510S
Network	Ethernet, RS-232, RS-485		RS-485	RS-422 RS-485
Comm. Protocol	Modbus/RTU, Modbus/TCP TCP/IP, UDP, ICMP, ARP, DHCP		ASCII Command/ Modbus	-
Comm. Speed (bps)	Ethernet: 10/100M Serial: From 1,200 to 115.2 kbps		Serial: From 1,200 to 115.2 k	Serial: From 1,200 to 115.2 k
Comm. Distance	Ethernet: 100 m Serial: 1.2 Km		Serial: 1.2 km	Serial: 1.2 km
Interface Connectors	Ethernet: RJ-45 RS-485: plug-in screw terminal RS-232: RJ-48		RS-485: plug-in screw terminal	RS-422/485: plug-in screw terminal
LED Indicators	Communication & Power		Power	Communication & Power
Data Flow Control	Yes		Yes	-
Watchdog Timer	Yes		Yes	-
Isolation Voltage	-	1,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	ADAM-4510: - ADAM-4510S: 3,000 V <sub>DC</sub>
Special Features	Email function Built-in HTTP and FTP Server		PID Control	-
Built-in I/O	4DI/4DO	1AI/1AO/2DI/2DO	-	-
Power Requirements	10 ~ 30 V <sub>DC</sub>			10 ~ 30 V <sub>DC</sub>
Operating Temperature	-10 ~ 70°C (14 ~ 158°F)			-10 ~ 70°C (14 ~ 158°F)
Operating Humidity	5 ~ 95% RH			5 ~ 95% RH
Power Consumption	4 W @ 24 V <sub>DC</sub>			1.4 W @ 24 V <sub>DC</sub>
Page	online	online	17-11	17-15

## Converters



Model	ADAM-4520	ADAM-4521	ADAM-4541 ADAM-4542+	ADAM-4561 ADAM-4562
Network	RS-232 to RS-422/485		Fiber Optic to RS-232/422/485	USB to RS-232/485/422
Comm. Protocol	-			
Comm. Speed (bps)	Serial: From 1,200 to 115.2 k			
Comm. Distance	Serial: 1.2 km	Serial: 1.2 km	ADAM-4541: 2.5 km ADAM-4542+: 15 km	Serial: 1.2 km
Interface Connectors	RS-232: female DB9 RS-422/485: plug-in screw terminal	RS-232: female DB9 RS-422/485: plug-in screw terminal	RS-232/422/485: plug-in screw terminal Fiber: ADAM-4541: ST connector ADAM-4542+: SC connector	USB: type A client connector Serial: ADAM-4561: plug-in screw terminal (RS-232/422/485) ADAM-4562: DB9 (RS-232)
LED Indicators	Communication & Power			
Data Flow Control	-	Yes	-	Yes
Watchdog Timer	-	Yes	-	Yes
Isolation Voltage	3,000 V <sub>DC</sub>	1,000 V <sub>DC</sub>	-	ADAM-4561: 3,000 V <sub>DC</sub> ADAM-4562: 2,500 V <sub>DC</sub>
Power Requirements	10 ~ 30 V <sub>DC</sub>			
Operating Temperature	-10 ~ 70°C (14 ~ 158°F)			
Operating Humidity	5 ~ 95% RH			
Power Consumption	1.2 W @ 24 V <sub>DC</sub>	1 W @ 24 V <sub>DC</sub>	ADAM-4541: 1.5 W @ 24 V <sub>DC</sub> ADAM-4542+: 3 W @ 24 V <sub>DC</sub>	ADAM-4561: 1.5 W @ 5 V <sub>DC</sub> ADAM-4562: 1.1 W @ 5 V <sub>DC</sub>
Page	17-15	17-15	17-16	17-16



# I/O Module Selection Guide

## Analog Input



Model	ADAM-4011	ADAM-4012	ADAM-4013	ADAM-4015 ADAM-4015T	ADAM-4016	ADAM-4017+
<b>Resolution</b>	16 bit					
<b>Analog Input</b>						
Channels	1 differential	1 differential	1 differential	6 differential	1 differential	8 differential
Sampling Rate	10 Hz					
Voltage Input	±15 mV ±50 mV ±100 mV ±500 mV ±1 V ±2.5 V	±150 mV ±500 mV ±1 V ±5 V ±10 V	-	-	±15 mV ±50 mV ±100 mV ±500 mV	±150 mV ±500 mV ±1 V ±5 V ±10 V
Current Input	±20 mA	±20 mA	-	-	±20 mA	4 ~ 20 mA ±20 mA
Direct Sensor Input	J, K, T, E, R, S, B Thermocouple	-	RTD	ADAM-4015: RTD ADAM-4015T: Thermistor	-	-
Burn-out Detection	Yes	-	-	Yes	-	-
Channel Independent Configuration	-	-	-	Yes	-	Yes
<b>Analog Output</b>						
Channels	-	-	-	-	1	-
Voltage Output	-	-	-	-	0 - 10 V	-
Current Output	-	-	-	-	-	-
<b>Digital Input/Output</b>						
Input Channels	1	1	-	-	-	-
Output Channels	2	2	-	-	4	-
Alarm Settings	Yes	Yes	-	-	-	-
<b>Counter (32-bit)</b>						
Channels	-	-	-	-	-	-
Input Frequency	-	-	-	-	-	-
<b>Isolation Voltage</b>	3,000 V <sub>DC</sub>					
<b>Digital LED Indicator</b>	-					
Watchdog Timer	Yes (System)	Yes (System)	Yes (System)	Yes (System & Comm.)	Yes (System)	Yes (System & Comm.)
Safety Setting	-					
Modbus Support *	-	-	-	Yes	-	Yes
Page	17-8	17-8	17-8	17-9	17-9	17-10

\*: All ADAM-4000 I/O Modules support ASCII Commands

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# I/O Module Selection Guide

## Analog Input

## Analog Output

## Digital Input/Output



Model	ADAM-4018+	ADAM-4019+	ADAM-4021	ADAM-4024	ADAM-4050	ADAM-4051
Resolution	16 bit		12 bit	12 bit	-	-
Analog Input	Channels	8 differential	8 differential	-	-	-
	Sampling Rate	10 Hz	10 Hz	-	-	-
	Voltage Input	-	± 100 mV ± 500 mV ± 1 V ± 2.5 V ± 5 V ± 10 V	-	-	-
	Current Input	4 ~ 20 mA ±20 mA	4 ~ 20 mA ±20 mA	-	-	-
	Direct Sensor Input	J, K, T, E, R, S, B Thermocouple	J, K, T, E, R, S, B Thermocouple	-	-	-
	Burn-out Detection	Yes	Yes (4 ~ 20 mA & All T/C)	-	-	-
	Channel Independent Configuration	Yes	Yes	-	-	-
Analog Output	Channels	-	-	1	4	-
	Voltage Output	-	-	0 ~ 10 V	±10 V	-
	Current Output	-	-	0 ~ 20 mA 4 ~ 20 mA	0 ~ 20 mA 4 ~ 20 mA	-
Digital Input/Output	Input Channels	-	-	-	4	7
	Output Channels	-	-	-	-	16
	Alarm Settings	-	-	-	Yes	-
Counter (32-bit)	Channels	-	-	-	-	-
	Input Frequency	-	-	-	-	-
Isolation Voltage	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	3,000 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>
Digital LED Indicator	-	-	-	-	-	Yes
Watchdog Timer	Yes (System & Comm.)	Yes (System & Comm.)	Yes (System)	Yes (System & Comm.)	Yes (System)	Yes (System & Comm.)
Safety Setting	-	-	-	Yes	-	-
Modbus Support *	Yes	Yes	-	Yes	-	Yes
Page	17-10	17-10	17-11	17-11	17-12	17-12

\*: All ADAM-4000 I/O Modules support ASCII Commands

# Selection Guide

## Relay Output

## Counter



ADAM-4052	ADAM-4053	ADAM-4055	ADAM-4056S/ 4056SO	ADAM-4060	ADAM-4068	ADAM-4069	ADAM-4080
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
8	16	8	-	-	-	-	-
-	-	8	12	4-ch relay	8-ch relay	8-ch power relay	2
-	-	-	-	-	-	-	Yes
-	-	-	-	-	-	-	2
-	-	-	-	-	-	-	50 kHz
5,000 V <sub>RMS</sub>	-	2,500 V <sub>DC</sub>	5,000 V <sub>DC</sub>	-	-	-	2,500 V <sub>RMS</sub>
-	-	Yes	Yes	-	Yes	-	-
Yes (System)	Yes (System)	Yes (System & Comm.)	Yes (System & Comm.)	Yes (System)	Yes (System & Comm.)	Yes (System & Comm.)	Yes (System)
-	-	Yes	-	Yes	Yes	Yes	-
-	-	Yes	Yes	-	Yes	Yes	-
17-12	online	17-13	17-13	17-14	17-14	17-14	17-13

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-4011 ADAM-4012 ADAM-4013

## 1-ch Thermocouple Input Module

## 1-ch Analog Input Module

## 1-ch RTD Input Module



ADAM-4011



ADAM-4012



ADAM-4013



### Specifications

#### General

- Power Consumption 1.4 W @ 24 V<sub>DC</sub>
- Supported Protocols ASCII command

#### Analog Input

- Channels 1
- Input Impedance Voltage: 2 MΩ  
Current: 125 Ω (Added by user)
- Input Type T/C, mV, V or mA
- Input Range ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5 V, ±20 mA
- Accuracy Voltage mode: ±0.1% or better  
Current mode: ±0.2% or better
- T/C Type and Temperature Range

<b>J</b>	0 ~ 760°C	<b>R</b>	500 ~ 1,750°C
<b>K</b>	0 ~ 1,370°C	<b>S</b>	500 ~ 1,750°C
<b>T</b>	-100 ~ 400°C	<b>B</b>	500 ~ 1,800°C
<b>E</b>	0 ~ 1,000°C		

- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C

#### Digital Input

- Channels 1  
Logic level 0: 1 V max.  
Logic level 1: 3.5 ~ 30 V  
Pull up current: 0.5 mA, 10 kΩ resistor to 5 V
- Event Counter Max. input freq: 50 Hz

#### Digital Output

- Channels 2, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW
- Supports high/low alarms

### Common Specifications

#### General

- Power Input Unregulated 10 ~ 30 V<sub>DC</sub>
- Connectors 1 x plug-in terminal block (#14 ~ 22 AWG)
- Watchdog Timer System (1.6 second)

#### Analog Input

- Resolution 16-bit
- Sampling Rate 10 sample/second

### Specifications

#### General

- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Supported Protocols ASCII command

#### Analog Input

- Channels 1
- Input Impedance Voltage: 20 MΩ  
Current: 125 Ω (Added by user)
- Input Type mV, V or mA
- Input Range ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V and ±20 mA
- Accuracy Voltage mode: ±0.1% or better  
Current mode: ±0.2% or better
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C

#### Digital Input

- Channels 1  
Logic level 0: 1 V max.  
Logic level 1: 3.5 ~ 30 V  
pull up current: 0.5 mA, 10 kΩ resistor to 5 V
- Event Counter Max. input freq.: 50 Hz  
Min. input pulse width: 1 msec.

#### Digital Output

- Channels 2, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW

### Specifications

#### General

- Power Consumption 0.7 W @ 24 V<sub>DC</sub>
- Supported Protocols ASCII command

#### Analog Input

- Channels 1
- Input Connections 2 or 3-wire
- Input Impedance 2 MΩ
- Input Type Pt or Ni RTD
- RTD Types and Temperature Ranges
- IEC RTD 100 ohms
 

Pt	-100°C	to	+100°C	a = 0.00385
Pt	0°C	to	+100°C	a = 0.00385
Pt	0°C	to	+200°C	a = 0.00385
Pt	0°C	to	+600°C	a = 0.00385
- JIS RTD 100 ohms
 

Pt	-100°C	to	+100°C	a = 0.003916
Pt	0°C	to	+100°C	a = 0.003916
Pt	0°C	to	+200°C	a = 0.003916
Pt	0°C	to	+600°C	a = 0.003916
- Ni RTD
 

Ni	-80°C	to	+100°C	
Ni	0°C	to	+100°C	
- Accuracy ±0.1% or better
- Span Drift ±25 ppm/°C
- Zero Drift ±3 μV/°C

### Ordering Information

- ADAM-4011 1-ch Thermocouple Input Module
- ADAM-4012 1-ch Analog Input Module
- ADAM-4013 1-ch RTD Input Module

# ADAM-4015

# ADAM-4015T

# ADAM-4016

6-ch RTD Module with Modbus

6-ch Thermistor Module with Modbus

1-ch Analog Input/Output Module



ADAM-4015



ADAM-4015T



ADAM-4016



## Specifications

### General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 s) & Communication
- Supported Protocols ASCII command and Modbus/RTU
- Burn-out Detection Yes

### Analog Input

- Channels 6 differential
- Input Connections 2, 3-wire
- Input Impedance 10 MΩ
- Input Type Pt, Balco and Ni RTD
- RTD Types and Temperature Ranges
  - Pt 100 RTD:
    - Pt -50°C to 150°C
    - Pt 0°C to 100°C
    - Pt 0°C to 200°C
    - Pt 0°C to 400°C
    - Pt -200°C to 200°C
  - IEC RTD 100 ohms (a = 0.00385)
  - JIS RTD 100 ohms (a = 0.00392)
  - Pt 1000 RTD
  - Balco 500 RTD
    - 30°C to 120°C
  - Ni 50 RTD
    - Ni -80°C to 100°C
  - Ni 508 RTD
    - Ni 0°C to 100°C
  - BA1
    - 200°C to 600°C
- Accuracy ±0.1% or better
- CMR @ 50/60 Hz 120 dB
- Span Drift ±25 ppm/°C
- Zero Drift ±3 μV/°C

## Specifications

### General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 s) & Communication
- Supported Protocols ASCII command and Modbus/RTU
- Burn-out Detection Yes

### Analog Input

- Channels 6 differential
- Input Connections 2, 3-wire
- Input Impedance 10 MΩ
- Input Type Thermistor (NTC)
- Thermistor Types and Temperature Ranges
  - Thermistor 3 k 0 ~ 100°C
  - Thermistor 10 k 0 ~ 100°C
- Accuracy ±0.1% or better
- CMR @ 50/60 Hz 120 dB
- Span Drift ±25 ppm/°C
- Zero Drift ±3 μV/°C

## Specifications

### General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 2.2 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 s)
- Supported Protocols ASCII command

### Analog Input

- Channels 1 differential
- Input Impedance Voltage: 2 MΩ  
Current: 125 Ω (Added by user)
- Input Type mV or mA
- Input Range ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±20 mA
- Accuracy
  - Voltage mode: ±0.1% or better
  - Current mode: ±0.2% or better
- CMR @ 50/60 Hz 150 dB
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C

### Analog Output

- Channels 1
- Accuracy 0.05% of FSR
- Output Type V
- Output Range 0 ~ 10 V
- Drift ±50 ppm/°C
- Drive Current 30 mA
- Isolation Voltage 3,000 V<sub>DC</sub>

### Digital Output

- Channels 4, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW

## Common Specifications

### General

- Power Input Unregulated 10 ~ 30 V<sub>DC</sub>

### Analog Input

- Resolution 16-bit
- NMR @ 50/60 Hz 100 dB
- Sampling Rate 10 sample/second (total)
- Isolation Voltage 3,000 V<sub>DC</sub>

### Environment

- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- ADAM-4015 6-ch RTD Input Module with Modbus
- ADAM-4015T 6-ch Thermistor Input Module with Modbus
- ADAM-4016 1-ch Analog Input/Output Module

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Wireless I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# ADAM-4017+ ADAM-4018+ ADAM-4019+

8-ch Analog Input Module with Modbus  
8-ch Thermocouple Input Module with Modbus  
8-ch Universal Analog Input Module with Modbus



ADAM-4017+ FCC CE RoHS UL



ADAM-4018+ FCC CE RoHS UL



ADAM-4019+ FCC CE RoHS UL

## Specifications

### General

- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

### Analog Input

- Channels 8 differential
- Channel Independent Configuration Yes
- Input Impedance Voltage: 20 MΩ  
Current: 120 Ω
- Input Type mV, V, mA
- Input Range ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, ±20 mA, 4 ~ 20 mA

## Specifications

### General

- Power Consumption 0.8 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

### Analog Input

- Channels 8 differential
- Channel Independent Configuration Yes
- Input Impedance Voltage: 20 MΩ  
Current: 120 Ω
- Input Type Thermocouple, mA
- Input Range 0 ~ 20 mA, 4 ~ 20 mA
- T/C Types and Temperature Ranges

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

- Burn-out Detection All T/C

## Specifications

### General

- Power Consumption 1.0 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

### Analog Input

- Channels 8 differential channels for individual input type
- Channel Independent Configuration Yes
- Input Impedance Voltage: 20 MΩ  
Current: 120 Ω
- Input Type T/C, mV, V, mA
- Input Range ±1 V, ±2.5 V, ±5 V, ±10 V, ±100 mV, ±500 mV, ±20 mA, 4 ~ 20 mA

### T/C Types and Temperature Ranges

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

- Burn-out Detection 4 ~ 20 mA & all T/C

## Common Specifications

### General

- Power Input Unregulated 10 ~ 30 V<sub>DC</sub>
- Connectors 2 x plug-in terminal block (#14 ~ 22 AWG)

### Analog Input

- Accuracy Voltage mode: ±0.1% or better  
Current mode: ±0.2% or better
- Resolution 16-bit
- Sampling Rate 10 sample/second (total)
- Isolation Voltage 3,000 V<sub>DC</sub>

- Overvoltage Protection ±35 V<sub>DC</sub>
- CMR @ 50/60 Hz 120 dB
- NMR @ 50/60 Hz 100 dB
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C
- Built-in TVS/ESD Protection

### Environment

- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- ADAM-4017+ 8-ch Analog Input Module with Modbus
- ADAM-4018+ 8-ch Thermocouple Input Module w/Modbus
- ADAM-4019+ 8-ch Universal Analog Input Module w/Modbus

# ADAM-4021

# ADAM-4022T

# ADAM-4024

1-ch Analog Output Module

2-ch Serial Based Dual Loop PID Controller with Modbus

4-ch Analog Output Module with Modbus



ADAM-4021



ADAM-4022T



ADAM-4024



## Specifications

### General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 1.4 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command

### Analog Output

- Channels 1
- Output Impedance 0.5 Ω
- Output Range 0 ~ 20 mA, 4 ~ 20 mA, 0 ~ 10 V
- Output Type mA, V
- Accuracy ±0.1% of FSR for current output  
±0.2% of FSR for voltage output
- Current Load Resistor 0 to 500 Ω (source)
- Resolution 12-bit
- Isolation Voltage 3,000 V<sub>DC</sub>
- Programmable Output Slope 0.125 ~ 128 mA/sec.  
0.0625 ~ 64.0 V/sec.
- Readback Accuracy ±1% of FSR
- Span Temperature Coefficient ±25 ppm/°C
- Zero Drift  
Voltage output: ±30 μV/°C  
Current output: ±0.2 μA/°C

## Common Specifications

### General

- Power Input Unregulated 10 ~ 30 V<sub>DC</sub>

### Environment

- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C (14 ~ 185°F)
- Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

## Specifications

### General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 4 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command and Modbus/RTU

### Analog Input (Only AI0 and AI2 are the PID input)

- Channels 4
- Input Type mA, V, Thermistor, RTD
- Input Range 0 ~ 20 mA, 4 ~ 20 mA, 0 ~ 10 V
- Thermistor Type and Temperature Ranges  
Thermistor 3 K (NTC): 0 ~ 100°C  
Thermistor 10 K (NTC): 0 ~ 100°C
- RTD Type and Temperature Ranges  
Pt 100 RTD  
Pt 0 ~ 100°C Pt -100 ~ 100°C  
Pt 0 ~ 600°C Pt 0 ~ 200°C  
IEC RTD 100 ohms (α = 0.00385)  
JIS RTD 100 ohms (α = 0.00392)  
Pt 1000 RTD Pt -40 ~ 160°C
- Resolution 16-bit
- Sampling Rate 10 sample/second
- Isolation Voltage 3,000 V<sub>DC</sub>

### Analog Output

- Channels 2
- Output Range 0 ~ 20 mA, 4 ~ 20 mA, 0 ~ 10 V
- Output Type mA, V
- Resolution 12-bit
- Isolation Voltage 3,000 V<sub>DC</sub>

### Digital Input

- Channels 2
- Dry Contact Logic level 0-close to GND  
Logic level 1-open

### Digital Output

- Channels 2
- Power Dissipation Open Collector to 30 V,  
30 mA max. load  
300 mW

## Specifications

### General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 3 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

### Analog Output

- Channels 4
- Output Impedance 0.5 Ω
- Output Range 0 ~ 20 mA, 4 ~ 20mA, ±10 V
- Output Type mA, V (Differential)
- Accuracy ±0.1 % of FSR for current output  
±0.1 % of FSR for voltage output
- Current Load Resistor 0 to 500 Ω (source)
- Resolution 12-bit
- Isolation Voltage 3,000 V<sub>DC</sub>
- Programmable Output Slope 0.125 ~ 128 mA/sec.  
0.0625 ~ 64.0 V/sec.
- Span Temperature Coefficient ±25 ppm/°C
- Zero Drift  
Voltage output: ±30 μV/°C  
Current output: ±0.2 μA/°C

### Digital Input

- Channels 4
- Input Level Logic level 0: 1 V max.  
Logic level 1: 10 ~ 30 V<sub>DC</sub>
- Isolation Voltage 3,000 V<sub>DC</sub>

## Ordering Information

- ADAM-4021 1-ch Analog Output Module
- ADAM-4022T 2-ch Serial Based Dual Loop PID Controller w/ Modbus
- ADAM-4024 4-ch Analog Output Module with Modbus

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Ethernet I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# ADAM-4050

# ADAM-4051

# ADAM-4052

15-ch Digital I/O Module

16-ch Isolated Digital Input Module with Modbus

8-ch Isolated Digital Input Module



ADAM-4050



ADAM-4051



ADAM-4052



## Specifications

### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 0.4 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command

### Digital Input

- **Channels** 7
- **Input Level** Logic level 0: 1 V max.  
Logic level 1: 3.5 ~ 30 V  
Pull up current: 0.5 mA,  
10 kΩ resistor to 5 V

### Digital Output

- **Channels** 8  
open collector to 30 V,  
30 mA max. load
- **Power Dissipation** 300 mW

## Specifications

### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 1 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command and Modbus/RTU
- **LED Indicators** Yes

### Digital Input

- **Channels** 16
- **Input Voltage** 50 V max
- **Input Level**  
Dry contact: Logic level 0: open  
Logic level 1: close to GND  
Wet contact: Logic level 0: 3 V max  
Logic level 1: 10 ~ 50 V  
(Note: Digital Input levels 0 and 1 can be inverted)
- **Isolation Voltage** 2,500 V<sub>DC</sub>
- **Input Resistance** 5.2 kΩ
- **Overshoot Protection** 70 V<sub>DC</sub>

## Specifications

### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 0.4 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command

### Digital Input

- **Channels** 8  
(6 fully independent isolated channels, 2 isolated channels with common ground)
- **Input Level** Logic level 0: 1 V max.  
Logic level 1: 3 ~ 30 V
- **Isolation Voltage** 5,000 V<sub>RMS</sub>
- **Input Resistance** 3 kΩ

## Common Specifications

### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>

### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- **ADAM-4050** 15-ch Digital I/O Module
- **ADAM-4051** 16-ch Isolated Digital Input Module with Modbus
- **ADAM-4052** 8-ch Isolated Digital Input Module



# ADAM-4055 ADAM-4056S/4056SO ADAM-4080

**16-ch Isolated Digital I/O Module with Modbus**  
**12-ch Sink/Source Type Isolated Digital Output Modules with Modbus**

**2-ch Counter/Frequency Module**



ADAM-4055



ADAM-4056S/4056SO



ADAM-4080



## Specifications

### General

- Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption** 1 W @ 24 V<sub>DC</sub>
- Watchdog Timer** System (1.6 second) & Communication
- Supported Protocols** ASCII command and Modbus/RTU
- Isolation Voltage** 2,500 V<sub>DC</sub>
- LED Indicators** Yes

### Digital Input

- Channels** 8
- Input Level** Dry Contact: Logic level 0: open  
Logic level 1: close to GND  
Wet Contact: Logic level 0: 3 V max.  
Logic level 1: 10 ~ 50 V
- Overvoltage Protection** 70 V<sub>DC</sub>

### Digital Output

- Channels** 8, open collector to 40 V (200 mA max. load)
- Power Dissipation** Channel: 1 W max.  
Total: 2.2 W (8 Channels)

## Common Specifications

### General

- Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>

### Environment

- Operating Humidity** 5 ~ 95% RH
- Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Specifications

### General

- Connectors** 2 x Plug-in terminal blocks (#14-22 AWG)
- Watchdog Timer** System (1.6 second) & Communication
- Support Protocol** ASCII command and Modbus/RTU
- Isolation Voltage** 5000 V<sub>DC</sub>
- LED Indicators** Yes

### ADAM-4056S

- Digital Output Channels** 12  
Open collector to 40V (200mA max. load)
- Power Dissipation** Channel: 1 W max  
Total: 4 W (12 Channels)
- Digital Output Type** Sink

### ADAM-4056SO

- Digital Output Channels** 12  
VCC: 10 ~ 35 V<sub>DC</sub>  
Current: 1A (per channel)
- Digital Output Type** Source
- Over Current Detection and Protection**

## Ordering Information

- ADAM-4055** 16-ch Isolated Digital I/O Module with Modbus
- ADAM-4056S** 12-ch Sink Type Isolated Digital Output Module with Modbus
- ADAM-4056SO** 12-ch Source Type Isolated Digital Output Module with Modbus
- ADAM-4080** 2-ch Counter/Frequency Modules

## Specifications

### General

- Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption** 2.0 W @ 24 V<sub>DC</sub>
- Watchdog Timer** System (1.6 second)
- Supported Protocols** ASCII command

### Counter Input

- Channels** 2 independent counters (32-bit + 1-bit overflow)
- Input Frequency** 50 kHz max.
- Input Pulse Width** >10 μs.
- Input Mode** Isolated or non-isolated
- Isolated Input Level** Logic level 0: 1 V max.  
Logic level 1: 3.5~30 V
- Isolation Voltage** 2,500 V<sub>RMS</sub>
- Non-isolated Input Level** Programmable threshold:  
Logic level 0: 0.8 Vmax.  
Logic level 1: 2.4 ~ 5.0 V
- Maximum Count** 4,294,967,295 (32-bit)
- Preset Type** Absolute or relative
- Programmable Digital Noise Filter** 2 μs ~ 65 ms
- Alarm** Alarm comparators on each counter
- Frequency Measurement Range** 5 Hz ~ 50 kHz
- Programmable Built-in Gate Time** 1 or 0.1 second

### Digital Output

- Channels** 2, open collector to 30 V, 30 mA max. load
- Power Dissipation** 300 mW for each channel

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-4060

# ADAM-4068

# ADAM-4069

## 4-ch Relay Output Module

## 8-ch Relay Output Module with Modbus

## 8-ch Power Relay Output Module with Modbus



ADAM-4060



ADAM-4068



ADAM-4069



### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 0.8 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command

#### Relay Output

- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60 Hz)
- **Channels** 2 x Form A  
2 x Form C
- **Contact Rating (Resistive)** 0.6 A @ 125 V<sub>AC</sub>  
0.3 A @ 250 V<sub>AC</sub>  
2 A @ 30 V<sub>DC</sub>  
0.6 A @ 110 V<sub>DC</sub>
- **Initial Insulation Resistance** 1 G Ω min. at 500 V<sub>DC</sub>
- **Relay off Time (Typical)** 2 ms
- **Relay on Time (Typical)** 3 ms
- **Maximum Operating Speed** 20 operations/min (at related load)

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 0.6 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

#### Relay Output

- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60 Hz)
- **Channels** 4 x Form A  
4 x Form C
- **Contact Rating (Resistive)** 0.5 A @ 120 V<sub>AC</sub>  
0.25 A @ 240 V<sub>AC</sub>  
1 A @ 30 V<sub>DC</sub>  
0.3 A @ 110 V<sub>DC</sub>
- **Initial Insulation Resistance** 1 GΩ min. at 500 V<sub>DC</sub>
- **Relay off Time (Typical)** 4 ms
- **Relay on Time (Typical)** 3 ms
- **Maximum Operating Speed** 50 operations/min (at related load)

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 2.2 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

#### Relay Output

- **Breakdown Voltage** 1,000 V<sub>AC</sub> (50/60 Hz)
- **Channels** 4 x Form A  
4 x Form C
- **Contact Rating (Resistive)** 5 A @ 250 V<sub>AC</sub>  
5 A @ 30 V<sub>DC</sub>
- **Initial Insulation Resistance** 1 GΩ min. at 500 V<sub>DC</sub>
- **Relay off Time (Typical)** 5.6 ms
- **Relay on Time (Typical)** 5 ms
- **Maximum Operating Speed** 6 operations/min (at related load)

### Common Specifications

#### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>


#### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- **ADAM-4060-DE** 4-ch Relay Output Module
- **ADAM-4068-BE** 8-ch Relay Output Module with Modbus
- **ADAM-4069-AE** 8-ch Power Relay Output Module with Modbus

### Dimensions

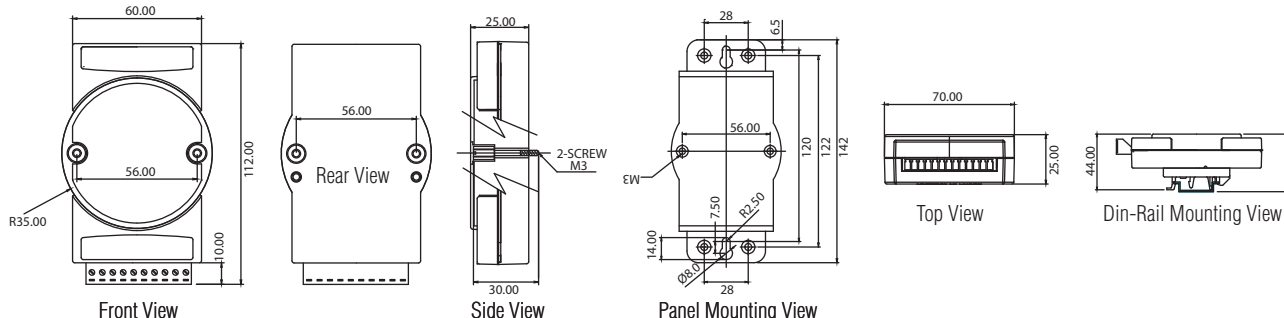

# ADAM-4510/S

# ADAM-4520

# ADAM-4521

RS-422/485 Repeater

Isolated RS-232 to RS-422/485 Converter

Addressable RS-422/485 to RS-232 Converter



ADAM-4510/4510S    



ADAM-4520    



ADAM-4521    

## Specifications

### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG) (RS-422/485)
- **Isolation Voltage** 3,000 V<sub>DC</sub> (ADAM-4510S)
- **Power Consumption** 1.4 W @ 24 V<sub>DC</sub>

### Serial Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)

## Specifications

### General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485) 1 x DB9-F (RS-232)
- **Isolation Voltage** 3,000 V<sub>DC</sub>
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>

### Serial Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)

## Specifications

### General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485) 1 x DB9-F (RS-232)
- **Isolation Voltage** 1,000 V<sub>DC</sub>
- **Power Consumption** 1.0 W @ 24 V<sub>DC</sub>
- **Built-in microprocessor and watchdog timer**

### Serial Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-232 (DB9)
- **Speed Modes (bps)** 300, 600, 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k (software configurable)
- **RS-232 and 485 can be set to different baudrates**
- **RS-485 surge protection and automatic RS-485 data flow control**
- **Software configurable to either addressable or non-addressable mode**

## Common Specifications

### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub> w/ power reversal protection

### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- **ADAM-4510** RS-422/485 Repeater
- **ADAM-4510S** Isolated RS-422/485 Repeater
- **ADAM-4520** Isolated RS-232 to RS-422/485 Converter
- **ADAM-4521** Addressable RS-422/485 to RS-232 Converter

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-4541 ADAM-4542+ ADAM-4561/4562

**Multi-mode Fiber Optic to RS-232/422/485 Converter**  
**Single-mode Fiber Optic to RS-232/422/485 Converter**  
**1-port Isolated USB to RS-232/422/485 Converter**



ADAM-4541



ADAM-4542+



ADAM-4561/4562



## Specifications

### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG)  
RS-232/422/485  
2 x ST fiber connector
- **Power Consumption** 1.5 W @ 24 V<sub>DC</sub>

### Serial Communications

- **Communication Mode** Asynchronous
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k and RS-232/422 mode (switchable)
- **Transmission Mode** Full/half duplex, bidirectional

### Fiber Optic Communications

- **Optical Power Budget (Attenuation)** 12.5 dB (measured with 62.5/125 μm)
- **Transmission Distance** 2.5 km
- **Transmission Mode** Multi mode (Send and Receive)
- **Wavelength** 820 nm

## Specifications

### General

- **Power Input** Unregulated 12 ~ 24 V<sub>DC</sub>
- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG)  
RS-232/422/485  
1 x SC fiber connector
- **Power Consumption** 3 W @ 24 V<sub>DC</sub>
- **Operation Modes** Support Point-to-Point, Redundant\* and Ring (half-duplex)
- **Redundant Transfer Time** 1 μs

### Serial Communications

- **Communication Mode** Asynchronous
- **Speed Modes (bps)\*** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, 230.4 k, 460.8 k, 921.6 k and RS-232/422/485 mode (switchable)
- **Transmission Modes** Full/half duplex, bidirectional

### Fiber Optic Communications

- **Optical Power Budget (Attenuation)** 15 dB
- **Transmission Distance** 15 km
- **Transmission Mode** Single mode (Send and Receive)
- **Wavelength** 1310 nm

## Specifications

### General

- **Connectors** Network: USB-type A connector (type A to type B cable provided)  
Serial:  
ADAM-4561 1 x plug-in terminal (#14 ~ 22 AWG) (3-wire RS-232/422/485)  
ADAM-4562 1 x DB-9 serial connectors (9-wire RS-232)

### Isolation Voltage

- ADAM-4561: 3,000 V<sub>DC</sub>
- ADAM-4562: 2,500 V<sub>DC</sub>

### Power Consumption

- ADAM-4561: 1.5 W @ 5 V
- ADAM-4562: 1.1 W @ 5 V

### Driver Support

- ADAM-4561: Windows 2000/XP/Vista/7/8 (32&64-bit)
- ADAM-4562: Windows 2000/XP/Vista/7/8(32&64-bit)

### USB Specification Compliance

- ADAM-4561: USB 2.0
- ADAM-4562: USB 2.0

### Serial Communications

- **Speed Modes (bps)** 75 bps to 115.2 kbps
- **Transmission Modes** Full/half duplex, bidirectional

## Common Specifications

### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** ADAM-4541/4542+: -10 ~ 70°C (14 ~ 158°F)  
ADAM-4561/4562: 0 ~ 70°C (32 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- **ADAM-4541** Multi-mode Fiber to RS-232/422/485 Converter
- **ADAM-4542+** Single-mode Fiber to RS-232/422/485 Converter
- **ADAM-4561** 1-port Isolated USB to RS-232/422/485 Converter
- **ADAM-4562** 1-port Isolated USB to RS-232 Converter

# ADAM-4100 Series

## Robust Remote Data Acquisition and Control Modules Overview



### Designed for Severe Industrial Environments

#### Broader Operating Temperature Range

The ADAM-4000 robust family supports a broad operating temperature range of -40 to 85°C.

#### Higher Noise Immunity

In order to prevent noise from affecting your system, the ADAM-4000 robust family has been designed with more protection to counteract these effects. New standard features include: 1 kV surge protection on power inputs, 3 kV EFT, and 8 kV ESD protection.

#### Broader Power Input Range

The ADAM-4000 robust family accepts any unregulated power source between 10 and 48 V<sub>DC</sub>. In addition, they are also protected against accidental power reversals, and can be safely connected or disconnected without disturbing a running network.

#### New Features for I/O Modules

- **ADAM-4117/4118**
  1. Supports 200 V<sub>DC</sub> High Common Mode voltage
  2. Software Filter
  3. Supports Auto Optimized Working Frequency
  4. Auto noise rejection at 50/60 Hz
  5. Higher over voltage protection  $\pm 60$  V<sub>DC</sub>
  6. Optional Sampling Rate 10 or 100 samples/sec
  7. Supports unipolar and bipolar input (ADAM-4117 only)
  8. Supports  $\pm 15$ V input range (ADAM-4117 only)

- **ADAM-4150**

1. Over current and temperature protection circuit
2. DI channels support counter (32-bit, overflow flag) and frequency type signal input
3. DO channels support pulse (1 kHz) and delay (high-to-low and low-to-high) type signal output
4. Support invert DI status

- **ADAM-4168**

1. Supports 1 kHz pulse output

#### ADAM-4100 Module with LED Display

The ADAM-4100 series modules have a LED display that lets you monitor the channel status. Using ADAM-4117/4118, the LED will be lit when related channel is active. Using ADAM-4150/4168, the LED will be lit when related channel value is high. The ADAM-4100 series modules have two operating modes (initial and normal), unlike the old module using extra wiring, ADAM-4100 modules can use the switch on the case to set "initial" mode or "normal" mode. It is very convenient for the user to configure. When you set to "initial" mode, the LED display can represent the node address of that module. Besides, when you use multiple ADAM-4100 series modules, you can locate the module through ADAM utility and LED display. All of these functions are very helpful to diagnose the ADAM-4100 series system.

### Introduction

The robust ADAM-4000 family includes the ADAM-4100 series modules, ADAM-4510I and ADAM-4520I modules. The ADAM-4100 series are compact, versatile sensor-to-computer interface units designed for reliable operation in harsh environments. Their built-in microprocessors, encased in rugged industrial-grade ABS+PC plastic, independently provide intelligent signal conditioning, analog I/O, digital I/O, LED data display, and an address mode with a user-friendly design for convenient address reading. The ADAM-4510I and ADAM-4520I modules are robust industrial-grade communication modules.

The ADAM-4000 robust family is designed to endure more severe and adverse environments. The operating temperature is -40 ~ 85°C which makes them suitable for more widespread applications.

#### Online Firmware Updates

The ADAM-4100 series modules have a friendly and convenient design where firmware can be updated through a local network or the Internet. You can easily update latest firmware using utility on host PC. This saves time and ensures that the module always runs with the latest functional enhancements.

#### Legacy Communication Protocol Support

To satisfy both the current ADAM users, and Modbus users, The ADAM-4100 series modules support both the ADAM (ASCII) protocol and the Modbus/RTU protocol. You can select the communication mode you want through the Windows Utility Software. The Modbus protocol not only supports the original data format (N, 8, 1) for (parity check, data bit, stop check) but also accepts (N,8,1) (N, 8, 2) (E, 8, 1) (O, 8, 1).

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Robust RS-485 I/O Module Selection Guide



Model	ADAM-4117	ADAM-4118	ADAM-4150	ADAM-4168
Resolution	16 bit		-	-
Channels	8 differential		-	-
Sampling Rate	10/100 Hz (total)		-	-
Voltage Input	0 ~ 150 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V, 0 ~ 15 V, ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, ±15V	±15 mV, ±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5V	-	-
Current Input	0 ~ 20 mA, ±20 mA, 4 ~ 20 mA	±20 mA, 4 ~ 20 mA	-	-
Direct Sensor Input	-	J, K, T, E, R, S, B Thermocouple	-	-
Burn-out Detection	Yes (mA)	Yes (mA and All T/C)	-	-
Channel Independent Configuration	Yes		-	-
Digital Input/ Output				
Input Channels	-	-	7	-
Output Channels	-	-	8	8-ch relay
Counter				
Channels	-	-	7	-
Input Frequency	-	-	3 kHz	-
Isolation Voltage	3,000 V <sub>DC</sub>			
Digital LED Indicator	Communication and Power			
Watchdog Timer	Yes (System & Communication)			
Safety Setting	-	-	Yes	Yes
Communication Protocol	ASCII Command/Modbus			
Power Requirements	10 ~ 48 V <sub>DC</sub>			
Operating Temperature	-40 ~ 85°C (-40 ~ 185°F)			
Storage Temperature	-40 ~ 85°C (-40 ~ 185°F)			
Operating Humidity	5 ~ 95% RH			
Power Consumption	1.2 W @ 24 V <sub>DC</sub>	0.5 W @ 24 V <sub>DC</sub>	0.7 W @ 24 V <sub>DC</sub>	1.8 W @ 24 V <sub>DC</sub>
Page	17-19		17-20	



Model	ADAM-4510I	ADAM-4520I
Network	RS-422/485	RS-232 to RS-422/485
Communication Speed (bps)	From 1,200 to 115.2k	
Communication Distance	Serial: 1.2 km	
Interface Connectors	RS-422/485: plug-in screw terminal	RS-232: female DB9 RS-422/485: plug-in screw terminal
Digital LED Indicators	Communication and Power	
Auto Data Flow Control	Yes	
Isolation Voltage	3,000 V <sub>DC</sub>	
Power Requirement	10 ~ 48 V <sub>DC</sub>	
Operating Temperature	-40 ~ 85°C (-40 ~ 185°F)	
Storage Temperature	-40 ~ 85°C (-40 ~ 185°F)	
Operating Humidity	5 ~ 95%	
Power Consumption	1.4 W @ 24 V <sub>DC</sub>	1.2 W @ 24 V <sub>DC</sub>
Page	17-19	

# ADAM-4510I

# ADAM-4520I

# ADAM-4117

## Robust RS-422/485 Repeater

## Robust RS-232 to RS-422/485 Converter

## Robust 8-ch Analog Input Module with Modbus



ADAM-4510I FCC CE RoHS UL US LISTED E190861 ETC.

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 1.4 W @ 24 V<sub>DC</sub>

#### Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**
- **Provide RS-485 to RS-422 Convert Ability**



ADAM-4520I FCC CE RoHS UL US LISTED E190861 ETC.

### Specifications

#### General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485) 1 x DB9-F (RS-232)
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>

#### Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**



ADAM-4117 FCC CE RoHS UL US LISTED E190861 ETC.

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII Command and Modbus/RTU
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>

#### Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** Voltage: 800 Ω Current: 120 Ω
- **Input Type** mV, V (supports unipolar and bipolar), mA
- **Input Range** 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 15V, ±150 mV, ±500 mV, ±1V, ±5 V, ±10 V, ±15V, ±20 mA, 0 ~ 20 mA, 4 ~ 20mA
- **Accuracy** Voltage mode : ±0.1% or better Current mode : ±0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by utility)
- **CMR @ 50/60 Hz** 92 dB
- **NMR @ 50/60 Hz** 60 dB
- **Over Voltage Protection** ±60 V<sub>DC</sub>
- **High Common Mode** 200 V<sub>DC</sub>
- **Span Drift** ±25 ppm/°C
- **Zero Drift** ±6μV/°C
- **Built-in TVS/ESD Protection**

### Common Specifications

#### General

- **Power Input** Unregulated 10 ~ 48 V<sub>DC</sub> w/power reversal protection
- **Isolation Voltage** 3,000 V<sub>DC</sub>

#### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Supports Noise Rejection**

### Ordering Information

- **ADAM-4510I** Robust RS-422/485 Repeater
- **ADAM-4520I** Robust RS-232 to RS-422/485 Converter
- **ADAM-4117** Robust 8-ch Analog Input Module with Modbus

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# ADAM-4118

# ADAM-4150

# ADAM-4168

**Robust 8-ch Thermocouple Input Module with Modbus**

**Robust 15-ch Digital I/O Module with Modbus**

**Robust 8-ch Relay Output Module with Modbus**



ADAM-4118



ADAM-4150



ADAM-4168



## Specifications

### General

- Power Consumption 0.5W @ 24 V<sub>DC</sub>

### Analog Input

- Channels 8 differential and independent configuration channels
- Input Impedance Voltage: 20 M $\Omega$   
Current: 120  $\Omega$
- Input Type T/C, mV, V, mA
- Input Range Thermocouple

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

- Voltage mode  $\pm 15$  mV,  $\pm 50$  mV,  $\pm 100$  mV,  $\pm 500$  mV,  $\pm 1$  V,  $\pm 2.5$  V
- Current mode  $\pm 20$  mA, 4 ~ 20 mA
- Accuracy Voltage mode:  $\pm 0.1\%$  or better  
Current mode:  $\pm 0.2\%$  or better
- Resolution 16-bit
- Sampling Rate 10/100 samples/sec (selected by Utility)
- CMR @ 50/60 Hz 92 dB
- NMR @ 50/60 Hz 60 dB
- Overshoot Protection  $\pm 60$  V<sub>DC</sub>
- High Common Mode 200 V<sub>DC</sub>
- Span Drift  $\pm 25$  ppm/°C
- Zero Drift  $\pm 6\mu$ V/°C
- Built-in TVS/ESD Protection
- Burn-out Detection

## Specifications

### General

- Power Consumption 0.7 W @ 24 V<sub>DC</sub>

### Digital Input

- Channels 7
- Input Level Dry contact: Logic level 0: Close to GND  
Logic level 1: Open  
Wet contact: Logic level 0: 3 V max  
Logic level 1: 10 ~ 30 V  
(Note: The Digital Input Level 0 and 1 status can be inverted)
- Supports 3 kHz Counter Input (32-bit + 1-bit overflow)
- Supports 3 kHz Frequency Input
- Supports Invert DI Status
- Over Voltage Protection 40 V<sub>DC</sub>

### Digital Output

- Channels 8, open collector to 40 V (0.8A max. load)
- Power Dissipation 1W load max
- RON Maximum 150 m $\Omega$
- Supports 1 kHz Pulse Output
- Supports High-to-Low Delay Output
- Supports Low-to-High Delay Output

## Specifications

### General

- Power Consumption 1.8 W @ 24 V<sub>DC</sub>

### Relay Output

- Output Channels 8 Form A
- Contact Rating 0.5 A @ 120 V<sub>AC</sub> (Resistive)  
0.25 A @ 240 V<sub>AC</sub>  
1 A @ 30 V<sub>DC</sub>  
0.3 A @ 110 V<sub>DC</sub>
- Breakdown Voltage 750 V<sub>AC</sub> (50/60 Hz)
- Initial Insulation Resistance 1 G  $\Omega$  min. @ 500 V<sub>DC</sub>
- Relay Response Time (Typical) On: 3ms  
Off: 1ms
- Total Switching Time 10 ms
- Supports 100 Hz pulse output
- Maximum Operating Speed 50 operations/min (at related load)

## Common Specifications

### General


- Power Input Unregulated 10 ~ 48 V<sub>DC</sub>
- Watchdog Timer System (1.6 second) & Communication
- Connector 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Isolation Voltage 3,000 V<sub>DC</sub>
- Supported Protocols ASCII Command and Modbus/RTU
- Operating Humidity 5 ~ 95% RH
- Operating Temperature -40 ~ 85°C (-40 ~ 185°F)
- Storage Temperature -40 ~ 85°C (-40 ~ 185°F)

## Ordering Information

- ADAM-4118 Robust 8-ch Thermocouple Input Module w/ Modbus
- ADAM-4150 Robust 15-ch Digital I/O Module with Modbus
- ADAM-4168 Robust 8-ch Relay Output Module with Modbus



## Data Acquisition Boards

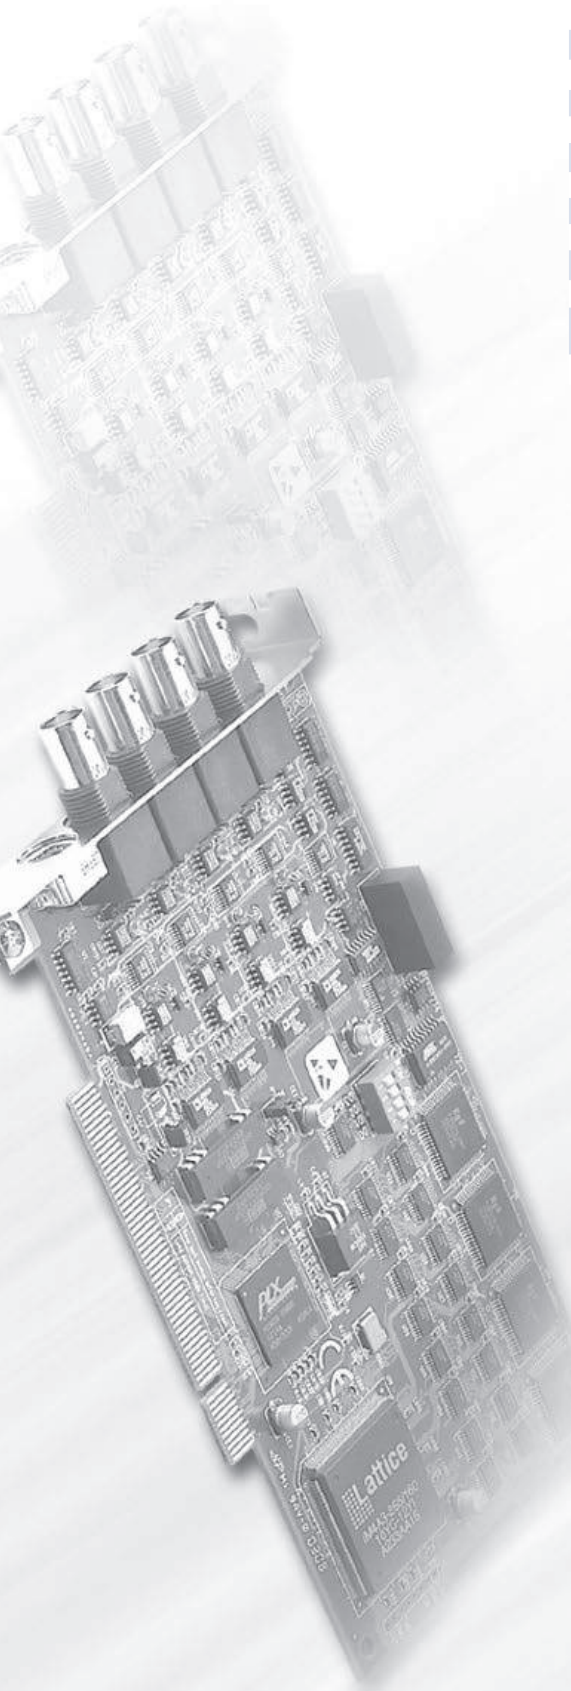

<b>Data Acquisition and Control Tutorial &amp; Software</b>		<b>18-2</b>
<b>DAQnavi Introduction</b>		<b>18-3</b>
<b>DAQnavi Data Logger</b>	Configurable Data Logging Software	<b>18-5</b>
<b>Analog I/O &amp; Multifunction Card Selection Guide</b>		<b>18-6</b>
<b>Digital I/O &amp; Counter Card Selection Guide</b>		<b>18-10</b>
<b>PCI Express DAQ Cards</b>		
<b>PCIE-1730</b>	32-ch TTL and 32-ch Isolated Digital I/O PCI Express Card	<b>18-17</b>
<b>PCIE-1751</b>	48-ch Digital I/O and 3-ch Counter PCI Express Card	<b>18-18</b>
<b>PCIE-1753</b>	96-ch Digital I/O PCI Express Card	
<b>PCIE-1752</b>	64-ch Isolated Digital Output PCI Express Card	<b>18-19</b>
<b>PCIE-1754</b>	64-ch Isolated Digital Input PCI Express Card	
<b>PCIE-1756</b>	64-ch Isolated Digital I/O PCI Express Card	
<b>PCIE-1760</b>	8-ch Relay and 8-ch Isolated Digital Input PCI Express Card	<b>18-20</b>
<b>PCIE-1810</b>	800 kS/s, 12-bit, 16-ch PCI Express Multifunction Card	<b>18-21</b>
<b>PCIE-1816</b>	1 MS/s, 16-bit, 16-ch PCI Express Multifunction Card	<b>18-22</b>
<b>PCIE-1816H</b>	5 MS/s, 16-bit, 16-ch PCI Express Multifunction Card	
<b>PCIE-1802</b>	8-ch, 24-Bit, 204.8 kS/s Dynamic Signal Acquisition PCI Express Card	<b>18-23</b>
<b>PCIE-1840</b>	4-ch 16Bit 125 MS/s High-Speed PCI Express Digitizer	<b>18-24</b>
<b>PCI Multifunction DAQ Cards</b>		
<b>PCI-1710U/UL</b>	100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card	<b>18-25</b>
<b>PCI-1710HGU</b>	100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card with High Gain	
<b>PCI-1711U/UL</b>	100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card	<b>18-26</b>
<b>PCI-1712/L</b>	1 MS/s, 12-bit, 16-ch PCI Multifunction DAQ Card	<b>18-27</b>
<b>PCI-1716/L</b>	250 kS/s, 16-bit, 16-ch PCI Multifunction DAQ Card	<b>18-28</b>
<b>PCI Analog I/O Cards</b>		
<b>PCI-1741U</b>	200 kS/s, 16-bit, 16-ch Universal PCI Multifunction Card	<b>18-29</b>
<b>PCI-1742U</b>	1 MS/s, 16-bit, 16-ch Universal PCI Multifunction Card	
<b>PCI-1714U</b>	30 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card	<b>18-30</b>
<b>PCI-1714UL</b>	10 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card	
<b>PCI-1713U</b>	100 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card	<b>18-31</b>
<b>PCI-1715U</b>	500 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card	
<b>PCI-1747U</b>	250 kS/s, 16-bit, 64-ch Analog Input Universal PCI Card	<b>18-32</b>
<b>PCI-1720U</b>	12-bit, 4-ch Isolated Analog Output Universal PCI Card	<b>18-33</b>
<b>PCI-1724U</b>	14-bit, 32-ch Isolated Analog Output Universal PCI Card	
<b>PCI-1721</b>	12-bit, 4-ch Analog Output PCI Card with 16-ch Digital I/O	<b>18-34</b>
<b>PCI-1723</b>	16-bit, 8-ch Analog Output PCI Card with 16-ch Digital I/O	<b>18-35</b>
<b>PCI-1727U</b>	14-bit, 12-ch Analog Output Universal PCI Card with 32-ch Digital I/O	
<b>PCI Digital I/O &amp; Counter Cards</b>		
<b>PCI-1735U</b>	64-ch Digital I/O and Counter Universal PCI Card	<b>18-36</b>
<b>PCI-1737U</b>	24-ch Digital I/O Universal PCI Card	
<b>PCI-1739U</b>	48-ch Digital I/O Universal PCI Card	
<b>PCI-1751</b>	48-ch Digital I/O and 3-ch Counter PCI Card	<b>18-37</b>
<b>PCI-1753</b>	96-ch Digital I/O PCI Card	<b>18-38</b>
<b>PCI-1753E</b>	96-ch Digital I/O Extension Card for PCI-1753	
<b>PCI-1755</b>	80 MB/s, 32-ch Digital I/O PCI Card	<b>18-39</b>
<b>PCI-1730U</b>	32-ch Isolated Digital I/O Universal PCI Card	<b>18-40</b>
<b>PCI-1733</b>	32-ch Isolated Digital Input PCI Card	
<b>PCI-1734</b>	32-ch Isolated Digital Output PCI Card	
<b>PCI-1750</b>	32-ch Isolated Digital I/O and 1-ch Counter PCI Card	<b>18-41</b>
<b>PCI-1752U</b>	64-ch Isolated Digital Output Universal PCI Card	<b>18-42</b>
<b>PCI-1754</b>	64-ch Isolated Digital Input PCI Card	
<b>PCI-1756</b>	64-ch Isolated Digital I/O PCI Card	
<b>PCI-1758UDI</b>	128-ch Isolated Digital Input Universal PCI Card	<b>18-43</b>
<b>PCI-1758UDO</b>	128-ch Isolated Digital Output Universal PCI Card	
<b>PCI-1758UDIO</b>	128-ch Isolated Digital I/O Universal PCI Card	
<b>PCI-1760U</b>	8-ch Relay and 8-ch Isolated Digital Input Universal PCI Card with 8-ch Counter/Timer	<b>18-44</b>
<b>PCI-1761</b>	8-ch Relay and 8-ch Isolated Digital Input PCI Card	<b>18-45</b>
<b>PCI-1762</b>	16-ch Relay and 16-ch Isolated Digital Input PCI Card	<b>18-46</b>
<b>PCI-1780U</b>	8-ch, 16-bit Counter/Timer Universal PCI Card	<b>18-47</b>
<b>PCI-1784U</b>	4-ch, 32-bit Encoder Counter Universal PCI Card with 8-ch Isolated Digital I/O	<b>18-48</b>

# Data Acquisition and Control Tutorial & Software

## PC-based Data Acquisition (DAQ) System Overview

Because industrial PC I/O interface products have become increasingly reliable, accurate, and affordable in the last few years, PC-based data acquisition and control systems are nowadays widely used in industrial and laboratory applications such as monitoring, control, data acquisition and automated testing.

It requires know-how of electrical and computer engineering to select and build a data acquisition (DAQ) and control system that actually does what you want. This tutorial gives a brief introduction to what data acquisition and control systems do and how to configure them. Here, we cover:

- Transducers and Actuators
- Signal Conditioning
- Data Acquisition and Control Hardware
- Getting Started

## Transducers and Actuators

A transducer converts temperature, pressure, level, length, position, etc. into voltage, current, frequency, pulses or other signals.

Thermocouples, thermistors and resistance temperature detectors (RTDs) are common transducers for temperature measurements. Other types of transducers include flow sensors, pressure sensors, strain gauges, load cells and LVDTs, which measure flow rate, pressure variances, force or displacement.

An actuator is a device that activates process control equipment by using pneumatic, hydraulic or electrical power. For example, a valve actuator can open and close a valve to control fluid rates.

## Signal Conditioning

Signal conditioning circuits improve the quality of signals generated by transducers before they are converted into digital signals by the PC's data-acquisition hardware. Examples of signal conditioning are signal scaling, amplification, linearization, cold-junction compensation, filtering, attenuation, excitation, common-mode rejection, and so on.


One of the most common signal conditioning functions is amplification. For maximum resolution, the voltage range of the input signals should be approximately equal to the maximum input range of the A/D converter. Amplification expands the range of the transducer signals so that they match the input range of the A/D converter. For example, a x10 amplifier maps transducer signals that range from 0 to 1 V into the range 0 to 10 V before they go into the A/D converter.

## Data Acquisition & Control Hardware

Data acquisition and control hardware generally performs one or more of the following functions: analog input, analog output, digital input, digital output and counter/timer functions. This section will discuss each function and list some considerations that are important when you select a data acquisition and control system.

### Analog Inputs (A/D)

Analog to digital (A/D) conversion changes analog voltage or current levels into digital information. The conversion is necessary to enable a computer to process or store the signals.

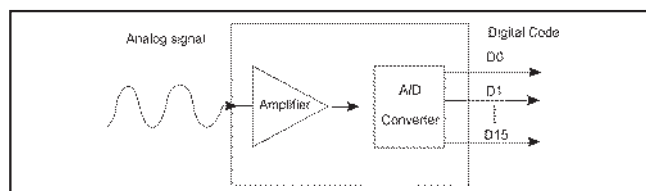


The most significant criteria when selecting A/D hardware are:

1. Number of input channels
2. Single-ended or differential input signals
3. Sampling rate (in samples per second)
4. Resolution (usually measured in bits of resolution)
5. Input range (specified in full-scale volts)
6. Noise and nonlinearity

### Analog Outputs (D/A)

The opposite of analog to digital conversion is digital to analog (D/A) conversion. This operation converts digital information into analog voltage or current. D/A devices allow a computer to control real-world events.

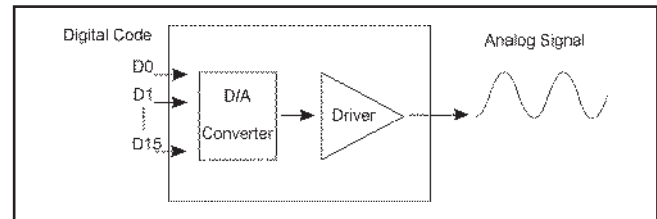

Analog output signals may directly control process equipment. The process can give feedback in the form of analog input signals. This is referred to as a closed loop control system with PID control. Analog outputs can also be used to generate waveforms. In this case, the device behaves as a function generator.

### Digital Inputs and Outputs

Digital input/output functions are useful in applications such as contact closure and switch status monitoring, industrial On/Off control and digital communications.

### Counter/Timer

A counter/timer can be used for event counting, flowmeter monitoring, frequency counting, pulse width measurement, time period measurement, and so on.

## Getting Started

### Advantech: The Source For What You Need

Advantech manufactures data acquisition hardware and software for measurement, monitoring and applications control. The following guide is provided to help you choose components for your data acquisition system.

#### Step 1: Know Your Fundamental Goal

Decide whether your DAQ system will be used primarily for measurement, monitoring, control, or analysis. Know the data requirements of your process, and know the number of data collection points in your system. Know the required data collection speed, the sampling rate, the type of measurement, the voltage or current being produced, the desired accuracy and the output resolution at each data collection point. Finally, know the timing of events in your system, and any special environmental conditions that exist.

#### Step 2: Hardware Selection

Select the hardware required to achieve your fundamental goal. Advantech provides plug-in boards for Analog-to-Digital, Digital-to-Analog, Digital I/O needs. Both ISA and PCI bus products are available. Your hardware selection should be based on five major criteria:

1. Number and types of channels
2. Differential or single-ended inputs
3. Resolution
4. Speed
5. Software compatibility with hardware

#### Step 3: Accessory Selection

Most applications require additional accessories which are available as separate items. These include:

1. Expansion peripherals to add channels to your system
2. Cables, signal conditioners and external boxes such as screw terminals or BNC accessories

#### Step 4: Software Selection

More than any other single factor, software will determine your system start-up time, as well as its effectiveness, suitability for your application, and ease of modification.

Three major criteria should determine the choice of software:

1. Operating system used
2. User programming expertise
3. Software compatibility with hardware

# DAQNavi Introduction

## What is DAQNavi?

DAQNavi is a Advantech next-generation driver package, for programmers to develop their application programs using Advantech DAQ boards or devices. This integrated driver package includes device drivers, SDK, tutorial and utility. With the user-friendly design, even the beginner can quickly get familiar with how to utilize DAQ hardware and write programs through the intuitive "Advantech Navigator" utility environment. Many example codes for different development environment dramatically decrease users' programming time and effort. You can go to [www.advantech.com/DAQNavi](http://www.advantech.com/DAQNavi) for more information about Advantech DAQNavi.

### Multiple Operating System Support

DAQNavi supports many popular operating systems (OS) used in automation applications. For different OSs, API functions will be the same, so users can simply install the driver without modifying their program again when migrating between two different OSs.

DAQNavi supports latest Windows 8/7/Vista/XP and Windows CE (both 32-bit and 64-bit).

Besides Windows operating system, Linux is famous for its openness and flexibility. DAQNavi software package also support Linux OS including Ubuntu, Fedora, Debian, Susi distributions. For other distributions, please contact the local Advantech branch or dealer in your area.

Note: DAQNavi only supports Windows 8 desktop version. Windows RT version is not supported.

### LabVIEW and Matlab Support

LabVIEW is popular graphical development environment used for measurement and automation. For LabVIEW user, DAQNavi offers two options for programming: Express VI and Polymorphic VIs. Express VI helps user quickly complete his programming without extra wiring. When user drags the Express VI on LabVIEW Block Diagram, a pop-up intuitive wizard window will appear and user can perform configurations. After that, the programming is done. So it is similar to the .NET Component DAQ Wizard used in Microsoft Visual Studio environment, making programming more easily. As for the Polymorphic VI, user can use several VIs and wiring to build more complex program. Except LabVIEW, DAQNavi also support Matlab programming.

### .NET Support

DAQNavi offers a series of **.NET Component** object, that you can benefit from platform-unified feature by latest .NET technology. User can simply drag and drop the .NET Components within .NET programming environment, such as Microsoft Visual C# and VB .NET. An intuitive window (called "DAQNavi Wizard") will pop-up, and user can perform all configurations by sequence. It is so-called "Configure & Run" programming. Programmers also can choose writing code manually with the .NET Component, to have a more flexible object calling. With Advantech CSCL technology, engineers can do the similar programming in a native environment such as Visual C++.


### C++, Delphi, VB, BCB, Java and Qt Support

DAQNavi offers C++ Class Library (for VC++ and Borland C++ Builder) and ActiveX (for Visual Basic, Delphi, and BCB) for Native programming environment with the same calling interface as .NET Class Library. With DAQNavi Java class library and Qt class library, users can develop Java and Qt programs to migrate between different operating systems (including Windows and Linux).

### Support Modules

DAQNavi supports all PCI Express, PCI, PC/104, and PCI-104 cards, as well as all USB DAQ devices.

## DAQNavi Driver Package Architecture

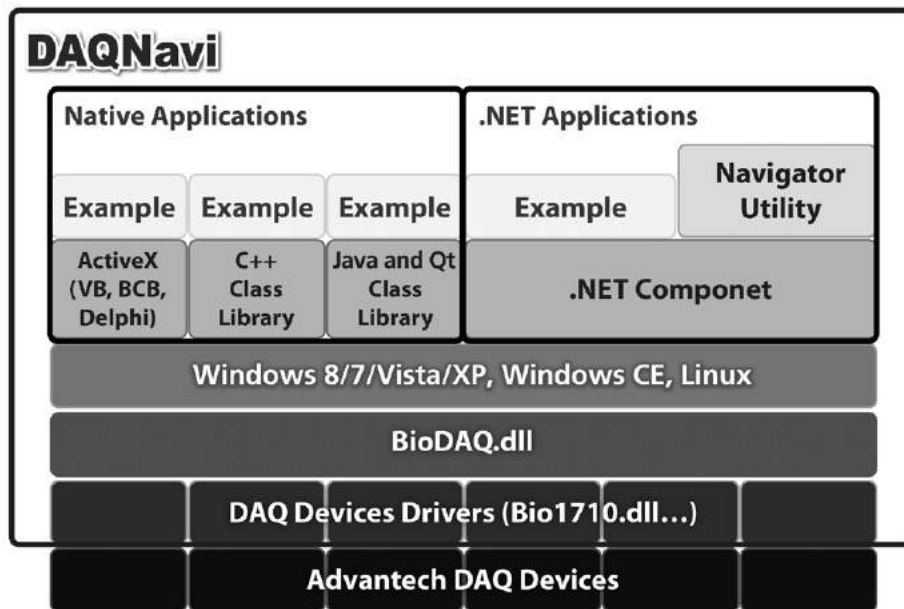

Note: When you visit Advantech DAQNavi download website, you can find two software: (1) DAQNavi SDK (2) individual DAQNavi driver for specific hardware. You need to install these two software on your computer to utilize the hardware.


- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Powerful Intuitive Utility: Advantech Navigator




**Devices**  
 You can see all your installed Advantech DAQ devices here, including the simulated DAQ device called "DemoDevice". In other words, you don't need any hardware installed on your computer to test all operations within DAQnavi. For each device, there are four items you can select.

- 1. Device Setting**  
 You can perform all hardware configurations for the selected device.
- 2. Device Test**  
 You can test all hardware functionality here, without any programming.

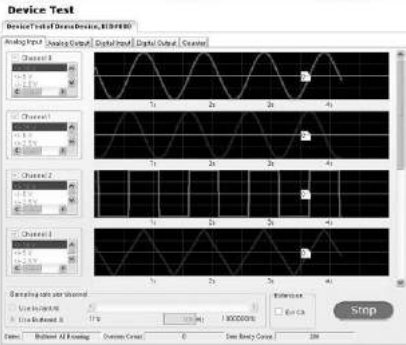

**3. Scenarios**  
 Advantech defines commonly-used measurement and automation applications, named "scenarios" for users to refer. For each scenario, one example program is embedded within Advantech Navigator that you can execute it directly. Corresponding source code for each scenario is provided, written by different language (C#, VB .NET, C++, Delphi, Qt, VB6, and Java). Besides, wiring diagram for each scenario is available here.

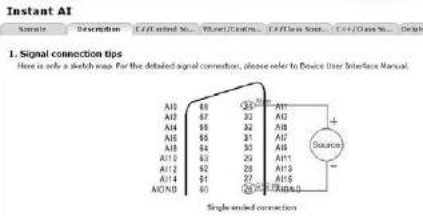

**4. Reference**  
 You can find the detailed user manual for the selected device.

## SDKs

### 1. DAQ User Interface Manual

To shorten the development time, Advantech offer a lot of tutorial and reference documentation. There are two programming ways you can refer: (1) Class Library (2) Device Control. You can find instructions for programming. It not only teaches you how to create one application project, but also how to write the program with a programming chart and example code.

```

Instant AI
-----
Instant AI
Example: Get AI Value

Example
-----
C#
-----
public static void IncreaseAI()
{
    // Open device with write access
    WriteAccess Device = null;
    DeviceOpen req = DeviceOpen.Open(AI_DEVICE_NAME, Device);
    // Set AI Mode
    Mode m = Device.GetMode(AI, out ai);
    // Set the parameter (not necessary)
    int offset = 0;
    int = ai.Property.Get(Property.AI_ChannelOffset, out offset);
    Device.Write(AI);
    int i = 0;
    while ( i < 1000 )
    {
        int = ai.Read(AI, offset, req, out data);
        Console.WriteLine("AI Value: " + data);
        i++;
    }
}
    
```

**2. Tutorial Video**  
 If you don't know how to start creating a project, Advantech offers a tutorial video for your programming reference.




## Scenarios: Commonly-used for Measurement and Automation Applications

Category	Scenario	Description
Analog Input	Instant AI	Read single AI value once
	Asynchronous One Buffered AI	Read a buffer of AI values once (Don't need to wait the acquisition is done to run other program)
	Synchronous One Buffered AI	Read a buffer of AI values once (Need to wait the acquisition is done to run other program)
	Streaming AI	Continuously read a buffer of AI values
Analog Output	Static AO	Change AO values once
	Asynchronous One Waveform AO	Change AO value based on a pre-defined waveform once (Don't need to wait the generation is done to run other program)
	Synchronous One Waveform AO	Change AO value based on a pre-defined waveform once (Need to wait the generation is done to run other program)
	Streaming AO	Continuously change AO value based on a pre-defined waveform
Digital Input	Static DI	Read the selected DI port value once
	DI Interrupt	When DI bit meets a pre-defined edge change (rising or falling), an interrupt is generated
	DI Pattern Match Interrupt	When selected DI port meets pre-defined pattern, an interrupt is generated
Digital Output	DI Status Change Interrupt	When the status of certain selected channel of DI port changes, an interrupt is generated
	Static DO	Change DO values once
Timer/Counter	Delayed Pulse Generation	When a trigger from counter gate is met, a pulse is generated after a specific period
	Pulse Output with Timer Interrupt	Continuously generate a periodic pulse train (using counter internal clock), and an event will be sent out at the same time.
	Event Counter	Continuously count the pulse number of signal from counter input
	Frequency Measurement	Measure frequency of signal from counter input
	Pulse Width Measurement	Measure pulse width of signal from counter input
PWM Output	Generate PWM (Pulse Width Modulation) signal	

# DAQNavi Data Logger

## Configurable Data Logging Software

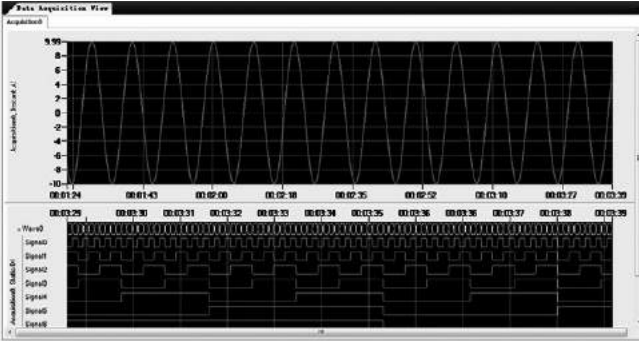

### Features

- Data logging, display and recording without programming
- Instant AI, buffered AI and static DI data logging
- Intuitive hardware channel parameters configuration wizard
- Supports simulated device operation
- Save configurations into a project file for future re-use
- Real-time display with zoom and pan operation
- Supports data recording to store as file to local disk
- Recorded data playback to view historical data
- Supports both analog graph and digital graph display


## Introduction

Advantech DAQNavi Data Logger is ready-to-use application software that engineers can leverage its easy-to-use interface to perform data logging, display and recording. Without spending any time on programming, engineers can benefit from flexibility to acquire and store data from various Advantech data acquisition devices for their data logging tasks.

## Features Details

### Data Acquisition Devices Configuration

Before data logging measurement, engineers can do all necessary analog and digital input channels configuration using built-in DAQNavi wizard. Step-by-step instructions by intuitive window can help engineer easily complete related settings. Except real data acquisition devices, DAQNavi Data Logger also offer simulated device that engineers can do all operation without any hardware installed on computer.

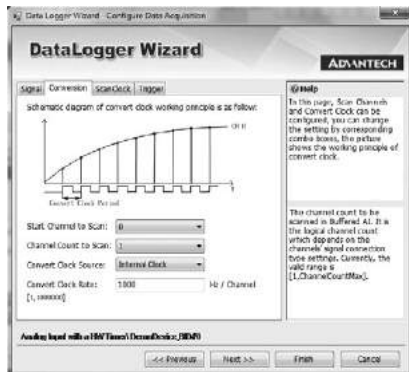

### Configuration Management by Project Files

Engineer can create and edit a project to include one or several data logging tasks.

Within one project, data can be acquired and displayed from one or multiple data acquisition devices. Current input channels configurations and logging settings can be saved as a specific project file. Afterwards, engineer can open previous project file to load all configurations and start data logging tasks immediately.

### Real-time Data Logging, Display and Recording

After data acquisition configuration is done, engineers can immediately start data acquisition and display the logging data on a real-time graph. The graph can be zoom in, zoom out or pan dynamically during data logging. Engineers can decide if they want to record the data (save data into a pre-defined file) during data logging.

### Historical Data Playback

Previous recorded data can be loaded back to DANNAvi Data Logger software and viewed by Playback function. Related zoom in, zoom out and pan operation is also available for historical data display.

## Specifications

### Supported Hardware

- PCI Express multifunction, analog input and digital input cards
- PCI multifunction, analog input and digital input cards
- USB multifunction, analog input and digital input modules
- PC/104 and PCI-104 multifunction, analog input and digital input cards

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Analog I/O & Multifunction Card Selection Guide



Category			Multifunction						
Bus			PCI						
Model			PCI-1710U/UL	PCI-1710HGU	PCI-1711U/UL	PCI-1712/L	PCI-1716/L	PCI-1706U/UL	PCI-1718HDU
Analog Input	General Spec.	Resolution	12 bits	12 bits	12 bits	12 bits	16 bits	16 bits	12 bits
		Channels	16 SE/8 Diff.	16 SE/8 Diff.	16 SE	16 SE/8 Diff.	16 SE/8 Diff.	8 Diff.	16 SE/8 Diff.
		Onboard FIFO	4,096 samples	4,096 samples	1,024 samples	1,024 samples	1,024 samples	8,192 samples	1,024 samples
		Sampling Rate	100 kS/s	100 kS/s	100 kS/s	1 MS/s	250 kS/s	250 kS/s	100 kS/s
	Input Ranges	Unipolar Inputs (V)	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 1, 0 ~ 0.1, 0 ~ 0.01	-	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	-	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25
		Bipolar Inputs (V)	±10, 5, 2.5, 1.25, 0.625	±10, 5, 1, 0.5, 0.1, 0.05, 0.01, 0.005	±10, 5, 2.5, 1.25, 0.625	±10, 5, 2.5, 1.25, 0.625	±10, 5, 2.5, 1.25, 0.625	±10, 5, 2.5, 1.25	±10, 5, 2.5, 1.25, 0.625
		Configurable Per-Channel	✓	✓	✓	✓	✓	✓	✓
	Trigger Modes	Pacer/Software/External Pulse	✓	✓	✓	✓	✓	✓	✓
		Analog Slope	-	-	-	✓	-	✓	-
		Advanced Trigger	-	-	-	✓	-	✓	-
	Data Transfer Modes	Software	✓	✓	✓	✓	✓	✓	✓
		DMA	-	-	-	Bus-mastering	Bus-mastering	✓	-
	Analog Output	Resolution	12 bits	12 bits	12 bits	12 bits	16 bits	12 bits	12 bits
		Channels	2 (PCI-1710U only)	2	2 (PCI-1711U only)	2 (PCI-1712 only)	2 (PCI-1716 only)	2 (PCI-1706U only)	1
Onboard FIFO		-	-	-	32,768 samples	-	-	-	
Output Range (V)		0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10, ±5, ±10	0 ~ 5, 0 ~ 10, ±5, ±10	0 ~ 5, 0 ~ 10, ±5, ±10, 0 ~ 20 mA, 4 ~ 20 mA	0 ~ 5, 0 ~ 10	
Output Rate		Static update	Static update	Static update	1 MS/s	Static update	Static update	Static update	
DMA Transfer		-	-	-	✓	-	-	-	
Digital I/O		Input Channels	16	16	16	16 (shared)	16	16 (shared)	16
	Output Channels	16	16	16	-	16	-	16	
Timer/Counter	Channels	1	1	1	3	1	2	1	
	Resolution	16 bits	16 bits	16 bits	16 bits	16 bits	32 bits	16 bits	
	Max. Input Frequency	10 MHz	10 MHz	10 MHz	10 MHz	10 MHz	10 MHz	10 MHz	
Isolation Voltage			-	-	-	-	-	-	
Auto Calibration			-	-	-	✓	✓	-	
BoardID Switch			✓	✓	✓	-	✓	✓	
Dimensions (mm)			175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	
Connector			68-pin SCSI	68-pin SCSI	68-pin SCSI	68-pin SCSI	68-pin SCSI	DB37	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	✓	
	WinCE	✓	-	-	-	-	-	-	
	Linux	✓	✓	✓	✓	✓	✓	✓	
DAQ/NAVI Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	✓	✓	
	WinCE	✓	-	-	-	-	-	-	
	Linux	-	-	✓	-	-	-	-	
LabVIEW Driver			✓	✓	✓	✓	✓	✓	
Page			19-23	19-23	19-24	19-25	19-26	online	online

\* All channels should be set to the same range.

\*\* SS: Single DMA channel, Single A/D channel scan; SM: Single DMA channel, Multiple A/D channel scan

# Selection Guide




Category			Multifunction						
Bus			PCI		ISA				
Model			PCI-1741U	PCI-1742U	PCL-711B	PCL-812PG	PCL-818L	PCL-818HD	PCL-818HG
Analog Input	General Spec.	Resolution	16 bits	16 bits	12 bits	12 bits	12 bits	12 bits	12 bits
		Channels	16 SE/8 Diff.	16 SE/8 Diff.	8 SE	16 SE	16 SE/8 Diff	16 SE/8 Diff	16 SE/8 Diff
		Onboard FIFO	1,024 samples	1,024 samples	-	-	-	1,024 samples	1,024 samples
		Sampling Rate	200 kS/s	1 MS/s	40 kS/s	30 kS/s	40 kS/s	100 kS/s	100 kS/s
	Input Ranges	Unipolar Inputs (V)	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25*	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	-	-	-	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 1, 0 ~ 0.1, 0 ~ 0.01
		Bipolar Inputs (V)	±10, 5, 2.5, 1.25, 0.625*	±10, 5, 2.5, 1.25, 0.625	±5, 2.5, 1.25, 0.625, 0.3125	±10, 5, 2.5, 1.25, 0.625, 0.3125	±10, 5, 2.5, 1.25, 0.625	±10, 5, 2.5, 1.25, 0.625	±10, 5, 1, 0.5, 0.1, 0.05, 0.01, 0.005
		Configurable Per-Channel	-	✓	✓	✓	✓	✓	✓
	Trigger Modes	Pacer/Software/External Pulse	✓	✓	✓	✓	✓	✓	✓
		Analog Slope	-	-	-	-	-	-	-
		Advanced Trigger	-	-	-	-	-	-	-
	Data Transfer Modes	Software	✓	✓	✓	✓	✓	✓	✓
		DMA	-	Bus-mastering	-	SS**	SM**	SM**	SM**
	Analog Output	Resolution		16 bits	16 bits	12 bits	12 bits	12 bits	12 bits
		Channels		1	2	1	2	1	1
Onboard FIFO		-	-	-	-	-	-	-	
Output Range (V)		±5, ±10	0 ~ 5, 0 ~ 10, ±5, ±10	0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10, ±10	0 ~ 5, 0 ~ 10, ±10	
Output Rate		Static update	Static update	Static update	Static update	Static update	Static update	Static update	
DMA Transfer		-	-	-	-	-	-	-	
Digital I/O	Input Channels		16	16	16	16	16	16	
	Output Channels		16	16	16	16	16	16	
Timer/Counter	Channels		1	1	-	1	1	1	
	Resolution		16 bits	16 bits	-	16 bits	16 bits	16 bits	
	Max. Input Frequency		10 MHz	10 MHz	-	2 MHz	10 MHz	10 MHz	
Isolation Voltage			-	-	-	-	-	-	
Auto Calibration			✓	✓	-	-	-	-	
BoardID Switch			✓	✓	-	-	-	-	
Dimensions (mm)			175 x 100	175 x 100	175 x 100	185 x 100	155 x 100	185 x 100	
Connector			68-pin SCSI	68-pin SCSI	3 x 20-pin	5 x 20-pin	DB37	DB37	DB37
Legacy Driver	Windows XP/2000		✓	✓	✓	✓	✓	✓	
	WinCE		-	-	-	-	-	-	
	Linux		✓	✓	-	-	-	-	
DAQnavi Driver	Windows 8/7/Vista/XP/2000		✓	✓	-	-	✓	✓	
	WinCE		-	-	-	-	-	-	
	Linux		✓	-	-	-	-	-	
LabVIEW Driver			✓	✓	✓	✓	✓	✓	
Page			19-27	19-27	online	online	online	online	

\* All channels should be set to the same range.

\*\* SS: Single DMA channel, Single A/D channel scan; SM: Single DMA channel, Multiple A/D channel scan

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Analog I/O & Multifunction Card Selection Guide



Category		Multifunction							
Bus		PC/104			PCI-104	PCIE			
Model		PCM-3718H	PCM-3718HG	PCM-3718HO	PCM-3810I	PCIE-1810	PCIE-1816	PCIE-1816H	
Analog Input	General Spec.	Resolution	12 bits	12 bits	12 bits	12 bits	12 bits	16 bits	16 bits
		Channels	16 SE/8 Diff.	16 SE/8 Diff.	16 SE/8 Diff.	16 SE/8 Diff.	16 SE/8 Duff.	16 SE/8 Duff.	16 SE/8 Duff.
		Onboard FIFO	-	-	1,024 samples	4,096 samples	4,096 samples	4,096 samples	4,096 samples
		Sampling Rate	100 kS/s	100 kS/s	100 kS/s*	250 kS/s	800 kS/s	1 MS/s	5 MS/s
	Input Ranges	Unipolar Inputs (V)	0 ~ 10, 0 ~ 5 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 1 0 ~ 0.1, 0 ~ 0.01	0 ~ 10, 0 ~ 5 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25
		Bipolar Inputs (V)	±10, 5, 2.5, 1.25, 0.625	±10, 5, 1, 0.5, 0.1, 0.05, 0.01, 0.005	±10, 5, 2.5, 1.25, 0.625	±10, 5, 2.5, 1.25, 0.625	±10, ±5, 2.5, 1.25, 0.625	±10, ±5, 2.5, 1.25, 0.625	±10, ±5, 2.5, 1.25, 0.625
		Configurable Per-Channel	✓	✓	✓	✓	✓	✓	✓
	Trigger Modes	Pacer/ Software/ External Pulse	✓	✓	✓	✓	✓	✓	✓
		Analog Slope	-	-	-	-	✓	✓	✓
		Advanced Trigger	-	-	-	✓	Start/ Stop/ Delay to Start/ Delay to Stop	Start/ Stop/ Delay to Start/ Delay to Stop	Start/ Stop/ Delay to Start/ Delay to Stop
	Data Transfer Modes	Software	✓	✓	✓	✓	✓	✓	✓
		DMA	SS**	SS**	SS**	-	Bus-mastering	Bus-mastering	Bus-mastering
Analog Output	Resolution	-	-	12 bits	12 bits	12 bits	16 bits	16 bits	
	Channels	-	-	1	2	2 (Waveform Output)	2 (Waveform Output)	2 (Waveform Output)	
	Onboard FIFO	-	-	-	-	4,096 samples	4,096 samples	4,096 samples	
	Output Range (V)	-	-	0 ~ 5, 0 ~ 10	0 ~ 5, 0 ~ 10, ±5, ±10	0 ~ 5, 0 ~ 10, ±5, ±10	0 ~ 5, 0 ~ 10, ±5, ±10	0 ~ 5, 0 ~ 10, ±5, ±10	
	Output Rate	-	-	Static update	250 kS/s	500 kS/s/s	3 MS/s	3 MS/s	
	DMA Transfer	-	-	-	-	Bus-mastering	Bus-mastering	Bus-mastering	
Digital I/O	Input Channels	16	16	16	16	24	24	24	
	Output Channels	(shared)	(shared)	(shared)	(shared)	(shared)	(shared)	(shared)	
Timer/ Counter	Channels	1	1	1	3	2	2	2	
	Resolution	16 bits	16 bits	16 bits	16 bits	32-bit	32-bit	32-bit	
	Max. Input Frequency	10 MHz	10 MHz	10 MHz	10 MHz	10 MHz	10 MHz	10 MHz	
Isolation Voltage		-	-	-	-	-	-	-	
Auto Calibration		-	-	-	✓	✓	✓	✓	
BoardID Switch		-	-	-	-	✓	✓	✓	
Dimensions (mm)		96 x 90	96 x 90	96 x 90	96 x 90	168 x 100	168 x 100	168 x 100	
Connector		2 x 20-pin	2 x 20-pin	2 x 20-pin	50-pin/26-pin box header	68-pin SCSI	68-pin SCSI	68-pin SCSI	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	-	-	-	
	WinCE	✓	✓	✓	-	-	-	-	
	Linux	✓	✓	✓	-	-	-	-	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	-	-	-	
	Linux	-	-	-	✓	-	-	-	
LabVIEW Driver		✓	✓	✓	✓	✓	✓	✓	
Page		19-49	19-49	19-49	19-47	19-21	19-22	19-22	

\* 80 kHz on Pentium 4-based (or upper) system

\*\* SS: Single DMA channel, Single A/D channel scan



# Selection Guide



Category		Analog Input							Analog Output		
Bus		PCI					ISA	PCI-104	PCI		
Model		PCI-1713U	PCI-1714U	PCI-1714UL	PCI-1715U	PCI-1747U	PCL-813B	PCM-3813I	PCI-1720U	PCI-1721	
Analog Input	General Spec.	Resolution	12 bits	12 bits	12 bits	12 bits	16 bits	12 bits	12 bits	-	-
		Channels	32 SE/16 Diff.	4 SE	4 SE	32 SE/16 Diff.	64 SE/32 Diff.	32 SE	32 SE/16 Diff.	-	-
		Onboard FIFO	4,096 samples	32,768 samples	8,192 samples	1,024 samples	1,024 samples	-	1,024 samples	-	-
		Sampling Rate	100 kS/s	30 MS/s	10 MS/s	500 kS/s	250 kS/s	25 kS/s	100 kS/s	-	-
	Input Ranges	Unipolar Inputs (V)	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	-	-	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25	-	-
		Bipolar Inputs (V)	±10, 5, 2.5, 1.25, 0.625	±5, 2.5, 1, 0.5	±5, 2.5, 1, 0.5	±10, 5, 2.5, 1.25, 0.625	±10, 5, 2.5, 1.25, 0.625	±5, 2.5, 1.25, 0.625	±5, 2.5, 1.25, 0.625	-	-
		Configurable Per-Channel	✓	✓	✓	✓	✓	✓	✓	-	-
	Trigger Modes	Pacer/ Software/ External Pulse	✓	✓	✓	✓	Pacer/ Software	Software	✓	-	-
		Analog Slope	-	✓	✓	-	-	-	-	-	-
		Advanced Trigger	-	✓	✓	-	-	-	-	-	-
	Data Transfer Modes	Software	✓	✓	✓	✓	✓	✓	✓	-	-
		DMA	-	Bus-mastering	Bus-mastering	Bus-mastering	Bus-mastering	-	-	-	-
	Analog Output	Resolution	-	-	-	-	-	-	-	12 bits	12 bits
Channels		-	-	-	-	-	-	-	4	4 (Waveform Output)	
Onboard FIFO		-	-	-	-	-	-	-	-	1,024 samples	
Output Range (V)		-	-	-	-	-	-	-	0 ~ 5, 0 ~ 10, ±5, ±10, 0 ~ 20 mA, 4 ~ 20 mA	0 ~ 5, 0 ~ 10, ±5, ±10, 0 ~ 20 mA, 4 ~ 20 mA	
Output Rate		-	-	-	-	-	-	-	Static update	10 MS/s	
DMA Transfer		-	-	-	-	-	-	-	-	Bus-mastering	
Digital I/O	Input Channels	-	-	-	-	-	-	-	-	16 (shared)	
	Output Channels	-	-	-	-	-	-	-	-	-	
Timer/ Counter	Channels	-	-	-	-	-	-	-	-	1	
	Resolution	-	-	-	-	-	-	-	-	16 bits	
	Max. Input Frequency	-	-	-	-	-	-	-	-	10 MHz	
Isolation Voltage		2,500 V <sub>DC</sub>	-	-	2,500 V <sub>DC</sub>	-	500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	
Auto Calibration		-	✓	✓	-	✓	-	-	-	✓	
BoardID Switch		-	✓	✓	✓	✓	-	-	✓	✓	
Dimensions (mm)		175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	219 x 100	96 x 90	175 x 100	175 x 100	
Connector		DB37	4 x BNC	4 x BNC	DB37	68-pin SCSI	DB37	40-pin	DB37	68-pin SCSI	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	WinCE	✓	-	-	-	✓	-	-	-	-	
	Linux	✓	✓	✓	-	✓	-	-	✓	✓	
DAQ/NavI Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	-	-	-	✓	-	
	Linux	-	✓	✓	✓	✓	-	-	-	✓	
LabVIEW Driver		✓	✓	✓	✓	✓	✓	✓	✓	✓	
Page		19-29	19-28	19-28	19-29	19-30	online	19-47	19-31	19-32	

\* 80 kHz on Pentium 4-based (or upper) system  
 \*\* SS: Single DMA channel, Single A/D channel scan

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Digital I/O & Counter Card Selection Guide



Category			Analog Output					
Bus			PCI			ISA		
Model			PCI-1723	PCI-1724U	PCI-1727U	PCL-726	PCL-727	PCL-728
Analog Input	General Spec.	Resolution	-	-	-	-	-	-
		Channels	-	-	-	-	-	-
		Onboard FIFO	-	-	-	-	-	-
		Sampling Rate	-	-	-	-	-	-
	Input Ranges	Unipolar Inputs (V)	-	-	-	-	-	-
		Bipolar Inputs (V)	-	-	-	-	-	-
		Configurable Per-Channel	-	-	-	-	-	-
	Trigger Modes	Pacer/Software/External Pulse	-	-	-	-	-	-
		Analog Slope	-	-	-	-	-	-
		Advanced Trigger	-	-	-	-	-	-
Data Transfer Modes	Software	-	-	-	-	-	-	
	DMA	-	-	-	-	-	-	
Analog Output	Resolution	16 bits	14 bits	14 bits	12 bits	12 bits	12 bits	
	Channels	8	32	12	6	12	2	
	Onboard FIFO	-	-	-	-	-	-	
	Output Range (V)	±10, 0 ~ 20 mA, 4 ~ 20 mA	±10, 0 ~ 20 mA	±10, 0~20 mA	0 ~ 5, 0 ~ 10, ±5, ±10, 4 ~ 20 mA	0 ~ 5, 0 ~ 10, ±5, 4 ~ 20 mA	0 ~ 5, 0 ~ 10, ±5, ±10, 0 ~ 20 mA, 4 ~ 20 mA	
	Output Rate	Static update	Static update	Static update	Static update	Static update	Static update	
	DMA Transfer	-	-	-	-	-	-	
Digital I/O	Input Channels	16	-	16	16	16	-	
	Output Channels	(shared)	-	16	16	16	-	
Timer/Counter	Channels	-	-	-	-	-	-	
	Resolution	-	-	-	-	-	-	
	Max. Input Frequency	-	-	-	-	-	-	
Isolation Voltage			-	1,500 V <sub>DC</sub>	-	-	2,500 V <sub>DC</sub>	
Auto Calibration			✓	-	-	-	-	
BoardID Switch			✓	✓	✓	-	-	
Dimensions (mm)			175 x 100	175 x 100	175 x 100	337 x 112	337 x 112	185 x 120
Connector			68-pin SCSI	DB62	2 x 2-pin, DB37	4 x 20-pin	2 x 20-pin, DB37	2 x DB9
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	
	WinCE	-	✓	-	-	-	-	
	Linux	✓	✓	✓	-	-	-	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	-	-	-	
	WinCE	-	-	-	-	-	-	
	Linux	-	✓	✓	-	-	-	
LabVIEW Driver			✓	✓	✓	✓	✓	
Page			19-33	19-31	19-33	online	online	online

# Selection Guide



Category		Non-Isolated Digital I/O							
Bus		PCI							
Model		PCI-1735U	PCI-1737U	PCI-1739U	PCI-1751	PCI-1753	PCI-1755	PCI-1757UP	
TTL DI/O	Input Channels	32	24	48	48	96	32	24	
	Output Channels	32	(shared)	(shared)	(shared)	(shared)	(shared)	(shared)	
	Output Channel	Sink Current	24 mA @ 0.5V	24 mA @ 0.4 V	24 mA @ 0.4 V	24 mA @ 0.4 V	24 mA @ 0.44 V	24 mA @ 0.5V	24 mA @ 0.5 V
		Source Current	15 mA @ 2.0V	15 mA @ 2.4 V	15 mA @ 2.4 V	15 mA @ 2.4 V	24 mA @ 3.76 V	15 mA @ 2.0V	24 mA @ 3.7 V
Isolated DI/O	Input	Channels	-	-	-	-	-	-	
		Isolation Voltage	-	-	-	-	-	-	
		Input Range	-	-	-	-	-	-	
	Output	Channels	-	-	-	-	-	-	
		Isolation Voltage	-	-	-	-	-	-	
		Output Range	-	-	-	-	-	-	
		Max. Sink Current	-	-	-	-	-	-	
	Timer/Counter	Channels	3	-	-	3	-	3	-
Resolution		16 bits	-	-	16 bits	-	16 bits	-	
Max. Input Frequency		10 MHz	-	-	10 MHz	-	10 MHz	-	
Advanced Function	Pattern Match	-	-	-	-	✓	✓	-	
	Change of State	-	-	-	-	✓	✓	-	
	BoardID Switch	✓	✓	✓	✓	✓	✓	✓	
	Channel-Freeze Function	-	-	-	-	-	✓	-	
	Output Status Read Back	✓	✓	✓	✓	✓	-	✓	
	Dry/Wet Contact*	-	✓	✓	✓	✓	-	✓	
Dimensions (mm)		175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	120 x 65	
Connector		5 x 20-pin	1 x 50-pin	2 x 50-pin	68-pin SCSI	100-pin SCSI	100-pin SCSI-II	1 x DB25	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	-	-	-	
	Linux	✓	✓	✓	✓	✓	-	✓	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	-	✓	
	WinCE	-	-	-	-	-	-	-	
	Linux	-	-	-	✓	-	-	-	
LabVIEW Driver		✓	✓	✓	✓	✓	✓	✓	
Page		19-34	19-34	19-34	19-35	19-36	19-37	19-38	

\* Dry/wet contact can be mixed at the same time within one group.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Digital I/O & Counter Card Selection Guide



Category		Non-Isolated Digital I/O						
Bus		ISA				PC/104	PCI-104	
Model		PCL-720+	PCL-722	PCL-724	PCL-731	PCM-3724	PCM-3753I	
TTL D/I/O	Input Channels	32	144 (shared)	24 (shared)	48 (shared)	48 (shared)	96 (shared)	
	Output Channels	32						
	Output Channel	Sink Current	24 mA @ 0.5 V	24 mA @ 0.4 V	24 mA @ 0.4 V	24 mA @ 0.4 V	24 mA @ 0.5 V	24 mA @ 0.4 V
		Source Current	15 mA @ 2.0 V	-15 mA @ 2.4 V	15 mA @ 2.4 V	15 mA @ 2.4 V	15 mA @ 2.0 V	15 mA @ 2.4 V
Isolated D/I/O	Input	Channels	-	-	-	-	-	
		Isolation Voltage	-	-	-	-	-	
		Input Range	-	-	-	-	-	
	Output	Channels	-	-	-	-	-	-
		Isolation Voltage	-	-	-	-	-	-
		Output Range	-	-	-	-	-	-
		Max. Sink Current	-	-	-	-	-	-
Timer/Counter	Channels	3	-	-	-	-	-	
	Resolution	16 bits	-	-	-	-	-	
	Max. Input Frequency	1 MHz	-	-	-	-	-	
Advanced Function	Pattern Match	-	-	-	-	-	✓	
	Change of State	-	-	-	-	-	✓	
	BoardID Switch	-	-	-	-	-	-	
	Channel-Freeze Function	-	-	-	-	-	-	
	Output Status Read Back	-	✓	✓	✓	✓	✓	
	Dry/Wet Contact*	-	-	-	-	-	-	
Dimensions (mm)		185 x 100	334 x 100	125 x 100	185 x 100	96 x 90	96 x 90	
Connector		5 X 20-pin	6 x 50-pin	1 x 50-pin	2 x 50-pin	2 x 50-pin	4 x 50-pin	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	✓	✓	
	Linux	-	-	-	-	✓	✓	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	-	-	-	-	✓	✓	
	WinCE	-	-	-	-	-	-	
	Linux	-	-	-	-	-	-	
LabVIEW Driver		✓	✓	✓	✓	✓	✓	
Page		online	online	online	online	19-49	19-48	

\* Dry/wet contact can be mixed at the same time within one group.

# Selection Guide



Category		Isolated Digital I/O					Non-isolated Digital I/O		
Bus		PCI Express							
Model		PCIE-1730	PCIE-1752	PCIE-1754	PCIE-1756	PCIE-1760	PCIE-1751	PCIE-1753	
TTL DI/O	Input Channels	16	-	-	-	-	48 (shared)	96 (shared)	
	Output Channels	16	-	-	-	-	48 (shared)	96 (shared)	
	Output Channel	Sink Current	24 mA @ 0.5 V	-	-	-	-	15 mA @ 0.8 V	15 mA @ 0.8 V
		Source Current	15 mA @ 2.4 V	-	-	-	-	15 mA @ 2.0 V	15 mA @ 2.0 V
Isolated DI/O	Input	Channels	16	-	64	32	8	-	-
		Isolation Voltage	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	-
		Input Range	10 ~ 30 V <sub>DC</sub>	-	10 ~ 30 V <sub>DC</sub>	10 ~ 30 V <sub>DC</sub>	4.5 ~ 12 V <sub>DC</sub>	-	-
	Output	Channels	16 (Sink)	64 (Sink)	-	32 (Sink)	6 x Form A 2 x Form C	-	-
		Isolation Voltage	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	-
		Output Range	5 ~ 40 V <sub>DC</sub>	5 ~ 40 V <sub>DC</sub>	-	5 ~ 40 V <sub>DC</sub>	-	-	-
		Max. Sink Current	500 mA	500 mA	-	500 mA	1 A @ 125 V <sub>AC</sub> 2 A @ 30 V <sub>AC</sub>	-	-
	Timer/ Counter	Channels	-	-	-	-	8 x UP CTR 2 x PWM	3	-
Resolution		-	-	-	-	16 bits	32 bits	-	
Max. Input Frequency		-	-	-	-	500 Hz	10 MHz	-	
Advanced Function	Pattern Match	-	-	-	-	✓	✓	✓	
	Change of State	-	-	-	-	✓	✓	✓	
	BoardID Switch	✓	✓	✓	✓	✓	✓	✓	
	Channel-Freeze Function	✓	✓	-	✓	-	-	-	
	Output Status Read Back	✓	✓	-	✓	✓	✓	✓	
	Dry/Wet Contact*	✓	-	-	-	-	✓	✓	
	Dimensions (mm)	168 x 100	168 x 100	168 x 100	168 x 100	168 x 100	168 x 100	168 x 100	
Connector		1 x DB37 4 x 20-pin	100-pin SCSI	100-pin SCSI	100-pin SCSI	1 x DB37	68-pin SCSI	68-pin SCSI	
Legacy Driver	Windows XP/2000	-	-	-	-	-	-	-	
	WinCE	-	-	-	-	-	-	-	
	Linux	-	-	-	-	-	-	-	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	-	-	-	
	Linux	-	-	-	-	✓	-	-	
	LabVIEW Driver	✓	✓	✓	✓	✓	✓	✓	
Page		19-17	19-19	19-19	19-19	19-20	19-18	19-18	

\* Dry/wet contact can be mixed at the same time within one group.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Digital I/O & Counter Card Selection Guide



Category		Isolated Digital I/O						
Bus		PCI						
Model		PCI-1730U	PCI-1733	PCI-1734	PCI-1750	PCI-1752U	PCI-1754	
TTL D/I/O	Input Channels	16	-	-	-	-	-	
	Output Channels	16	-	-	-	-	-	
	Output Channel	Sink Current	24 mA @ 0.5 V	-	-	-	-	-
		Source Current	15 mA @ 2.4 V	-	-	-	-	-
Isolated D/I/O	Input	Channels	16	32	-	16	-	64
		Isolation Voltage	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>
		Input Range	5 ~ 30 V <sub>DC</sub>	5 ~ 30 V <sub>DC</sub>	-	5 ~ 50 V <sub>DC</sub>	-	10 ~ 50 V <sub>DC</sub>
	Output	Channels	16 (Sink)	-	32 (Sink)	16 (Sink)	64 (Sink)	-
		Isolation Voltage	2,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-
		Output Range	5 ~ 40 V <sub>DC</sub>	-	5 ~ 40 V <sub>DC</sub>	5 ~ 40 V <sub>DC</sub>	5 ~ 40 V <sub>DC</sub>	-
		Max. Sink Current	300 mA	-	200 mA	200 mA	200 mA	-
Timer/Counter	Channels	-	-	-	1	-	-	
	Resolution	-	-	-	16 bits	-	-	
	Max. Input Frequency	-	-	-	1 MHz	-	-	
Advanced Function	Pattern Match	-	-	-	-	-	-	
	Change of State	-	-	-	-	-	-	
	BoardID Switch	✓	✓	✓	-	✓	✓	
	Channel-Freeze Function	✓	-	-	-	✓	-	
	Output Status Read Back	✓	-	✓	-	✓	-	
	Dry/Wet Contact*	✓	✓	-	✓	-	-	
Dimensions (mm)		175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	
Connector		1 x DB37 4 x 20-pin	1 x DB37	1 x DB37	1 x DB37	100-pin SCSI	100-pin SCSI	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	
	WinCE	✓	-	✓	✓	✓	✓	
	Linux	✓	✓	✓	✓	✓	✓	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	-	-	
	Linux	✓	-	-	✓	✓	-	
LabVIEW Driver		✓	✓	✓	✓	✓	✓	
Page		19-39	19-39	19-39	19-40	19-41	19-41	

\* Dry/wet contact can be mixed at the same time within one group.

# Selection Guide



Category		Isolated Digital I/O							
Bus		PCI							
Model		PCI-1756	PCI-1758UDI	PCI-1758UDO	PCI-1758UDIO	PCI-1760U	PCI-1761	PCI-1762	
TTL D/I/O	Input Channels	-	-	-	-	-	-	-	
	Output Channels	-	-	-	-	-	-	-	
	Output Channel	Sink Current	-	-	-	-	-	-	-
		Source Current	-	-	-	-	-	-	-
Isolated D/I/O	Input	Channels	32	128	-	64	8	8	16
		Isolation Voltage	2,500 V <sub>DC</sub>	2,500 V <sub>RMS</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	3,750 V <sub>DC</sub>	2,500 V <sub>DC</sub>
		Input Range	10 ~ 50 V <sub>DC</sub>	5 ~ 25 V <sub>DC</sub>	-	5 ~ 25 V <sub>DC</sub>	4.5 ~ 12 V <sub>DC</sub>	5 ~ 50 V <sub>DC</sub>	10 ~ 50 V <sub>DC</sub>
	Output	Channels	32 (Sink)	-	128	64	6 x Form A 2 x Form C	4 x Form A 4 x Form C	16**
		Isolation Voltage	2,500 V <sub>DC</sub>	-	2,500 V <sub>RMS</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>
		Output Range	5 ~ 40 V <sub>DC</sub>	-	5 ~ 40 V <sub>DC</sub>	5 ~ 40 V <sub>DC</sub>	1 A @ 125 V <sub>AC</sub> 2 A @ 30 V <sub>DC</sub>	8 A @ 250 V <sub>AC</sub> 2 A @ 30 V <sub>DC</sub>	0.25 A @ 250 V <sub>AC</sub> 2 A @ 30 V <sub>DC</sub>
		Max. Sink Current	200 mA	-	90 mA	90 mA	-	-	-
Timer/Counter	Channels	-	-	-	-	8 x Up CTR 2 x PWM	-	-	
	Resolution	-	-	-	-	16 bits (2,500 Isolation)	-	-	
	Max. Input Frequency	-	-	-	-	500 Hz for Up CTR	-	-	
Advanced Function	Pattern Match	-	-	-	-	✓	-	-	
	Change of State	-	-	-	-	✓	-	-	
	BoardID Switch	✓	✓	✓	✓	✓	✓	✓	
	Channel-Freeze Function	✓	-	-	-	-	-	✓	
	Output Status Read Back	✓	-	✓	✓	✓	✓	✓	
Dry/Wet Contact*	-	-	-	-	-	-	-	-	
Dimensions (mm)		175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	
Connector		100-pin SCSI	Dual 100-pin mini-SCSI	Dual 100-pin mini-SCSI	Dual 100-pin mini-SCSI	1 x DB37	1 x DB37	1 x DB62	
Legacy Driver	Windows XP/2000	-	✓	✓	✓	-	✓	✓	
	WinCE	✓	✓	✓	✓	✓	✓	✓	
	Linux	-	✓	✓	✓	-	✓	✓	
DAQ/Nav Driver	Windows 8/7/Vista/XP/2000	✓	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	-	-	-	-	-	
	Linux	-	✓	✓	✓	-	✓	✓	
LabVIEW Driver		✓	✓	✓	✓	✓	✓	✓	
Page		19-41	19-42	19-42	19-42	19-43	19-43	19-43	

\* Dry/wet contact can be mixed at the same time within one group.

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# Digital I/O & Counter Card Selection Guide



Category		Isolated Digital I/O						Counter			
Bus		ISA		PC/104		PCI-104		PCI	ISA	PC/104	
Model		PCL-725	PCL-735	PCM-3725	PCM-3730	PCM-3730I	PCM-3761I	PCI-1780U	PCL-836	PCM-3780	
TTL DI/O	Input Channels	-	-	8	16	-	-	8	16	24	
	Output Channels	-	-	8	16	-	-	8	16	(shared)	
	Output Channel	Sink Current	-	-	-	0.5 V @ 8 mA	-	-	24 mA @ 0.5 V	8 mA @ 0.5 V	24 mA @ 0.5 V
		Source Current	-	-	-	0.4 mA @ 2.4 V	-	-	15 mA @ 2.4 V	0.4 mA @ 2.4 V	15 mA @ 2.0 V
Isolated DI/O	Input	Channels	8	-	8	8	16	8	-	-	-
		Isolation Voltage	1,500 V <sub>DC</sub>	-	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	-	-	-
		Input Range	5 ~ 24 V <sub>DC</sub>	-	10 ~ 50 V <sub>DC</sub>	5 ~ 24 V <sub>DC</sub>	5 ~ 30 V <sub>DC</sub>	5 ~ 30 V <sub>DC</sub>	-	-	-
	Output	Channels	4 x Form A 4 x Form C	12 x Form C	8 x Form C	8	16	8 x Form C	-	-	-
		Isolation Voltage	1,000 V <sub>DC</sub>	1,000 V <sub>DC</sub>	2,000 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,500 V <sub>DC</sub>	2,000 V <sub>DC</sub>	-	-	-
		Output Range	0.5A @ 120 V <sub>AC</sub>	1A @ 125 V <sub>AC</sub>	0.25A @ 240 V <sub>DC</sub>	5 ~ 40 V <sub>DC</sub>	5 ~ 30 V <sub>DC</sub>	0.25 A @ 250 V <sub>AC</sub>	-	-	-
		Max. Sink Current	1A @ 30 V <sub>DC</sub>	2A @ 30 V <sub>DC</sub>	1A @ 30 V <sub>DC</sub>	200 mA	300 mA	2 A @ 30 V <sub>DC</sub>	-	-	-
	Timer/Counter	Channels	-	-	-	-	-	-	8 x CTR	6 x CTR 3 x PWM	2
Resolution		-	-	-	-	-	-	16 bits	16 bits	16 bits	
Max. Input Frequency		-	-	-	-	-	-	20 MHz	10 MHz	20 MHz	
Advanced Function	Pattern Match	-	-	-	-	-	-	-	-	-	
	Change of State	-	-	-	-	-	-	-	-	-	
	BoardID Switch	-	-	-	-	-	✓	✓	-	-	
	Channel-Freeze Function	-	-	-	-	-	-	-	-	-	
	Output Status Read Back	-	-	-	-	-	✓	-	-	-	
	Dry/Wet Contact*	-	-	-	-	-	-	-	-	-	
Dimensions (mm)		147 x 95	155 x 100	96 x 90	96 x 90	96 x 90	96 x 90	175 x 100	185 x 100	96 x 90	
Connector		1 x DB37	1 x DB37	1 x 20-pin 1 x 50-pin	3 x 20-pin	2 x 20-pin	1 x 20-pin 1 x 50-pin	68-pin SCSI	1 x DB37 2 x 20-pin	1 x 50-pin 1 x 20-pin	
Legacy Driver	Windows XP/2000	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	WinCE	-	-	✓	✓	✓	✓	-	-	✓	
	Linux	-	-	✓	✓	✓	✓	✓	-	-	
DAQnavi Driver	Windows 8/7/Vista/XP/2000	-	-	✓	✓	✓	✓	✓	-	✓	
	WinCE	-	-	-	-	-	-	-	-	-	
	Linux	-	-	-	-	-	✓	-	-	-	
LabVIEW I/O Driver		✓	✓	✓	✓	✓	✓	✓	✓	✓	
Page		online	online	19-50	19-50	19-50	19-48	19-44	online	19-50	


\* Dry/wet contact can be mixed at the same time within one group.

\*\* Jumper selectable Form A/Form B-type relay output



# PCIE-1730

## 32-ch TTL and 32-ch Isolated Digital I/O PCI Express Card

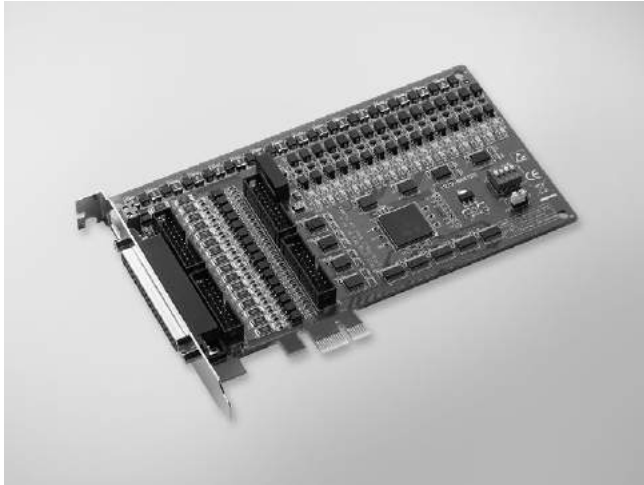

FCC CE 

### Features

- 32-ch isolated DI/O (16-ch digital input, 16-ch digital output)
- 32-ch TTL DI/O (16-ch digital input, 16-ch digital output)
- High output driving capacity
- Interrupt handling capability
- 2 x 20-pin connectors for isolated DI/O channels and 2 x 20-pin connectors for TTL DI/O channels
- D-type connector for isolated input and output channels
- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)

### Introduction

PCIE-1730 offers isolated digital input channels as well as isolated digital output channels with isolation protection up to 2,500 V<sub>DC</sub>, which makes them ideal for industrial applications where high-voltage isolation is required. There are also 32 TTL digital I/O channels on PCIE-1730.

### Specifications

#### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** 2 (DI0, DI8)

#### Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (30 V max.)
- **Interrupt Capable Ch.** 2 (IDIO, IDI8)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 50 μs
- **Input Resistance** 2.7 kΩ @ 1 W

#### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.5V max.  
Logic 1: 2.4V min.
- **Output Capability** Sink: 24mA @ 0.5V  
Source: 15mA @ 2.4V

#### Isolated Digital Output

- **Channels** 16
- **Output Type** Sink type (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** 500 mA max./channel
- **Opto-Isolator Response** 50 μs

#### General

- **Bus Type** PCI Express V1.0
- **I/O Connectors** 1 x DB37 female connector  
4 x 20-pin box header
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption** Typical: 3.3 V @ 280 mA, 12 V @ 330 mA  
Max.: 3.3 V @ 420 mA, 12 V @ 400 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCIE-1730** 32-ch Isolated Digital I/O PCIe Card

#### Accessories

- **PCL-10120-1E** 20-pin Flat Cable, 1 m
- **PCL-10120-2E** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-782** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules

16  
IoT Ethernet I/O  
Modules


17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# PCIE-1751 PCIE-1753

## 48-ch Digital I/O and 3-ch Counter PCI Express Card

## 96-ch Digital I/O PCI Express Card

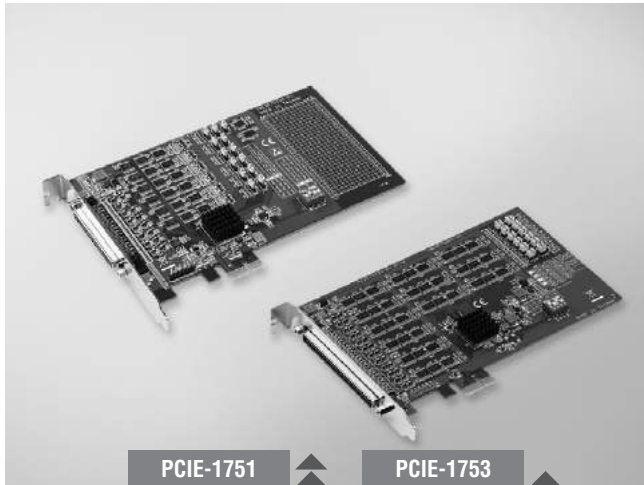

PCIE-1751

PCIE-1753



### Features

- Emulates mode 0 of 8255 PPI (every port with nibble)
- Buffered circuits for higher driving capacity than the 8255
- Interrupt handling capability
- Timer/Counter interrupt capability
- Supports both dry and wet contact
- Keeps the I/O port setting and DO state after system reset
- BoardID switch
- Pattern match interrupt function for DI
- "Change of state" interrupt function for DI
- Programmable digital filter function for DI
- Output status read back

### Introduction

PCIE-1751 is a 48-bit digital I/O card for the PCI Express bus. Its 48 channels are divided into six 8-bit I/O ports and users can configure each 4-channel per port (nibble) as input or output via software. PCIE-1751 also provides three 32-bit counters.

### Specifications

#### Digital Input

- **Channels** 48 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2 V min.
- **Interrupt Capable Ch.** 6

#### Digital Output

- **Channels** 48 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** Sink: 24mA @ 0.4 V  
Source: 15mA @ 2.4 V

#### Counter/Timer

- **Channels** 3
- **Resolution** 3 x 32-bit counter
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 20K / 200K / 2M / 20MHz  
External Clock Frequency: 10 MHz  
External Voltage Range: 5 V/TTL

#### General

- **Bus Type** Universal PCI Express
- **I/O Connectors** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption** Typical: 3.3 V @ 850 mA  
Max.: 3.3V @ 2.63 A  
Note: The maximum power consumption includes power consumption for +5 V output (on pin 34 and pin 68, with 0.5 A)
- **Operating Temperature** 0~60°C ( 32~140°F )
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCIE-1751** 48-ch Digital I/O and 3-ch Counter PCI Express

#### Accessories

- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **ADAM-3968/20** 68-pin SCSI to 3 20-pin Box Header Board
- **ADAM-3968/50** 68-pin SCSI to 2 50-pin Box Header Board
- **PCLD-8751** 48-ch Isolated Digital Input Board
- **PCLD-8761** 24-ch Replay/ Isolated Digital Input Board
- **PCLD-8762** 48-ch Relay Board

### Pin Assignment


P00	1	35	P30
P01	2	36	P31
P02	3	37	P32
P03	4	38	P33
P04	5	39	P34
P05	6	40	P35
P06	7	41	P36
P07	8	42	P37
GND	9	43	GND
P10	10	44	P40
P11	11	45	P41
P12	12	46	P42
P13	13	47	P43
P14	14	48	P44
P15	15	49	P45
P16	16	50	P46
P17	17	51	P47
GND	18	52	GND
P20	19	53	P50
P21	20	54	P51
P22	21	55	P52
P23	22	56	P53
P24	23	57	P54
P25	24	58	P55
P26	25	59	P56
P27	26	60	P57
GND	27	61	GND
CNT0_OUT	28	62	CNT0_CLK
GND	29	63	WR0_G
CNT1_OUT	30	64	CNT1_CLK
GND	31	65	WR1_G
CNT2_OUT	32	66	CNT2_CLK
REF_OUT	33	67	CNT2_G
VCC(5V)	34	68	VCC(5V)

# PCIE-1752 PCIE-1754 PCIE-1756

## 64-ch Isolated Digital Output PCI Express Card

## 64-ch Isolated Digital Input PCI Express Card

## 64-ch Isolated Digital I/O PCI Express Card

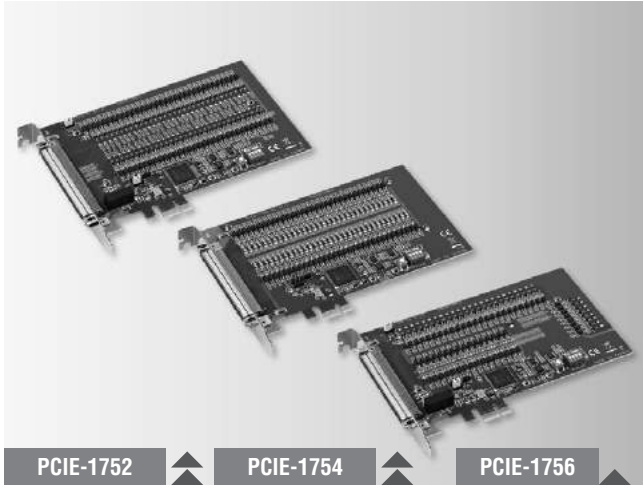

PCIE-1752

PCIE-1754

PCIE-1756



### Features

#### PCIE-1752/1756

- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High sink current on isolated output channels (500mA max./ch)
- 2,000 V<sub>DC</sub> ESD protection
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Interrupt handling capability

#### PCIE-1754/1756

- Wide input range (10 ~ 30 V<sub>DC</sub>)
- Either +/- voltage input for DI by group
- High over-voltage protection (70 V<sub>DC</sub>)
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Output status read-back
- Keeps the output settings and values after system hot reset
- Channel-freeze function

### Introduction

The Advantech PCIE-1752, PCIE-1754 and PCIE-1756 series products offer 64 isolated digital input and output channels with 2,500 V<sub>DC</sub> isolation protection. They feature a wide input range (10 ~ 30 V<sub>DC</sub>), wide output range (5 ~ 40 V<sub>DC</sub>) and high sink current (500mA max./channel) can make PCIE-1752/1754/1756 series products easily used in industrial automation control systems. With the help of the latest Advantech driver - DAQNav, users can perform the configuration and setting easily and efficiently in the programming.

### Specifications

#### Isolated Digital Input

- **Channels** PCIE-1754: 64  
PCIE-1756: 32
- **Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (30 V<sub>DC</sub> max.)
- **Input Current** 10 V<sub>DC</sub> @ 2.97 mA  
20 V<sub>DC</sub> @ 6.35 mA  
30 V<sub>DC</sub> @ 9.73 mA
- **Interrupt Capable Ch.** PCIE-1754: 4  
PCIE-1756: 2
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Overvoltage Protection** 70 V<sub>DC</sub>
- **ESD Protection** 2,000 V<sub>DC</sub>
- **Opto-isolator Response** 50 μs

#### Isolated Digital Output

- **Channels** PCIE-1752: 64  
PCIE-1756: 32
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** 500 mA max./channel
- **Opto-isolator Response** 50 μs

#### General

- **Bus Type** PCI Express V1.0
- **I/O Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption**
  - PCIE-1752**  
Typical: 3.3 V @ 485 mA  
Max.: 3.3 V @ 530 mA; 12V @ 90 mA
  - PCIE-1754**  
Typical: 3.3 V @ 285 mA  
Max.: 3.3 V @ 330 mA
  - PCIE-1756**  
Typical: 3.3 V @ 385 mA  
Max.: 3.3 V @ 430 mA; 12V @ 55 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCIE-1752** 64-ch Isolated Digital Output PCI Express Card
- **PCIE-1754** 64-ch Isolated Digital Input PCI Express Card
- **PCIE-1756** 64-ch Isolated Digital I/O PCI Express Card

#### Accessories

- **PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **PCL-10250-2E** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators
- **PCL-101100M-3E** 100-pin SCSI to 100-pin SCSI Cable, 3 m
- **ADAM-39100** 100-pin DIN-rail Wiring Board

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# PCIE-1760

## 8-ch Relay and 8-ch Isolated Digital Input PCI Express Card



FCC CE RoHS

### Features

- 8 opto-isolated digital input channels with counter/timer function
- 8 relay actuator output channels
- 2 opto-isolated PWM outputs
- LED indicators to show activated relays
- Jumper selectable dry contact/wet contact input signals
- Up event counters for DI
- Programmable digital filter function for DI
- Pattern match interrupt function for DI
- "Change of state" interrupt function for DI
- BoardID switch

### Introduction

PCIE-1760 relay actuator and isolated digital input card is a PC add-on card for the PCI Express bus. It meets the PCI Express standard Rev. 1.0. It provides 8 opto-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital inputs in noisy environments, 8 relay actuators that can be used as a on/off control devices or small power switches, and 2 isolated PWM (Pulse Width Modulation) outputs for custom applications.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

### Specifications

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 1.0 V max.  
Logic 1: 4.5 V min. (12 V max.)
- **Interrupt Capable Ch.** 8
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 25  $\mu$ s
- **Input Resistance** 2 k $\Omega$  1/4 W

#### Counter/Timer

- **Channels** 8
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 500 Hz
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **PWM Channels** 2
- **Digital Noise Filter** Min. effective high input period  $\geq [(2 \sim 65535) \times 5 \text{ ms}] + 5 \text{ ms}$   
Min. effective low input period  $\geq [(2 \sim 65535) \times 5 \text{ ms}] + 5 \text{ ms}$

#### Relay Output

- **Channels** 8
- **Relay Type** 2 x Form C, and 6 x Form A
- **Contact Rating** 1 A @ 125 V<sub>AC</sub>, 2 A @ 30 V<sub>DC</sub>
- **Max. Switching Power** 125 VA, 60 W
- **Max. Switching Voltage** 250 V<sub>AC</sub>, 220 V<sub>DC</sub>
- **Max. Switching Current** 2 A
- **Operate/Release Time** 5 / 3.5 ms max
- **Resistance** Contact: 50 m $\Omega$  max.  
Insulation: 100 M $\Omega$  min. @ 500 V<sub>DC</sub>
- **Life Expectancy (Electrical)** 3 x 10<sup>6</sup> cycles min.: 2 A @ 30 V<sub>DC</sub>, 1 A @ 125 V<sub>AC</sub>  
10<sup>6</sup> cycles min.: 1 A @ 30 V<sub>DC</sub>, 0.5 A @ 125 V<sub>AC</sub>

#### General

- **Bus Type** PCI Express V1.0
- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption** Typical: 5 V @ 450 mA  
Max.: 5 V @ 850 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

### Ordering Information

- **PCIE-1760** 8-ch Relay/DI PCIe Card w/ 10-ch Counter/Timer


#### Accessories

- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

# PCIE-1810

## 800 kS/s, 12-bit, 16-ch PCI Express Multifunction DAQ Car

**NEW**

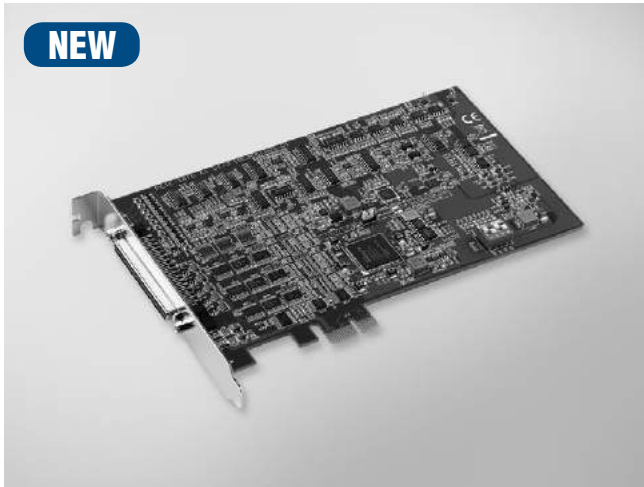

FCC CE RoHS COMPLIANT PRODUCT

### Features

- 16 analog inputs, up to 800 kS/s, 12-bit resolution
- 2 analog outputs, up to 500 kS/s, 12-bit resolution
- Support for digital trigger and analog trigger
- 24 programmable digital I/O lines
- Two 32-bit programmable counter/timers
- Onboard FIFO memory (4k samples)
- Automatic channel/gain scanning

### Introduction

The PCIE-1810 is a multifunction PCI Express card that includes digital I/O, analog I/O and counter functions. It also features a 800 kS/s 12-bit A/D converter and supports analog trigger for A/D data acquisition.

### Specifications

#### Analog Input

- **Channels** Single-end 16-ch  
Differential 8-ch
- **Resolution** 12 bits
- **Sample Rate** Single Channel 800 kS/s max.  
Multi-Channel 500 kS/s max.

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of PCIE-1810 are used, the sampling rate is  $500k/4 = 125$  kS/s per channel.

- **Trigger Reference** Digital Trigger,  
Analog Trigger
- **Trigger Mode** Start trigger, Delay to Start trigger  
Stop trigger, Delay to Stop trigger
- **FIFO Size** 4k samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 1 GΩ
- **Sampling Modes** Software and external clock
- **Input Range** Software programmable

Gain	0.5	1	2	4	8
<b>Bipolar</b>	±10V	±5	±2.5	±1.25	±0.625
<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Absolute Accuracy (% of FSR)*</b>	0.1	0.1	0.2	0.2	0.4

#### Analog Output

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static- Software Polling  
500 KS/s max.
- **Output Range** Software programmable

Internal Reference	Unipolar	0 ~ 5 V 0 ~ 10 V
	Bipolar	-5 V ~ 5 V -10 V ~ 10 V
<b>External Reference</b>	0 ~ +x V @ -x V (-10 ≤ x ≤ 10)	

- **Slew Rate** 20 V/μs
- **Driving Capability** 5 mA
- **Operation Mode** Static update, Waveform generation
- **Accuracy** INLE: ± 1 LSB, DNLE: ± 1 LSB

#### Digital I/O

- **Channels** 24
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** Sink: 15 mA @ 0.8 V  
Source: 15 mA @ 2.0 V

#### Counter

- **Channels** 2
- **Resolution** 32 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Pulse Generation** Yes
- **Timebase Stability** 50 ppm

#### General

- **Form factor** PCI Express x 1
- **Triggering** 12 bits Analog x 2 / Digital x 2
- **I/O Connector** 68-pin SCSI female connector
- **Dimensions (L x W)** 167 x 100 mm
- **Power Consumption** Typical: 3.3 V @ 488 mA  
12 V @ 112 mA  
Max.: 3.3 V @ 2.25 A  
12 V @ 390 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F) (refer to IEC 60068-2-1, 2)
- **Storage Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 60068-2-3)

### Ordering Information

- **PCIE-1810** 800 kS/s, 12-bit Multifunction Card

#### Accessories

- **PCL-10168H-1E** 68-pin SCSI Shielded Cable with Noise Rejecting, 1 m
- **PCL-10168H-2E** 68-pin SCSI Shielded Cable with Noise Rejecting, 2 m
- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards


# PCIE-1816

# PCIE-1816H

1 MS/s, 16-bit, 16-ch PCI Express Multifunction DAQ Card

5 MS/s, 16-bit, 16-ch PCI Express Multifunction DAQ Card

**NEW**

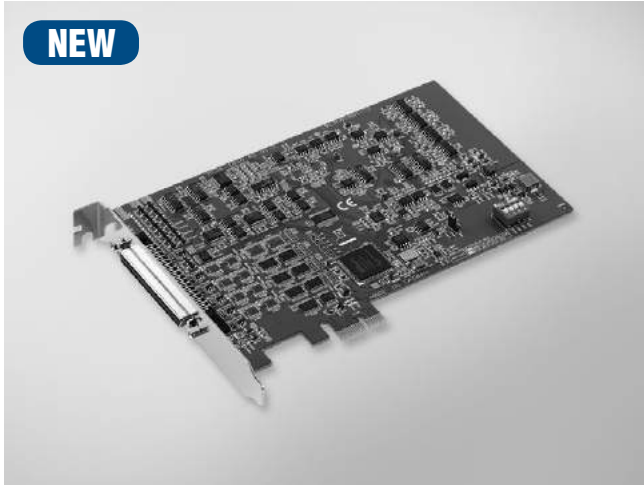

FCC CE RoHS

## Features

### PCIE-1816

- 16 analog inputs, up to 1 MS/s, 16-bit resolution

### PCIE-1816H

- 16 analog inputs, up to 5 MS/s, 16-bit resolution

### PCIE-1816/1816H

- 2 analog outputs up to 3 MS/s, 16-bit resolution
- Support Analog and Digital Trigger for AI/O
- Support Waveform generation for AO
- 24 programmable digital I/O lines
- Two 32-bit programmable counter/timers
- Onboard FIFO memory (4k samples)
- Support for Microsoft Windows 8 (desktop mode only)/7/XP

## Introduction

PCIE-1816/1816H is a 16-ch, up to 5 MS/s multi-function DAQ card and integrates digital I/O, analog I/O, and counter functions. The PCIE-1816/1816H also features analog and digital triggering, 2-ch 16 bit analog outputs with waveform generation capability, 24-ch programmable digital I/O lines, and two 32-bit general-purpose timer/counters.

## Specifications

### Analog Input

- Channels** Single-end 16-ch  
Differential 8-ch
- Resolution** 16 bits
- Sample Rate** PCIE-1816 Single Channel 1 MS/s max.  
Multi-Channel 500 kS/s max.  
PCIE-1816H Single Channel 5 MS/s max.  
Multi-Channel 1 MS/s max.

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of PCIE-1816H are used, the sampling rate is  $1M/4 = 250$  kS/s per channel.

- Trigger Reference** Analog Trigger, Digital Trigger
- FIFO Size** 4k samples
- Overvoltage Protection** 30 Vp-p
- Input Impedance** 1 G $\Omega$
- Sampling Mode** Software and external clock
- Input Range** Software programmable

PCIE-1816					
Gain	0.5	1	2	4	8
Bipolar	$\pm 10V$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
Unipolar	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Absolute Accuracy ( % of FSR)*	0.0075	0.0075	0.0075	0.008	0.008

### Analog Output

- Channels** 2
- Resolution** 16 bits
- Output Rate** 3 MS/s max.
- Output Range** Software programmable

Internal Reference	Unipolar	0 ~ 5 V 0 ~ 10 V
	Bipolar	-5 V ~ 5 V -10 V ~ 10 V
External Reference		0 ~ +x V @ -x V (-10 $\leq$ x $\leq$ 10)

- Slew Rate** 20 V/ $\mu$ s
- Driving Capability** 5 mA
- Operation Mode** Static update, Waveform Generation
- Accuracy** INLE:  $\pm 4$  LSB, DNLE:  $\pm 1$  LSB

### Digital I/O

- Channels** 24
- Compatibility** 5 V/TTL
- Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Output Capability** Sink: 15 mA @ 0.8 V  
Source: 15 mA @ 2.0 V

### Counter

- Channels** 2
- Resolution** 32 bits
- Compatibility** 5 V/TTL
- Max. Input Frequency** 10 MHz
- Pulse Generation** Yes
- Timebase Stability** 50 ppm

### General

- Form factor** PCI Express x 1
- Triggering** 16 bits Analog x 2 / Digital x 2
- I/O Connector** 68-pin SCSI female connector
- Dimensions (L x W)** 167 x 100 mm
- Power Consumption** Typical: 3.3 V @ 488 mA  
12 V @ 112 mA  
Max.: 3.3 V @ 2.25 A  
12 V @ 390 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -40 ~ 70°C (-40 ~ 158°F)
- Storage Humidity** 5 ~ 95% RH non-condensing

## Ordering Information

- PCIE-1816** 1 MS/s, 16-bit Multifunction Card
- PCIE-1816H** 5 MS/s, 16-bit Multifunction Card


### Accessories

- PCL-10168H-1E** 68-pin SCSI Shielded Cable with Noise Rejecting, 1 m
- PCL-10168H-2E** 68-pin SCSI Shielded Cable with Noise Rejecting, 2 m
- PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

# PCIE-1802

## 8-ch, 24-Bit, 216 kS/s Dynamic Signal Acquisition PCI Express Card

**Preliminary**

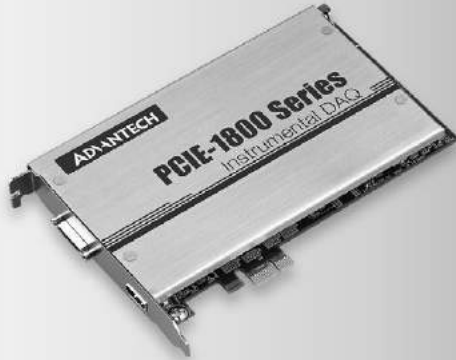

### Features

- 8 simultaneously sampled analog inputs up to 216 kS/s
- 24-bit resolution ADCs with 115 dB dynamic range
- Wide input ranges from  $\pm 0.2$  V to  $\pm 10$  V
- Built-in anti-aliasing filter
- Software configurable 4 or 10 mA Integrated Electronic Piezoelectric Excitation (IEPE)
- Software selectable AC/DC coupling
- Full auto-calibration
- Multiple card synchronization

### Introduction

The Advantech PCIE-1802 is a 24-bit high-accuracy data acquisition PCI Express module specifically designed for sound and vibration applications. This module has built-in 4 or 10 mA excitation currents for IEPE sensors such as accelerometers and microphones.

### Specifications

#### Analog Input

- **Channels** 8 (simultaneously sample, differential or 50  $\Omega$  pseudo-differential)
- **Resolution** 24 bits (Delta-sigma)
- **Max. Sampling Rate** 100 S/s to 204.8 kS/s (with resolution  $\leq 363.80$   $\mu$ S/s)
- **Input Coupling** AC/DC, selectable per channel
- **AC Cut-Off Frequency** 0.016 Hz ( $-3$  dB)
- **DC Offset Adjustment**  $\pm 50$  % of input range
- **Trigger Modes** Start trigger, Delay to Start trigger  
Stop trigger, Delay to Stop trigger
- **Input Range**  $\pm 0.2$ ,  $\pm 0.5$ ,  $\pm 1$ ,  $\pm 2$ ,  $\pm 5$ ,  $\pm 10$  V<sub>pp</sub>
- **Offset Error**  $< \pm 0.002$  %
- **Gain Error**  $< \pm 0.2$  %
- **Total Harmonic Distortion (THD)** 100 dB
- **Dynamic Range** 115 dB
- **IEPE Excitation** 0, 4, or 10 mA, selectable per channel (open/short detect)
- **Data Transfer** Direct memory access (DMA)
- **Multiple Card Synchronization** For more than 8 AI channels

#### Digital Input/Output

- **DI Channels** 1 (edge detect, noise filter)
- **DO Channels** 2

#### General


- **Bus Type** PCI Express x1
- **I/O Connectors** CN600 36-pin Mini-SCSI (for AI)  
CN601 HDMI (for clock, trigger, and DI/Os)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -40 ~ 70°C (40 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

### Ordering Information


- **PCI-1802** 8-ch, 24-Bit, 216 kS/s Dynamic Signal Acquisition PCI Express Card

### Pin Assignments

#### CN601



#### CN600

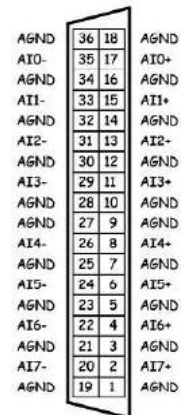


1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DI/V-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# PCIE-1840

## 4-ch 16-Bit 125 MS/s High-Speed PCI Express Digitizer

**NEW**

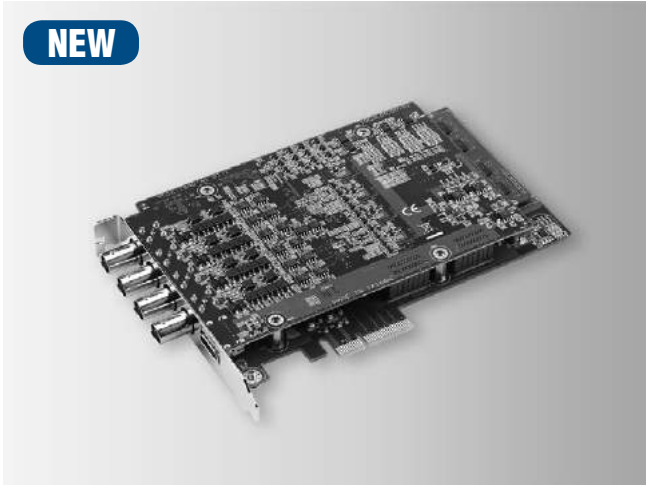

### Features

- 4 simultaneously sample analog inputs, up to 125 MS/s, 16-bit resolution
- 500 MS/s Time Interleaved Sampling
- Non-stop data streaming capable
- 2 GB on-board memory
- 1M or 50 Ohm selectable input impedance
- On-Board tunable anti-aliasing filter
- AC/DC Coupling

### Introduction

The PCIE-1840 high-speed digitizers feature four 125 MS/s simultaneously sampled analog input channels with 16-bit resolution, 100 MHz bandwidth, and up to 2 GB of memory in a PCI Express device.

### Specifications

#### Analog Input

- **Channels** 4 single-ended, simultaneously sampling
- **Resolution** 16 bits
- **Max. Sampling Rate** 125 MS/s per channel
- **Memory Size** 2GB
- **Over Voltage Protection** 30 Vp-p
- **Input Impedance** 50 Ω / 1M Ω
- **Input Coupling** AC/DC (only for 1MΩ input impedance)
- **Sampling Modes** Software and external clock
- **Trigger Modes** Start trigger, Delay to Start trigger  
Stop trigger, Delay to Stop trigger
- **Input Range** 0.2 / 0.4 / 1 / 2 / 4 / 10 / 20 Vpp (input Impedance must be 1 MΩ)
- **Time Interleaved Sampling**
  - 4 channels combined, 500 MSPS max.
  - 2 channels combined, 250 MSPS max.
  - No time interleaved, 125 MSPS max.
  - Configured automatically by setting sampling rate


#### General

- **Bus Type** PCI Express x 4
- **I/O Connectors** 4 x BNC connector (for AI)  
1 x HDMI connector (for Ext. clock and trigger)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Operating Temperature** 0 ~ 50°C (32 ~ 140°F)
- **Storage Temperature** -40 ~ 70°C (40 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCIE-1840** 4-ch 16Bit 125 MS/s High-Speed PCI Express Digitizer

### Pin Assignments

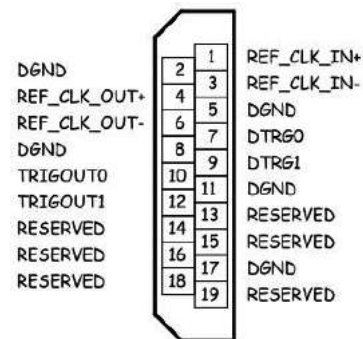




# PCI-1710U/UL PCI-1710HGU

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card with High Gain

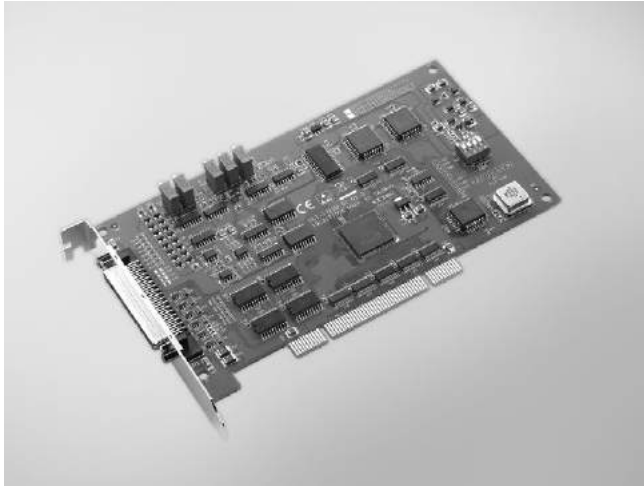

FCC CE RoHS

## Specifications

### Analog Input

- Channels: 16 single-ended/ 8 differential (software programmable)
- Resolution: 12 bits
- FIFO Size: 4,096 samples
- Oversampling Protection: 30Vp-p
- Input Impedance: 1 GΩ
- Sampling Modes: Software, onboard programmable pacer and external
- Input Range (V, software programmable) & Absolute Accuracy

PCI-1710U/UL					
Gain	0.5	1	2	4	8
Bipolar	±10	±5	±2.5	±1.25	±0.625
Unipolar	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

PCI-1710HGU								
Gain	0.5	1	5	10	50	100	500	1000
Bipolar	±10	±5	±1	±0.5	±0.1	±0.05	±0.01	±0.005
Unipolar	N/A	0 ~ 10	N/A	0 ~ 1	N/A	0 ~ 0.1	N/A	0 ~ 0.01
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4	0.4	0.8	0.8

\* ±1 LSB is added as the derivative for absolute accuracy

### Maximum Sampling Rate

Model	Gain	Max. Sampling Rate
PCI-1710U/UL	0.5, 1, 2, 4, 8	100 kS/s
PCI-1710HGU	0.5, 1	100 kS/s
	5, 10	35 kS/s
	20, 100	7 kS/s
	500, 1000	770 S/s

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of PCI-1710U are used, the sampling rate is 100k/4 = 25 kS/s per channel.

### Analog Output (PCI-1710U/HGU only)

- Channels: 2
- Resolution: 12 bits
- Output Rate: Static update
- Output Range: (Software programmable)

Internal Reference	Unipolar	0 ~ 5 V 0 ~ 10 V
External Reference		0 ~ +x V @ -x V (-10 ≤ x ≤ 10)

- Slew Rate: 10 V/μs
- Driving Capability: 3 mA
- Operation Mode: Static update
- Accuracy: INLE: ±1 LSB, DNLE: ±1 LSB

## Features

- 16-ch single-ended or 8-ch differential or a combination of analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (4,096 samples)
- Two 12-bit analog output channels (PCI-1710U/HGU only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter
- BoardID™ switch

### Digital Input

- Channels: 16
- Compatibility: 5 V/TTL
- Input Voltage: Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- Channels: 16
- Compatibility: 5 V/TTL
- Output Voltage: Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.  
Sink: 8.0 mA @ 0.8 V  
Source: 0.4 mA @ 2.0 V

### Output Capability

### Pacer/Counter

- Channels: 1
- Resolution: 16 bits
- Compatibility: 5 V/TTL
- Max. Input Frequency: 1 MHz

### General

- Bus Type: Universal PCI V2.2
- I/O Connector: 1 x 68-pin SCSI female connector
- Dimensions (L x H): 175 x 100 mm (6.9" x 3.9")
- Power Consumption: Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A
- Operating Temperature: 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature: -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity: 5 ~ 95% RH non-condensing

## Ordering Information

- PCI-1710U: 100 kS/s, 12-bit Multifunction Card
- PCI-1710UL: 100 kS/s, 12-bit Multifunction Card w/o AO
- PCI-1710HGU: 100 kS/s, 12-bit High-gain Multifunction Card


### Accessories

- PCLD-8710: DIN-rail Wiring Board w/ CJC
- PCL-10168-1E: 68-pin SCSI Shielded Cable, 1 m
- PCL-10168-2E: 68-pin SCSI Shielded Cable, 2 m
- ADAM-3968: 68-pin DIN-rail SCSI Wiring Board

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Ethernet I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules
- Data Acquisition Boards

# PCI-1711U/UL

## 100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card

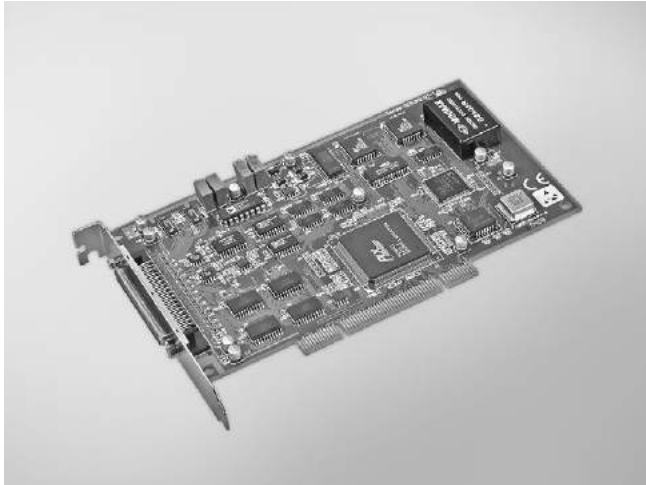

FCC CE RoHS

### Features

- 16-ch single-ended analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples)
- Two 12-bit analog output channels (PCI-1711U only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter

### Specifications

#### Analog Input

- **Channels** 16 single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels are used, the sampling rate is  $100k/4 = 25$  kS/s per channel.

- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 2 M $\Omega$ /5 pF
- **Sampling Modes** Software, onboard programmable pacer, or external
- **Input Range (V, software programmable) & Absolute Accuracy**

Bipolar	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

\*  $\pm 1$  LSB is added as the derivative for absolute accuracy

#### Analog Output (PCI-1711U only)

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (Software programmable)

Internal Reference	Unipolar	0 ~ 5 V, 0 ~ 10 V
External Reference		0 ~ +x V @ -x V ( $-10 \leq x \leq 10$ )

- **Slew Rate** 11 V/ $\mu$ s
- **Driving Capability** 3 mA
- **Output Impedance** 0.81  $\Omega$
- **Operation Mode** Static update
- **Accuracy** INLE:  $\pm 0.5$  LSB  
DNLE:  $\pm 0.5$  LSB

#### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

#### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V  
Logic 1: 2.0 V
- **Output Capability** Sink: 8.0 mA @ 0.8 V  
Source: 0.4 mA @ 2.0 V

#### Pacer/Counter

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption**  
PCI-1711U Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A  
PCI-1711UL Typical: 5 V @ 700 mA  
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **PCI-1711U** Entry-level 100 kS/s, 12-bit Multifunction Card
- **PCI-1711UL** Entry-level 100 kS/s, 12-bit Multi. Card w/o AO

#### Accessories

- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

# PCI-1712/L

## 1 MS/s, 12-bit, 16-ch PCI Multifunction DAQ Card



FCC CE RoHS

### Specifications

#### Analog Input

- **Channels** 16 single-ended/ 8 differential (software programmable)
- **Resolution** 12 bits
- **Max. Sampling Rate** Multi-channel, single gain: 1 MS/s  
Multi-channel, multi gain: 600 kS/s  
Multi-channel, multi gain, unipolar/bipolar: 400 kS/s
- **FIFO Size** 1,024 samples

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels are used, the sampling rate is  $600k/4 = 125$  kS/s per channel. (multi gain, without unipolar/bipolar mixed)

- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 100 M $\Omega$ /10 pF (Off), 100 M $\Omega$ /100 pF (On)
- **Sampling Modes** Software, onboard programmable pacer and external
- **Trigger Modes** Pre-trigger, post-trigger, delay-trigger and about-trigger

#### Input Range (V, software programmable) & Absolute Accuracy

<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Bipolar</b>	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
<b>Absolute Accuracy (% of FSR)*</b>	0.1	0.1	0.2	0.2	0.4

\*  $\pm 1$  LSB is added as the derivative for absolute accuracy

#### Analog Output (PCI-1712 only)

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** 1 MS/s max.
- **FIFO Size** 32,768 samples
- **Output Range** (Software programmable)

<b>Internal Reference</b>	<b>Bipolar</b>	$\pm 5$ V, $\pm 10$ V
	<b>Unipolar</b>	0 ~ 5 V, 0 ~ 10 V
<b>External Reference</b>		0 ~ +x V @ +x V (-10 $\leq$ x $\leq$ 10)
		-x ~ +x V @ +x V (-10 $\leq$ x $\leq$ 10)

- **Slew Rate** 20 V/ $\mu$ s
- **Driving Capability** 10 mA
- **Output Impedance** 0.1  $\Omega$  max.
- **Operation Mode** Static update, waveform generation
- **Accuracy** INLE:  $\pm 1$  LSB  
DNLE:  $\pm 1$  LSB

### Features

- 16 single-ended or 8 differential or a combination of analog inputs
- 12-bit A/D converter, with up to 1 MHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (AI: 1,024 samples AO: 32,768 samples)
- Two 12-bit analog output channels with continuous waveform output function (PCI-1712 only)
- 16-ch digital input or output (programmable)
- Three 16-bit programmable multifunction counter/timers on 10 MHz
- Auto-calibration (AI/AO)
- PCI-Bus mastering data transfer
- Pre-, post-, about- and delay-trigger data acquisition modes for analog input channels
- Flexible triggering and clocking capabilities

#### Digital I/O

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min
- **Output Capability** Sink: 8.0 mA @ 0.8 V  
Source: 0.4 mA @ 2.0 V

#### Pacer/Counter

- **Channels** 3
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz, 1 MHz, 100 kHz, 10 kHz  
External Frequency: 10 MHz max.

#### General

- **Bus Type** PCI V 2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1.0 A, 12 V @ 700 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **PCI-1712** 1 MS/s, 12-bit High-speed Multifunction PCI Card
- **PCI-1712L** 1 MS/s, 12-bit High-speed Multi. PCI Card w/o AO

#### Accessories

- **PCLD-8712** DIN-rail Wiring Board for PCI-1712/L
- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board



1 WebAccess+ Solutions

2 Motion Control

3 Power & Energy Automation

4 Automation Software

5 Intelligent Operator Panel

6 Automation Panels

7 Panel PCs

8 Industrial Wireless Solutions

9 Industrial Ethernet Solutions

10 Industrial Gateway Solutions

11 Serial communication cards

12 Embedded Automation PCs

13 DIN-Rail IPCs

14 CompactPCI Systems

15 IoT Wireless I/O Modules

16 IoT Ethernet I/O Modules

17 RS-485 I/O Modules

18 Data Acquisition Boards

# PCI-1716/L

## 250 kS/s, 16-bit, 16-ch PCI Multifunction DAQ Card



FCC CE 

### Features

- 16 single-ended or 8 differential or a combination of analog inputs
- 16-bit A/D converter, with up to 250 kHz sampling rate
- Onboard FIFO memory (1,024 samples)
- Auto-calibration
- PCI-Bus mastering data transfer
- 2 analog output channels (PCI-1716 only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter
- BoardID switch

### Specifications

#### Analog Input

- **Channels** 16 single-ended/ 8 differential (software programmable)
- **Resolution** 16 bits
- **Max. Sampling Rate** 250 kS/s

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels are used, the sampling rate is  $250k/4 = 62.5$  kS/s per channel.

- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 100 M $\Omega$ /10 pF (off), 100 M $\Omega$ /100 pF (on)
- **Sampling Modes** Software, onboard programmable pacer and external
- **Input Range (V, software programmable) & Absolute Accuracy**

<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Bipolar</b>	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
<b>Absolute Accuracy (% of FSR)*</b>	0.05	0.03	0.03	0.05	0.1

\*  $\pm 1$  LSB is added as the derivative for absolute accuracy

#### Analog Output (PCI-1716 only)

- **Channels** 2
- **Resolution** 16 bits
- **Output Rate** Static update
- **Output Range** (Software programmable)

<b>Internal Reference</b>	<b>Unipolar</b>	0 ~ 5 V, 0 ~ 10 V
	<b>Bipolar</b>	$\pm 5$ V, $\pm 10$ V
<b>External Reference</b>	0 ~ +x V @ +x V (-10 $\leq$ x $\leq$ 10) -x ~ +x V @ +x V (-10 $\leq$ x $\leq$ 10)	

- **Slew Rate** 20 V/ $\mu$ s
- **Driving Capability** 20 mA
- **Output Impedance** 0.1  $\Omega$  max.
- **Operation Mode** Static update
- **Accuracy** INLE:  $\pm 1$  LSB

#### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

#### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** Sink: 0.8 mA @ 0.8 V  
Source: 2.4 mA @ 2.0 V

#### Pacer/Counter

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 1 MHz
- **Reference Clock** Internal: 10 MHz  
External Clock Frequency: 10 MHz max.

#### General

- **Bus Type** PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1 A, 12 V @ 700 mA
- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)
- **Operating Humidity** 5 ~ 85% RH non-condensing
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **PCI-1716** 250 kS/s, 16-bit High-resolution Multi. Card
- **PCI-1716L** 250 kS/s, 16-bit High-res. Multi. Card w/o AO


#### Accessories

- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

# PCI-1741U PCI-1742U

**200 kS/s, 16-bit, 16-ch Universal PCI Multifunction Card**

**1 MS/s, 16-bit, 16-ch Universal PCI Multifunction Card**

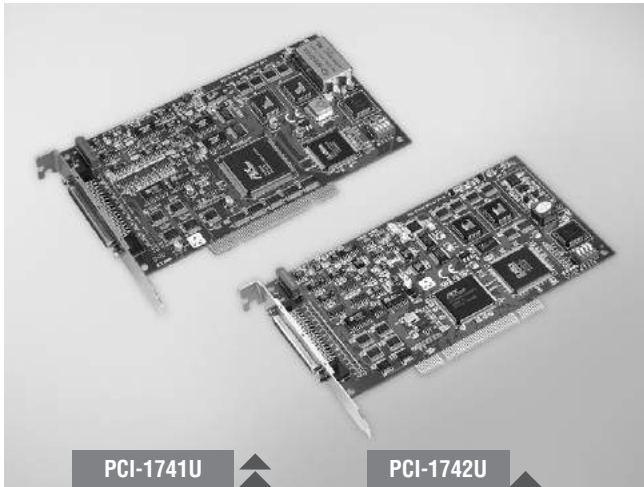

PCI-1741U

PCI-1742U



## Specifications

### Analog Input

- Channels: 16 single-ended/8 differential (software programmable)
- Resolution: 16 bits
- Max. Sampling Rate: PCI-1741U: 200 kS/s  
PCI-1742U: single-channel - 1 MS/s  
multi-channel - 800 kS/s  
unipolar bipolar mixed - 250 kS/s
- FIFO Size: 1,024 samples
- Overvoltage Protection: 30 Vp-p
- Input Impedance: 100 M $\Omega$ /10pF (Off); 100 M $\Omega$ /100pF (On)
- Sampling Mode: Software, onboard programmable pacer and external
- Input Range\*: (V, software programmable)

Unipolar	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Bipolar	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
Accuracy (% of FSR $\pm 1$ LSB)	0.02	0.02	0.02	0.03	0.04

\* Note: All channels should be set to the same range

### Analog Output

- Channels: PCI-1741U: 1  
PCI-1742U: 2
- Resolution: 16 bits
- Output Rate: Static update
- Output Range: (V, software programmable)

Internal Reference	Bipolar	$\pm 5, \pm 10$
	Unipolar	0 ~ 5, 0 ~ 10
External Reference	0 ~ +xV @ +xV (-10 $\leq$ x $\leq$ 10) -x ~ +xV @ +xV (-10 $\leq$ x $\leq$ 10)	

- Slew Rate: PCI-1741U: 20 V/us  
PCI-1742U: 40 V/us
- Driving Capability:  $\pm 20$  mA
- Output Impedance: 0.1 W max.
- Operation Mode: Software polling
- Accuracy: INLE:  $\pm 2$ LSB

### Digital Input

- Channels: 16
- Compatibility: 5 V/TTL
- Input Voltage: Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

## Features

- 16-ch single-ended or 8-ch differential analog input
- PCI-1741U: 16-bit A/D converter, with up to 200 kHz sampling rate  
PCI-1742U: 16-bit A/D converter, with up to 1 MHz sampling rate
- Onboard FIFO memory (1,024 samples)
- Auto calibration
- PCI-1741U: 1 x 16-bit analog output channel  
PCI-1742U: 2 x 16-bit analog output channels
- 16-ch digital input and 16-ch digital output
- Universal PCI bus (support 3.3 V or 5 V PCI bus signal)
- Onboard programmable counter
- BoardID™ switch

### Digital Output

- Channels: 16
- Compatibility: 5 V/TTL
- Output Voltage: Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Output Capability: Sink: 24 mA @ 0.8 V  
Source: -15 mA @ 2.0 V

### Counter/Timer

- Channels: 1
- Compatibility: 5 V/TTL
- Resolution: 16 bits
- Max. Input Frequency: 10 MHz
- Reference Clock: Internal: 10 MHz  
External Clock Frequency: 10 MHz

### General

- Bus Type: Universal PCI V2.2
- I/O Connector Type: 1 x 68-pin SCSI female connector
- Dimensions (L x H): 175 x 100 mm (6.9" x 3.9")
- Power Consumption: Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1 A, 12 V @ 700 mA
- Operating Temperature: 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1, 2)
- Storage Temperature: -20 ~ 70° C (-4 ~ 158° F)
- Storage Humidity: 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

## Ordering Information

- PCI-1741U: 200 kS/s, 16-bit, 16-ch Univ. PCI Multi. Card
- PCI-1742U: 1 MS/s, 16-bit, 16-ch Univ. PCI Multi. Card

### Accessories

- PCL-10168-1: 68-pin SCSI Shielded Cable, 1 m
- PCL-10168-2: 68-pin SCSI Shielded Cable, 2 m
- ADAM-3968: 68-pin DIN-rail SCSI Wiring Board
- PCLD-8710: DIN-rail Wiring Board w/ CJC

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1714U PCI-1714UL

**30 MS/s, 12-bit, Simultaneous 4-ch  
Analog Input Universal PCI Card**

**10 MS/s, 12-bit, Simultaneous 4-ch  
Analog Input Universal PCI Card**



PCI-1714U

PCI-1714UL



## Features

- 4 single-ended analog input channels
- 12-bit A/D converter, with up to 30 MHz sampling rate
- Programmable gain
- Onboard FIFO memory (PCI-1714U: 32,768 samples each channel; PCI-1714UL: 8,192 samples, each channel)
- 4 A/D converters simultaneously sampling
- Multiple A/D triggering modes
- Programmable pacer/counter
- BoardID™ switch
- Universal PCI Bus (supports 3.3 V or 5 V PCI bus signals)

## Introduction

PCI-1714U and PCI-1714UL are advanced high-performance data acquisition cards based on the PCI bus. With a large FIFO of 32,768 for each channel, the maximum sampling rate of PCI-1714U can get up to 30 MS/s, on each channel, with an emphasis on continuous, non-stop, high-speed, streaming data of samples to host memory. The low-cost PCI-1714UL offers 10 MS/s on each channel at a stable rate, and has also been equipped with a universal PCI interface.

## Specifications

### Analog Input

- **Channels** 4 single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** PCI-1714U: 30 MS/s per channel  
PCI-1714UL: 10 MS/s per channel
- **FIFO Size** PCI-1714U: 32,768 samples each channel  
PCI-1714UL: 8,192 samples each channel
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 50 Ω/1 MΩ/Hi Z jumper selectable/100 pF
- **Sampling Modes** Software polling, pacer
- **Trigger Modes** Post-trigger, pre-trigger, delay-trigger, about-trigger
- **Input Range (V, software programmable) & Absolute Accuracy**

Bipolar	±5	±2.5	±1	±0.5
Absolute Accuracy (% of FSR)*	0.1	0.2	0.2	0.4

\* ±1 LSB is added as the derivative for absolute accuracy

### General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 4 x BNC connector (for AI)  
1 x PS/2 connector (for Ext. clock and trigger)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA ; 12 V @ 600 mA  
Max.: 5 V @ 1 A; 12 V @ 700m A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing


## Ordering Information

- **PCI-1714U** 30 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card
- **PCI-1714UL** 10 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card


### Accessories

- **ADAM-3909** DB9 DIN-rail Wiring Board
- **PCL-1010B-1E** BNC to BNC Wiring Cable, 1 m
- **PCL-10901-1E** DB9 to PS/2 Cable, 1 m
- **PCL-10901-3E** DB9 to PS/2 Cable, 3 m

## Pin Assignments

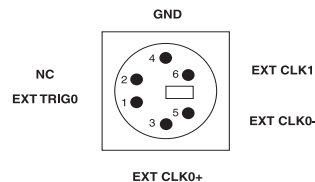

Onboard PS/2 Connector

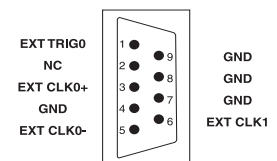


PS/2 To DB9 Cable Connector

# PCI-1713U PCI-1715U

## 100 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card

## 500 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card

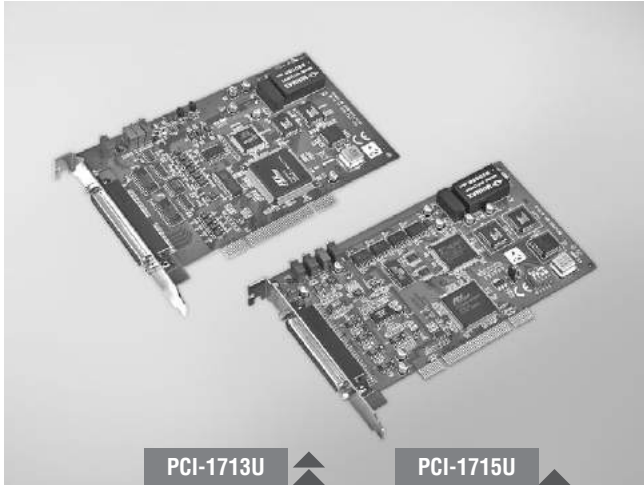

PCI-1713U

PCI-1715U



### Specifications

#### Analog Input

- **Channels** 32 single-ended/16 differential (software programmable)
- **Resolution** 12 bits
- **Max. Sampling Rate** PCI-1713U: 100 kS/s  
PCI-1715U: 500 kS/s

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of PCI-1713U are used, the sampling rate is  $100k/4 = 25$  kS/s per channel.

- **FIFO Size** PCI-1713U: 4,096 samples  
PCI-1715U: 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Input Impedance** 1 G $\Omega$
- **Sampling Modes** Software, onboard programmable pacer and external clock (TTL level)

#### Input Range (V, software programmable) & Absolute Accuracy

Unipolar	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Bipolar	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

\*  $\pm 1$  LSB is added as the derivative for absolute accuracy

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Features

- 2,500 V<sub>DC</sub> isolation protection
- 32-ch single-ended or 16-ch differential or a combination of analog input
- 12-bit resolution for A/D conversion
- Programmable gain for each input channel
- Onboard FIFO memory (PCI-1713U: 4,096 samples; PCI-1715U: 1,024 samples)
- Software, internal or external pacer sampling modes supported
- Universal PCI bus
- BoardID™ switch

### Ordering Information

- **PCI-1713U** 100 kS/s, 12-bit, 32-ch Isolated AI PCI Card
- **PCI-1715U** 500 kS/s, 12-bit, 32-ch Isolated AI PCI Card

#### Accessories

- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m

### Pin Assignments

AI0	1	20	AI1
AI2	2	21	AI3
AI4	3	22	AI5
AI6	4	23	AI7
AI8	5	24	AI9
AI10	6	25	AI11
AI12	7	26	AI13
AI14	8	27	AI15
GND	9	28	GND
GND	10	29	GND
AI16	11	30	AI17
AI18	12	31	AI19
AI20	13	32	AI21
AI22	14	33	AI23
AI24	15	34	AI25
AI26	16	35	AI27
AI28	17	36	AI29
AI30	18	37	AI31
EXT_TRG	19		

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy Automation

4  
Automation Software

5  
Intelligent Operator Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless Solutions

9  
Industrial Ethernet Solutions

10  
Industrial Gateway Solutions

11  
Serial communication cards

12  
Embedded Automation PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O Modules


16  
IoT Ethernet I/O Modules

17  
RS-485 I/O Modules

18  
Data Acquisition Boards

# PCI-1747U

## 250 kS/s, 16-bit, 64-ch Analog Input Universal PCI Card

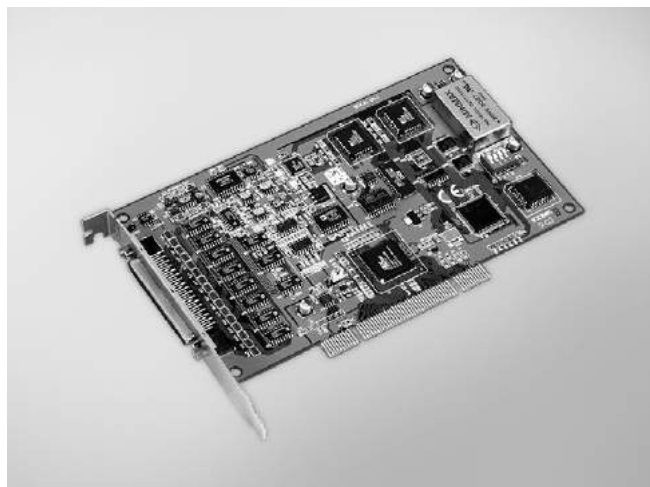

RoHS COMPLIANT  
FCC CE

### Features

- 64-ch single-ended or 32-ch differential or a combination of analog input
- 16-bit A/D converter, with up to 250 kHz sampling rate
- Auto calibration
- Onboard FIFO memory (1,024 samples)
- PCI-Bus mastering data transfer
- Universal PCI Bus (support 3.3 V or 5 V PCI bus signal)
- BoardID™ switch

### Introduction

PCI-1747U is a high-resolution, high-channel-count analog input card for the PCI bus. Its sampling rate is up to 250 kS/s and 16-bit resolution provides the resolution needed for most data acquisition applications. PCI-1747U provides 64 single-ended, 32 differential analog input channels or a combination of these. It also has built in a 1,024 FIFO buffer for analog input data.

### Specifications

#### Analog Input

- **Channels** 64 single-ended, 32 differential, or combination
- **Resolution** 16 bits
- **Max. Sampling Rate** 250 kS/s
- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 V<sub>p-p</sub>
- **Input Impedance** 100 MΩ/10 pF (Off); 100 MΩ/100 pF (On)
- **Sampling Modes** Software and onboard programmable pacer
- **Input Range** (V, software programmable)

<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Bipolar</b>	±10	±5	±2.5	±1.25	±0.625
<b>Accuracy (% of FSR ±1LSB)</b>	0.03	0.02	0.02	0.03	0.04

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1 A, 12 V @ 700 mA
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1, 2)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

### Ordering Information

- **PCI-1747U** 250 kS/s, 16-bit, 64-ch AI Universal PCI Card

#### Accessories

- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **PCL-10168-1** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2** 68-pin SCSI Shielded Cable, 2 m

### Pin Assignments


AI0	68	34	AI1
AI2	67	33	AI3
AI4	66	32	AI5
AI6	65	31	AI7
AI8	64	30	AI9
AI10	63	29	AI11
AI12	62	28	AI13
AI14	61	27	AI15
AGND	60	26	AGND
AI16	59	25	AI17
AI18	58	24	AI19
AI20	57	23	AI21
AI22	56	22	AI23
AI24	55	21	AI25
AI26	54	20	AI27
AI28	53	19	AI29
AI30	52	18	AI31
AI32	51	17	AI33
AI34	50	16	AI35
AI36	49	15	AI37
AI38	48	14	AI39
AI40	47	13	AI41
AI42	46	12	AI43
AI44	45	11	AI45
AI46	44	10	AI47
AGND	43	9	AGND
AI48	42	8	AI49
AI50	41	7	AI51
AI52	40	6	AI53
AI54	39	5	AI55
AI56	38	4	AI57
AI58	37	3	AI59
AI60	36	2	AI61
AI62	35	1	AI63



# PCI-1720U PCI-1724U


## 12-bit, 4-ch Isolated Analog Output Universal PCI Card

## 14-bit, 32-ch Isolated Analog Output Universal PCI Card

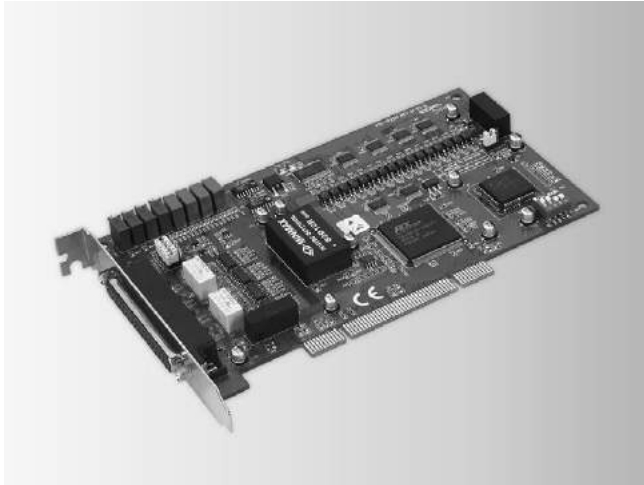

PCI-1720U

FCC CE RoHS

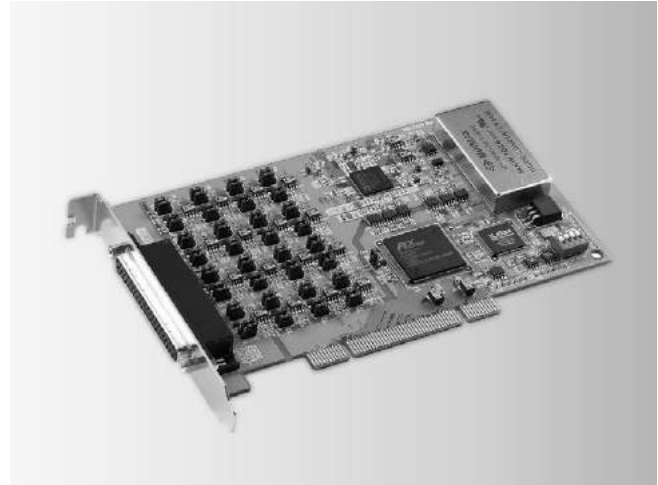

PCI-1724U

FCC CE RoHS

### Specifications

#### Analog Output

- Channels 4 isolated
- Resolution 12 bits
- Output Rate Static update
- Output Range

Bipolar (V)	$\pm 5, \pm 10$
Unipolar (V)	0 ~ 5, 0 ~ 10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Slew Rate 2 V/ $\mu$ s
- Isolation Protection 2,500 V<sub>DC</sub>
- Driving Capability 5 mA
- Operation Modes Software polling
- Accuracy Relative:  $\pm 1$  LSB; Differential Non-Linearity:  $\pm 1$  LSB (monotonic)
- Excitation Voltage 50 V (max.)

#### General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x DB37 female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption 5 V @ 350 mA (typical), 500 mA (max.)  
12 V @ 200 mA (typical), 350 mA (max.)
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity 5 ~ 95% RH, non-condensing

### Ordering Information

- PCI-1720U 12-bit, 4-ch Isolated AO Universal PCI Card

#### Accessories

- PCL-10137-1E DB37 Cable, 1 m
- PCL-10137-2E DB37 Cable, 2 m
- PCL-10137-3E DB37 Cable, 3 m
- ADAM-3937 DB37 DIN-rail Wiring Board

### Specifications

#### Analog Output

- Channels 32 isolated
- Resolution 14 bits
- Output Rate Static update
- Output Range

Bipolar (V)	$\pm 10$
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Isolation Protection 1,500 V<sub>DC</sub> system isolation
- Output Impedance 0.1  $\Omega$  max.
- Operation Modes Software polling, synchronized output
- Accuracy Relative:  $\pm 4$  LSB  
Differential Non-linearity:  $\pm 2$  LSB (monotonic)
- Driving Capacity 10 mA

#### General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x DB62 female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption 5 V @ 400 mA, 12 V @ 270 mA max.
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity 5 ~ 95% RH, non-condensing

### Ordering Information

- PCI-1724U 14-bit, 32-ch Isolated AO Universal PCI Card


#### Accessories

- PCL-10162-1E DB62 Cable, 1 m
- PCL-10162-3E DB62 Cable, 3 m
- ADAM-3962 DB62 DIN-rail Wiring Board

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1721

## 12-bit, 4-ch Analog Output PCI Card with 16-ch Digital I/O

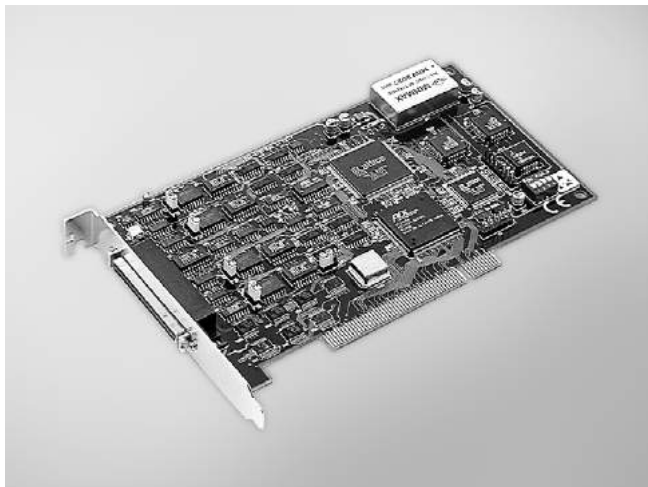

FCC CE RoHS

### Features

- 10 MHz maximum digital update rate
- Auto calibration function
- Four analog output channels with 1,024 samples FIFO buffer
- A 12-bit DAC is equipped for each of analog output channels
- Real-time waveform output function with internal/external pacer
- Synchronized output function
- Flexible output types and range settings
- Keeps the output settings and values after system hot reset
- 16-ch DI/O and one 10 MHz 16-bit resolution counter
- BoardID™ switch

### Introduction

PCI-1721 is an advanced high-speed analog output card for the PCI bus, and each of analog output channels are equipped with a 12-bit, double-buffered DAC. It features many powerful and unique functions, like a waveform output function with 10 MHz maximum update rate, auto-calibration and a BoardID switch. PCI-1721 is an ideal solution for industrial applications where high-speed continuous analog output or real-time waveform output functions are required.

### Specifications

#### Analog Output

- **Channels** 4
- **Resolution** 12 bits
- **FIFO Size** 1,024 samples
- **Output Rate** 10 MHz or static update
- **Reference Clock** Internal: 10 MHz  
External Clock Frequency: 10 MHz max.  
External Voltage Range: 0.8 V max., 2 V min.

#### Output Range

Internal Reference	Unipolar	0 ~ 5 V, 0 ~ 10 V,
	Bipolar	±5 V, ±10 V
	Current Loop	0 ~ 20 mA, 4 ~ 20 mA (software programmable)
External Reference		0 ~ +x V @ +x V (-10 ≤ x ≤ 10) -x ~ +x V @ +x V (-10 ≤ x ≤ 10)

- **Slew Rate** 10 V/μs
- **Driving Capability** 10 mA
- **Output Impedance** 0.1 Ω max.
- **Operation Modes** Single/continuous/waveform/synchronized output
- **Accuracy** Relative: ±1 LSB  
Differential Non-linearity: ±1 LSB (monotonic)

#### Digital Input/Output

- **Channels** 16 (shared by input/output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** Sink: 0.5 V @ 24 mA  
Source: 2.0 V @ -15 mA

#### Counter/Timer

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz  
External Clock Frequency: 10 MHz max.  
External Voltage Range: 0.8 V max, 2.0 V min.

#### General

- **Bus Type** PCI V2.2
- **I/O Connectors** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1 A, 12 V @ 700 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1721** 12-bit, 4-ch Advanced PCI Analog Output Card

#### Accessories


- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

# PCI-1723

# PCI-1727U


16-bit, 8-ch Analog Output PCI Card with  
16-ch Digital I/O

14-bit, 12-ch Analog Output Universal  
PCI Card with 32-ch Digital I/O

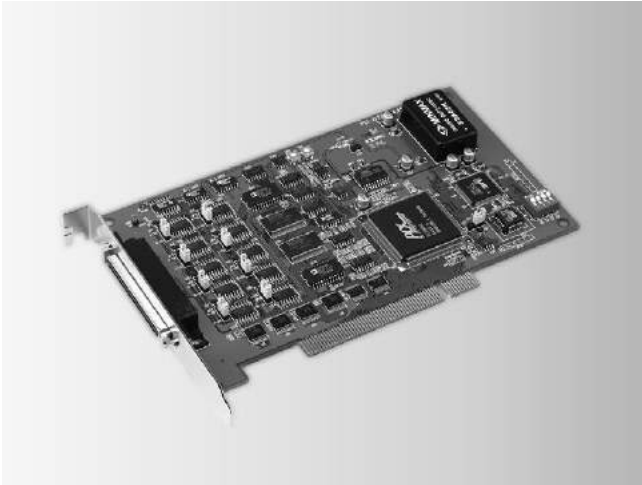

PCI-1723

FCC CE RoHS

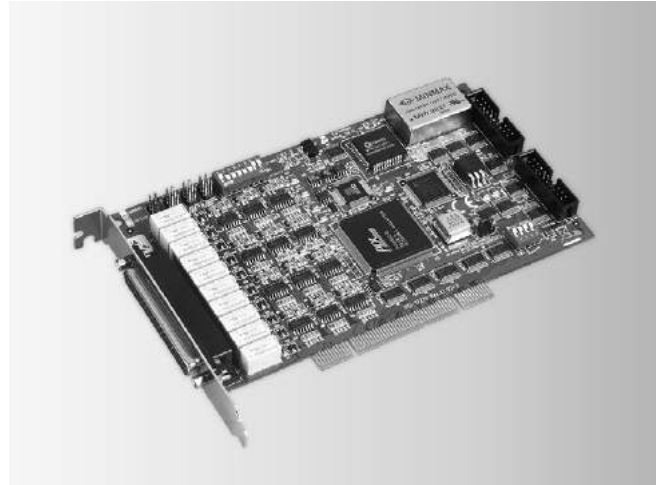

PCI-1727U

FCC CE RoHS

## Specifications

### Analog Output

- Channels 8
- Resolution 16 bits
- Output Rate Static update
- Output Range

Bipolar (V)	±10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Driving Capability 5 mA
- Output Impedance 0.1 Ω max.
- Operation Modes Software polling, synchronized output
- Accuracy Relative: ±6 LSB  
Differential Non-linearity: ±6 LSB (monotonic)

### Digital Input/Output

- Channels 16 (shared by input/output)
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Output Capability Sink Sink: 0.5 V @ 24 mA  
Source: 2.0 V @ 15 mA

### General

- Bus Type PCI V2.2
- I/O Connectors 1 x 68-pin SCSI female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1 A, 12 V @ 700 mA
- Operating Temperature 0 ~ 60°C (32 ~ 158°F)
- Storage Temperature -20 ~ 85°C (-4 ~ 185°F)
- Storage Humidity 5 ~ 95% RH non-condensing

## Ordering Information

- PCI-1723 16-bit, 8-ch Non-isolated Analog Output PCI Card

### Accessories

- PCL-10168-1E 68-pin SCSI Shielded Cable, 1 m
- PCL-10168-2E 68-pin SCSI Shielded Cable, 2 m
- ADAM-3968 68-pin DIN-rail SCSI Wiring Board

## Specifications

### Analog Output

- Channels 12
- Resolution 14 bits
- Output Rate Static update
- Output Range

Bipolar (V)	±5
Unipolar (V)	0 ~ 5, 0 ~ 10
Current Loop (mA)	0 ~ 20

- Slew Rate 0.7 V/μs
- Driving Capability 15 mA
- Operation Modes Software polling, synchronized output
- Current Loop Excitation 8 ~ 36 V

### Digital Input

- Channels 16
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Input Loading 0.5 V @ 0.4 mA max. (low)  
2.7 V @ 50 μA max. (high)

### Digital Output

- Channels 16
- Compatibility 5 V/TTL
- Output Voltage Logic 0: 0.5 V, Logic 1: 2.4 V
- Output Capability Sink: 0.5 V @ 8 mA  
Source: 2.4 V @ 0.4 mA

### General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x 37-pin D-type female connector  
2 x 20-pin box header
- Power Consumption 5 V @ 460 mA typical, 500 mA max  
12 V @ 150 mA typical, 100 mA max  
175 x 100 mm (6.9" x 3.9")
- Dimensions (L x H) 0 ~ 50°C (32 ~ 122°F)
- Operating Temperature -20 ~ 65°C (-4 ~ 149°F)
- Storing Humidity 5 ~ 95% RH, non-condensing

## Ordering Information

- PCI-1727U 14-bit, 12-ch Universal Analog Output Card

### Accessories

- PCL-10120-1E 20-pin flat cable, 1 m
- PCL-10137-1E DB37 cable assembly, 1 m
- ADAM-3937 DB37 wiring terminal for DIN-rail mounting

- WebAccess+ Solutions
- Motion Control
- Power & Energy Automation
- Automation Software
- Intelligent Operator Panel
- Automation Panels
- Panel PCs
- Industrial Wireless Solutions
- Industrial Ethernet Solutions
- Industrial Gateway Solutions
- Serial communication cards
- Embedded Automation PCs
- DIN-Rail IPCs
- CompactPCI Systems
- IoT Wireless I/O Modules
- IoT Ethernet I/O Modules
- RS-485 I/O Modules

## 18


Data Acquisition Boards

# PCI-1735U PCI-1737U PCI-1739U

## 64-ch Digital I/O and Counter Universal PCI Card

## 24-ch Digital I/O Universal PCI Card

## 48-ch Digital I/O Universal PCI Card

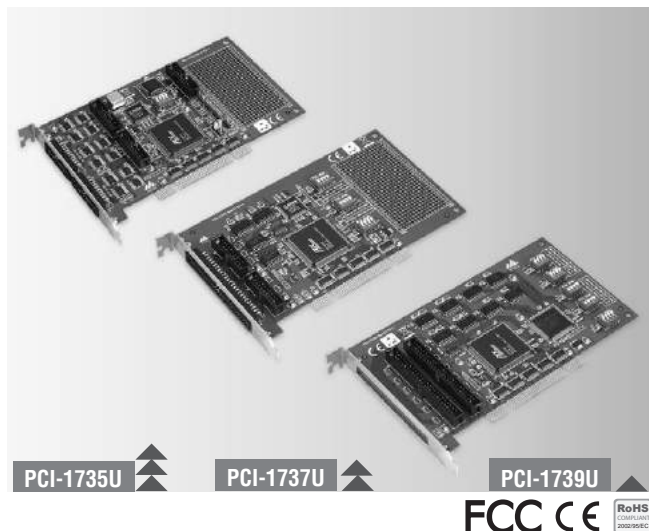

### Features

- ISA-Compatible with PCL-720+ (PCI-1735U), PCL-724 (PCI-1737U) and PCL-731 (PCI-1739U)
- TTL-level digital input and output compatibility
- Emulates mode 0 of 8255 PPI (PCI-1737U and PCI-1739U)
- Interrupt handling capability (PCI-1737U and PCI-1739U)
- Output status readback (PCI-1737U and PCI-1739U)
- 3 programmable counter/timer channels and User configurable clock source (PCI-1735U)
- Breadboard area for custom circuits (PCI-1735U and PCI-1739U)
- PCI universal card

### Specifications

#### Digital Input

- **Channels** PCI-1735U: 32  
PCI-1737U: 24 (shared with output)  
PCI-1739U: 48 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** PCI-1735: Logic 0: 0.8V max.  
Logic 1: 2.0V min.  
PCI-1737U/1739U: Logic 0: 0.4V max.  
Logic 1: 2.4V min.
- **Interrupt Capable Ch.** PCI-1737U: 1  
PCI-1739U: 2

#### Digital Output

- **Channels** PCI-1735U: 32  
PCI-1737U: 24 (shared with input)  
PCI-1739U: 48 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage** PCI-1735U: Logic 0: 0.5 V max.  
Logic 1: 2.4 V min.  
PCI-1737U/1739U: Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** PCI-1735U: Sink: 0.5 V @ 24 mA  
Source: 2.4 V @ 15 mA  
PCI-1737U/1739U: Sink: 0.4 V @ 24 mA  
Source: 2.4 V @ 15 mA

#### Counter/Timer (PCI-1735U)

- **Channels** 3
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 1 MHz
- **Re. Clock Internal** Selectable 1 MHz, 100 kHz, or 10 kHz base clock
- **Ext. Clock Frequency** Jumper selectable divider: x2, x1, x0.5, and x0.25

- **Prog.Counter Modes** 6

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** PCI-1735U: 5 x 20-pin box header  
PCI-1737U: 2 x 20-pin & 1 x 50-pin box header  
PCI-1739U: 2 x 50-pin box header
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** PCI-1735U: 5V @365 mA (max.)  
PCI-1737U: 5V @300 mA (max.)  
PCI-1739U: 5V @720 mA (max.)
- **Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- **Storage Temperature** -25 ~ 80°C (-13 ~ 176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information


- **PCI-1735U** 64-ch Digital I/O and Counter Card
- **PCI-1737U** 24-ch Digital I/O Universal PCI Card
- **PCI-1739U** 48-ch Digital I/O Universal PCI Card

#### Accessories

- **PCL-10120-1E** IDC-20 Flat Cable, 1 m
- **PCL-10120-2E** IDC-20 Flat Cable, 2 m
- **PCL-10150-1.2E** 50-pin Flat Cable, 1.2 m
- **ADAM-3920** 20-Pin Flat Cable Terminal, DIN-rail Mount
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board

# PCI-1751

## 48-ch Digital I/O and 3-ch Counter PCI Card

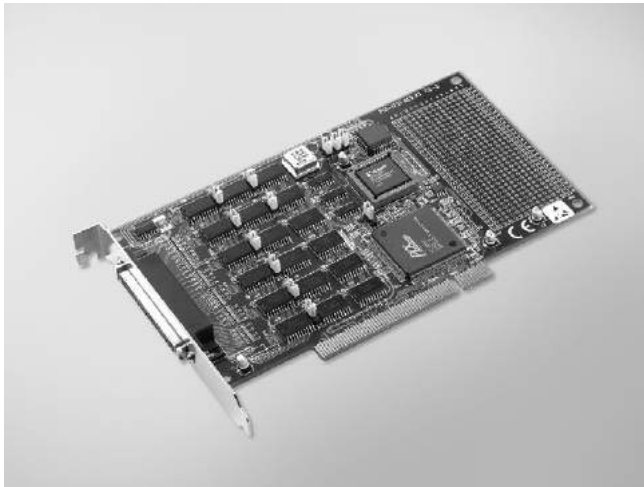

FCC CE RoHS

### Features

- 48 TTL digital I/O lines
- Emulates mode 0 of 8255 PPI
- Buffered circuits for higher driving capacity than the 8255
- Interrupt handling capability
- Timer/Counter interrupt capability
- Supports both dry and wet contact
- Keeps the I/O port setting and DO state after system reset
- BoardID switch

### Introduction

PCI-1751 is a 48-bit digital I/O card for the PCI bus. Its 48 bits are divided into six 8-bit I/O ports and users can configure each port as input or output via software. PCI-1751 also provides one event counter and two 16-bit timers, which can be cascaded to become a 32-bit timer.

### Specifications

#### Digital Input

- **Channels** 48 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2 V min.
- **Interrupt Capable Ch.** 2

#### Digital Output

- **Channels** 48 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** Sink: 0.4 V @ 24 mA  
Source: 2.4 V @ 15 mA

#### Counter/Timer

- **Channels** 3
- **Resolution** 2 x 16-bit counters, or 1 x 32-bit counter (jumper selectable)  
1 x 16-bit event counter
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz  
External Clock Frequency: 10 MHz  
External Voltage Range: 5 V/TTL

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1751** 48-ch Digital I/O and Counter PCI Card

#### Accessories

- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **ADAM-3968/20** 68-pin SCSI to 3 20-pin Box Header Board
- **ADAM-3968/50** 68-pin SCSI to 2 50-pin Box Header Board
- **PCLD-8751** 48-ch Isolated Digital Input Board
- **PCLD-8761** 24-ch Replay/ Isolated Digital Input Board
- **PCLD-8762** 48-ch Relay Board

### Pin Assignments


PA00	1	35	PA10
PA01	2	36	PA11
PA02	3	37	PA12
PA03	4	38	PA13
PA04	5	39	PA14
PA05	6	40	PA15
PA06	7	41	PA16
PA07	8	42	PA17
GND	9	43	GND
PB00	10	44	PB10
PB01	11	45	PB11
PB02	12	46	PB12
PB03	13	47	PB13
PB04	14	48	PB14
PB05	15	49	PB15
PB06	16	50	PB16
PB07	17	51	PB17
GND	18	52	GND
PC00	19	53	PC10
PC01	20	54	PC11
PC02	21	55	PC12
PC03	22	56	PC13
PC04	23	57	PC14
PC05	24	58	PC15
PC06	25	59	PC16
PC07	26	60	PC17
GND	27	61	GND
CNT0_OUT	28	62	CNT0_CLK
GND	29	63	CNT0_G
CNT1_OUT	30	64	CNT1_CLK
GND	31	65	CNT1_G
CNT2_OUT	32	66	CNT2_CLK
INT_OUT	33	67	CNT2_G
VCC	34	68	VCC

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1753 PCI-1753E

## 96-ch Digital I/O PCI Card

## 96-ch Digital I/O Extension Card for PCI-1753

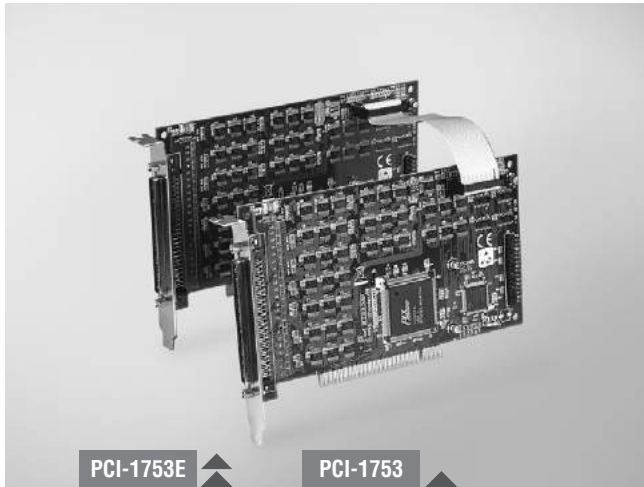

FCC CE RoHS

### Features

- Up to 96 TTL digital I/O lines
- Emulates mode 0 of 8255 PPI
- Buffered circuits for higher driving capacity than the 8255
- Multiple-source interrupt handling capability
- Interrupt output pin for simultaneously triggering external devices with the interrupt
- Output status read-back
- "Pattern match" and "Change of state" interrupt functions for critical I/O monitoring
- Keeps the output settings and values after system hot reset
- Supports both dry and wet contact
- High-density 100-pin SCSI connector

### Introduction

PCI-1753 is a 96-bit digital I/O card for the PCI bus, which can be extended to 192 digital I/O channels by connecting its extension board - PCI-1753E. The card emulates mode 0 of the 8255 PPI chip, but the buffered circuits offer a higher driving capability than the 8255. The 96 I/O lines are divided into twelve 8-bit I/O ports: A0, B0, C0, A1, B1, C1, A2, B2, C2, A3, B3 and C3. You can configure each port as input or output via software.

### Specifications

#### Digital Input/Output

- **Channels** 96 digital I/O lines for PCI-1753  
192 digital I/O lines if extending with PCI-1753E
- **Programming Mode** 8255 PPI mode 0
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Voltage** Logic 0: 0.44 V max.  
Logic 1: 3.76 V min.
- **Output Capability** Sink: 0.44 V @ 24 mA  
Source: 3.76 V @ 24 mA

#### General

- **Bus Type** PCI V2.2
- **I/O Connector** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 400 mA  
Max.: 5 V @ 2.7 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1753** 96-ch Digital I/O PCI Card
- **PCI-1753E** Extension Board for PCI-1753

#### Accessories

- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **ADAM-3968/20** 68-pin SCSI to 3 20-pin Box Header Board
- **ADAM-3968/50** 68-pin SCSI to 2 50-pin Box Header Board
- **PCLD-8751** 48-ch Isolated Digital Input Board
- **PCLD-8761** 24-ch Replay/ Isolated Digital Input Board
- **PCLD-8762** 48-ch Relay Board
- **PCL-10268-2E** 100-pin to Two 68-pin SCSI Cables, 1 m and 2 m


### Pin Assignments

PA00	1	51	PA20
PA01	2	52	PA21
PA02	3	53	PA22
PA03	4	54	PA23
PA04	5	55	PA24
PA05	6	56	PA25
PA06	7	57	PA26
PA07	8	58	PA27
PB00	9	59	PB20
PB01	10	60	PB21
PB02	11	61	PB22
PB03	12	62	PB23
PB04	13	63	PB24
PB05	14	64	PB25
PB06	15	65	PB26
PB07	16	66	PB27
PC00	17	67	PC20
PC01	18	68	PC21
PC02	19	69	PC22
PC03	20	70	PC23
PC04	21	71	PC24
PC05	22	72	PC25
PC06	23	73	PC26
PC07	24	74	PC27
GND	25	75	GND
PA10	26	76	PA30
PA11	27	77	PA31
PA12	28	78	PA32
PA13	29	79	PA33
PA14	30	80	PA34
PA15	31	81	PA35
PA16	32	82	PA36
PA17	33	83	PA37
PB10	34	84	PB30
PB11	35	85	PB31
PB12	36	86	PB32
PB13	37	87	PB33
PB14	38	88	PB34
PB15	39	89	PB35
PB16	40	90	PB36
PB17	41	91	PB37
PC10	42	92	PC30
PC11	43	93	PC31
PC12	44	94	PC32
PC13	45	95	PC33
PC14	46	96	PC34
PC15	47	97	PC35
PC16	48	98	PC36
PC17	49	99	PC37
VCC	50	100	VCC

PA00 ~PA07: I/O pins of Port A0  
PA10 ~PA17: I/O pins of Port A1  
PA20 ~PA27: I/O pins of Port A2  
PA30 ~PA37: I/O pins of Port A3  
PB00 ~PB07: I/O pins of Port B0  
PB10 ~PB17: I/O pins of Port B1  
PB20 ~PB27: I/O pins of Port B2  
PB30 ~PB37: I/O pins of Port B3  
PC00 ~PC07: I/O pins of Port C0  
PC10 ~PC17: I/O pins of Port C1  
PC20 ~PC27: I/O pins of Port C2  
PC30 ~PC37: I/O pins of Port C3  
GND: Ground  
VCC: +5V voltage output

# PCI-1755

## 80 MB/s, 32-ch Digital I/O PCI Card

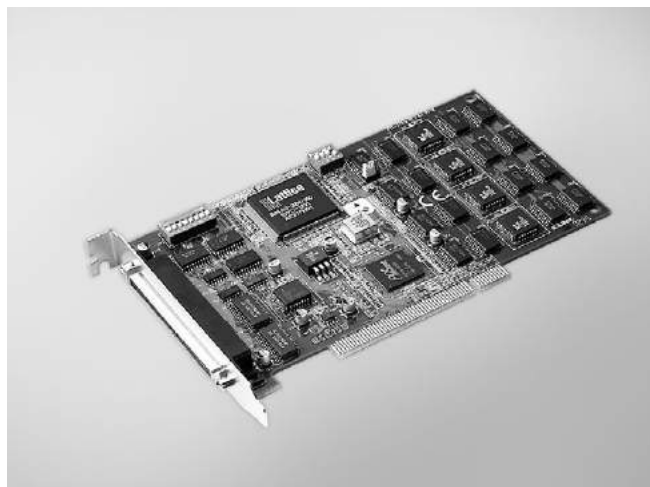

FCC CE

### Features

- Bus-mastering DMA data transfer with scatter gather technology
- 32/16/8-bit pattern I/O with start and stop trigger function, 2 modes handshaking I/O Interrupt handling capability
- Onboard active terminators for high speed and long distance transfer
- Pattern match and change state detection interrupt function
- General-purpose 8-ch digital I/O

### Introduction

The PCI-1755 supports PCI-bus mastering DMA for high-speed data transfer. By setting aside a block of memory in the PC, the PCI-1755 performs bus-mastering data transfers without CPU intervention, setting the CPU free to perform other more urgent tasks such as data analysis and graphic manipulation. The function allows users to run all I/O functions simultaneously at full speed without losing data.

### Specifications

#### Digital Input

- **Channels** General: 8 (shared with output)  
High speed: 32 (shared with output)
- **Compatibility** 5V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** DI00-DI07

#### Digital Output

- **Channels** General: 8 (shared with input)  
High speed: 32 (shared with input)
- **Compatibility** 5V/TTL
- **Output Voltage** Logic 0: 0.5 V max.  
Logic 1: 2.7 V min.
- **Output Capacity** Sink: 0.5 V @ 48 mA  
Source: 2.4 V @ 15 mA

#### Transfer Characteristics

- **Onboard FIFO** 16 KB for DI & 16 KB DO channels
- **Data Transfer Mode** Bus Mastering DMA with Scatter-Gather
- **Data Transfer Bus Width** 8/16/32 bits (programmable)
- **Max. Transfer Rate** DI: 80 M bytes/sec, 32-bit @ 20 MHz  
120 M bytes/sec, 32-bit @ 40 MHz  
external pacer when data length is less than FIFO size  
DO: 80 MBytes/sec, 32-bit @ 20 MHz
- **Operation Mode** Handshaking

#### General

- **Bus Type** PCI V2.2
- **I/O Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 1 A  
Max.: 5 V @ 1 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1755** 80 MB/s, 32-ch Digital I/O PCI Card

#### Accessories

- **ADAM-39100** 100-pin DIN-rail SCSI Wiring Board
- **PCL-101100-1E** 100-pin SCSI High-Speed Cable, 1 m

1	WebAccess+ Solutions
2	Motion Control
3	Power & Energy Automation
4	Automation Software
5	Intelligent Operator Panel
6	Automation Panels
7	Panel PCs
8	Industrial Wireless Solutions
9	Industrial Ethernet Solutions
10	Industrial Gateway Solutions
11	Serial communication cards
12	Embedded Automation PCs
13	DIN-Rail IPCs
14	CompactPCI Systems
15	IoT Wireless I/O Modules
16	IoT Ethernet I/O Modules
17	RS-485 I/O Modules
18	Data Acquisition Boards

# PCI-1730U


# PCI-1733

# PCI-1734

## 32-ch Isolated Digital I/O Universal PCI Card

## 32-ch Isolated Digital Input PCI Card

## 32-ch Isolated Digital Output PCI Card

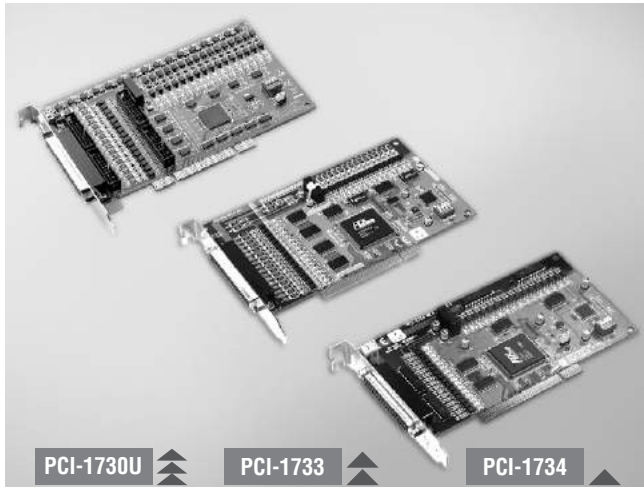

PCI-1730U

PCI-1733

PCI-1734



### Features

- ISA-compatible with PCL-730/733/734
- 32-ch isolated DI/O (16-ch digital input, 16-ch digital output)
- 32-ch TTL DI/O (16-ch digital input, 16-ch digital output) (PCI-1730U only)
- High output driving capacity
- Interrupt handling capability
- 2 x 20-pin connectors for isolated DI/O channels (PCI-1730U only)
- 2 x 20-pin connectors for TTL DI/O channels (PCI-1730U only)
- D-type connector for isolated input and output channels
- High-voltage isolation on output channels

### Introduction

PCI-1730U, PCI-1733, and PCI-1734 offer isolated digital input channels as well as isolated digital output channels with isolation protection up to 2,500 V<sub>DC</sub>, which makes them ideal for industrial applications where high-voltage isolation is required. There are also 32 TTL digital I/O channels on PCI-1730U.

### Specifications

#### Digital Input (PCI-1730U only)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** 2 (DI0, DI1)

#### Isolated Digital Input (PCI-1730U/ PCI-1733)

- **Channels** PCI-1730U: 16  
PCI-1733: 32
- **Input Voltage** Logic 0: 1 V max. (2 V max.)  
Logic 1: 5 V min. (30 V max.)
- **Interrupt Capable Ch.** PCI-1730U: 2 (IDI0, IDI1)  
PCI-1733: 4 (IDI0, IDI1, IDI16, IDI17)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 25 μs
- **Input Resistance** 2.7 kΩ @ 1 W

#### Digital Output (PCI-1730U only)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** Sink: 0.8 V @ 24 mA  
Source: 2.0 V @ 15 mA

#### Isolated Digital Output (PCI-1730U/ PCI-1734)

- **Channels** 16
- **Output Type** Sink type (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** PCI-1730U: 300 mA max./channel  
PCI-1734: 200 mA max./channel

- **Opto-Isolator Response** 25 μs

#### General

- **Bus Type** PCI V2.2 (Universal PCI V2.2 for PCI-1730U)
- **I/O Connectors** 1 x DB37 female connector  
4 x 20-pin box header (PCI-1730U only)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 250 mA, 12 V @ 35 mA  
Max.: 5 V @ 400 mA, 12 V @ 60 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1730U** 32-ch Isolated Digital I/O Univ. PCI Card
- **PCI-1733** 32-ch Isolated Digital Input PCI Card
- **PCI-1734** 32-ch Isolated Digital Output PCI Card


#### Accessories

- **PCL-10120-1E** 20-pin Flat Cable, 1 m
- **PCL-10120-2E** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-782** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m



# PCI-1750

## 32-ch Isolated Digital I/O and 1-ch Counter PCI Card

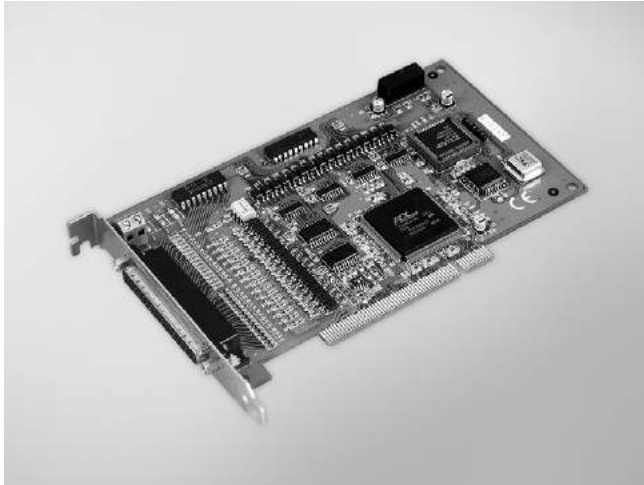

FCC CE RoHS

### Features

- 16 isolated DI and 16 isolated DO channels
- High voltage isolation on all isolated channels (2,500 V<sub>DC</sub>)
- High sink current on isolated output channels (200 mA/channel)
- Supports dry contact or 5 ~ 50 V<sub>DC</sub> isolated inputs
- Interrupt handling capability
- Timer/counter interrupt capability

### Introduction

PCI-1750 offers 16 isolated digital input channels, 16 isolated digital output channels, and one isolated counter/timer for the PCI bus. With isolation protection of 2,500 V<sub>DC</sub>, and dry contact support, PCI-1750 is ideal for industrial applications where high-voltage protection is required. Each I/O channel of the PCI-1750 corresponds to a bit in a PC I/O port. This makes PCI-1750 very easy to program. This card also offers a counter or timer interrupt and two digital input interrupt lines to a PC, so you can then easily configure the card with software.

### Specifications

#### Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 2 V max.  
Logic 1: 5 V min. (30 V<sub>DC</sub> max.) or dry contact
- **Interrupt Capable Ch.** 2
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100 μs

#### Isolated Digital Output

- **Channels** 16
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** 200 mA max. per channel
- **Opto-Isolator Response** 100 μs

#### Counter/Timer

- **Channels** 1
- **Resolution** 1 x 16-bit isolated counter
- **Input Voltage** Logic 0: 2V max.  
Logic 1: 5V min. (30V<sub>DC</sub> max.)
- **Max. Input Frequency** 1 MHz
- **Isolation Protection** 2,500 V<sub>DC</sub>

#### General

- **Bus Type** PCI V2.2
- **I/O Connectors** 1 x DB37 female connector  
1 x 2-pin terminal block for extended ground
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing


### Ordering Information

- **PCI-1750** 32-ch Isolated Digital I/O and Counter PCI Card

#### Accessories

- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

### Pin Assignments

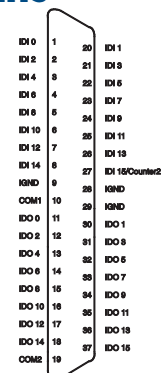

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

# PCI-1752U


# PCI-1754

# PCI-1756


## 64-ch Isolated Digital Output Universal PCI Card

## 64-ch Isolated Digital Input PCI Card


## 64-ch Isolated Digital I/O PCI Card

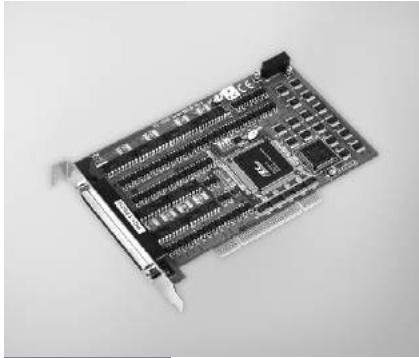

PCI-1752U

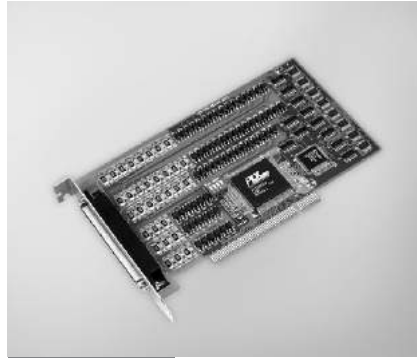

PCI-1754

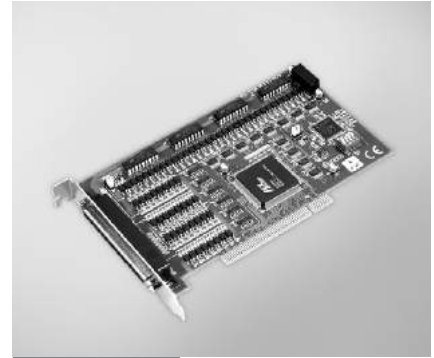

PCI-1756



### Features

- 64 isolated digital output channels
- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps the output settings and values after system hot reset
- Channel-freeze function
- High-density 100-pin SCSI connector

### Specifications

#### Isolated Digital Output

- Channels** 64 (16-ch/group)
- Output Type** Sink (NPN)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 40 V<sub>DC</sub>
- Sink Current** 200 mA max./channel
- Opto-isolator Response** 25 µs

#### General

- Bus Type** Universal PCI V2.2
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 230 mA  
Max.: 5 V @ 500 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95%, RH non-condensing

### Ordering Information

- PCI-1752U** 64-ch Isolated Digital Output Universal PCI Card

#### Accessories

- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

### Features

- 64 isolated digital input channels
- Either ± voltage input for DI by group
- High-voltage isolation on input channels (2,500 V<sub>DC</sub>)
- High over-voltage protection (70 V<sub>DC</sub>)
- Wide input range (10 ~ 50 V<sub>DC</sub>)
- 2,000 V<sub>DC</sub> ESD protection
- Interrupt handling capability
- High-density 100-pin SCSI connector

### Specifications

#### Isolated Digital Input

- Channels** 64 (16-ch/group)
- Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (50 V max.)
- Input Current (Typical)** 10 V<sub>DC</sub> @ 1.7 mA  
12 V<sub>DC</sub> @ 2.1 mA  
24 V<sub>DC</sub> @ 4.4 mA  
48 V<sub>DC</sub> @ 9.0 mA  
50 V<sub>DC</sub> @ 9.4 mA
- Interrupt Capable Ch.** 4
- Isolation Protection** 2,500 V<sub>DC</sub>
- Overvoltage Protection** 70 V<sub>DC</sub>
- ESD** 2,000 V<sub>DC</sub>
- Opto-isolator Response** 25 µs

#### General

- Bus Type** PCI V2.2
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 340 mA  
Max.: 5 V @ 450 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- PCI-1754** 64-ch Isolated Digital Input PCI Card

#### Accessories

- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

### Features

- Either ± voltage input for DI by group
- High-voltage isolation input/output channels (2,500 V<sub>DC</sub>)
- 2,000 V<sub>DC</sub> ESD protection for DI
- High over-voltage protection (70 V<sub>DC</sub>) for DI
- High-sink current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps output settings/ values after system hot reset
- Interrupt handling capability
- High-density 100-pin SCSI connector

### Specifications

#### Isolated Digital Input

- Channels** 32 (16-ch/group)
- Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (50 V max.)
- Interrupt Capable Ch.** 2 (ID10, ID116)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Overvoltage Protection** 70 V<sub>DC</sub>
- ESD** 2,000 V<sub>DC</sub>
- Opto-isolator Response** 25 µs
- Input Current** 10 V<sub>DC</sub> @ 1.7 mA  
12 V<sub>DC</sub> @ 2.1 mA  
24 V<sub>DC</sub> @ 4.4 mA  
48 V<sub>DC</sub> @ 9.0 mA  
50 V<sub>DC</sub> @ 9.4 mA

#### Isolated Digital Output

- Channels** 32 (16-ch/group)
- Output Type** Sink (NPN)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 40 V<sub>DC</sub>
- Sink Current** 200 mA max./channel
- Opto-isolator Response** 25 µs

#### General

- Bus Type** PCI V2.2
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 285 mA  
Max.: 5 V @ 475 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95%, non-condensing

### Ordering Information

- PCI-1756** 64-ch Isolated Digital I/O PCI Card

#### Accessories


- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

# PCI-1758UDI PCI-1758UDO PCI-1758UDIO

## 128-ch Isolated Digital Input Universal PCI Card

## 128-ch Isolated Digital Output Universal PCI Card

## 128-ch Isolated Digital I/O Universal PCI Card

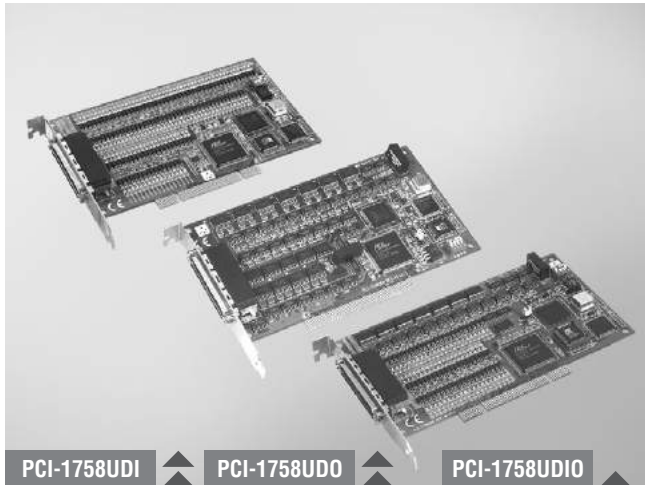

PCI-1758UDI

PCI-1758UDO

PCI-1758UDIO



### Features

#### PCI-1758UDO and PCI-1758UDIO

- 128 isolated digital output channels (64 channels for PCI-1758UDIO)
- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink current for isolated output channels (90 mA max./channel)
- Current protection for each port
- BoardID™ switch
- Output status read-back
- Digital output value retained after hot system reset
- Programmable Power-up States
- Watchdog timer

#### PCI-1758UDI and PCI-1758UDIO

- 128 isolated digital input channels (64 channels for PCI-1758UDIO)
- Wide input range (5 ~ 25 V<sub>DC</sub>)
- High ESD protection (2,000 V<sub>DC</sub>)
- Digital Filter function
- BoardID™ switch
- Interrupt handling capability for each channel

### Specifications

#### Isolated Digital Input

- Channels** PCI-1758UDI: 128  
PCI-1758UDIO: 64
- Input Voltage** Logic 0: 2.5 V max.  
Logic 1: 5 V min. (25 V max.)
- Interrupt Capable Ch.** PCI-1758UDI: 128  
PCI-1758UDIO: 64
- Isolation Protection** 2,500 V<sub>DC</sub>
- Opto-Isolator Response** 20 μs
- Input Resistance** 3 kΩ

#### Isolated Digital Output

- Channels** PCI-1758UDO: 128  
PCI-1758UDIO: 64
- Output Type** Sink (NPN)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 40 V<sub>DC</sub>
- Sink Current** 90 mA max./channel
- Opto-isolator Response** 20 μs

#### General

- Bus Type** Universal PCI V2.2
- I/O Connectors** 1 x mini-SCSI HDRA-E100 female connector
- Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- Power Consumption**

	PCI-1758UDI	PCI-1758UDO	PCI-1758UDIO
<b>Typical</b>	5 V @ 0.3 A	5 V @ 1.1 A	5 V @ 1.2 A
<b>Max.</b>	5 V @ 0.6 A	5 V @ 2.2 A	5 V @ 1.8 A

- Operating Temperature** 0 ~ 60°C (32 ~ 140°F) (IEC 68-2-1, 2)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95% non-condensing

### Ordering Information

- PCI-1758UDI** 128-ch Isolated DI Universal PCI Card
- PCI-1758UDO** 128-ch Isolated DO Universal PCI Card
- PCI-1758UDIO** 128-ch Isolated Digital I/O Universal PCI Card

#### Accessories

- PCL-101100S-1E** 100-pin Mini-SCSI Cable, 1 m
- PCL-101100S-2E** 100-pin Mini-SCSI Cable, 2 m
- ADAM-39100** 100-pin DIN-rail SCSI Wiring Board

### Feature Details

#### Interrupt Function (PCI-1758UDI/PCI-1758UDIO)

PCI-1758UDI and PCI-1758UDIO provide an interrupt function for every digital input channel. You can disable/enable the interrupt functions, and select trigger type by setting the Rising Edge Interrupt Registers or Falling Edge Interrupt Registers of the card. When the interrupt request signals occur, software will service these interrupt requests by ISR. The multiple interrupt sources provide the card with more flexibility.

#### Digital Filter Function (PCI-1758UDI/PCI-1758UDIO)

The digital filter function is used to eliminate glitches on input data and reduce the number of changes to examine and process. The filter blocks pulses that are shorter than the specified timing interval and passes pulses that are twice as long as the specified interval. Intermediate-length pulses that are longer than half of the interval, but less than the interval, may or may not pass the filter.


### Pin Assignments

CNB				CNA			
PEF_COMM	100	50	PAB_COMM	NC	1	51	NC
PEF_COMM	99	49	PAB_COMM	NC	2	52	NC
PF_IDI07	98	48	PB_IDI07	NC	3	53	NC
PF_IDI06	97	47	PB_IDI06	NC	4	54	NC
PF_IDI05	96	46	PB_IDI05	NC	5	55	NC
PF_IDI04	95	45	PB_IDI04	NC	6	56	NC
PF_IDI03	94	44	PB_IDI03	P0_IDI00	7	57	P4_IDI00
PF_IDI02	93	43	PB_IDI02	P0_IDI01	8	58	P4_IDI01
PF_IDI01	92	42	PB_IDI01	P0_IDI02	9	59	P4_IDI02
PF_IDI00	91	41	PB_IDI00	P0_IDI03	10	60	P4_IDI03
PE_IDI07	90	40	PA_IDI07	P0_IDI04	11	61	P4_IDI04
PE_IDI06	89	39	PA_IDI06	P0_IDI05	12	62	P4_IDI05
PE_IDI05	88	38	PA_IDI05	P0_IDI06	13	63	P4_IDI06
PE_IDI04	87	37	PA_IDI04	P0_IDI07	14	64	P4_IDI07
PE_IDI03	86	36	PA_IDI03	P1_IDI00	15	65	P5_IDI00
PE_IDI02	85	35	PA_IDI02	P1_IDI01	16	66	P5_IDI01
PE_IDI01	84	34	PA_IDI01	P1_IDI02	17	67	P5_IDI02
PE_IDI00	83	33	PA_IDI00	P1_IDI03	18	68	P5_IDI03
NC	82	32	NC	P1_IDI04	19	69	P5_IDI04
NC	81	31	NC	P1_IDI05	20	70	P5_IDI05
NC	80	30	NC	P1_IDI06	21	71	P5_IDI06
NC	79	29	NC	P1_IDI07	22	72	P5_IDI07
NC	78	28	NC	P01_COMM	23	73	P45_COMM
NC	77	27	NC	P01_COMM	24	74	P45_COMM
NC	76	26	NC	NC	25	75	NC
NC	75	25	NC	NC	26	76	NC
NC	74	24	NC	NC	27	77	NC
PCD_COMM	73	23	P89_COMM	NC	28	78	NC
PD_IDI07	72	22	P9_IDI07	NC	29	79	NC
PD_IDI06	71	21	P9_IDI06	NC	30	80	NC
PD_IDI05	70	20	P9_IDI05	NC	31	81	NC
PD_IDI04	69	19	P9_IDI04	NC	32	82	NC
PD_IDI03	68	18	P9_IDI03	P2_IDI00	33	83	P6_IDI00
PD_IDI02	67	17	P9_IDI02	P2_IDI01	34	84	P6_IDI01
PD_IDI01	66	16	P9_IDI01	P2_IDI02	35	85	P6_IDI02
PD_IDI00	65	15	P9_IDI00	P2_IDI03	36	86	P6_IDI03
PC_IDI07	64	14	P8_IDI07	P2_IDI04	37	87	P6_IDI04
PC_IDI06	63	13	P8_IDI06	P2_IDI05	38	88	P6_IDI05
PC_IDI05	62	12	P8_IDI05	P2_IDI06	39	89	P6_IDI06
PC_IDI04	61	11	P8_IDI04	P2_IDI07	40	90	P6_IDI07
PC_IDI03	60	10	P8_IDI03	P3_IDI00	41	91	P7_IDI00
PC_IDI02	59	9	P8_IDI02	P3_IDI01	42	92	P7_IDI01
PC_IDI01	58	8	P8_IDI01	P3_IDI02	43	93	P7_IDI02
PC_IDI00	57	7	P8_IDI00	P3_IDI03	44	94	P7_IDI03
NC	56	6	NC	P3_IDI04	45	95	P7_IDI04
NC	55	5	NC	P3_IDI05	46	96	P7_IDI05
NC	54	4	NC	P3_IDI06	47	97	P7_IDI06
NC	53	3	NC	P3_IDI07	48	98	P7_IDI07
NC	52	2	NC	P23_COMM	49	99	P67_COMM
NC	51	1	NC	P23_COMM	50	100	P67_COMM



# PCI-1760U

## 8-ch Relay and 8-ch Isolated Digital Input Universal PCI Card with 8-ch Counter/Timer

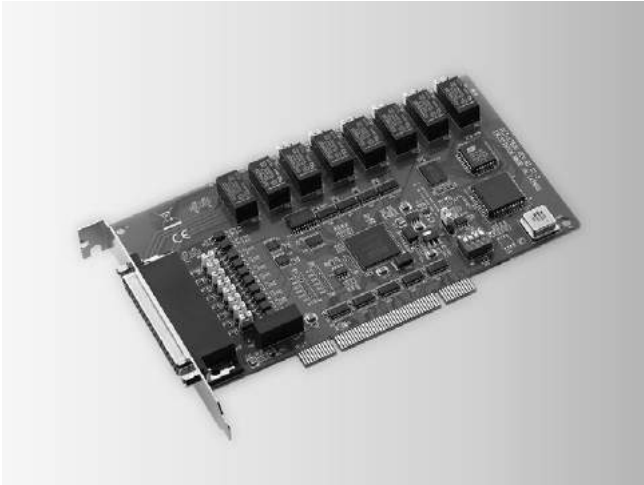

RoHS  
COMPLIANT  
2005/618/EC

FCC CE

### Features

- 8 opto-isolated digital input channels
- 8 relay actuator output channels
- 2 opto-isolated PWM outputs
- LED indicators to show activated relays
- Jumper selectable dry contact/wet contact input signals
- Up event counters for DI
- Programmable digital filter function for DI
- Pattern match interrupt function for DI
- "Change of state" interrupt function for DI
- Universal PCI and BoardID switch

### Introduction

PCI-1760U relay actuator and isolated digital input card is a PC add-on card for the PCI bus. It meets the PCI standard Rev. 2.2 (Universal PCI expansion card), and works with both 3.3 V and 5 V PCI slots. It provides 8 opto-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital inputs in noisy environments, 8 relay actuators that can be used as a on/off control devices or small power switches, and 2 isolated PWM (Pulse Width Modulation) outputs for custom applications.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

### Specifications

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 1.0 V max.  
Logic 1: 4.5 V min. (12 V max.)
- **Interrupt Capable** Ch. 8 (IDI0 ~ IDI7)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100 μs
- **Input Resistance** 2 k Ohm @ 1/4 W

#### Counter/Timer

- **Channels** 8
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 500 Hz
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **PWM Channels** 2
- **Digital Noise Filter** Min. effective high input period ≥ [(2 ~ 65535) x 5 ms] + 5 ms  
Min. effective low input period ≥ [(2 ~ 65535) x 5 ms] + 5 ms

#### Relay Output

- **Channels** 8
- **Relay Type** 2 x Form C, and 6 x Form A
- **Contact Rating** 1 A @ 125 V<sub>AC</sub>, 2 A @ 30 V<sub>DC</sub>
- **Max. Switching Power** 125 VA, 60 W
- **Max. Switching Voltage** 250 V<sub>AC</sub>, 220 V<sub>DC</sub>
- **Max. Switching Current** 2 A
- **Operate/Release Time** max. 5 / 3.5 ms
- **Resistance** Contact: 50 mW max.
- **Life Expectancy (Electrical)** 3 x 10<sup>9</sup> cycles min.: 2 A @ 30 V<sub>DC</sub>, 1 A @ 125 V<sub>AC</sub>  
10<sup>6</sup> cycles min.: 1 A @ 30 V<sub>DC</sub>, 0.5 A @ 125 V<sub>AC</sub>

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 450 mA  
Max.: 5 V @ 850 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

### Ordering Information


- **PCI-1760U** 8-ch Relay/IDI PCI Card w/ 8-ch Counter/Timer

#### Accessories

- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

# PCI-1761

## 8-ch Relay and 8-ch Isolated Digital Input PCI Card

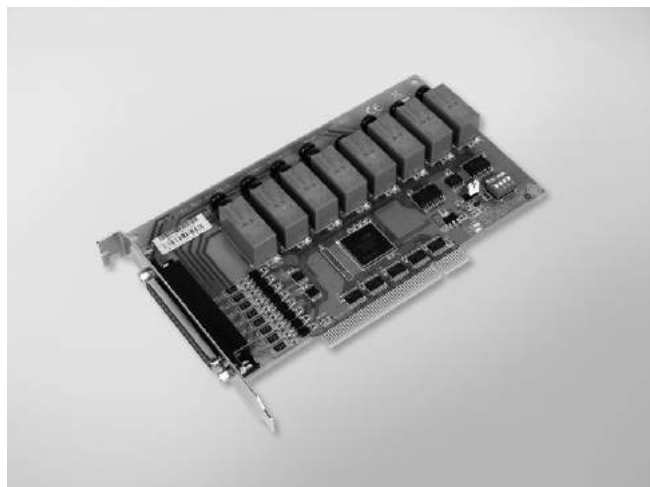

RoHS  
COMPLIANT  
2002/95/EC

FCC CE

### Features

- 8 opto-isolated digital input channels
- 8 relay actuator output channels
- LED indicators to show activated relays
- BoardID switch

### Introduction

The PCI-1761 provides 8 opto-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital inputs in noisy environments, 8 relay actuators that can be used as a on/off control devices or small power switches.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

### Specifications

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 3.0 V max.  
Logic 1: 10 V min. (50 V max.)
- **Interrupt Capable Ch.** 8 (ID10 ~ ID17)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100 μs
- **Input Resistance** 5.7 k Ohm @ 1 W

#### Relay Output

- **Channels** 8
- **Relay Type** 4 x Form C, and 4 x Form A
- **Contact Rating** 2 A @ 250 V<sub>AC</sub>, 2 A @ 30 V<sub>DC</sub>
- **Max. Switching Power** 500 VA, 60 W
- **Max. Switching Voltage** 400 V<sub>AC</sub>, 300 V<sub>DC</sub>
- **Operating Time** Typical: 7 ms, Max: 15 ms
- **Release Time** Typical: 2 ms, Max: 6 ms
- **Resistance** Contact: 100 m Ohm max.
- **Life Expectancy** 2 x 10<sup>8</sup> cycles min. @ 2A/ 250V<sub>AC</sub>

#### General

- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 220 mA  
Max.: 5 V @ 750 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

### Ordering Information

- **PCI-1761** 8-ch Relay and 8-ch Isolated Digital Input PCI Card

#### Accessories

- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules


16  
IoT Ethernet I/O  
Modules

17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# PCI-1762

## 16-ch Relay and 16-ch Isolated Digital Input PCI Card

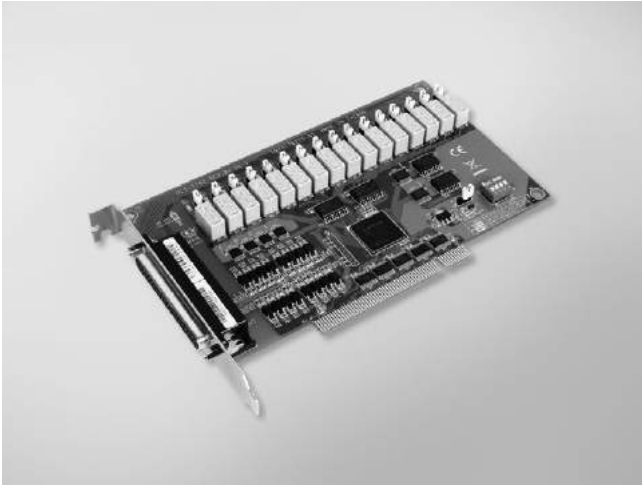

RoHS  
COMPLIANT  
2002/95/EC

FCC CE

### Features

- 16 opto-isolated digital input channels
- 16 relay actuator output channels
- LED indicators to show activated relays
- Jumper selectable dry contact/wet contact input signals
- BoardID switch

### Introduction

The PCI-1762 provides 16 opto-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital inputs in noisy environments, 16 relay actuators that can be used as a on/off control devices or small power switches.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

### Specifications

#### Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 3.0 V max.  
Logic 1: 10 V min. (50 V max.)
- **Interrupt Capable Ch.** 2 (ID10, ID18)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100  $\mu$ s
- **Input Resistance** 5.7 k Ohm 1 W

#### Relay Output

- **Channels** 16
- **Relay Type** Form A or Form B (Jumper selectable)
- **Contact Rating** 0.5 A @ 250 V<sub>AC</sub>, 0.5 A @ 30 V<sub>DC</sub>
- **Max. Switching Power** 125 VA, 15 W
- **Max. Switching Voltage** 250 V<sub>AC</sub>, 220 V<sub>DC</sub>
- **Operate Time** Typical: 3 ms, Max.: 5 ms
- **Release Time** Typical: 2 ms, Max.: 4 ms
- **Resistance** Contact: 50 m Ohm max.
- **Life Expectancy** 2 x 10<sup>8</sup> cycles min. @ 0.5A/ 250V<sub>AC</sub>

#### General

- **I/O Connectors** 1 x DB62 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 250 mA  
Max.: 5 V @ 620 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

### Ordering Information


- **PCI-1762** 16-ch Relay and 16-ch Isolated Digital Input PCI Card

#### Accessories

- **PCL-10162-1E** DB62 Cable, 1 m
- **PCL-10162-3E** DB62 Cable, 3 m
- **ADAM-3962** DB62 DIN-rail Wiring Board

# PCI-1780U

## 8-ch, 16-bit Counter/Timer Universal PCI Card

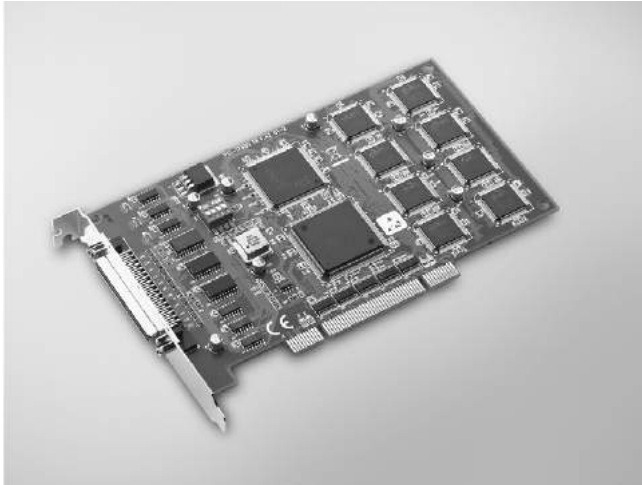

FCC CE RoHS

### Features

- 8 independent 16-bit counters
- 8 programmable clock source
- 8 digital TTL outputs and 8 digital TTL inputs
- Up to 20 MHz input frequency
- Multiple counter clock source selectable
- Counter output programmable
- Counter gate function
- Flexible interrupt source select
- BoardID™ switch

### Introduction

PCI-1780U is a general purpose multi-channel counter/timer PCI card. It targets the AM9513 to implement the counter/timer function by CPLD. It provides eight 16-bit counter channels, 8 digital outputs and 8 digital inputs. Its powerful counter functions cater to a broad range of industrial and laboratory applications.

The card features 12 programmable counter modes, to provide one shot output, PWM output, periodic interrupt output, time-delay output, and to measure the frequency and the pulse width. The PCL-10168 shielded cable works well with PCI-1780U to reduce noise. Its wires are all twisted pairs, and the input signals and output signals are separately shielded, providing minimal cross talk between signals and the best protection against EMI/EMC problems.

### Specifications

#### Digital Input

- **Channels** 8
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** Ch. 0

#### Digital Output

- **Channels** 8
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V  
Logic 1: 2.0 V
- **Output Capability** Sink: 24 mA @ 0.8V  
Source: -15 mA @ 2.0V

#### Counter/Timer

- **Channels** 8 (independent)
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 20 MHz
- **Reference Clock** Internal: 20 MHz  
External clock: 20 MHz max.
- **Counter Modes** 12 (programmable)
- **Interrupt Capable Ch.** 8
- **PWM Channels** 8

#### General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 900 mA  
Max.: 5 V @ 1.2 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1780U** 8-ch, 16-bit Counter/Timer Universal PCI Card

#### Accessories

- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

1  
WebAccess+ Solutions

2  
Motion Control

3  
Power & Energy  
Automation

4  
Automation Software

5  
Intelligent Operator  
Panel

6  
Automation Panels

7  
Panel PCs

8  
Industrial Wireless  
Solutions

9  
Industrial Ethernet  
Solutions

10  
Industrial Gateway  
Solutions

11  
Serial communication  
cards

12  
Embedded Automation  
PCs

13  
DIN-Rail IPCs

14  
CompactPCI Systems

15  
IoT Wireless I/O  
Modules

16  
IoT Ethernet I/O  
Modules

17  
RS-485 I/O Modules

18  
Data Acquisition  
Boards

# PCI-1784U

## 4-ch, 32-bit Encoder Counter Universal PCI Card with 8-ch Isolated Digital I/O



### Features

- Four 32-bit encoder counters
- Single-ended or differential inputs
- Quadrature (x1, x2, x4), pulse/direction, and up/down counting modes
- Optically isolated up to 2,500 VDC
- 4-stage digital filter with selectable sampling rate
- On-board 8-bit timer with wide range time-base selector
- Multiple interrupt sources for precision applications
- 4 isolated digital inputs and 4 isolated digital outputs
- BoardIDTM switch

### Introduction

PCI-1784U is a 4-ch encoder counter universal PCI card. It includes four 32-bit encoder counters, 8-bit timer with multiple range time-base selector, 4 isolated digital inputs, and 4 isolated digital outputs. Its flexible interrupt sources are suitable for motor control and position monitoring.

### Specifications

#### Encoder Counter

- **Channels** 4
- **Resolution** 32 bits
- **Counting Modes** Quadrature, pulse/direction, or up/down
- **Max. Input Frequency** 8 MHz for pulse/direction and up/down modes  
2 MHz for quadrature mode without digital filter  
1 MHz for quadrature mode with digital filter
- **Digital Filter** 4 stages
- **Isolation** 2,500 V<sub>DC</sub>
- **Sample Clock Frequency** 8, 4, 2, or 1 MHz
- **Interrupt Sources** Overflow, underflow, index status, counter over compare, counter under compare
- **Input Voltage** Single-ended:  
Logic 0: 0.8 V max.  
Logic 1: 2.8 V min. (12 V max.)  
Differential:  
Logic 0: -0.2 V max. (-12 V min.)  
Logic 1: 0.2 V min. (12 V max.)

#### Isolated Digital input

- **Channels** 4
- **Input Voltage** Logic 0: 3 V max  
Logic 1: 10 V min. (30 V max.)
- **Interrupt Capable** All 4 channels
- **Isolation** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100 μs
- **Overvoltage Protection** 70 V<sub>DC</sub>

#### Isolated Digital Output

- **Channels** 4
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** 50 mA @ 0.8 V  
-50 mA @ 2.0 V
- **Isolation** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 2 μs

#### General

- **Bus Type** Universal PCI V2.2
- **Connector** 37-pin D-sub female
- **Dimension (L x H)** 175 x 100 mm<sup>2</sup> (6.9" x 3.9")
- **Power Consumption** Typical: +5 V @ 200 mA  
Max.: +5 V @ 450 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)
- **Certification** CE

### Ordering Information

- **PCI-1784U** 4-ch encoder counter universal PCI card
- **PCL-10137H-3E** High-speed DB37 cable, 3 m
- **ADAM-3937** DB37 DIN-rail wiring board



# Signal Conditioning Modules and Terminal Boards

## Isolated Signal Conditioning Modules

<b>ADAM-3000 Series</b>	Isolated Signal Conditioning Modules	<b>19-3</b>
<b>ADAM-3011</b>	Isolated Thermocouple Input Module	<b>19-4</b>
<b>ADAM-3013</b>	Isolated RTD Input Module	
<b>ADAM-3014</b>	Isolated DC Input/Output Module	
<b>ADAM-3016</b>	Isolated Strain Gauge Input Module	<b>19-5</b>
<b>ADAM-3112</b>	Isolated AC Voltage Input Module	
<b>ADAM-3114</b>	Isolated AC Current Input Module	


## Terminal Board Selection Guide

**19-6**


## Isolated Digital I/O Terminal Boards

<b>ADAM-3854</b>	4-ch Power Relay Module	<b>19-8</b>
<b>ADAM-3864</b>	4-ch Solid State Digital I/O Module Carrier Backplane	

To view all of Advantech's Signal Conditioning Modules and Terminal Boards, please visit [www.advantech.com/products](http://www.advantech.com/products).

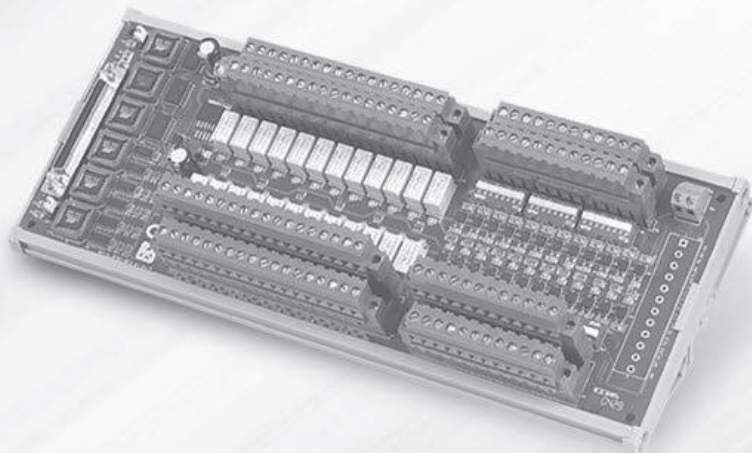

# ADAM-3000 Series

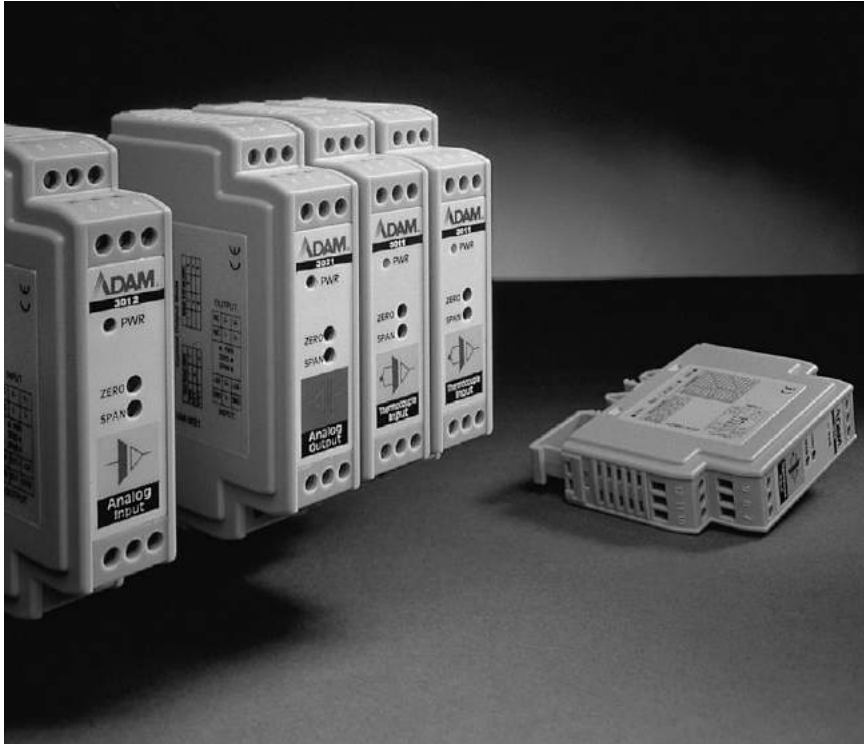

## Features

- 1,000 V<sub>DC</sub> three-way isolation
- Easy input/output range configuration
- Flexible DIN-rail mounting
- Linearized thermocouple/RTD measurement
- Low power consumption
- Wide input bandwidth

## Introduction

The ADAM-3000 Series consist of the most cost-efficient, field configurable, isolation-based, signal conditioners on the market today. The modules are easily installed to protect your instruments and process signals from the harmful effects of ground loops, motor noise, and other electrical interferences.

### Affordable Signal Isolation Solution

Featuring optical isolation technology, the ADAM-3000 modules provide three-way (input/output/power) 1,000 V<sub>DC</sub> isolation. Optical isolation provides pin-point accuracy and stability over a wide range of operations at minimal power consumption.

### Flexible Analog Data Conversion

The input/output range for the ADAM-3000 modules can be configured through switches located inside the module. The modules accept voltage, current, thermocouple or RTD as input, and pass voltage or current as output.

Thermocouple input is handled by the built-in input thermocouple linearization circuitry and a cold junction compensation function. These ensure accurate temperature measurement and accurate conversion of this information to the voltage or current output.

## Configuration

The ADAM-3000 modules use 24 V<sub>DC</sub> power. This electrical power wiring can be acquired from adjacent modules, which greatly simplifies wiring and maintenance. The I/O configuration switches are located inside the modules. To reach the switches, simply remove the modules from the DIN-rail bracket by sliding the modules downward.

## Modular Industrial Design

The ADAM-3000 modules can be easily mounted on a DIN-rail, and signal wires can be connected through screw terminals. The screw terminals and input/output configuration switches are built inside the industrial grade plastic casing. With simple two-wire input/output cables, wiring is easy and reliable in harsh industrial environments.

## Applications


- Signal isolation
- Signal transmitters
- Thermocouple/RTD/strain gauge measurements
- Signal amplifiers
- Noise filter

## Common Specifications

- **Isolation** 1,000 V<sub>DC</sub>
- **Indicators** Power LED indicator
- **Power Requirement** 24 V<sub>DC</sub> ± 10%
- **Case** ABS
- **Screw Terminal** Accepts 0.5 mm<sup>2</sup> ~ 2.5 mm<sup>2</sup>  
1- #12 or 2- #14 ~ #22 AWG
- **Operating Temperature** 0 ~ 70°C (32 ~ 158°F)  
(ADAM-3011: 0 ~ 50°C (32 ~ 122°F))
- **Storage Temperature** -25 ~ 85°C  
(-13 ~ 185°F)

# Isolated Signal Conditioning Modules

## Block Diagram

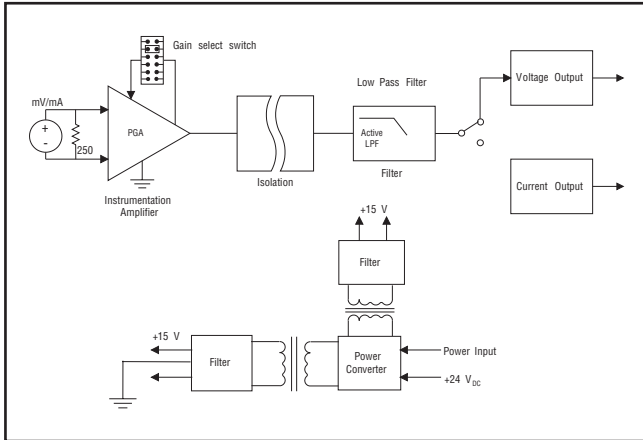


Block Diagram of ADAM-3014



### Three-way Signal Isolation


Three-way (input/output/power)  
1,000 V<sub>DC</sub> isolation.

## Dimensions

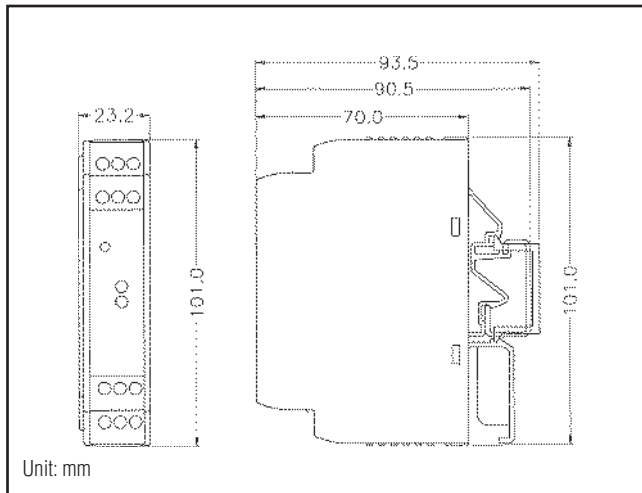


Unit: mm

ADAM-3000 Series Modules

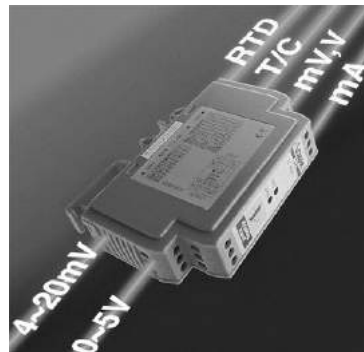


### Field Configurable I/O Range

The I/O range can be configured on site with switches inside the module.

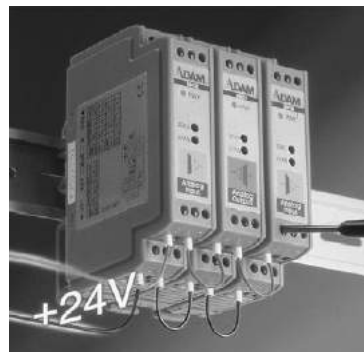

### Easy Daisy Chain Power Wiring

Power can be connected conveniently from adjacent modules.

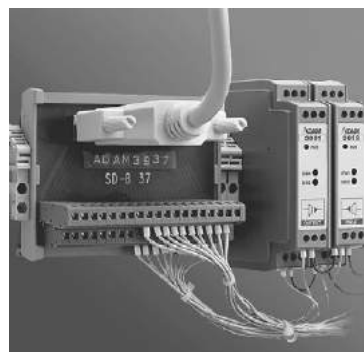

### Interfacing to DAQ Cards

A wiring adapter can connect modules to a data acquisition card.

# ADAM-3011 ADAM-3013 ADAM-3014

## Isolated Thermocouple Input Module

## Isolated RTD Input Module

## Isolated DC Input/Output Module



ADAM-3011



ADAM-3013



ADAM-3014



### Specifications

#### Thermocouple Input

- Common Mode Rejection: 115 dB min
- Input Type

T/C type	Temperature Range (°C)	Accuracy at 25°C (°C)
J	-40 ~ 760	±2
K	0 ~ 1,000	±2
T	-100 ~ 400	±2
E	0 ~ 1,000	±2
S	500 ~ 1,750	±4
R	500 ~ 1,750	±4
B	500 ~ 1,800	±4

- Isolation: 1,000 V<sub>DC</sub> (Three-way)
- Output Impedance: 0.5 Ω
- Stability (Temperature Drift): ±2°C
- Voltage Output: 0 ~ 10 V

#### General

- Connectors: Screw terminal
- Enclosure: ABS
- Indicators: Power LED indicator
- Isolation: 1,000 V<sub>DC</sub>
- Power Consumption: 1.4 W
- Power Input: 24 V<sub>DC</sub> ± 10%
- Operating Temperature: 0 ~ 50°C (32 ~ 122°F)
- Storage Temperature: -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- ADAM-3011: Isolated Thermocouple Input Module

### Specifications

#### RTD Input

- Accuracy: ± 0.1% of full range (voltage) or +/- 0.15°C (voltage) ± 0.2% of full range (current)
- Bandwidth: 4 Hz
- Input CMR at DC: 92 dB min.
- Input Connections: 2, 3 or 4 wires
- Input Type

RTD type	α	Temperature Range (°C)
Pt	0.00385	-100 ~ 100
Pt	0.00385	0 ~ 100
Pt	0.00385	0 ~ 200
Pt	0.00385	0 ~ 600
Pt	0.00385	-100 ~ 0
Pt	0.00385	-100 ~ 200
Pt	0.00385	-50 ~ 50
Pt	0.00385	-50 ~ 150
Pt	0.00392	-100 ~ 100
Pt	0.00392	0 ~ 100
Pt	0.00392	0 ~ 200
Pt	0.00392	0 ~ 600
Ni	N/A	0 ~ 100
Ni	N/A	-80 ~ 100

- Output Range: 0 ~ 5 V, 0 ~ 10 V, 0 ~ 20 mA
- Output Resistance: < 5 Ω
- Temperature Drift: ± 30 ppm of full range

#### General

- Connectors: Screw terminal
- Enclosure: ABS
- Indicators: Power LED indicator
- Isolation: 1,000 V<sub>DC</sub>
- Power Consumption: < 0.95 W
- Power Input: 24 V<sub>DC</sub> ± 10%
- Operating Temperature: 0 ~ 70°C (32 ~ 158°F)
- Storage Temperature: -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- ADAM-3013: Isolated RTD Input Module

### Specifications

#### I/O

- Accuracy: ±0.1% of full range (typical)
- Common Mode Rejection: > 100 dB @ 50 Hz/60 Hz
- Current Input: Bipolar: ±20 mA, Unipolar: 0 ~ 20 mA, Input impedance: 250 Ω
- Current Output: 0 ~ 20 mA
- Stability (Temperature Drift): 150 ppm (typical)
- Voltage Input: Bipolar input: ±10 mV, ±50 mV, ±100 mV, ±0.5 V, ±1.0 V, ±5 V, ±10 V, Unipolar input: 0 ~ 10 mV, 0 ~ 50 mV, 0 ~ 100 mV, 0 ~ 0.5 V, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V, Input impedance: 2 MΩ, Input bandwidth: 2.4 kHz (typical)
- Voltage Output: Bipolar: ±5 V, ±10 V, Unipolar: 0 ~ 10 V, Impedance: < 50 Ω, Drive: 10 mA max.

#### General

- Connectors: Screw terminal
- Enclosure: ABS
- Indicators: Power LED indicator
- Isolation (Three-way): 1,000 V<sub>DC</sub>
- Power Consumption: 0.85 W (voltage output), 1.2 W (current output)
- Power Input: 24 V<sub>DC</sub> ± 10%
- Operating Temperature: -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature: -25 ~ 85°C (-13 ~ 185°F)

### Ordering Information

- ADAM-3014: Isolated DC Input/Output Module

# ADAM-3016

# ADAM-3112

# ADAM-3114

Isolated Strain Gauge Input Module

Isolated AC Voltage Input Module

Isolated AC Current Input Module

19  
Signal Conditioning

20  
Industrial USB I/O  
Modules



ADAM-3016



ADAM-3112



ADAM-3114



## Specifications

### I/O

- **Accuracy**  $\pm 0.1\%$  of full range
- **Bandwidth** 2.4 kHz (typical)
- **Isolation Mode Rejection**  $>100$  dB @ 50 Hz/60 Hz
- **Current Output** Current: 0 ~ 20 mA  
Current load resistor: 0 ~ 500  $\Omega$  (Source)
- **Stability (Temperature Drift)** 150 ppm (typical)
- **Voltage Specifications** Electrical input:  $\pm 10$  mV,  $\pm 20$  mV,  $\pm 30$  mV,  $\pm 100$  mV  
Excitation voltage: 1 ~ 10  $V_{DC}$  (60 mA max)
- **Voltage Output** Bipolar:  $\pm 5$  V,  $\pm 10$  V  
Unipolar: 0 ~ 10 V  
Impedance:  $< 50 \Omega$

### General

- **Connectors** Screw terminal
- **Enclosure** ABS
- **Indicators** Power LED indicator
- **Isolation** 1,000  $V_{DC}$  (Three-way)
- **Power Consumption**  $\leq 1.85$  W (voltage output)  
 $\leq 2.15$  W (current output)
- **Power Input** 24  $V_{DC} \pm 10\%$
- **Operating Temperature**  $-10 \sim 70^\circ\text{C}$  ( $14 \sim 158^\circ\text{F}$ )
- **Storage Temperature**  $-25 \sim 85^\circ\text{C}$  ( $-13 \sim 185^\circ\text{F}$ )

## Ordering Information

- **ADAM-3016** Isolated Strain Gauge Input Module

## Specifications

### Voltage Input

Full Range Mode		400 V	250 V	120 V
Input Voltage	AC ( $V_{RMS}$ )	0 ~ 400	0 ~ 250	0 ~ 120
	DC (V)	0 ~ 400	0 ~ 250	0 ~ 120
Input Impedance		48 k	30 k	14.4 k

### Voltage Output

- **Output Signal** 0 ~ 5  $V_{DC}$
- **Accuracy**  $< \pm 1.0\%$  for full range
- **Output Impedance**  $< 10 \Omega$  @ operating frequency  $< 60$  Hz
- **Load**  $> 10$  k  $\Omega$
- **Ripple**  $< 120$  mVp-p
- **Temperature Coefficient** 400 ppm/ $^\circ\text{C}$
- **Input Bandwidth** 6 kHz

### Power Consumption

- **Supply Voltage** 24  $V_{DC} \pm 10\%$
- **Current Consumption** 40 mA

### General

- **Isolation Protection** 1,000  $V_{DC}$  (output to power)  
2,500  $V_{RMS}$  (input to output, input to power)
- **Operating Temperature**  $0 \sim 60^\circ\text{C}$  ( $32 \sim 140^\circ\text{F}$ )
- **Storage Temperature**  $-20 \sim 70^\circ\text{C}$  ( $-4 \sim 158^\circ\text{F}$ )
- **Storage Humidity** 5 ~ 95 %

## Ordering Information

- **ADAM-3112** Isolated AC Voltage Input Module

## Specifications

### Current Input

- **AC Current Input** 0 ~ 5  $A_{RMS}$
- **DC Current Input** 0 ~ 5 A

### Voltage Output

- **Output Signal** 0 ~ 5  $V_{DC}$
- **Accuracy**  $< \pm 1.0\%$  for full range
- **Output Impedance**  $< 10 \Omega$  @ operating frequency  $< 60$  Hz
- **Load**  $> 10$  k  $\Omega$
- **Ripple**  $< 120$  mVp-p
- **Temperature Coefficient** 400 ppm/ $^\circ\text{C}$
- **Input Bandwidth** 10 kHz

### Power Consumption

- **Supply Voltage** 24  $V_{DC} \pm 10\%$
- **Current Consumption** 40 mA

### General


- **Isolation Protection** 1,000  $V_{DC}$  (output to power)  
2,500  $V_{RMS}$  (input to output, input to power)
- **Operating Temperature**  $0 \sim 60^\circ\text{C}$  ( $32 \sim 140^\circ\text{F}$ )
- **Storage Temperature**  $-20 \sim 70^\circ\text{C}$  ( $-4 \sim 158^\circ\text{F}$ )
- **Storage Humidity** 5 ~ 95 %

## Ordering Information


- **ADAM-3114** Isolated AC Current Input Module

# Terminal Board Selection Guide

## Recommended Cables, I/O Wiring Terminal Boards and Isolated Digital I/O Terminals for Connecting to PCI & USB Data Acquisition (DAQ) Products

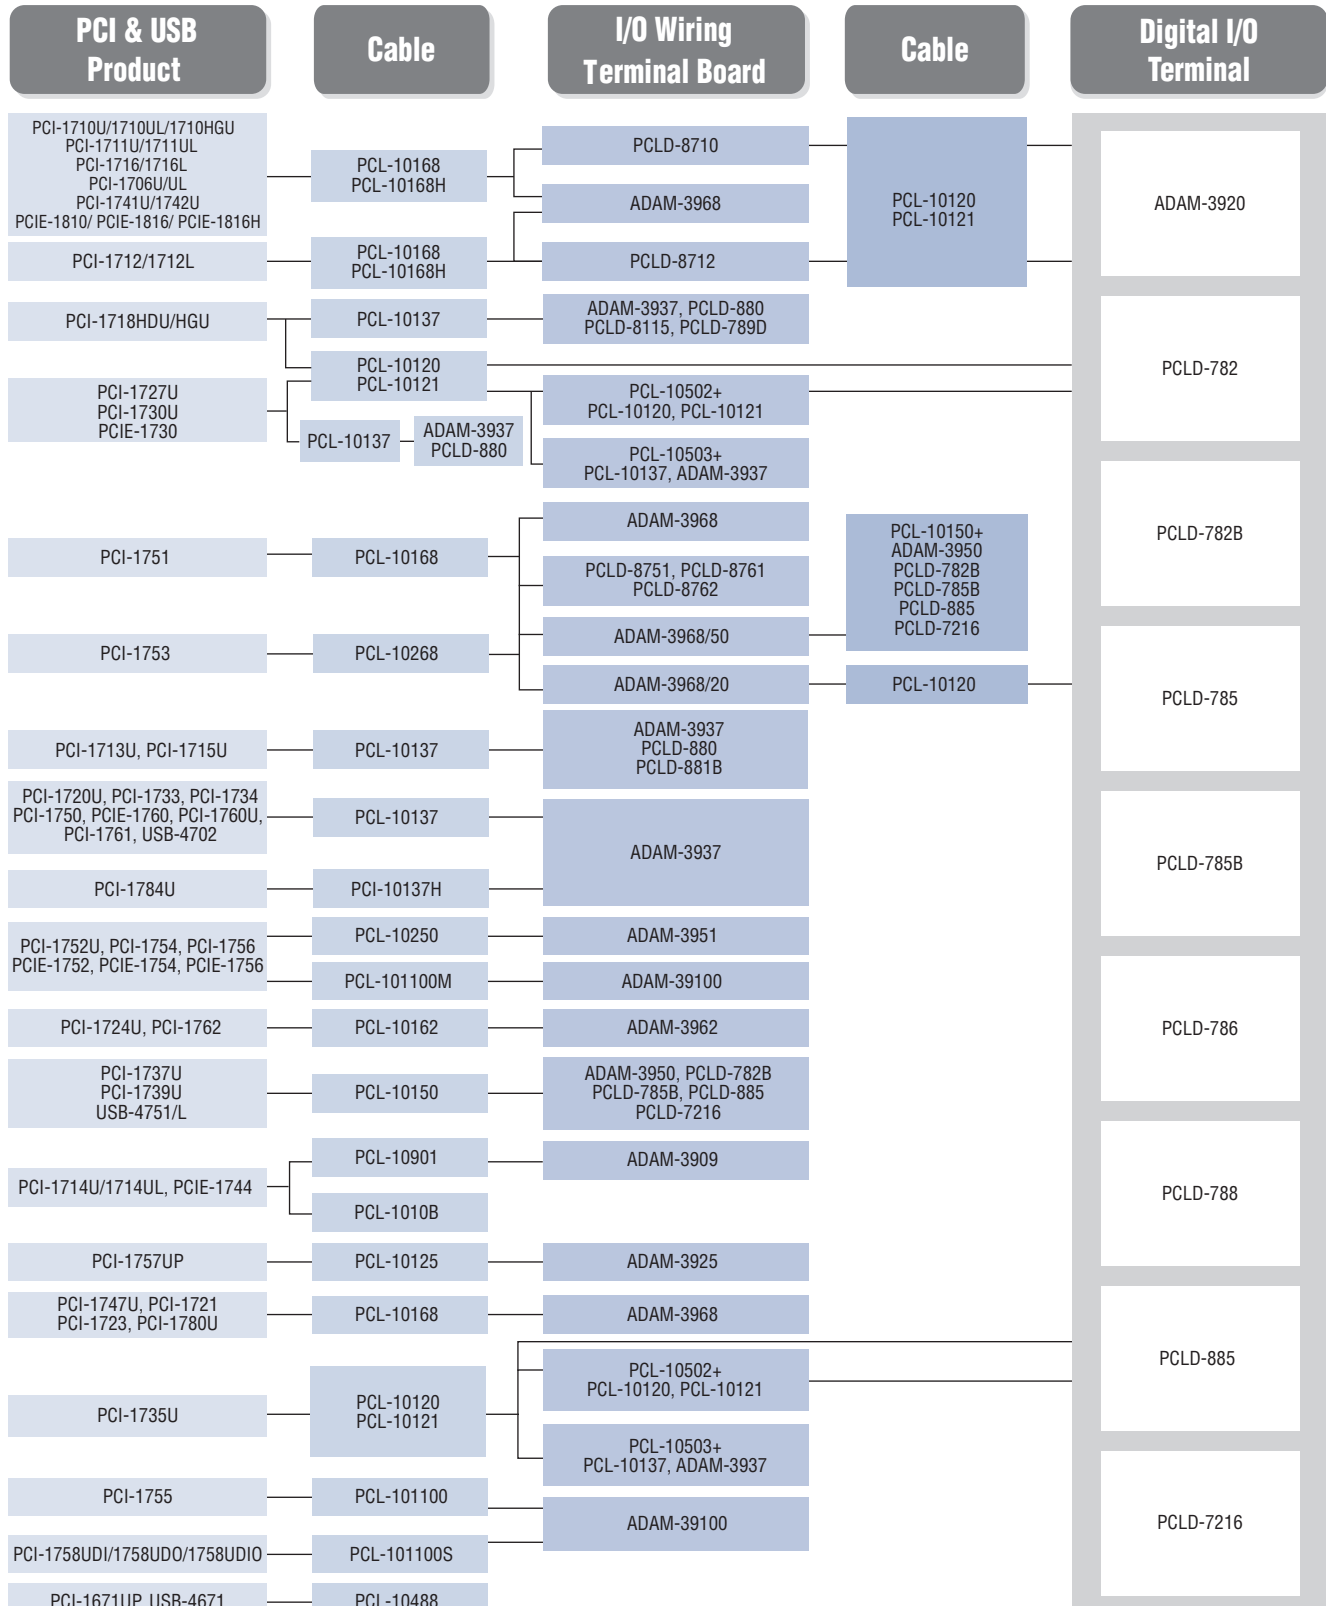

## Recommended Cables, I/O Wiring Terminal Boards and Isolated Digital I/O Terminals for Connecting to PC/104 & PCI-104 Data Acquisition (DAQ) Products

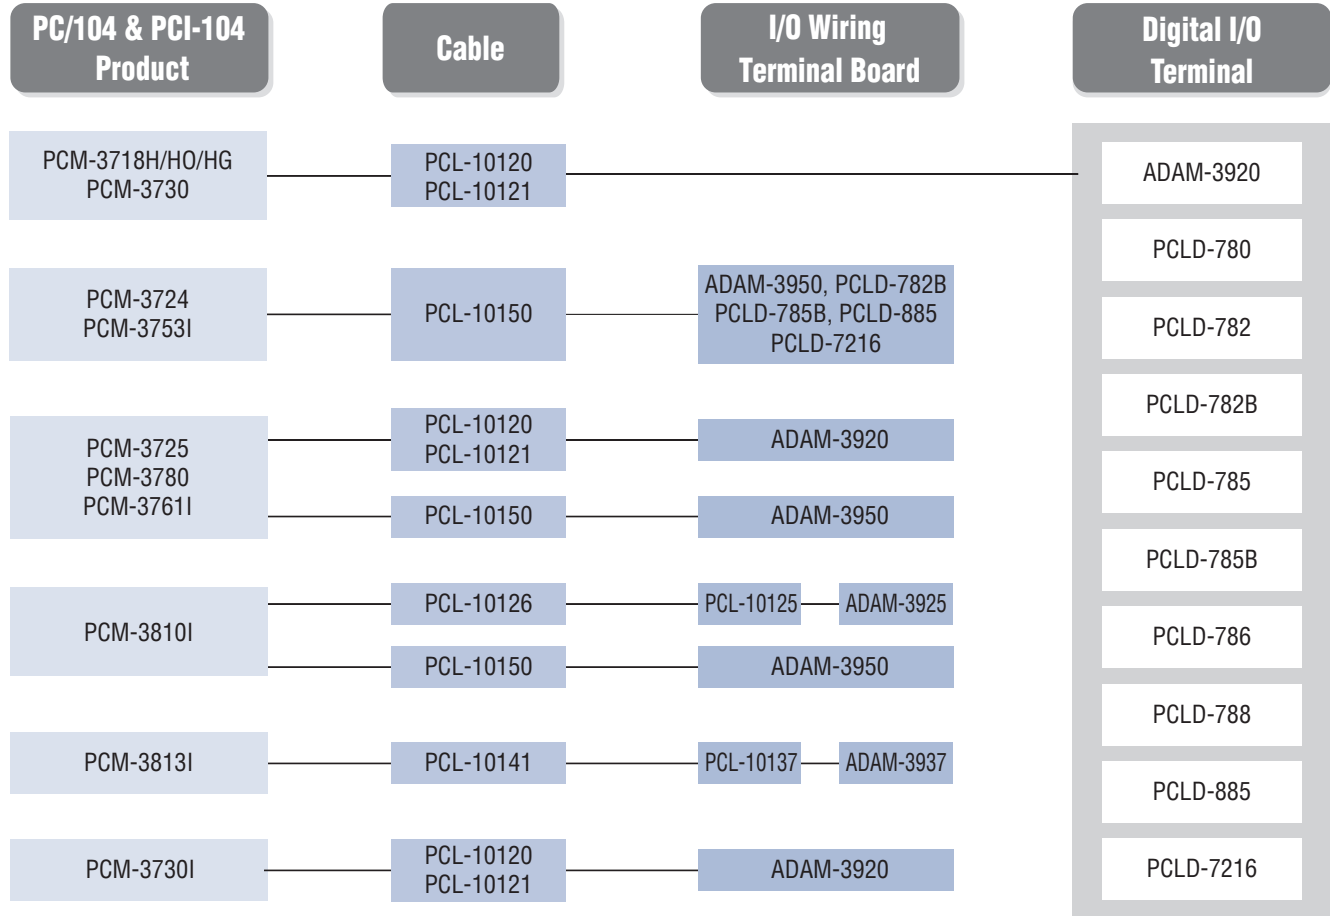

### Cable Accessories

Model	Description
PCL-1010B-1E	BNC to BNC Wiring Cable, 1 m
PCL-101100-1E	100-pin SCSI High-Speed Cable, 1 m
PCL-101100S-1E	100-pin Mini-SCSI Cable, 1 m
PCL-101100S-2E	100-pin Mini-SCSI Cable, 2 m
PCL-101100S-3E	100-pin Mini-SCSI Cable, 3 m
PCL-101100M-3E	100-pin SCSI Shielded Cable, 3 m
PCL-10120-0.4E	20-pin Flat Cable, 0.4 m
PCL-10120-1E	20-pin Flat Cable, 1 m
PCL-10120-2E	20-pin Flat Cable, 2 m
PCL-10121-2E	20-pin Shielded Cable, 2 m
PCL-10125-1E	DB25 Cable, 1 m
PCL-10125-3E	DB25 Cable, 3 m
PCL-10126-0.2E	IDE#2 26-pin to DB25(F) Flat CABLE, 0.2m
PCL-10137-1E	DB37 Cable, 1 m
PCL-10137-2E	DB37 Cable, 2 m
PCL-10137-3E	DB37 Cable, 3 m
PCL-10137H-1E	DB37 High-Speed Cable, 1 m

Model	Description
PCL-10137H-3E	DB37 High-Speed Cable, 3 m
PCL-10141-0.2E	IDE#2 40-pin to DB37(F) Flat CABLE, 0.2m
PCL-10150-1.2E	50-pin Flat Cable, 1.2 m
PCL-10162-1E	DB62 Cable, 1 m
PCL-10162-3E	DB62 Cable, 3 m
PCL-10168-1E	68-pin SCSI Shielded Cable, 1 m
PCL-10168-2E	68-pin SCSI Shielded Cable, 2 m
PCL-10168H-1E	68-pin SCSI Shielded Cable with Noise Rejecting, 1m
PCL-10168H-2E	68-pin SCSI Shielded Cable with Noise Rejecting, 2m
PCL-10250-1E	100-pin SCSI to Two 50-pin SCSI Cable, 1 m
PCL-10250-2E	100-pin SCSI to Two 50-pin SCSI Cable, 2 m
PCL-10268-1E	100-pin SCSI to Two 68-pin SCSI Cables, 1 m
PCL-10268-2E	100-pin SCSI to Two 68-pin SCSI Cables, 2 m
PCL-10488-2	IEEE-488 Cable, 2 m
PCL-10502-AE	Extender, Extend Dual 20-pin to PC Slot-Plate
PCL-10503-AE	Adapter Dual 20-pin to DB37
PCL-10901-3E	DB9 to PS/2 Cable, 3 m


# ADAM-3854

# ADAM-3864

## 4-ch Power Relay Module

## 4-ch Solid State Digital I/O Module

### Carrier Backplane

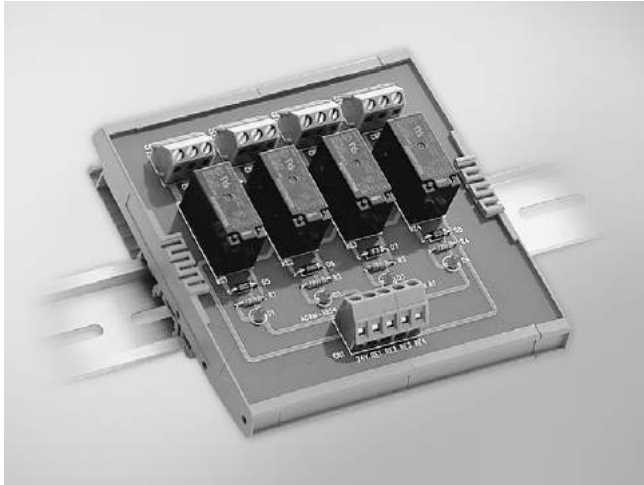

ADAM-3854

### Features

- High power relays can handle up to 5 A @ 250 V<sub>AC</sub> and 5 A @ 30 V<sub>DC</sub>
- 4 single-pole double-throw (SPDT) relays
- Industrial screw terminals for easy output wiring
- LED status indicators
- Onboard varistor protects relay contact points
- DIN-rail mounting

### Specifications

#### I/O

- **Channels** 4
- **Contact Rating** 250 V<sub>AC</sub> @ 5 A  
30 V<sub>DC</sub> @ 5 A
- **Contact Resistance** 100 mΩ
- **Operation Time** 15 ms max.
- **Relay Type** SPDT (Form C)
- **Release Time** 5 ms max.
- **Life Expectancy** 1.7 x 10<sup>5</sup> at rated load

#### Varistor


- **Clamping Voltage** 760 V (10 A)
- **Max. Applied Voltage** 300 V<sub>RMS</sub>
- **Max. Peak Current** 1,200 A for 8 ms
- **Varistor Voltage** 470 V (current = 1 mA)

#### General

- **Connectors** Screw terminals
- **Dimensions (L x W x H)** 112.5 x 118.4 x 46 mm (4.43" x 4.66" x 1.81")
- **LED Indicators** Status displayed for each relay
- **Mounting** DIN-rail
- **Power Consumption** 2.2 W
- **Power Input** 24 V<sub>DC</sub>

### Ordering Information

- **ADAM-3854** 4-ch DIN-rail Power Relay Module

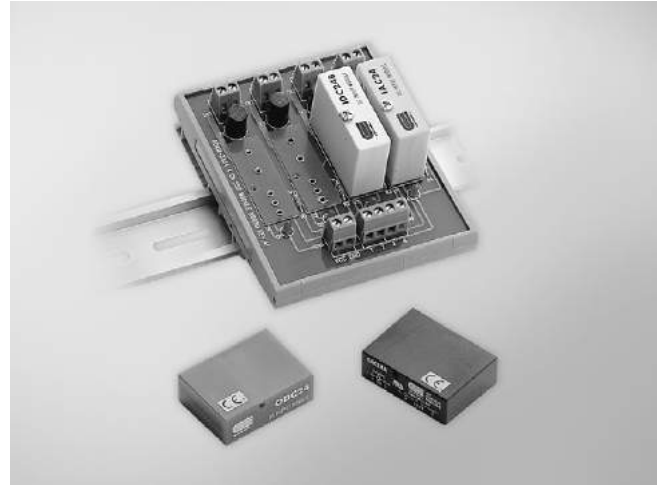

ADAM-3864

### Features

- 2,500 V<sub>RMS</sub> optical isolation
- LED status indicators
- Onboard fuse protection
- DIN-rail mounting

### Specifications

#### Input Modules

##### Field Side:

- **Input On/Off Voltage** IAC24A series: 180 ~ 280 V/80 V<sub>RMS</sub>  
Range IDC24B series: 3 ~ 32 V/1 V<sub>DC</sub>
- **Input Resistance** IAC24A series: 44 kΩ  
IDC24B series: 1.5 kΩ

##### Logic Side:

- **Breakdown Voltage** 30 V<sub>DC</sub>
- **Output Current** 100 mA max.
- **Output Voltage Drop** 0.4 V max.
- **Supply Current** 12 mA max.
- **Supply Voltage** 24 V<sub>DC</sub>

#### Output Modules

##### Field Side:

- **Contact Voltage Drop** 1.6 V max.
- **Current Rating** 3 A max. (@ 25°C)

##### Logic Side:

- **Input Resistance** 220 Ω
- **Supply Current** 12 mA max.
- **Supply Voltage** 24 V

#### General

- **Dimensions (L x H x W)** 118.4 x 90 x 59 mm (4.66" x 3.54" x 2.32")
- **Mounting** DIN-rail

### Ordering Information

- **ADAM-3864** 4-ch Solid State Module Carrier Backplane
- **OAC24A** AC Output Module (24-280 V<sub>AC</sub>, 3 A)
- **ODC24** DC Output Module (5-60 V<sub>DC</sub>, 3 A)
- **PCLM-ODC5** Single Piece DC SSR Module (60 V<sub>DC</sub>, 3 A)
- **IAC24A** AC Input Module (180-280 V<sub>AC</sub>)
- **IDC24B** DC Input Module (3-32 V<sub>DC</sub>)



## Industrial USB I/O Modules

### USB Hubs

USB-4620	5-port Full-speed Isolated USB 2.0 Hub	20-2
USB-4622	5-port High-speed USB 2.0 Hub	

### USB DAQ Modules

USB-4702	10 kS/s, 12-bit, 8-ch Multifunction DAQ USB Module	20-3
USB-4704	48 kS/s, 14-bit, 8-ch Multifunction DAQ USB Module	
USB-4711A	150 kS/s, 12-bit, 16-ch Multifunction DAQ USB Module	20-4
USB-4716	200 kS/s, 16-bit, 16-ch Multifunction DAQ USB Module	20-5
USB-4718	8-ch Thermocouple Input USB Module with 8-ch Isolated Digital Input	20-6
USB-4750	32-ch Isolated Digital I/O USB Module	20-7
USB-4751	48-ch Digital I/O USB Module	20-8
USB-4751L	24-ch Digital I/O USB Module	
USB-4761	8-ch Relay and 8-ch Isolated Digital Input USB Module	20-9

### USB GPIB Modules

USB-4671	GPIB USB Module	20-10
----------	-----------------	-------

To view all of Advantech's Industrial USB I/O Modules, please visit [www.advantech.com/products](http://www.advantech.com/products).



# USB-4620

# USB-4622

## 5-port Full-speed Isolated USB 2.0 Hub

## 5-port High-speed USB 2.0 Hub



USB-4620

CE FCC RoHS COMPLIANT 2002/95/EC

### Features

- 5 downstream USB 2.0 ports
- Compatible with USB 2.0 Full-speed
- 3,000 V<sub>DC</sub> voltage isolation for each downstream port
- Suitable for DIN-rail mounting
- One lockable USB cable included
- 10 ~ 30 V<sub>DC</sub> power input (power adapter not included\*)

### Specifications

#### Connectivity

- **Ports** Upstream x 1 (Type B) Downstream x 5 (Type A)
- **Compatibility** USB 2.0 Full-speed
- **Transfer Speed** 12 Mbps
- **Supply Current** 500 mA max. per channel

#### General

- **Housing** Plastic (ABS+PC)
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **DC Input** 10 ~ 30 V<sub>DC</sub>
- **Power Consumption** 24 V @ 36 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

#### Protection

- **Isolation Protection** 3,000 V<sub>DC</sub>

### Ordering Information

- **USB-4620-AE** 5-port Full-speed Isolated USB 2.0 Hub

#### Accessories

- **PWR-242-AE** DIN-rail Power Supply
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket
- **USB-LOCKCABLE-AE** 1.8 M Lockable USB 2.0 Cable with Screw Kit



USB-4622

CE FCC RoHS COMPLIANT 2002/95/EC

### Features

- 5 downstream USB 2.0 ports
- Compatible with USB 2.0 High-speed, USB 2.0 Full-speed, USB 1.0
- 480 Mbps high-speed data transfer
- LED indicator
- Suitable for DIN-rail mounting
- One lockable USB cable included
- 10 ~ 30 V<sub>DC</sub> power input (power adapter not included\*)

### Specifications

#### Connectivity

- **Ports** Upstream x 1 (Type B) Downstream x 5 (Type A)
- **Compatibility** USB 2.0 High-speed, USB 2.0 Full-speed, USB 1.0
- **Transfer Speed** 480 Mbps/12 Mbps/1.5 Mbps
- **Supply Current** 500 mA max. per channel

#### General

- **Housing** Plastic (ABS+PC)
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **DC Input** 10 ~ 30 V<sub>DC</sub>
- **Power Consumption** 24 V @ 36 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **USB-4622-BE** 5-port High-speed USB 2.0 Hub

#### Accessories


- **PWR-242-AE** DIN-rail Power Supply
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket
- **USB-LOCKCABLE-AE** 1.8 M Lockable USB 2.0 Cable with Screw Kit

# USB-4702

# USB-4704

**10 kS/s, 12-bit, 8-ch Multifunction DAQ USB Module**

**48 kS/s, 14-bit, 8-ch Multifunction DAQ USB Module**

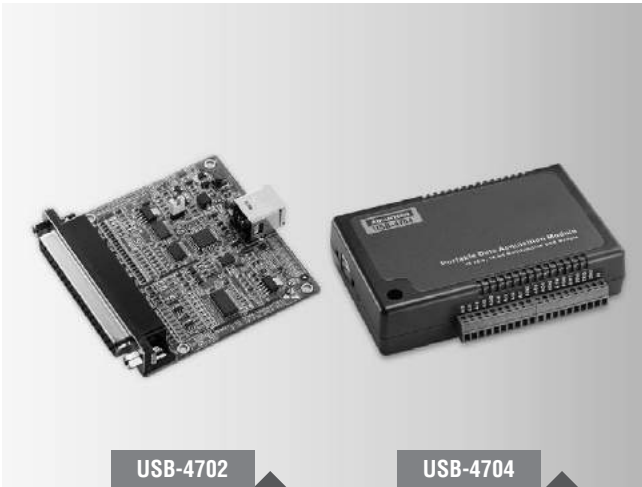

USB-4702

USB-4704



## Features

- Supports USB 2.0
- Portable
- Bus-powered
- 8 analog input channels
- 12-bit (USB-4702), 14-bit (USB-4704) resolution AI
- Sampling rates up to 10 kS/s (USB-4702), 48 kS/s (USB-4704)
- 8-ch DI/8-ch DO, 2-ch AO and one 32-bit counter

19  
Signal Conditioning

20  
Industrial USB I/O  
Modules

## Introduction

USB-4702/4704 are low-cost USB data acquisition modules. You no longer need to open the chassis to install DAQ modules. Just plug in the module, then get the data. It's easy to use and efficient. Reliable and rugged enough for industrial applications, yet affordable for home projects, USB-4702/4704 are the perfect way to add measurement and control capability to any USB capable computer. It obtains all required power from the USB port, so no external power connection is ever required. With the features of USB-4702/4704, they are your most cost effective choice of lab or production line test & measurement tool.

## Specifications

### Analog Input

- **Channels** 8 single-ended/4 differential (software programmable)
- **Resolution** USB-4702: Single-ended: 11 bits  
Differential: 12 bits  
SUB-4704: Single-ended: 13 bits  
Differential: 14 bits
- **Max. Sampling Rate** USB-4702: 10 kS/s max.  
USB-4704: 48 kS/s max.

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of USB-4702 are used, the sampling rate is  $10k/4 = 2.5$  kS/s per channel.

- **FIFO Size** 512 samples
- **Overvoltage Protection** 30 V<sub>p-p</sub>
- **Input Impedance** 127 k $\Omega$
- **Sampling Modes** Software, onboard programmable pacer, and external
- **Input Range (V, software programmable) & Absolute Accuracy**

Single Ended	$\pm 10$	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Differential	N/A	$\pm 1$	$\pm 1.25$	$\pm 2$	$\pm 2.5$	$\pm 4$	$\pm 5$	$\pm 10$	$\pm 20$
Absolute Accuracy (% of FSR)*	USB-4702	0.2	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	USB-4704	0.15	0.1	0.1	0.1	0.1	0.1	0.15	0.15

\*:  $\pm 1$  LSB is added as the derivative for absolute accuracy

### Analog Output

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable) 0-5
- **Slew Rate** 0.7 V/ $\mu$ s
- **Driving Capability** 5 mA
- **Output Impedance** 51  $\Omega$
- **Operation Mode** Single output
- **Accuracy** Relative:  $\pm 12$  LSB  
Differential non-linearity:  $\pm 5$  LSB

### Digital Input

- **Channels** 8
- **Compatibility** 3.3 V/5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 8
- **Compatibility** TTL
- **Output Voltage** Logic 0: 0.4 V max.@ 4 mA (sink)  
Logic 1: 3.5 V min.@ 4 mA (source)

### Counter

- **Channels** 1
- **Resolution** 32 bits
- **Compatibility** 3.3 V/TTL
- **Max. Input Frequency** 5 MHz

### General

- **Bus Type** USB 2.0
- **I/O Connector** USB-4702: 1 x DB37 female connector  
USB-4704: Onboard screw terminal
- **Dimensions (L x W)** USB-4702: 70 x 70 mm (2.76" x 2.76")  
USB-4704: 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 100 mA  
Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

## Ordering Information

- **USB-4702-AE** 10 kS/s, 12-bit, 8-ch Multi. USB Module
- **USB-4704-AE** 48 kS/s, 14-bit, 8-ch Multi. USB Module

### Accessories

- **PCL-10137-1E** DB37 Cable, 1m
- **PCL-10137-2E** DB37 Cable, 2m
- **PCL-10137-3E** DB37 Cable, 3m
- **ADAM-3937-BE** DB37 DIN-rail Wiring Board
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket

# USB-4711A

## 150 kS/s, 12-bit, 16-ch Multifunction DAQ USB Module



CE FCC RoHS

### Features

- Supports USB 2.0
- Portable
- Bus-powered
- 16 analog input channels
- 12-bit resolution AI
- Sampling rate up to 150 kS/s
- 8-ch DI/8-ch DO, 2-ch AO and one 32-bit counter
- Detachable screw terminal on modules
- Suitable for DIN-rail mounting
- One lockable USB cable for secure connection included

### Introduction

The USB-4700 series consists of true plug & play data acquisition modules. You no longer need to open the chassis to install DAQ modules. Just plug in the module, then get the data. It's easy to use and efficient. Reliable and rugged enough for industrial applications, yet affordable for home projects, the USB-4700 series module is the perfect way to add measurement and control capability to any USB capable computer. The USB-4700 series is fully plug & play and with onboard terminal block for easy usage. It obtains all required power from the USB port, so no external power connection is ever required. USB-4711A is a multifunction module, with 16-ch Analog Input, 2-ch Analog Output, 16-ch Digital I/O and counter channel which is able to output a constant frequency square wave. With the features of USB-4700 series; USB-4711A is your most cost effective choice of lab or production line test & measurement tool.

### Specifications

#### Analog Input

- **Channels** 16 single-ended/8 differential (software programmable)
- **Resolution** 12 bits
- **Max. Sampling Rate** 150 kS/s max.

Note: The sampling rate for each channels will be affected by used channel number. Eg. if 4 channels are used, the sampling rate is  $150k/4 = 37.5$  kS/s per channel.

- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 1 G $\Omega$
- **Sampling Modes** Software, onboard programmable pacer, and external
- **Input Range (V, software programmable) & Absolute Accuracy**

Bipolar	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

\*:  $\pm 1$  LSB is added as the derivative for absolute accuracy

#### Analog Output

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ 5, 0 ~ 10
	Bipolar	$\pm 5, \pm 10$

- **Slew Rate** 0.125 V/us
- **Driving Capability** 5 mA
- **Output Impedance** 0.1  $\Omega$
- **Operation Mode** Single output
- **Accuracy** Relative:  $\pm 1$  LSB  
Differential non-linearity:  $\pm 1$  LSB

#### Digital Input

- **Channels** 8
- **Compatibility** 3.3 V/5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

#### Digital Output

- **Channels** 8
- **Compatibility** 3.3 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.@ 6 mA  
Logic 1: 2.6 V min.@ 6 mA

#### Event Counter

- **Channels** 1
- **Compatibility** 3.3 V/TTL
- **Max. Input Frequency** 1 kHz

#### General

- **Bus Type** USB 2.0
- **I/O Connector** Onboard screw terminal
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 360 mA  
Max.: 5 V @ 450 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **USB-4711A-AE** 150 kS/s, 12-bit, 16-ch Multi. USB Module

#### Accessories

- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket

# USB-4716

## 200 kS/s, 16-bit, 16-ch Multifunction DAQ USB Module

19  
Signal Conditioning  
20  
Industrial USB I/O  
Modules



CE FCC RoHS

### Features

- Supports USB 2.0
- Portable
- Bus-powered
- 16 analog input channels
- 16-bit resolution AI
- Sampling rate up to 200 kS/s
- 8-ch DI/8-ch DO, 2-ch AO and one 32-bit counter
- Detachable screw terminal on modules
- Suitable for DIN-rail mounting
- One lockable USB cable for secure connection included

### Introduction

The USB-4700 series consists of true plug & play data acquisition devices. No more opening up your computer chassis to install boards just plug in the module, then get the data. It's easy to use and efficient. USB-4716 offers 16 single-ended/ 8 differential analog inputs with 16-bit resolution, up to 200 kS/s throughput, 16 digital I/Os, and 1 user counter, plus 2 16-bit analog outputs. The high performance makes USB-4716 your best choice for test & measurement applications in the production line or in the lab.

Reliable and rugged enough for industrial applications, yet affordable for home projects, the USB-4716 is the perfect way to add measurement and control capability to any USB capable computer. The USB-4700 series is fully plug & play and easy to use. It obtains all required power from the USB port, so no external power connection is ever required.

### Specifications

#### Analog Input

- **Channels** 16 single-ended/ 8 differential (software programmable)
- **Resolution** 16 bits
- **Max. Sampling Rate** 200 kS/s (for USB 2.0)

Note: The sampling rate for each channel will be affected by used channel number. For example, if 4 channels are used, the sampling rate is  $200k/4 = 50$  kS/s per channel.

- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 1 GΩ
- **Sampling Modes** Software, onboard programmable pacer, or external
- **Input Range (V, software programmable) & Absolute Accuracy**

	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Single Ended</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Differential</b>	±10	±5	±2.5	±1.25	±0.625
<b>Absolute Accuracy (% of FSR)*</b>	0.015	0.03	0.03	0.05	0.1

\*: ±1 LSB is added as the derivative for absolute accuracy

#### Analog Output

- **Channels** 2
- **Resolution** 16 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ 5, 0 ~ 10
	Bipolar	±5, ±10

- **Slew Rate** 0.125 V/μs
- **Driving Capability** 5 mA
- **Output Impedance** 0.1 Ω max.
- **Operation Mode** Single output
- **Accuracy** Relative: ±1 LSB

#### Digital Input

- **Channels** 8
- **Compatibility** 3.3 V/5 V/TTL
- **Input Voltage** Logic 0: 1.0 V max.  
Logic 1: 2.0 V min.

#### Digital Output

- **Channels** 8
- **Compatibility** 3.3 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** Sink: 6 mA (sink)  
Source: 6 mA (source)

#### Event Counter

- **Channels** 1
- **Compatibility** 3.3V/TTL
- **Max. Input Frequency** 1 kHz

#### General

- **Bus Type** USB 2.0
- **I/O Connector** Onboard screw terminal
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 360 mA  
Max.: 5 V @ 450 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 158°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Operating Humidity** 5 ~ 85% RH non-condensing
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **USB-4716-AE** 200 kS/s, 16-bit, 16-ch Multi. USB Module

#### Accessories

- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket

# USB-4718

## 8-ch Thermocouple Input USB Module with 8-ch Isolated Digital Input



CE FCC 

### Features

- Supports USB 2.0
- Supports voltage, current, and thermocouple inputs
- Bus-powered
- 8 thermocouple input channels
- 2,500 V<sub>DC</sub> isolation
- Supports 4 ~ 20 mA current input
- Detachable screw terminal on modules
- 8-ch isolated DI and 8-ch isolated DO
- Suitable for DIN-rail mounting
- One lockable USB cable for secure connection included

### Introduction

The USB-4700 series consists of true plug & play data acquisition devices. No more opening up your computer chassis to install boards just plug in the module, then get the data. It's easy to use and efficient. USB-4718 offers 8 thermocouple inputs with 16-bit resolution, up to 0.1% input range accuracy. Portable design makes the USB-4718 suitable for field research. Also, the input channels can be set separately making handling multiple type of sensors with just one USB-4718 module possible.

Reliable and rugged enough for industrial applications, yet affordable for home projects, the USB-4718 is the perfect way to add measurement and control capability to any USB capable computer. The USB-4700 series is fully plug and play and easy to use. It obtains all required power from the USB port, so no external power connection is ever required.

### Specifications

#### Analog Input

- **Accuracy**  $\pm 0.1\%$  for voltage input
- **Bandwidth** 13.1 Hz @ 50 Hz, 15.72 Hz @ 60 Hz
- **Channels** 8 differential
- **Ch. Independent Conf.** Yes
- **CMR @ 50/60 Hz** 92 dB min.
- **Resolution** 16 bits
- **Input Impedance** 1.8 M $\Omega$
- **Input Range** 0 ~ 15 mV, 0 ~ 50 mV, 0 ~ 100 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 2.5 V, 0 ~ 20 mA, 4 ~ 20 mA
- **Input Types** Thermocouple, mV, V, mA
- **Sampling Rate** 10 S/s (shared for all channels)

Note: The sampling rate for each channel is fixed due to the hardware design. It is 10/8 = 1.25 S/s per channel no matter how many channels you use.

- **Span Drift**  $\pm 25$  ppm/ $^{\circ}$ C
- **T/C Type and Temperature Ranges**

<b>J</b>	0 ~ 760 $^{\circ}$ C	<b>R</b>	500 ~ 1750 $^{\circ}$ C
<b>K</b>	0 ~ 1370 $^{\circ}$ C	<b>S</b>	500 ~ 1750 $^{\circ}$ C
<b>T</b>	-100 ~ 400 $^{\circ}$ C	<b>B</b>	500 ~ 1800 $^{\circ}$ C
<b>E</b>	0 ~ 1000 $^{\circ}$ C		

- **TVS/ESD Protection** Built-in
- **Zero Drift**  $\pm 0.3$   $\mu$ V/ $^{\circ}$ C

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 3 V max.  
Logic 1: 5 V min. (30 V max.)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-isolator Response** 25  $\mu$ s

#### Isolated Digital Output

- **Channels** 8
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 30 V<sub>DC</sub>, 1.1 A max./total
- **Sink Current** 200 mA max./channel
- **Opto-isolator Response** 25  $\mu$ s

#### General

- **Bus Type** USB 2.0
- **I/O Connector** Onboard screw terminal
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** 100 mA @ 5 V
- **Watchdog Timer** 1.6 sec. (system)
- **Operating Temperature** 0 ~ 60 $^{\circ}$ C (32 ~ 140 $^{\circ}$ F)
- **Storage Temperature** -20 ~ 70 $^{\circ}$ C (-4 ~ 158 $^{\circ}$ F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

### Ordering Information

- **USB-4718-AE** 8-ch Thermocouple Input USB Module

#### Accessories

- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket

# USB-4750

## 32-ch Isolated Digital I/O USB Module

19  
Signal Conditioning  
20  
Industrial USB I/O  
Modules



CE FCC RoHS

### Features

- Compatible with USB 1.1/2.0
- Bus-powered
- 16 isolated DI and 16 isolated DO channels
- High voltage isolation on all channels (2,500 V<sub>DC</sub>)
- High sink current on isolated output channels (100 mA/Channel)
- Supports 5 ~ 60 V<sub>DC</sub> isolated input channels
- Interrupt handling capability
- Timer/counter capability
- Suitable for DIN-rail mounting
- One lockable USB cable for secure connection included

### Introduction

The USB-4700 series consists of true plug & play data acquisition devices. No more opening up your computer chassis to install boards—just plug in the module, then get the data. It's easy to use and efficient. USB-4750 is a 32-channel isolated digital I/O module. With isolation protection of 2,500 V<sub>DC</sub>, and dry contact support, USB-4750 is ideal for industrial applications where high-voltage protection is required. Each I/O channel of the USB-4750 corresponds to a bit in an I/O port. This makes USB-4750 very easy to program. This module also offers a counter or timer and one digital input interrupt to a PC so users can then easily configure by software.

Reliable and rugged enough for industrial applications, yet affordable for home projects, the USB-4750 is the perfect way to add measurement and control capability to any USB capable computer. The USB-4750 is fully compatible with USB plug & play and easy to use. It obtains all required power from the USB port, so no external power connection is ever required.

### Specifications

#### Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 5 V max.  
Logic 1: 5 V min. (60 V max.) or dry contact
- **Interrupt Capable Ch.** 2
- **Isolation Protection** 2,500 V<sub>DC</sub>

#### Isolated Digital Output

- **Channels** 16
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** 100 mA max. per channel  
Total 1.1 A max.

#### Isolated Counter

- **Channels** 2
- **Resolution** 32-bit
- **Max. Input Frequency** 8 MHz
- **Isolation Protection** 2,500 V<sub>DC</sub>

#### General

- **Bus Type** USB 1.1/2.0
- **I/O Connector** Onboard screw terminal
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 200 mA  
Max.: 5 V @ 350 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **USB-4750-AE** 32-ch Isolated Digital I/O USB Module

#### Accessories

- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket

# USB-4751 USB-4751L

## 48-ch Digital I/O USB Module

## 24-ch Digital I/O USB Module



CE FCC 

### Features

- Compatible with USB 1.1/2.0
- Portable
- Bus-powered
- 48/24 TTL digital I/O lines
- Emulates mode 0 of 8255 PPI
- Buffered circuits for higher driving capacity than the 8255
- Interrupt handling capability
- Timer/Counter interrupt capability
- Supports both dry and wet contact
- 50-pin Opto-22 compatible box header
- Suitable for DIN-rail mounting
- One lockable USB cable for secure connection included

### Introduction

The USB-4700 series consists of true plug & play data acquisition devices. No more opening up your computer chassis to install boards; just plug in the module, then get the data. It's easy to use and efficient. USB-4751/4751L is a 48/24-bit digital I/O module with USB interface. Its 48/24 bits are divided into six/three 8-bit I/O ports and users can configure each port as input or output via software. USB-4751/USB-4751L also provides one event counter and three 16-bit timers, which can be cascaded to become a 32-bit timer.

### Specifications

#### Digital Input

- **Channels** USB-4751: 48 (shared with output)  
USB-4751L: 24 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2 V min.

#### Digital Output

- **Channels** USB-4751: 48 (shared with input)  
USB-4751L: 24 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.5 V max.  
Logic 1: 3.8 V min.
- **Output Capability** Sink: 12 mA @ 0.5 V  
Source: 12 mA @ 3.8 V for single channels  
5 mA @ 3.8 V for all channels in high status

#### Counter/Timer

- **Channels** 2
- **Resolution** 32-bit
- **Max. Input Frequency** 8 MHz

#### General

- **Bus Type** USB 1.1/2.0
- **I/O Connector** 50-pin box headers, pin assignments are fully compatible with Opto-22 I/O module racks
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 200 mA  
Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **USB-4751-AE** 48-ch Digital I/O USB Module
- **USB-4751L-AE** 24-ch Digital I/O USB Module

#### Accessories

- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket
- **PCL-10150-1.2E** 50-pin Flat Cable, 1.2 m
- **ADAM-3950-AE** 50-pin DIN-rail Flat Cable Wiring Board
- **PCLD-782B-AE** 24-ch IDI Board w/ 20-pin & 50-pin Flat Cables
- **PCLD-785B-AE** 24-ch Relay Board w/ 20-pin & 50-pin Flat Cables



# USB-4761

## 8-ch Relay and 8-ch Isolated Digital Input USB Module

19  
Signal Conditioning  
20  
Industrial USB I/O  
Modules



CE FCC RoHS

### Features

- Compatible with USB 1.1/2.0
- Portable
- Bus-powered
- 8 relay output channels and 8 isolated digital input channels
- LED indicators to show activated relays
- 8 Form C type relay output channels
- High-voltage isolation on input channels (2,500 V<sub>DC</sub>)
- High ESD protection (2,000 V)
- Wide input range (5 ~ 30 V<sub>DC</sub>)
- Interrupt handling capability
- Detachable screw terminal on modules
- Suitable for DIN-rail mounting
- One lockable USB cable for secure connection included

### Introduction

The USB-4761 is a relay actuator and isolated digital input module with USB interface. It provides 8 optically-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital signals in noisy environments and 8 relay actuators for serving as on/off control devices or small power switches. For easy monitoring, each relay is equipped with one green LED to show its on/off status.

### Rugged Protection

The USB-4761's digital input channels feature a rugged isolation protection for industrial, lab and machinery automation applications. They durably withstand voltages up to 2,500 V<sub>DC</sub>, protecting your host system from any incidental harms. If connected to an external input source with surge-protection, the USB-4761 can offer up to a maximum of 2,000 V ESD (Electrostatic Discharge) protection.

### Specifications

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 2 V max.  
Logic 1: 5 V min. (30 V max.)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 25  $\mu$ s

#### Relay Output

- **Contact Rating** 0.25 A @ 250 V<sub>AC</sub>, 2 A @ 30 V<sub>DC</sub>
- **Max. Switching Power** 62.5 VA, 60 W
- **Max. Switching Voltage** 250 V<sub>AC</sub>, 220 V<sub>DC</sub>
- **Max. Switching Current** 5 A
- **Min. Switching Voltage** 100  $\mu$ V
- **Operate/Release Time** typ. 3 / 2 ms, max. 5 / 4 ms
- **Resistance** Contact: 50 m $\Omega$  max. @ 10 mA/20 mV  
Insulation: 1 G $\Omega$  min. @ 500 V<sub>DC</sub>
- **Life Expectancy (Electrical)** 5 x 10<sup>7</sup> cycles typ. @ 10 mA/12 V  
2 x 10<sup>5</sup> cycles typ. @ 2000 mA/30 V

#### General

- **Bus Type** USB 1.1/2.0
- **I/O Connector** Onboard screw terminal
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 60 mA  
Max.: 5 V @ 400 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

### Ordering Information

- **USB-4761-AE** 8-ch Relay/Isolated Digital Input USB Module

#### Accessories

- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket

# USB-4671

## GPIB USB Module



CE FCC

### Features

- Supports USB 2.0
- Convenient portable design
- Bus-powered
- Complete IEEE 488.1 & 488.2 compatibility
- Full driver, library, and example support, including; Visual C++®, Visual C#®, Visual Basic®, Visual Basic .NET®, Delphi®, and LabView
- Provides powerful and easy-to-use configuration utility
- No GPIB cable required for instrument connection
- Plug & Play installation and configuration

### Introduction

USB-4671 is a high-performance USB Module with a GPIB interface. The module is fully compatible with IEEE 488.1 and 488.2 standards with USB 2.0 specification. With two driver control modes: controller mode and slave mode; USB-4671 can perform basic IEEE 488 talker, listener and controller functions required by IEEE 488.2. You can also connect up to 15 GPIB instruments. Therefore, USB-4671 is especially suitable for instrument measurements and control.

Furthermore, USB-4671 also offers powerful testing features and a configuration utility that allows users to easily access and control instruments. USB-4671 offers a comprehensive supplementary controller driver database and provides standard IEEE-488 commands to help users develop applications. Users can use an interactive GPIB window interface to control devices directly without any need of programming.

### Specifications

#### GPIB

- **Compatibility** IEEE 488.1 & IEEE 488.2
- **GPIB Transfer Rate** 1.8 MB/s
- **OS Support** Windows 2000/XP/Vista and Win 7
- **Library Support** Visual C++, Visual C#, Visual Basic, Visual Basic .NET, Delphi, LabView
- **Max. GPIB Connections** 15

#### General

- **Bus Type** USB 2.0
- **I/O Connector** 1 x 24-pin IEEE 488
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Operating Humidity** 10 ~ 90% RH, non-condensing
- **Dimensions (L x W x H)** 107 x 66 x 26 mm (4.21" x 2.6" x 1.02")

### Ordering Information

- **USB-4671-A** GPIB USB Module

#### Accessories

- **PCL-10488-2** IEEE-488 Cable, 2 m



# Product Index

ECU-4574	Intel® Atom™ N2600 Power & Energy Computers with 8 x LAN, 10 x COM Ports.....	3-8	EKI-9316	Industrial-Class 16 Port Full Gigabit Managed DIN Rail Switch .....	9-20
ECU-4674	Intel® Atom™ N2600 Power & Energy Computers with 8xLAN, 18xCOM, 8DI, 8DO, 1x IRIG-B and 1 x PCI-104 .....	3-7	EKI-9316P	Industrial-Class 16 Port Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+ .....	9-13
ECU-4784	Intel® Haswell Core i7 Power & Energy Automation Computer with 8 x LAN, 2 x COM and 2 x Expansion Slots .....	3-10	EKI-9778	1U Rackmount Industrial-Class Switch with Combo Port Flexibility 24GbE + 4 10GbE Managed Switch .....	9-18
ECU-P1300	Vibration Signal Modulate Card .....	3-15	<b>F</b>		
ECU-P1702	10 MS/s, 12bit, Simultaneous 4-ch Analog input PCI-104 .....	3-15	FPM-2120G	12" SVGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port .....	6-76
ECU-P1706	250 KS/s, 16bit, Simultaneous 8-ch Analog input PCI-104 .....	3-15	FPM-2150G	15" XGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port .....	6-74
EKI-1221/CI/I	1-port Modbus Gateway .....	10-7	FPM-2170G	17" SXGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port .....	6-72
EKI-1221D	1-port Modbus Gateway with Integrated Ethernet Cascading .....	10-8	FPM-3121G	12.1" SVGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI and Wide Operating Temperature .....	6-58
EKI-1222/CI/I	2-port Modbus Gateway .....	10-7	FPM-3151G	15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI Ports, and Wide Operating Temperature .....	6-56
EKI-1222D	2-port Modbus Gateway with Integrated Ethernet Cascading .....	10-8	FPM-3171G	8U Rackmount 17" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports, and Wide Operating Temperature Range .....	6-54
EKI-1224/CI/I	4-port Modbus Gateway .....	10-7	FPM-3191G	9U Rackmount 19" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports .....	6-52
EKI-1321	1-port RS-232/422/485 to GPRS IP Gateway .....	8-6	FPM-5151G	15" XGA Industrial Monitors with Resistive Touchscreens, Direct-VGA, and DVI Ports .....	6-70
EKI-1322	2-port RS-232/422/485 to GPRS IP Gateway .....	8-6	FPM-5171G	17" SXGA Industrial Monitors with Resistive Touchscreens, Direct-VGA, and DVI Ports .....	6-70
EKI-1361	1-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server .....	10-4	FPM-5191G	19" SXGA Industrial Monitors with Resistive Touchscreens, Direct-VGA, and DVI Ports .....	6-70
EKI-1362	2-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server.....	10-4	FPM-6211W	21.5" Semi-industrial Monitor with Projected Capacitive Touchscreen for long-distance / daisy chain applications .....	6-34
EKI-1521/CI/I	1-port RS-232/422/485 Serial Device Server .....	10-5	FPM-7121T	12.1" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DP and Wide Operating Temperature .....	6-68
EKI-1522/CI/I	2-port RS-232/422/485 Serial Device Server .....	10-5	FPM-7151T	15" XGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DP and Wide Operating Temperature .....	6-66
EKI-1524/CI/I	4-port RS-232/422/485 Serial Device Server .....	10-5	FPM-7151W	15.6 WXGA Industrial Monitor with Projected Capacitive Touchscreen, Direct-VGA/DVI or VGA/HDMI ports .....	6-64
EKI-1526/T	16-port RS-232/422/485 Serial Device Server .....	10-6	FPM-7181W	18.5" WXGA Industrial Monitor with Projected Capacitive Touchscreen, Direct-VGA and DVI Ports .....	6-62
EKI-1528/T	8-port RS-232/422/485 Serial Device Server .....	10-6	FPM-7211W	21.5" Full HD Industrial Monitor with Projected Capacitive Touchscreen, Direct-VGA and DVI Ports .....	6-60
EKI-2525/I	5-port Unmanaged Industrial Ethernet Switch .....	9-33	FPM-8151H	15" XGA TFT LED LCD Industrial Monitor for Hazardous location with C1D2 .....	6-40
EKI-2525P	5-port Industrial PoE Switch.....	9-16	<b>I</b>		
EKI-2526PI	6-port Industrial PoE Switch with Wide Temperature .....	9-16	IPPC-3152H	15" XGA TFT LED LCD Intel® Core™ i7/Celerons Industrial Touch Panel PC for Hazardous Area with C1D2 and ATEX .....	6-42
EKI-2528/I	8-port Unmanaged Industrial Ethernet Switch .....	9-33	IPPC-3152WH	15.6" HD TFT LED LCD Intel® Core™ i7/Celerons Industrial Multi-Touch Panel PC for Hazardous Area with C1D2 and ATEX .....	6-44
EKI-2541M/MM	10/100T (X) to Multi-Mode SC Type Fiber Optic Industrial Media Converter .....	9-34	IPPC-5211WS	21.5" HD TFT LED LCD Industrial Multi-Touch Panel PC for Food and Beverage application with IP69K .....	6-38
EKI-2541S/SI	10/100T (X) to Single-Mode SC Type Fiber Optic Industrial Media Converter.....	9-34	IPPC-6152A	15" XGA TFT LED LCD Intel Core™ i7/i5/i3 Industrial Touch Panel PC with 2 x PCIe Slots .....	6-46
EKI-2701HPI	IEEE 802.3af/at Gigabit PoE+ Injector with Wide Temperature .....	9-17	IPPC-6172A	17" SXGA TFT LED LCD Intel Core™ i7/i5/i3 Industrial Touch Panel PC with 2 x PCIe Slots .....	6-46
EKI-2726FHPI	4G+2 SFP W/ 4 IEEE 802.3 High Power PoE Industrial Wide Temperature Switch .....	9-15	IPPC-6192A	19" SXGA TFT LED LCD Intel Core™ i7/i5/i3 Industrial Touch Panel PC with 2 x PCIe Slots .....	6-46
EKI-2741 Series	10/100/1000T (X) to Fiber Optic Gigabit Industrial Media Converters.....	9-35	IPPC-9151G	15" XGA TFT LED LCD Intel® Core™ i7/i5/i3 Celeron® Industrial Touch Panel PC with 1 x PCIe Slot .....	6-48
EKI-5525/I	5-port Fast Ethernet ProView Switch .....	9-28	IPPC-9171G	17" SXGA TFT LED LCD Intel® Core™ i7/i5/i3 Celeron® Industrial Touch Panel PC with 1 x PCIe Slot .....	6-48
EKI-5528/I	8-port Fast Ethernet ProView Switch .....	9-28	<b>K</b>		
EKI-5725/I	5-port Gigabit Ethernet ProView Switch.....	9-27	KW Multiprog	IEC 61131-3 softlogic control software .....	4-7
EKI-5726/I	16-port Gigabit Ethernet ProView Switch.....	9-30	<b>M</b>		
EKI-5726F/FI	16-port+2 SFP Gigabit Ethernet ProView Switch .....	9-31	MIC-3001	4U CompactPCI® Enclosure with 8-Slot 3U Backplane .....	14-8
EKI-5728/I	8-port Gigabit Ethernet ProView Switch.....	9-27	MIC-3106	CompactPCI Machine Automation Solution .....	2-15
EKI-5729F/FI	8-Port+2 SFP Gigabit Ethernet ProView Switch.....	9-29	MIC-3106	4U CompactPCI With 2 Peripheral Slots .....	14-4
EKI-6310GN	IEEE 802.11 b/g/n Wi-Fi AP/Client.....	8-12	MIC-3111	4U CompactPCI With 7 Peripheral Slots .....	14-4
EKI-6311GN	IEEE 802.11 b/g/n Wi-Fi AP/Client.....	8-11	MIC-3121	4U CompactPCI With 7 Peripheral Slots .....	14-6
EKI-6331AN	IEEE 802.11 a/n Wi-Fi AP/Client.....	8-10	MIC-3321	3U CompactPCI® Intel Celeron® M 1GHz / Pentium® M 2 GHz Controller .....	14-9
EKI-6340 Series	IEEE 802.11 a/b/g/n Outdoor Wi-Fi Mesh AP .....	8-8			
EKI-6351-A	IEEE 802.11 a/b/g/n Wi-Fi Mesh AP/Client .....	8-9			
EKI-6528TI	EN50155 8-port M12 Unmanaged Switch with Wide Temperature .....	9-11			
EKI-6528TPI	EN50155 8-port M12 Unmanaged PoE Switch with Wide Temperature .....	9-11			
EKI-6558TI	EN50155 IP67 8-port M12 Managed Ethernet Switch with Wide Temperature.....	9-10			
EKI-6559TMI	EN50155 IP67 8-port M12 + 2-port Fiber Optic Managed Ethernet Switch with Wide Temperature .....	9-10			
EKI-7554S/MI	4+2 SC Type Fiber Optic Managed Industrial Ethernet Switch with Wide Temperature.....	9-26			
EKI-7559S/MI	8+2 SC Type Fiber Optic Managed Industrial Ethernet Switch with Wide Temperature.....	9-26			
EKI-7629C/CI	8+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch .....	9-32			
EKI-7654C	4+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch.....	9-25			
EKI-7656C/CI	16+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch.....	9-22			
EKI-7657C/CI	7+3G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch with 2 x DI/O .....	9-24			
EKI-7659C/CI	8+2G Combo Port Gigabit Managed Redundant Industrial Ethernet Switch.....	9-23			
EKI-7659CPI	8+2G Port Gigabit Managed Redundant Industrial PoE Switch with Wide Temperature.....	9-14			
EKI-7758F	4G+4 SFP Gigabit Managed Redundant Industrial Ethernet Switch .....	9-21			
EKI-9312	Industrial-Class 12 Port Full Gigabit Managed DIN Rail Switch .....	9-19			
EKI-9312P	Industrial-Class 12 Port Managed DIN Rail Switch Full Gigabit Switch with PoE/PoE+ .....	9-12			

# Product Index

MIC-3323	3U CompactPCI® Intel Core® 2 Duo 1.66GHz / Atom™ D510 1.66GHz Controller .....	14-10
MIC-3611	4-port RS-422/485 3U CompactPCI® Card with Surge and Isolation Protection .....	14-11
MIC-3612	4-port RS-232/422/485 3/6U CompactPCI® Card .....	14-11
MIC-3620	8-port RS-232 3U CompactPCI® Card .....	14-11
MIC-3621	8-Port RS-232/422/485 6U CompactPCI® Card with Surge Protection .....	14-12
MIC-3680	2-Port CAN-bus 3U CompactPCI® Card .....	14-12
MIC-3716	250 kS/s, 16-bit, 16-ch Multifunction 3U CompactPCI® Card .....	14-13
MIC-3723	16-bit, 8-ch Analog Output 3U CompactPCI® Card .....	14-13
MIC-3758	128-CH Isolated Digital I/O 3U CompactPCI® Card .....	14-13
MIC-3761	8-CH Relay & 8-CH Isolated Digital Input 3U CompactPCI® Card .....	14-14
MIC-3780	8-CH, 16-bit Counter/Timer 3U CompactPCI® Card .....	14-14

## O

OPC Server	OPC Server for ADAM & Modbus Devices .....	4-8
------------	--	-----

## P

PCI-1202U	2-port AMONet RS-485 PCI Master Card .....	2-22
PCI-1203	2-port EtherCAT Universal PCI Master Card .....	2-26
PCI-1220U	2-axis Stepping and Servo Motor Control Universal PCI Card .....	2-20
PCI-1240U	4-axis Stepping and Servo Motor Control Universal PCI Card .....	2-20
PCI-1243U	4-axis Stepping Motor Control Universal PCI Card .....	2-21
PCI-1245	DSP-based 4-axis Stepping and Servo Motor Control Universal PCI Card .....	2-16
PCI-1245E	Economic DSP-based 4-axis Stepping and Servo Motor Control Universal PCI Card .....	2-18
PCI-1245L	4-axis Stepping and Servo Motor Control Universal PCI Card .....	2-19
PCI-1245S	DSP-based 4-axis SCARA Robot Motor Control Universal PCI Card .....	2-17
PCI-1265	DSP-based 6-axis Stepping and Servo Motor Control Universal PCI Card .....	2-16
PCI-1285	DSP-based 8-axis Stepping and Servo Motor Control Universal PCI Card .....	2-16
PCI-1285E	Economic DSP-based 8-axis Stepping and Servo Motor Control Universal PCI Card .....	2-18
PCI-1601	2-port RS-422/485 Universal PCI Communication Card .....	11-5
PCI-1602	2-port RS-422/485 Universal PCI Communication Card with Isolation Protection .....	11-5
PCI-1602UP	2-port RS-422/485 Low-Profile Universal PCI Communication Card with Isolation Protection .....	11-4
PCI-1603	2-port RS-232/Current-loop Universal PCI Communication Card with Isolation Protection .....	11-5
PCI-1604UP	2-port RS-232 Low-Profile Universal PCI Communication Card with Isolation Protection .....	11-4
PCI-1610	4-port RS-232 Universal PCI Communication Card .....	11-6
PCI-1612	4-port RS-232/422/485 Universal PCI Communication Card .....	11-6
PCI-1620	8-port RS-232 Universal PCI Communication Card .....	11-7
PCI-1622	8-port RS-422/485 Universal PCI Communication Card .....	11-7
PCI-1680U	2-port CAN-bus Universal PCI Card with Isolation Protection .....	11-11
PCI-1710HGU	100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card with High Gain .....	18-25
PCI-1710U/UL	100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card .....	18-25
PCI-1711U/UL	100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card .....	18-26
PCI-1712/L	1 MS/s, 12-bit, 16-ch PCI Multifunction DAQ Card .....	18-27
PCI-1713U	100 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card .....	18-31
PCI-1714U	30 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card .....	18-30
PCI-1714UL	10 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card .....	18-30
PCI-1715U	500 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card .....	18-31
PCI-1716/L	250 kS/s, 16-bit, 16-ch PCI Multifunction DAQ Card .....	18-28
PCI-1720U	12-bit, 4-ch Isolated Analog Output Universal PCI Card .....	18-33
PCI-1721	12-bit, 4-ch Analog Output PCI Card with 16-ch Digital I/O .....	18-34
PCI-1723	16-bit, 8-ch Analog Output PCI Card with 16-ch Digital I/O .....	18-35
PCI-1724U	14-bit, 32-ch Isolated Analog Output Universal PCI Card .....	18-33
PCI-1727U	14-bit, 12-ch Analog Output Universal PCI Card with 32-ch Digital I/O .....	18-35
PCI-1730U	32-ch Isolated Digital I/O Universal PCI Card .....	18-40
PCI-1733	32-ch Isolated Digital Input PCI Card .....	18-40
PCI-1734	32-ch Isolated Digital Output PCI Card .....	18-40
PCI-1735U	64-ch Digital I/O and Counter Universal PCI Card .....	18-36
PCI-1737U	24-ch Digital I/O Universal PCI Card .....	18-36
PCI-1739U	48-ch Digital I/O Universal PCI Card .....	18-36

PCI-1741U	200 kS/s, 16-bit, 16-ch Universal PCI Multifunction Card .....	18-29
PCI-1742U	1 MS/s, 16-bit, 16-ch Universal PCI Multifunction Card .....	18-29
PCI-1747U	250 kS/s, 16-bit, 64-ch Analog Input Universal PCI Card .....	18-32
PCI-1750	32-ch Isolated Digital I/O and 1-ch Counter PCI Card .....	18-41
PCI-1751	48-ch Digital I/O and 3-ch Counter PCI Card .....	18-37
PCI-1752U	64-ch Isolated Digital Output Universal PCI Card .....	18-42
PCI-1753	96-ch Digital I/O PCI Card .....	18-38
PCI-1753E	96-ch Digital I/O Extension Card for PCI-1753 .....	18-38
PCI-1754	64-ch Isolated Digital Input PCI Card .....	18-42
PCI-1755	80 MB/s, 32-ch Digital I/O PCI Card .....	18-39
PCI-1756	64-ch Isolated Digital I/O PCI Card .....	18-42
PCI-1758UDI	128-ch Isolated Digital Input Universal PCI Card .....	18-43
PCI-1758UDIO	128-ch Isolated Digital I/O Universal PCI Card .....	18-43
PCI-1758UDO	128-ch Isolated Digital Output Universal PCI Card .....	18-43
PCI-1760U	8-ch Relay and 8-ch Isolated Digital Input Universal PCI Card with 8-ch Counter/Timer .....	18-44
PCI-1761	8-ch Relay and 8-ch Isolated Digital Input PCI Card .....	18-45
PCI-1762	16-ch Relay and 16-ch Isolated Digital Input PCI Card .....	18-46
PCI-1780U	8-ch, 16-bit Counter/Timer Universal PCI Card .....	18-47
PCI-1784U	4-ch, 32-bit Encoder Counter Universal PCI Card with 8-ch Isolated Digital I/O .....	18-48
PCIE-1602	2-port RS-232/422/485 PCI-express PCI Comm. Card .....	11-8
PCIE-1604	2-port RS-232 PCI-express PCI Comm. Card .....	11-8
PCIE-1610	4-port RS-232/422/485 PCI-express PCI Comm. Card .....	11-8
PCIE-1612	4-port RS-232 PCI-express PCI Comm. Card .....	11-8
PCIE-1620	8-port RS-232 PCI Express Communication Card .....	11-9
PCIE-1622	8-port RS-232/422/485 PCI Express Communication Card .....	11-9
PCIE-1680	2-Port CAN-Bus PCIE card with Isolation Protection .....	11-10
PCIE-1730	32-ch TTL and 32-ch Isolated Digital I/O PCI Express Card .....	18-17
PCIE-1751	48-ch Digital I/O and 3-ch Counter PCI Express Card .....	18-18
PCIE-1752	64-ch Isolated Digital Output PCI Express Card .....	18-19
PCIE-1753	96-ch Digital I/O PCI Express Card .....	18-18
PCIE-1754	64-ch Isolated Digital Input PCI Express Card .....	18-19
PCIE-1756	64-ch Isolated Digital I/O PCI Express Card .....	18-19
PCIE-1760	8-ch Relay and 8-ch Isolated Digital Input PCI Express Card .....	18-20
PCIE-1802	8-ch, 24-Bit, 204.8 kS/s Dynamic Signal Acquisition PCI Express Card .....	18-23
PCIE-1810	800 kS/s, 12-bit, 16-ch PCI Express Multifunction Card .....	18-21
PCIE-1816	1 MS/s, 16-bit, 16-ch PCI Express Multifunction Card .....	18-22
PCIE-1816H	5 MS/s, 16-bit, 16-ch PCI Express Multifunction Card .....	18-22
PCIE-1840	4-ch 16Bit 125 MS/s High-Speed PCI Express Digitizer .....	18-24
PCL-841	2-port CAN-bus ISA Card with Isolation Protection .....	11-11
PCM-2300MR	MR4A16B, MRAM, 2 MByte, mPCIe .....	12-29
PCM-23C1CF	1 CFast Slot with Cover Protection .....	12-30
PCM-23U1DG	USB Slot w/ Lock for USB Dongle .....	12-30
PCM-24D2R2	2-Port Isolated RS-232 mPCIe, DB9 .....	12-31
PCM-24D2R4	2-Port Isolated RS-422/485 mPCIe, DB9 .....	12-31
PCM-24D4R2	4-Port Non-Isolated RS-232 mPCIe, DB37 .....	12-31
PCM-24D4R4	4-Port Non-Isolated RS-422/485 mPCIe, DB37 .....	12-31
PCM-24R1TP	1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45 .....	12-34
PCM-24R2GL	2-Port Gigabit Ethernet, mPCIe, RJ45 .....	12-33
PCM-24R2PE	2-Port Gigabit Ethernet, IEEE 802.3af (PoE) Compliant, mPCIe, RJ45 .....	12-32
PCM-24S1ZB	Wireless Zigbee Gateway, mPCIe, 1-port SMA .....	12-36
PCM-24S23G	Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA .....	12-38
PCM-24S2WF	WiFi 802.11 a/b/g/n 2T2R w/ Bluetooth 4.0, Half-size mPCIe, 2-port SMA .....	12-37
PCM-24U2U3	2-Port USB 3.0, mPCIe, USB-A type .....	12-35
PCM-26D1DB	1-Port HiLScher netX100 FieldBus mPCIe, PROFIBUS, DB9 .....	12-41
PCM-26D2CA	2-Port Isolated CANBus mPCIe, CANOpen, DB9 .....	12-40
PCM-26R2EC	2-Port HiLScher netX100 FieldBus mPCIe, EtherCAT, RJ45 .....	12-42
PCM-26R2EI	2-Port HiLScher netX100 FieldBus mPCIe, EtherNet/IP, RJ45 .....	12-42
PCM-26R2PL	2-Port HiLScher netX100 FieldBus mPCIe, POWERLINK, RJ45 .....	12-42
PCM-26R2PN	2-Port HiLScher netX100 FieldBus mPCIe, PROFINET, RJ45 .....	12-42
PCM-26R2S3	2-Port HiLScher netX100 FieldBus mPCIe, SerCos III, RJ45 .....	12-42
PCM-27D24DI	24-Channel Isolated Digital I/O w/ counter mPCIe, DB37 .....	12-39
PCM-28P1AD	PCIe to mPCIe, 2-Slots mPCIe, iDoor I/O plate expansion .....	12-43
PCM-28P1BK	iDoor PCIe I/O Plate .....	12-43

# Product Index

PCM-3202P	2-port AMONet RS-485 PC/104+ Master Card .....	2-22
PCM-3610	2-port RS-232/422/485 PC/104 Module with Isolation Protection.....	11-12
PCM-3612	2-port RS-422/485 PC/104 Module.....	11-12
PCM-3614	4-port RS-422/485 High-speed PC/104 Module.....	11-12
PCM-3614I	4-port RS-232/422/485 PCI-104 Module.....	11-14
PCM-3618	8-port RS-422/485 High-speed PC/104 Module.....	11-13
PCM-3640/3641	4-port RS-232 High-speed PC/104 Module.....	11-13
PCM-3641I	4-port RS-232 PCI-104 Module.....	11-14
PCM-3660	Jumperless Ethernet PC/104 Module.....	11-13
PCM-3680/I	2-port CAN-bus PC/104 / PCI-104 Module with Isolation Protection .....	11-11
PPC-3100	10.4" Fanless Panel PC with Intel® Atom™ D2550 Processor.....	7-12
PPC-3120	12.1" Fanless Panel PC with Intel® Atom™ D2550 Processor .....	7-10
PPC-3150	15" Fanless Panel PC with Intel Atom Quad-Core Processor .....	7-8
PPC-3170	17" Fanless Panel PC with Intel Atom Quad-Core Processor .....	7-6
PPC-3190	19" Fanless Panel PC with Intel Atom Quad-Core Processor .....	7-4
PPC-4151W	15.6" Fanless Wide Screen Panel PC with Intel Core i5 / Celeron Processor.....	7-16
PPC-4211W	21.5" Fanless Wide Screen Panel PC with Intel Core i5 / Celeron Processor .....	7-14
PPC-6120	12" Panel PC Supporting 4th Generation Intel® Core™ i / Celeron® Processors .....	7-22
PPC-6150	15" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor .....	7-20
PPC-6170	17" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor .....	7-18
PPC-8150	15" Panel PC with Intel® Core™ i3 / i5 Processor.....	7-26
PPC-8170	17" Panel PC with Intel® Core™ i3 / i5 Processor.....	7-24

## S

SPC-2140WP	21.5" Full HD TFT LED LCD stationary Multi-Touch Panel Computer with AMD dual-core processor .....	6-32
------------	--	------

## T

TPC-1051WP	10.1" WXGA TFT LED LCD Intel® Atom™ Thin Client Terminal.....	6-22
TPC-1071H	10.4" SVGA TFT LED LCD Intel® Atom™ Dual-Core D525 Touch Panel Computer .....	6-18
TPC-1251T	12.1" XGA TFT LED LCD Intel® Atom™ Thin Client Terminal .....	6-28
TPC-1282T	12.1" XGA TFT LED LCD Intel® 5th Generation Core i3 Touch Panel Computer .....	6-16
TPC-1551T	15" XGA TFT LED LCD Intel® Atom™ Thin Client Terminal.....	6-26
TPC-1551WP	15.6" WXGA TFT LED LCD Intel® Atom™ Thin Client Terminal.....	6-20
TPC-1581WP	15.6" WXGA TFT LED LCD Intel® 4th Generation Core i3 Multi-Touch Panel Computer .....	6-10
TPC-1582H	15" XGA TFT LED LCD Intel® 4th Generation Core i3 Touch Panel Computer.....	6-14
TPC-1751T	17" SXGA TFT LED LCD Intel® Atom™ Thin Client Terminal.....	6-24
TPC-1782H	17" SXGA TFT LED LCD Intel® 4th Generation Core i3 Touch Panel Computer .....	6-12
TPC-1881WP	18.5" HD TFT LED LCD Intel® 4th Generation Core i3/i7 Multi-Touch Panel Computer.....	6-8
TPC-31T	3.5" QVGA TFT LED LCD TI Cortex-A8 Touch Panel Computer.....	5-10
TPC-61T	5.7" QVGA TFT LED LCD TI Cortex-A8 Touch Panel Computer.....	5-10
TPC-651T	5.7" VGA TFT LED LCD Intel® Atom™ Thin Client Terminal.....	6-30
TPC-8100TR	10.4" EN50155 Railway Panel Computer.....	6-36

## U

UNO-1110	TI Cortex AM3505 DIN-rail PC with 2 x LAN, 5 x COM, 4 x USB .....	12-17
UNO-1172AH	Class I, Division 2 Certified Intel® Atom™ D510 DIN-rail PC with 3 x LAN, 2 x COM, VGA, Mini PCIe .....	6-50
UNO-1252G	Intel® Quark Palm-Size Control DIN-Rail PC w/ 2 x LAN, 2 x mPCIe, 2 x COM, 8 x GPIO, 2 x USB, 1 x microSD, 1 x SIM .....	12-18
UNO-1372G	Intel® Atom™ Quad-Core Small-Size Control DIN-Rail PC w/ 3 x GbE, 2 x mPCIe, 1 mSATA, 2 x COM, 8 x DIO, 3 x USB, HDMI/VGA .....	12-20
UNO-1483G	Intel® Core™ i3 Regular-Size Control DIN-Rail PC w/ 4 x GbE, 3 x mPCIe, 1 PCIe, DP/VGA, 8 DI/O .....	12-22
UNO-2174G/GL	Intel® Celeron®/Core™ i7 Regular-Size Automation Computer with 4 x GbE, 2 x Mini PCIe, DVI/DP/HDMI.....	12-16
UNO-2184G	Intel® Celeron®/Core™ i7 Regular-Size Automation Computer with 4 x GbE, 2 x Mini PCIe, DVI/DP/HDMI.....	12-16
UNO-2272G	Intel® Atom™ Palm-Size Automation Computer with 1 x GbE, 2 x mPCIe, VGA.....	12-6

UNO-2362G	AMD® Dual Core T40E Small-Size Automation Computer w/ 1 x GbE, 1 x mPCIe, HDMI/DP .....	12-8
UNO-2473G	Intel® Atom™ Regular-Size Automation Computer w/ 4 x GbE, 3 x mPCIe, HDMI/VGA .....	12-10
UNO-2483G	Intel® Core™ i7/i3/Celeron Regular-Size Automation Computer w/ 4 x GbE, 3 x mPCIe, HDMI/VGA .....	12-12
UNO-2483P	Intel® Core™ i7/Celeron Regular-Size Vision Controller w/ 4 x PoE, 4 x GbE, HDMI/VGA .....	12-14
UNO-3073G/3075G	Intel® Core i7/Celeron 800 series Automation Computers with 3/5 PCI(e) expansion slots, 2 mPCIe slots and 2 CFast sockets.....	12-28
UNO-3073GL	Intel® Core i7/Celeron 800 series Automation Computers with 3/5 PCI(e) expansion slots, 2 mPCIe slots and 2 CFast sockets.....	12-28
UNO-3083G/3085G	Intel® Core i7/Celeron 800 series Automation Computers with 3/5 PCI(e) expansion slots, 2 mPCIe slots and 2 CFast sockets.....	12-28
UNO-3382G	Intel® Core™ i7/Celeron Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/DP .....	12-24
UNO-3384G	Intel® Core™ i7/Celeron Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/DP .....	12-24
UNO-3483G	Intel® Core™ i7 Control Cabinet PC w/ 2 x GbE, 2 x mPCIe, HDMI/VGA.....	12-26
UNO-4671A	Intel® Atom™ D510/D525 Power & Energy Automation Computers with 6 x LAN, 10 x COM, and 1 x PCI-104.....	3-6
UNO-4673A	Intel® Atom™ / Core™ i7 Automation Computers with 6 x LAN, 2 x COM and 3 x Expansion Slots .....	3-9
UNO-4683	Intel® Atom™ / Core™ i7 Automation Computers with 6 x LAN, 2 x COM and 3 x Expansion Slots .....	3-9
UNOP-1514RE/PE	4-Port Gigabit Base Ethernet Card.....	3-11
UNOP-1624D	4-port Isolated RS-232/422/485 with IRIG B.....	3-11
UNOP-1628D/1618D	8-port Isolated/Non Isolated RS-232/422/485 .....	3-11
USB-4620	5-port Full-speed Isolated USB 2.0 Hub.....	20-2
USB-4622	5-port High-speed USB 2.0 Hub .....	20-2
USB-4671	GPIO USB Module .....	20-10
USB-4702	10 kS/s, 12-bit, 8-ch Multifunction DAQ USB Module.....	20-3
USB-4704	48 kS/s, 14-bit, 8-ch Multifunction DAQ USB Module.....	20-3
USB-4711A	150 kS/s, 12-bit, 16-ch Multifunction DAQ USB Module.....	20-4
USB-4716	200 kS/s, 16-bit, 16-ch Multifunction DAQ USB Module.....	20-5
USB-4718	8-ch Thermocouple Input USB Module with 8-ch Isolated Digital Input.....	20-6
USB-4750	32-ch Isolated Digital I/O USB Module .....	20-7
USB-4751	48-ch Digital I/O USB Module.....	20-8
USB-4751L	24-ch Digital I/O USB Module.....	20-8
USB-4761	8-ch Relay and 8-ch Isolated Digital Input USB Module.....	20-9

## W

WebAccess Solution Ready Package WA+SECS	WebAccess SECS Server with Intel® Core™ i7 Automation Computer .....	1-7
WebOP Designer / Panel Express HMI Runtime Software.....		4-5
WebOP-2040T	4.3" WQVGA Operator Panel with WebOP Designer Software.....	5-20
WebOP-2050T	5.6" QVGA Operator Panel with WebOP Designer Software.....	5-18
WebOP-2070T	7" WVGA Operator Panel with WebOP Designer Software .....	5-16
WebOP-2080T	8" SVGA Operator Panel with WebOP Designer Software .....	5-14
WebOP-2100T	10.1" WSVGA Operator Panel with WebOP Designer Software .....	5-12
WebOP-3070T	7" WVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range .....	5-8
WebOP-3100T	10.1" WSVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range.....	5-6
WebOP-3120T	12" SVGA Cortex™ - A8 Operator Panel with Wide Operating Temperature Range.....	5-4
WISE-4012E	6-ch Universal Input/Output IoT Wireless I/O Module for IoT Developers ...	15-10
WISE-4012	4-ch Universal Input and 2-ch Relay Output IoT Wireless I/O Module .....	15-9
WISE-4050	4-ch Digital Input and 4-ch Digital Output IoT Wireless I/O Module .....	15-9
WISE-4060	4-ch Digital Input and 4-ch Relay Output IoT Wireless I/O Module .....	15-9

# Advantech Headquarters

No. 1, Alley 20, Lane 26, Rueiguang Road Neihu District, Taipei, Taiwan 11491

Tel: 886-2-2792-7818 Fax: 886-2-2794-7301

www.advantech.com

## Greater China

### Regional Service Center, China Kunshan Manufacturing Center

No. 600, Han-Pu Road, Yu-Shan  
Kunshan, Jiang Su, China  
Tel: 86-512-5777-5666  
Fax: 86-512-5778-5388

### Regional Service Center, Taiwan Taipei Manufacturing Center

7F, No.1, Lane 169, Kang-Ning Street,  
Shejy City, Taipei, Taiwan  
Tel: 886-2-2692-6076  
Fax: 886-2-2692-2762

### Advantech China 800-810-0345 Beijing Office

6th Street No. 7, Shang Di Zone,  
Hai-Dian District  
Beijing, China  
Tel: 86-10-6298-4346  
Fax: 86-10-6298-4342  
Email: sales@advantech.com.cn  
www.advantech.com.cn

### Shanghai Office

136# Jiangchang Three Road Zhabei  
District Shanghai, China  
Tel: 86-21-36321616  
Fax: 86-21-36321616-3394

### Advantech Plus Technology Campus

No. 887, Han-pu Road, Yu-Shan, Kunshan,  
Jiangsu, China  
Tel: 86-512-5777-5666  
Fax: 86-512-5778-5388

### Shenzhen Office

NO.28, Keji South Road 12th, NanShan district,  
Shenzhen, China  
Tel: 800-810-0345  
Fax: 86-755-2586-7910

### Chengdu Office

Room1401, Building NO.2 HangXing  
International Square, High-tech zone NO.800  
TianFu Avenue, ChengDu, China  
Tel: 800-810-0345  
Fax: 028-85435101

### Hong Kong Office

Unit 1601, 16/F, Westin Centre, 26 Hung To  
Road, Kwun Tong, Kowloon, Hong Kong  
Tel: 852-2720-5118  
Tel: 852-2720-8013  
Email: Infohk@advantech.com

### Advantech Taiwan 0800-777-111 Taipei Neihu Office

No. 1, Alley 20, Lane 26, Rueiguang Road,  
Neihu District, Taipei 11491, Taiwan, R.O.C.  
Tel: 886-2-2792-7818  
Fax: 886-2-2794-7302  
Toll Free: 0800-777-111  
Email: sales@advantech.com.tw

### Taipei Xindian Office

4F No. 108-3, Minquan Road,  
Xindian Dist., New Taipei City,  
Taiwan 231, R.O.C.  
Tel: 886-2-2218-4567  
Fax: 886-2-2218-3650  
Toll Free: 0800-777-111  
Email: emarketing.aatw@advantech.com.tw

### Linkou Office

No. 27, Wende Road, Guishan Township,  
Taoyuan City 33371, Taiwan, R.O.C.  
Tel: 0800-777-111  
Fax: 886-2-2794-7301

### Taichung Office

6F-5, No.633, Sec. 2, Taiwan Blvd., Xitun Dist.,  
Taichung City 407, Taiwan, R.O.C.  
Tel: 886-4-2329-0371  
Fax: 886-4-2329-0373

### Kaohsiung Office

11F-7, No.56, Minsheng 1st Rd., Xinxing Dist.,  
Kaohsiung City 800, Taiwan, R.O.C.  
Tel: 886-7-229-3600  
Fax: 886-7-227-0217

## Asia Pacific

### Advantech Japan 0800-500-1055 Tokyo Office

6-16-3, Asakusa Taito-Ku,  
Tokyo 111-0032, Japan  
Tel: 81-3-6802-1021  
Fax: 81-3-6802-1022  
Email: ajp\_sales@advantech.com  
www.advantech.co.jp

### Osaka Office

6F, Minami Senba M21 Bldg.  
1-10-20 Minami Senba,  
Chuo-Ku, Osaka, 542-0081 Japan  
Tel: 81-3-6802-1021  
Fax: 81-6-6267-1886

### Advantech Korea 080-363-9494

#1202 AceTechno Tower, 468 Gangseo-ro,  
Gangseo-gu, Seoul 157-721, Korea  
Tel: 82-2-3663-9494  
Fax: 82-2-3663-4955  
Email: pros@advantech.co.kr  
www.advantech.co.kr

### Advantech Singapore

6 Serangoon North Ave 5, #03-08 East  
Lobby, Singapore 554910  
Tel: 65-6442-1000  
Fax: 65-6442-1001  
Email: sg@advantech.com  
www.advantechsg.com.sg

### Advantech Malaysia 1800-88-1809 Kuala Lumpur Office

L3-03 / 03A, Wisma BU8, No 11,  
Lebuhr Bandar Utama,  
Bandar Utama, 47800 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia  
Tel: 60-3-7724-3555  
Fax: 60-3-7728-1571  
Email: sales@advantech.com.my  
www.advantech.com.my

### Penang Office

No.117 & 119 Ground Floor,  
Jalan Perniagaan Gemilang 1,  
Pusat Perniagaan Gemilang,  
14000 Bukit Mertajam, Penang  
Tel: 60-4-537-9188 (x.4512)  
Fax: 60-4-538-1571

### Advantech Thailand

24F, Chamnan Phenjati Business Center  
65/205 Rama IX Road, Huay-Kwang,  
Bangkok 10320 Thailand  
Tel: 66-2-248-3140  
Fax: 66-2-248-2424  
Email: sales-th@advantech.com  
www.advantech.co.th

### Advantech Indonesia

Plaza Aminta 6th Floor Suite 601  
Jl. TB Simatupang Kav 10  
Jakarta Selatan 1231, Indonesia  
Tel : 62-21-7511930/39  
Fax : 62-21-7511933  
Email : aid.ccs@advantech.com  
www.advantech.co.id

### Advantech India Bangalore Office

No. 3M-409, Kasturi Plaza, 2nd Floor, 3rd Main  
Road, East of NGEF Layout, Kasturinaragar,  
Bangalore - 560043, India  
Tel: +91-80-25450206  
Fax: +91-80-25450317  
Toll Free: 1800-425-5071  
Email: info.in@advantech.com

### Pune Office

809, 810, 8th Floor, South block, Sacred World,  
Wanwadi, Pune - 411040, India  
Tel: 91-20-3948-2075  
Toll Free: 1800-425-5070  
Email: sales.in@advantech.com

### Advantech Australia 1300-308-531 Melbourne Office

Unit 1, 3 Southpark Close,  
Keysborough VIC 3173, Australia  
Tel: 61-3-9797-0100  
Fax: 61-3-9797-0199  
Email: info@advantech.net.au  
www.advantech.net.au

### Sydney Office

Unit 1, 14 Leighton Place  
Hornsby NSW 2077, Australia  
Tel: 61-2-9476-9300  
Fax: 61-2-9477-2521

## Europe

### Advantech Europe B.V. 00800-2426-8080

Email: CustomerCare@advantech.eu  
www.advantech.eu

### Advantech Europe Service Center

Ekkersrijt 5708 Science Park Eindhoven  
5692 ER Son, The Netherlands  
Tel: 31-40-267-7000  
Fax: 31-40-267-7001  
Email: CustomerCare@advantech.eu

### Europe Technical Service Center/ R&D Center

Fuggerstr. 9, 92224 Amberg, Germany  
Tel: 49-9621-9732-355  
Fax: 49-9621-9732-199  
Email: CustomerService.aeu@advantech.eu

### Europe Repair Service Center

Ul. Matuszewska 14, Budynek C5,  
03-786, Warsaw, Poland  
Toll Free: 00800 2426 8080  
Email: rma@advantech.pl

### Advantech Benelux & Nordics Breda Office

Bijster 20A, 4817 HX Breda,  
The Netherlands  
Tel: 31-76-5233100  
Tel: 31-76-5233119  
www.advantech.nl

### Advantech France Paris Office

1 Bld Charles de Gaulle Noblet hall C (entrée  
rue du débarcadère) 92700 Colombes, France  
Toll Free: 00800-2426-8080  
Tel: 33-1-4119-4666  
Fax: 33-1-4119-7929  
www.advantech.fr

### Advantech Germany Munich Office

Indusriestr. 15  
82110 Germering, Germany  
Tel: 49-89-12599-0  
Fax: 49-89-12599-1221  
Toll Free: 00800-2426-8081  
www.advantech.de

### Düsseldorf Office

Hochdahler Str. 14  
40724 Hilden, Germany  
Tel.: 49-2103-97-855-0  
Fax: 49-2103-97-855-19  
www.advantech.de

### Advantech Italy Milano Office

Via Roma, 74  
20060 Cassina de' Pecchi, Milano, Italy  
Tel: 39-02-9544-961  
Fax: 39-02-9544-9650  
www.advantech.it

### Advantech Poland Warsaw Office

Ul. Matuszewska 14, Budynek C5,  
03-786, Warsaw, Poland  
Tel: 48-22-33-23-730  
Fax: 48-22-33-23-732  
www.advantech.com.pl

### Advantech UK

Unit 13, Suttons Business Park  
Suttons Park Avenue  
Reading, Berkshire, RG6 1AZ  
United Kingdom  
Tel: 44-0118-929-4540  
Fax: 44-0118-929-4551  
www.advantech-uk.com

### Advantech Russia Moscow Office

115184 Москва, Большой Ордынский  
переулок, д.4, стр.2, офис 102  
Tel: 7-495-644-0364  
Toll Free: 8-800-555-01-50  
Email: info@advantech.ru  
www.advantech.ru

### St. Petersburg Office

190031, Россия, Санкт-Петербург, ул.  
Ефимова, д.4а, лит. А, офис 535  
Tel: 7-812-332-5727  
Toll Free: 8-800-555-81-20  
Email: ARU.embedded@advantech.com

## Americas

### Regional Service Center, N. America

380 Fairview Way  
Milpitas, CA 95035, USA  
Tel: 1-408-519-3800  
Fax: 1-408-519-3801

### Advantech North America 1-888-576-9668 Ohio (Cincinnati) Office

11380 Reed Hartman Highway  
Cincinnati, OH 45241, USA  
Tel: 1-513-742-8895  
Fax: 1-513-742-8892  
Toll Free: 1-800-800-6889  
RMA/Tech Support: 1-877-451-6868  
Email: info@advantech.com  
www.advantech.com/ea

### Northern California (Milpitas) Office

380 Fairview Way,  
Milpitas, CA 95035, USA  
Tel: 1-408-519-3898  
Fax: 1-408-519-3888  
Toll free: 1-888-576-9668  
mail: buy@advantech.com  
buy.advantech.com

### Southern California (Irvine) Office

13 Whatney, Irvine, CA 92618, USA  
Tel: 949-420-2500  
Fax: 949-420-2501  
Toll Free: 1-800-866-6008  
Toll Free: 1-800-557-6813  
Email: ECGinfo@advantech.com  
Email: CInfo@advantech.com

### Advantech South America Mexico Office

Av. Baja California 245  
Colonia Hipódromo Condesa, Delegation  
Cuauhtémoc, 6100 ad de México, DF Mexico  
Tel: 52-55-6275-2777  
Fax: 52-55-6275-2727

### Advantech South America Advantech Brazil

Avenida Fagundes Filho, 134 - 12º andar  
CEP: 04304-010 - São Paulo  
Tel: 55-11-5592-5355  
Toll Free: 0800-770-5355  
E-mail: vendas@advantech.com.br

## Mission

Enabling an Intelligent Planet

## Growth Model

Segmented Business Units  
Powered by Global Trusted Brand

## Focus & Goal

The Global Leader of  
Embedded & Automation Solutions  
for iWorld System Integrators

[www.advantech.com](http://www.advantech.com)

## Regional Service & Customization Centers

### China

Kunshan  
86-512-5777-5666

### Taiwan

Taipei  
886-2-2792-7818

### Netherlands

Eindhoven  
31-40-267-7000

### Poland

Warsaw  
48-22-33-23-730

### USA/ Canada

Milpitas, CA  
1-408-519-3898

## Worldwide Offices

### Greater China

#### China

Toll Free 800-810-0345  
Beijing 86-10-6298-4346  
Shanghai 86-21-3632-1616  
Shenzhen 86-755-8212-4222  
Chengdu 86-28-8545-0198  
Hong Kong 852-2720-5118

#### Taiwan

Toll Free 0800-777-111  
Neihu 886-2-2792-7818  
Xindian 886-2-2218-4567  
Taichung 886-4-2329-0371  
Kaohsiung 886-7-229-3600

### Asia Pacific

#### Japan

Toll Free 0800-500-1055  
Tokyo 81-3-6802-1021  
Osaka 81-3-6802-1021

#### Korea

Toll Free 080-363-9494  
Seoul 82-2-3663-9494

#### Singapore

Singapore 65-6442-1000

#### Malaysia

Toll Free 1800-88-1809  
Kuala Lumpur 60-3-7725-4188  
Penang 60-4-537-9188

#### Indonesia

Jakarta 62-21-751-1939

#### Thailand

Bangkok 66-2-248-3140

#### India

Pune 1800-425-5071  
Bangalore 1800-425-5070

#### Australia

Toll Free 1300-308-531  
Melbourne 61-3-9797-0100  
Sydney 61-2-9476-9300

### Europe

#### Germany

Toll Free 00800-2426-8080  
Munich 49-89-12599-0  
Hilden / D'dorf 49-2103-97-885-0

#### France

Paris 33-1-4119-4666

#### Italy

Milano 39-02-9544-961

#### Benelux & Nordics

Breda 31-76-5233-100

#### UK

Reading 44-0118-929-4540

#### Poland

Warsaw 00800-2426-8080

#### Russia

Moscow 8-800-555-01-50  
St. Petersburg 8-800-555-81-20

### Americas

#### North America

Toll Free 1-888-576-9668  
Cincinnati 1-513-742-8895  
Milpitas 1-408-519-3898  
Irvine 1-949-420-2500

#### Brazil

Toll Free 0800-770-5355  
São Paulo 55-11-5592-5355

#### Mexico

Toll Free 1-800-467-2415  
Mexico City 52-55-6275-2777

# ADVANTECH

Enabling an Intelligent Planet

Please verify specifications before quoting. This guide is intended for reference purposes only. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher. All brand and product names are trademarks or registered trademarks of their respective companies. © Advantech Co., Ltd. 2015

More Information



860000198





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.