

Click [here](#) to ask about the production status of specific part numbers.

MAX98307/MAX98308

3.3W Mono Class DG Multilevel Audio Amplifier

General Description

The MAX98307/MAX98308 fully differential mono Class DG multilevel power amplifiers with integrated inverting charge pumps offer highly efficient, high-power audio solutions for portable applications.

Class DG multilevel modulation extends the dynamic range of the output signal by employing a charge-pump-generated negative rail as needed to extend the supply range. This scheme results in high efficiency over a wide output power range.

The ICs combine Maxim's active emissions limiting edge rate and overshoot control circuitry with multilevel output modulation to greatly reduce EMI. These features eliminate the need for output filtering as compared to traditional Class D devices, reducing component count and cost.

The MAX98307's 16-pin TQFN package features an adjustable gain set by external resistors. The MAX98308's space-saving 12-bump WLP package features an internally fixed gain of 8.5dB, 11.5dB, 14.5dB, 17.5dB, and 20.5dB set by a single gain input. Both devices operate over the extended -40°C to $+85^{\circ}\text{C}$ temperature range.

Applications


- Cellular Phones
- Smartphones
- Notebook Computers
- VoIP Phones
- Portable Audio
- Tablet PCs

Benefits and Features


- High Efficiency Combined with High Output Power
 - Class DG Multilevel Modulation Ensures Maximum Efficiency Over Wide Output Power Range
- Improves Battery Life
 - Low 1.85mA Quiescent Current
- High Output Power at 1% THD+N
 - 1.54W at $V_{PVDD} = 3.6\text{V}$, $8\Omega + 68\mu\text{H}$ Load
 - 2.85W at $V_{PVDD} = 5\text{V}$, $8\Omega + 68\mu\text{H}$ Load
- High Output Power at 10% THD+N
 - 1.77W at $V_{PVDD} = 3.6\text{V}$, $8\Omega + 68\mu\text{H}$ Load
 - 3.3W at $V_{PVDD} = 5\text{V}$, $8\Omega + 68\mu\text{H}$ Load
- 84% Efficiency ($V_{PVDD} = 3.6\text{V}$, at 500mW Output)
- Active Emissions Limiting and Class DG Multilevel Output Modulation Eliminates EMI Output Filtering Requirement
- Integrated Charge Pump and High Efficiency Results in Small Solution Size
- Excellent RF Immunity
- Click-and-Pop Suppression
- Thermal and Overcurrent Protection
- Low-Current Shutdown Mode

Ordering Information appears at end of data sheet.


Simplified Block Diagrams

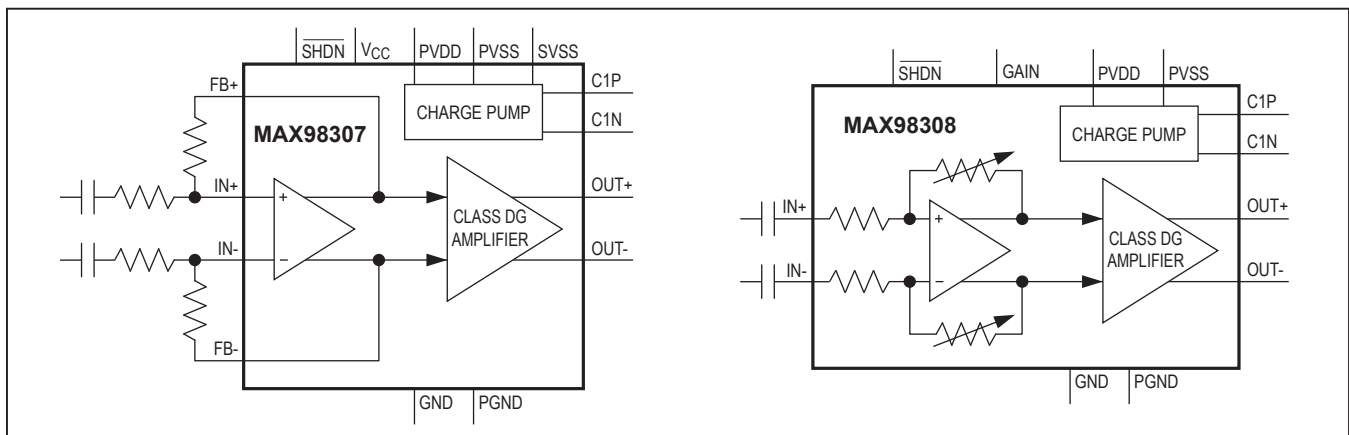

MAX98307 Typical Application Circuit

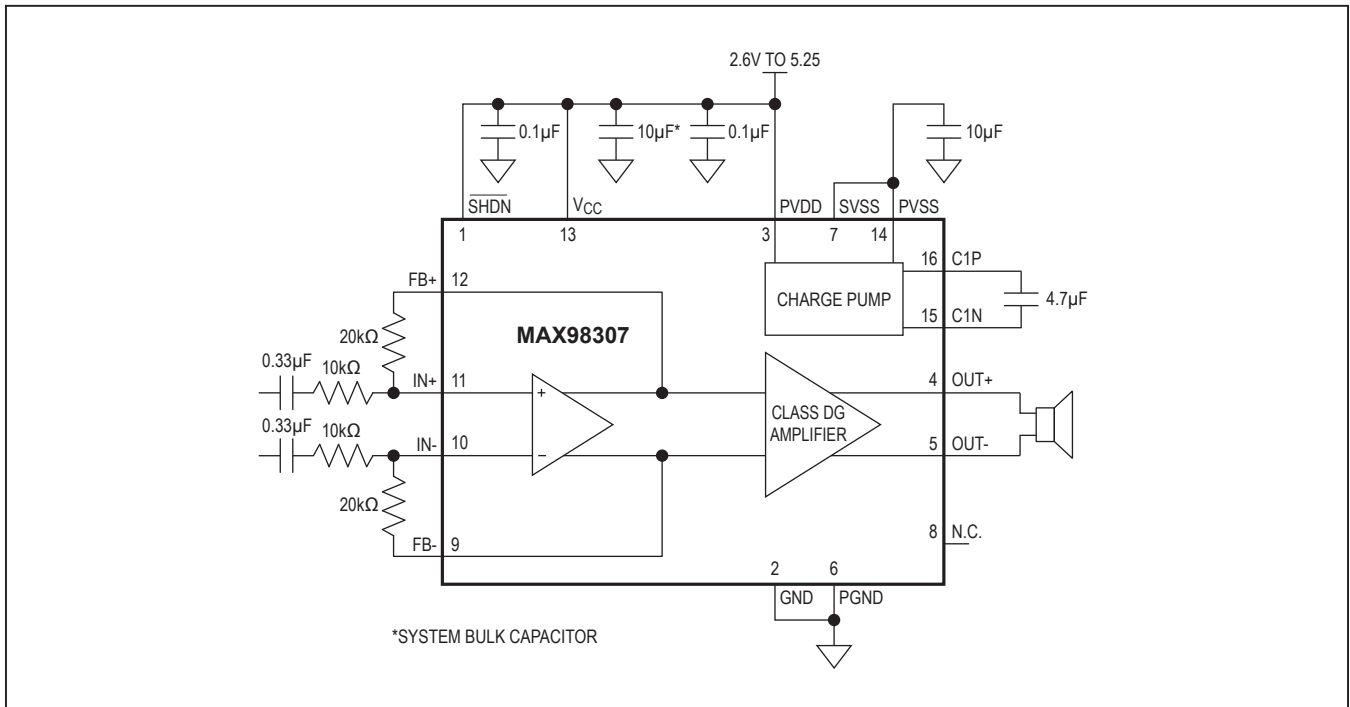

MAX98308 Typical Application Circuit

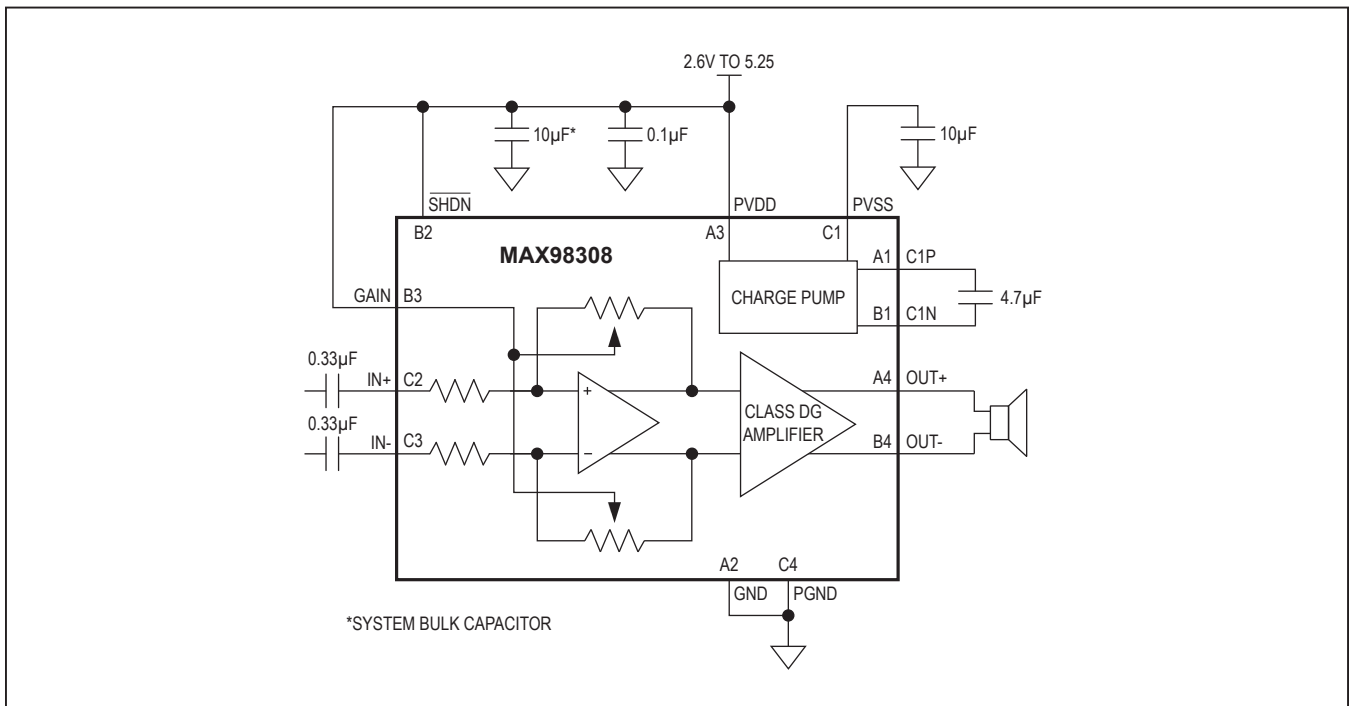

Absolute Maximum Ratings

| | | | |
|---|-------------------------------------|--|-----------------|
| PVDD to GND | -0.3V to +6V | Continuous Current (all other pins) | ±20mA |
| PGND to GND | -0.3V to +0.3V | Duration of OUT+/OUT- Short Circuit to PGND | |
| C1N to GND | (V _{PVSS} - 0.3V) to +0.3V | or PVDD | Continuous |
| IN+, IN- (MAX98307) | -0.3V to (V _{CC} + 0.3V) | Short-Circuit Duration Between | |
| V _{CC} to PVDD (MAX98307) | -0.3V to +0.3V | OUT+ and OUT- Pins | Continuous |
| PVSS to SVSS (MAX97307) | -0.3V to +0.3V | Continuous Power Dissipation (T _A = +70°C) for Multilayer Board | |
| PVSS, SVSS to GND (MAX98307) | -6V to +0.3V | TQFN (derate 20.8mW/°C above +70°C) | 1667mW |
| IN+, IN- (MAX98308) | -0.3V to +6V | WLP (derate 13.7mW/°C above +70°C) | 1100mW |
| PVSS to GND (MAX98308) | -6V to +0.3V | Junction Temperature | +150°C |
| All Other Pins to GND | -0.3V to (V _{PVDD} + 0.3V) | Operating Temperature Range | -40°C to +85°C |
| Continuous Current Into/Out of PVDD, V _{CC} , PGND, GND, | | Storage Temperature Range | -65°C to +150°C |
| OUT+, OUT-, C1P, C1N, PVSS, SVSS | ±800mA | Lead Temperature (soldering, 10s) (TQFN-EP) | +300°C |
| | | Soldering Temperature (reflow) | +260°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Thermal Characteristics (Note 1)

| | | | |
|---|--------|---|--------|
| TQFN | WLP | | |
| Junction-to-Ambient Thermal Resistance (θ _{JA}) | 48°C/W | Junction-to-Ambient Thermal Resistance (θ _{JA}) | 73°C/W |
| Junction-to-Case Thermal Resistance (θ _{JC}) | 10°C/W | Junction-to-Case Thermal Resistance (θ _{JC}) | 30°C/W |

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

(V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V, V_{PGND} = V_{GND} = 0V, Z_L = 8Ω + 68μH between OUT+ and OUT-. [MAX98307 R_{IN+} = R_{IN-} = 10kΩ, R_{FB+} = R_{FB-} = 20kΩ] C_{IN+} = C_{IN-} = 0.33μF, A_V = 14.5dB, AC measurement bandwidth 20Hz to 20kHz, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Notes 2, 3)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------------|-------------------------------------|--|----------------------------------|-------|------|-------|
| Power-Supply Range | V _{PVDD} , V _{CC} | Guaranteed by PSRR test | 2.6 | | 5.25 | V |
| Quiescent Current | I _{DD} | V _{PVDD} = 3.6V | | 1.85 | 2.7 | mA |
| Shutdown Current | I _{SHDN} | SHDN = GND | | 0.225 | 10 | μA |
| Power-Supply Rejection Ratio (Note 4) | PSRR | V _{PVDD} = 2.6V to 5.25V | | 78 | | dB |
| | | f = 217Hz, 200mV _{P-P} ripple | | 78 | | |
| | | f = 10kHz, 200mV _{P-P} ripple | | 67 | | |
| Turn-On Time | t _{ON} | Time from shutdown or power-on to full operation | MAX98308 | 25 | 40 | ms |
| | | | MAX98307, R _{IN} = 10kΩ | 50 | 80 | |
| Input DC Bias Voltage | V _{BIAS} | | | 1.3 | | V |
| Input Resistance (MAX98308) | R _{IN} | A _V = 20.5dB (maximum gain) | 15 | 22 | | kΩ |
| | | A _V = 17.5dB | | 22 | | |
| | | A _V = 14.5dB | | 22 | | |
| | | A _V = 11.5dB | | 28 | | |
| | | A _V = 8.5dB | | 40 | | |

Electrical Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between OUT+ and OUT-. [MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$] $C_{IN+} = C_{IN-} = 0.33\mu F$, $A_V = 14.5dB$, AC measurement bandwidth 20Hz to 20kHz, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Notes 2, 3)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|---|-----------|--------------------------------------|--|-----|------|-----|-------|
| Voltage Gain (MAX98308) | A_V | GAIN = short to GND | | 20 | 20.5 | 21 | dB |
| | | GAIN = 100k Ω pulldown to GND | | 17 | 17.5 | 18 | |
| | | GAIN = short to PVDD | | 14 | 14.5 | 15 | |
| | | GAIN = 100k Ω pullup to PVDD | | 11 | 11.5 | 12 | |
| | | GAIN = unconnected | | 8 | 8.5 | 9 | |
| Common-Mode Rejection Ratio (MAX98308) | CMRR | $f_{IN} = 1kHz$ | | | 65 | | dB |
| Output Power (MAX98307) | P_{OUT} | $f_{IN} = 1kHz$, THD+N = 1% | $Z_L = 8\Omega + 68\mu H$, $V_{PVDD} = 3.6V$ | | 1.54 | | W |
| | | | $Z_L = 8\Omega + 68\mu H$, $V_{PVDD} = 4.2V$ | | 2 | | |
| | | | $Z_L = 8\Omega + 68\mu H$, $V_{PVDD} = 5.0V$ | | 2.85 | | |
| | | $f_{IN} = 1kHz$, THD+N = 10% | $Z_L = 8\Omega + 68\mu H$, $V_{PVDD} = 3.6V$ | | 1.77 | | |
| | | | $Z_L = 8\Omega + 68\mu H$, $V_{PVDD} = 4.2V$ | | 2.3 | | |
| | | | $Z_L = 8\Omega + 68\mu H$, $V_{PVDD} = 5.0V$ | | 3.3 | | |
| Output Power (MAX98308) | P_{OUT} | THD+N \leq 1% | $Z_{SPK} = 8\Omega + 68\mu H$, $V_{PVDD} = 3.6V$ | | 1.4 | | W |
| | | | $Z_{SPK} = 8\Omega + 68\mu H$, $V_{PVDD} = 4.2V$ | | 1.92 | | |
| | | | $Z_{SPK} = 8\Omega + 68\mu H$, $V_{PVDD} = 5.0V$ | | 2.7 | | |
| | | THD+N \leq 10% | $Z_{SPK} = 8\Omega + 68\mu H$, $V_{PVDD} = 3.6V$ | | 1.57 | | |
| | | | $Z_{SPK} = 8\Omega + 68\mu H$, $V_{PVDD} = 4.2V$ | | 2.13 | | |

Electrical Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between OUT+ and OUT-. [MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$] $C_{IN+} = C_{IN-} = 0.33\mu F$, $A_V = 14.5dB$, AC measurement bandwidth 20Hz to 20kHz, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Notes 2, 3)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--------------------------------------|-----------|--|-----------------|-----|---------|----------|---------------|
| Total Harmonic Distortion Plus Noise | THD+N | $f_{IN} = 1kHz$, $P_{OUT} = 1W$ | | | 0.05 | | % |
| Output Offset Voltage | V_{OS} | $T_A = +25^\circ C$ | | | ± 1 | ± 5 | mV |
| Click-and-Pop Level | K_{CP} | Peak voltage, A-weighted, 32 samples per second (Notes 4, 5) | Into shutdown | | -65 | | dBV |
| | | | Out of shutdown | | -65 | | |
| Output Switching Frequency | | | | | 340 | | kHz |
| Efficiency | η | $f_{IN} = 1kHz$, P_{OUT} at 500mW, THD+N = 0.02% | | | 84 | | % |
| | | $f_{IN} = 1kHz$, P_{OUT} at 1W, THD+N = 0.05% | | | 82 | | |
| Current Limit | I_{LIM} | | | | 2 | | A_{RMS} |
| Output Noise | V_N | A-weighted | | | 52 | | μV_{RMS} |
| LOGIC INPUT (SHDN) | | | | | | | |
| Input Voltage High | V_{IH} | | | 1.4 | | | V |
| Input Voltage Low | V_{IL} | | | | | 0.4 | V |
| Input Leakage Current | | $T_A = +25^\circ C$ | | | | ± 10 | μA |

Note 2: 100% production tested at $T_A = +25^\circ C$. Specifications over temperature limits are guaranteed by design.







Note 3: Testing performed with a resistive load in series with an inductor to simulate an actual speaker. For $R_L = 8\Omega$, $L = 68\mu H$.

Note 4: Amplifier inputs AC-coupled to GND.

Note 5: Specified at room temperature with an 8Ω resistive load in series with a $68\mu H$ inductive load connected across the BTL outputs. Mode transitions controlled by $SHDN$ active-low shutdown control.







Typical Operating Characteristics

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between $OUT+$ and $OUT-$, $A_V = 14.5dB$ (MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$), $C_{IN+} = C_{IN-} = 0.33\mu F$, AC measurement bandwidth 20Hz to 20kHz.)

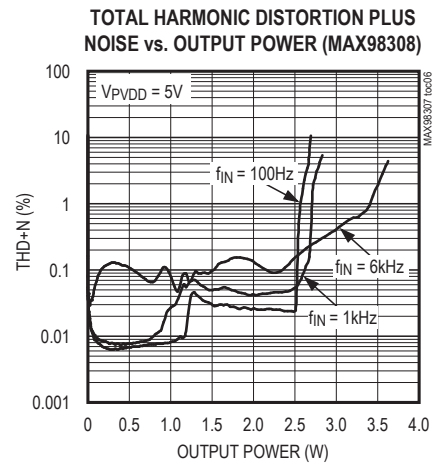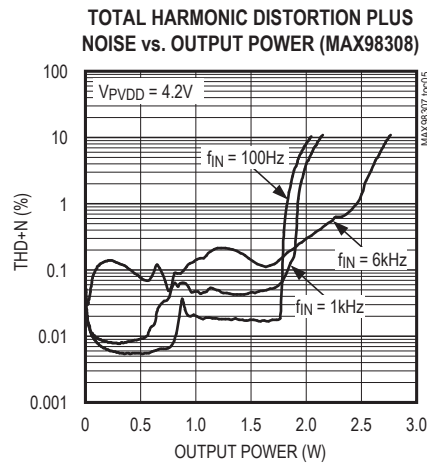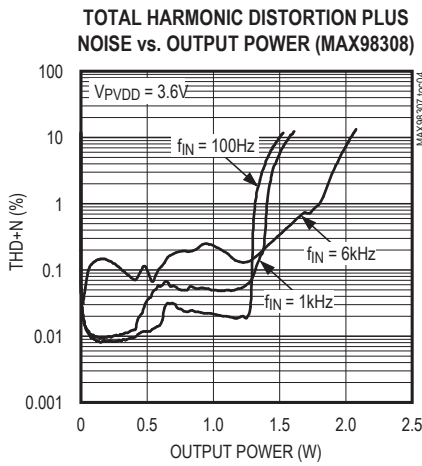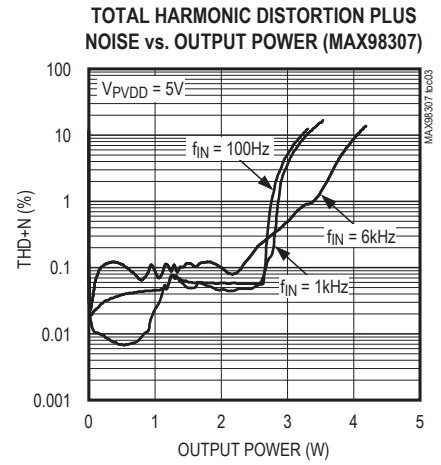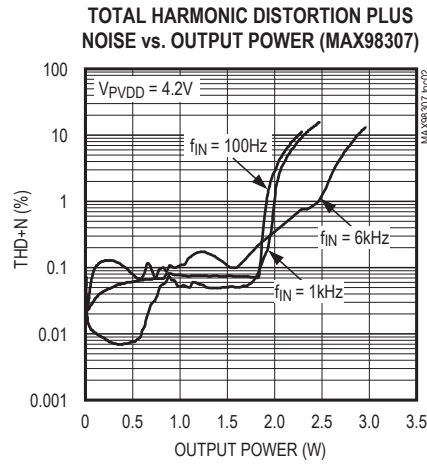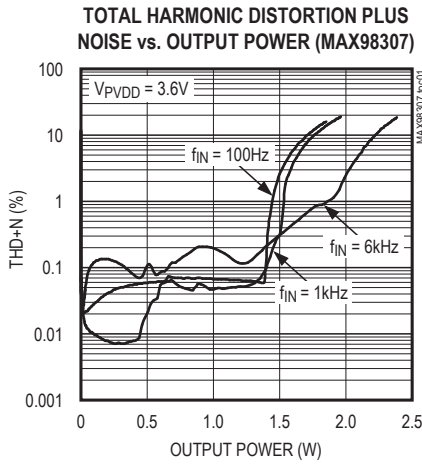







Typical Operating Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between $OUT+$ and $OUT-$, $A_V = 14.5dB$ (MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$, $C_{IN+} = C_{IN-} = 0.33\mu F$, AC measurement bandwidth 20Hz to 20kHz.)

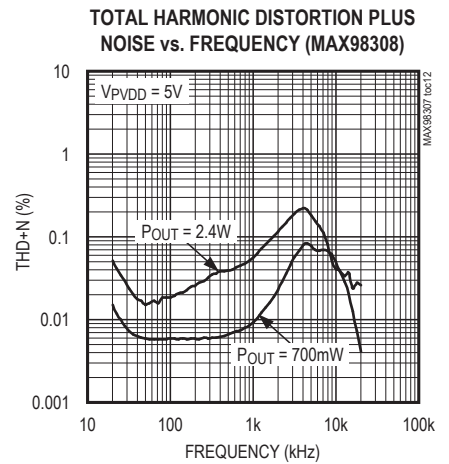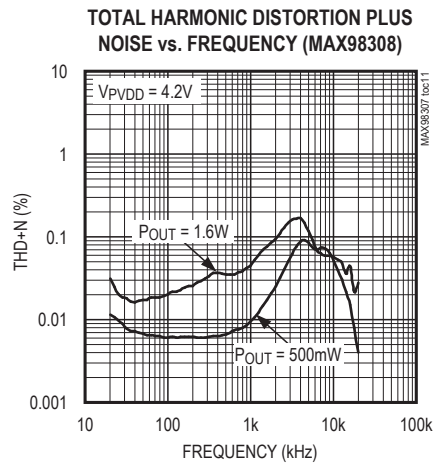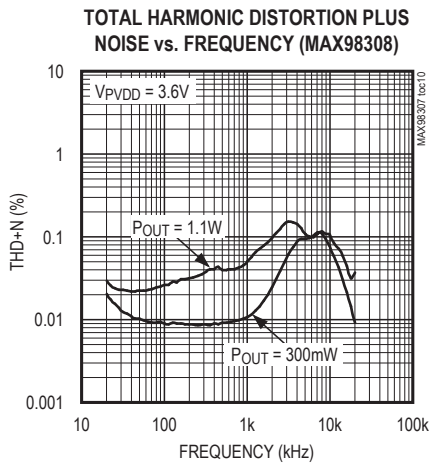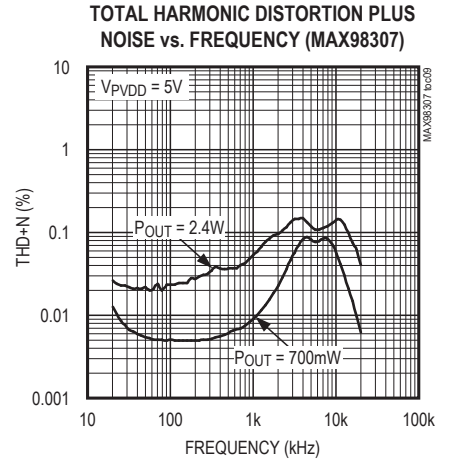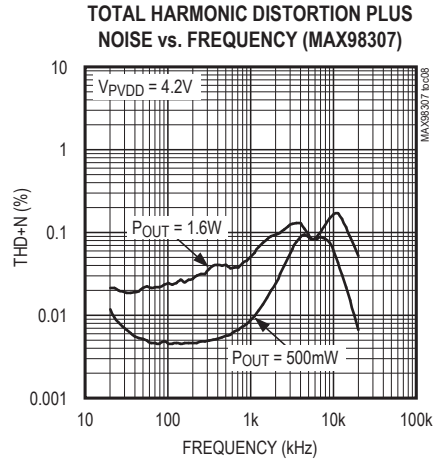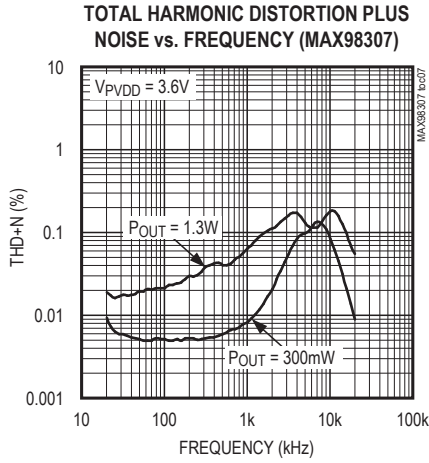







Typical Operating Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between $OUT+$ and $OUT-$, $A_V = 14.5dB$ (MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$), $C_{IN+} = C_{IN-} = 0.33\mu F$, AC measurement bandwidth 20Hz to 20kHz.)

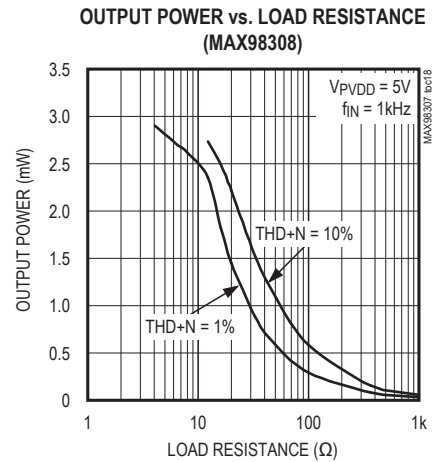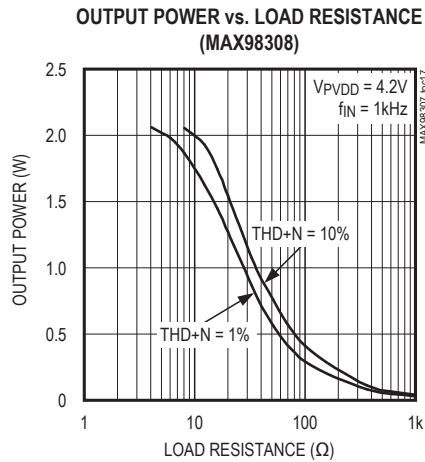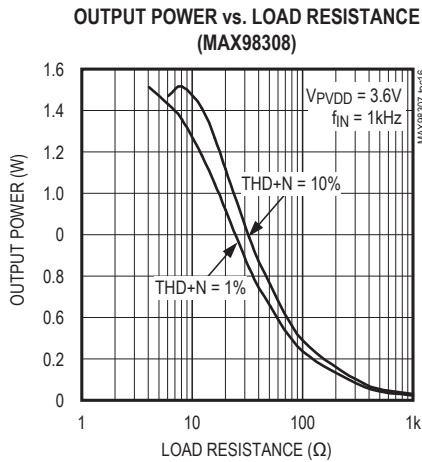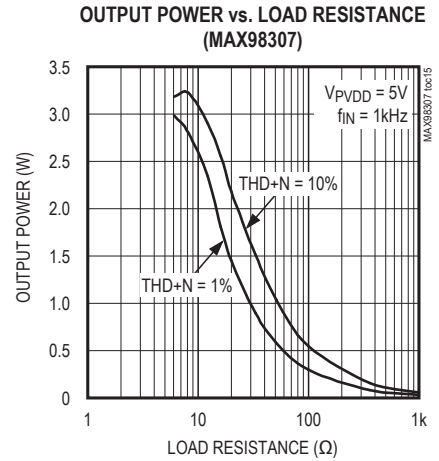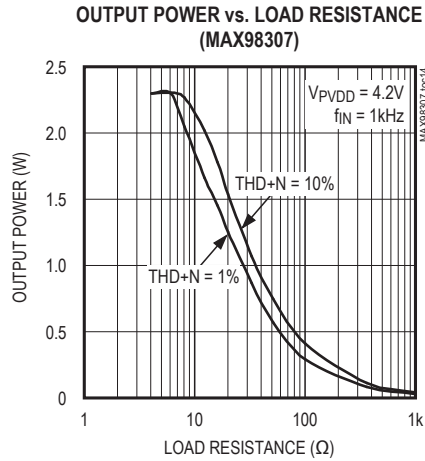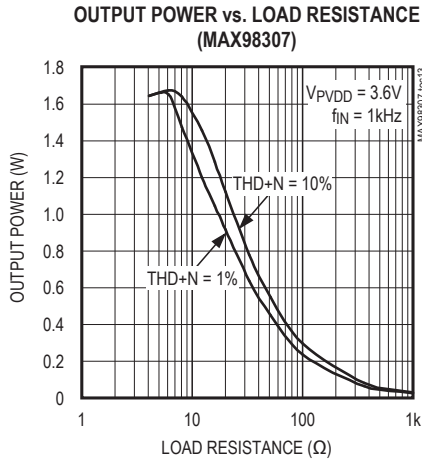







Typical Operating Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between $OUT+$ and $OUT-$, $A_V = 14.5dB$ (MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$, $C_{IN+} = C_{IN-} = 0.33\mu F$, AC measurement bandwidth 20Hz to 20kHz.)

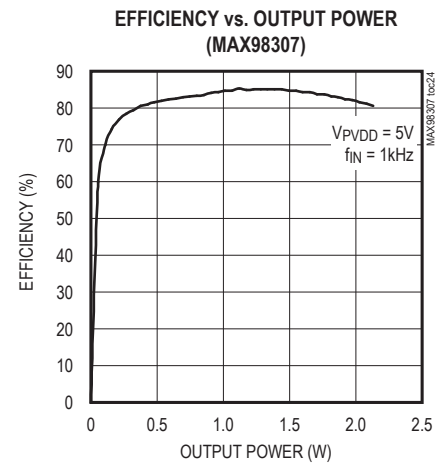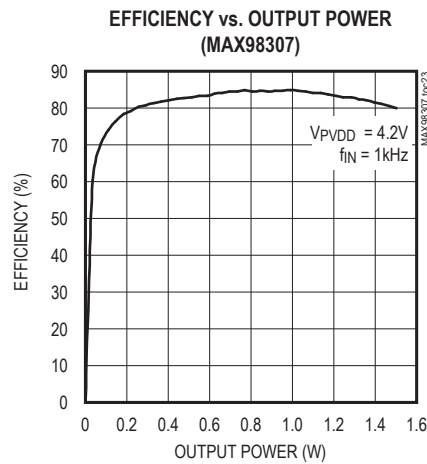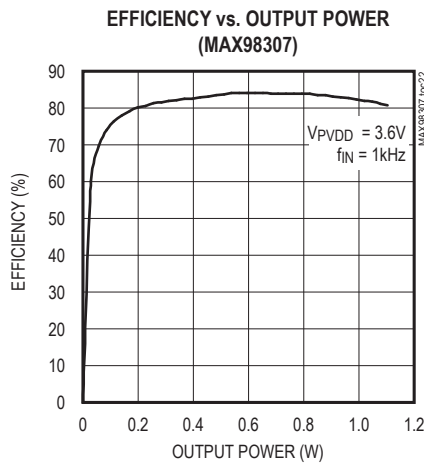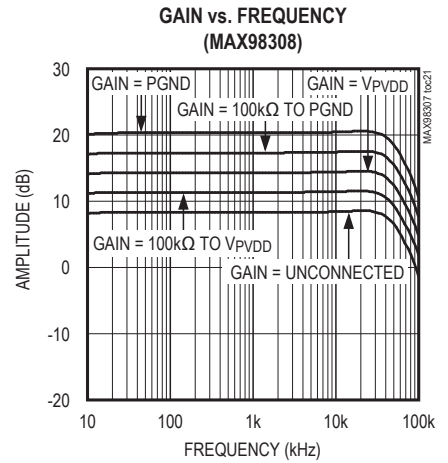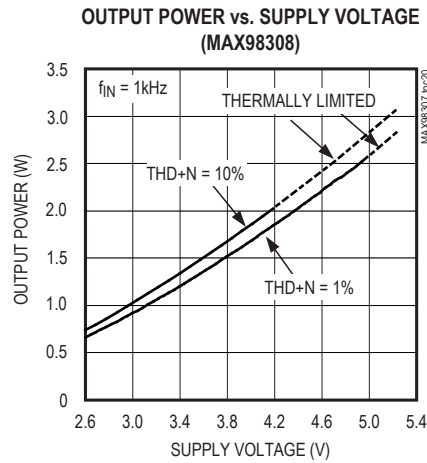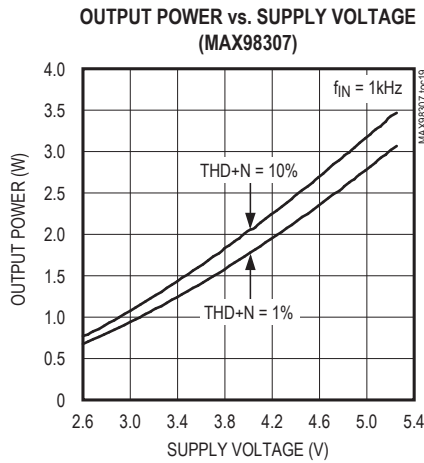








Typical Operating Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between $OUT+$ and $OUT-$, $A_V = 14.5dB$ (MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$, $C_{IN+} = C_{IN-} = 0.33\mu F$, AC measurement bandwidth 20Hz to 20kHz.)

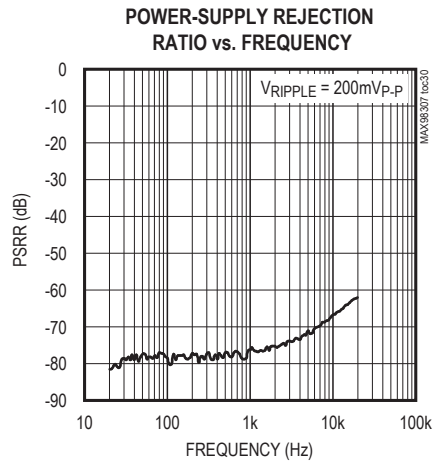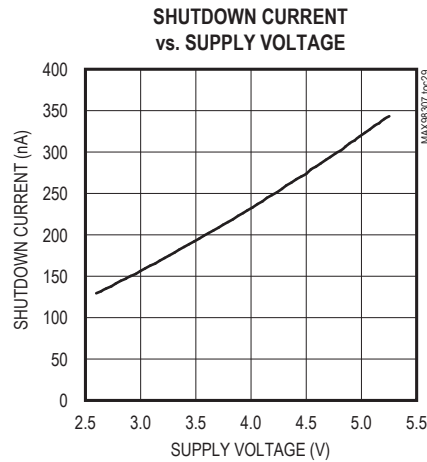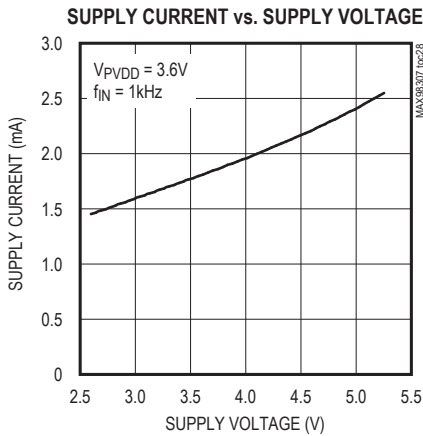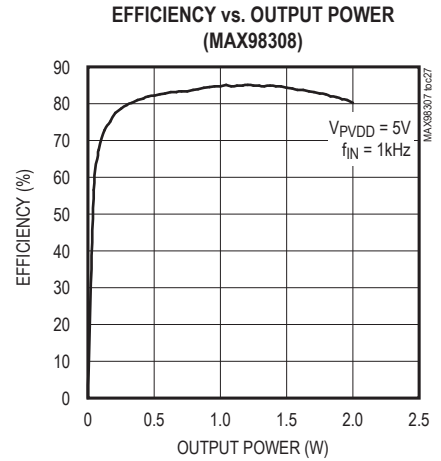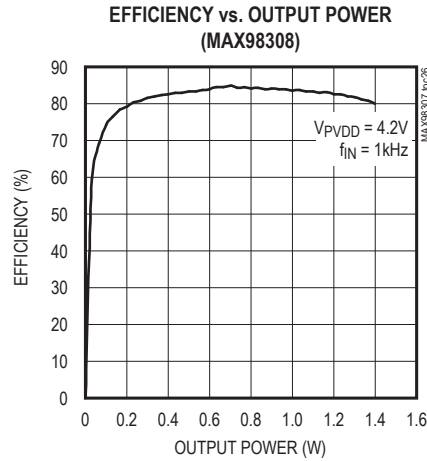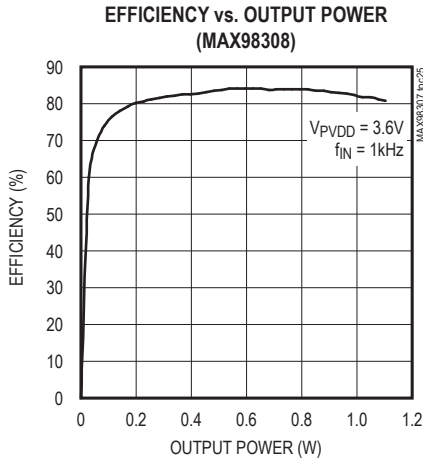


Typical Operating Characteristics (continued)

($V_{PVDD} = V_{CC} = V_{SHDN} = 3.6V$, $V_{PGND} = V_{GND} = 0V$, $Z_L = 8\Omega + 68\mu H$ between $OUT+$ and $OUT-$, $A_V = 14.5dB$ (MAX98307 $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 20k\Omega$, $C_{IN+} = C_{IN-} = 0.33\mu F$, AC measurement bandwidth 20Hz to 20kHz.)

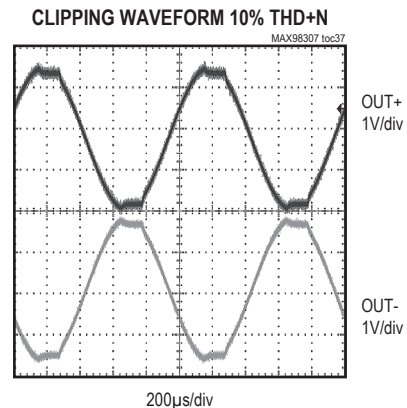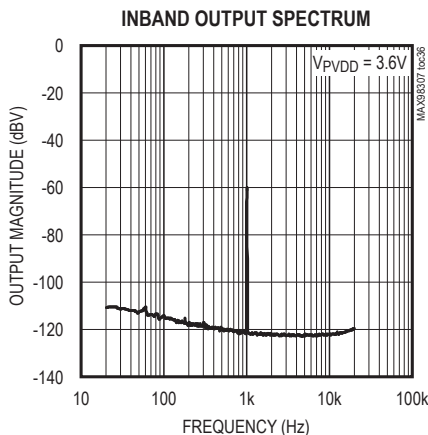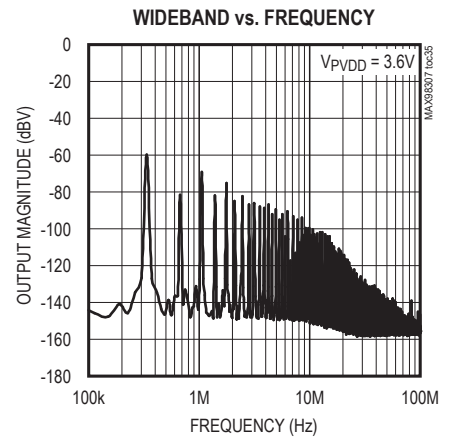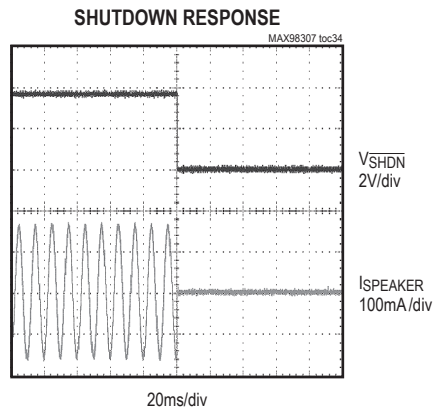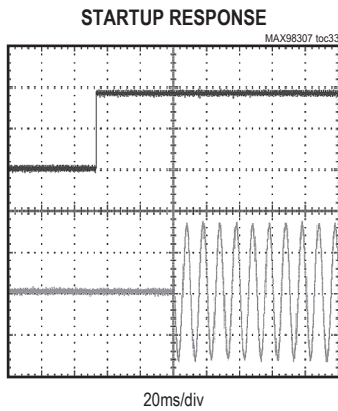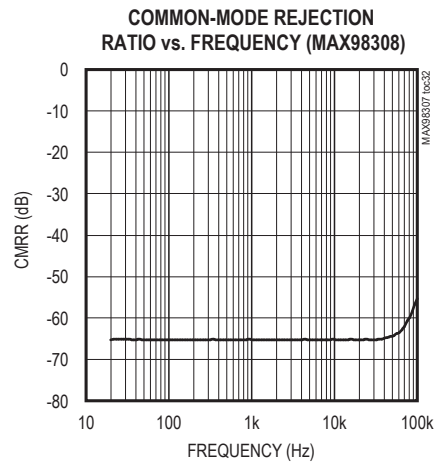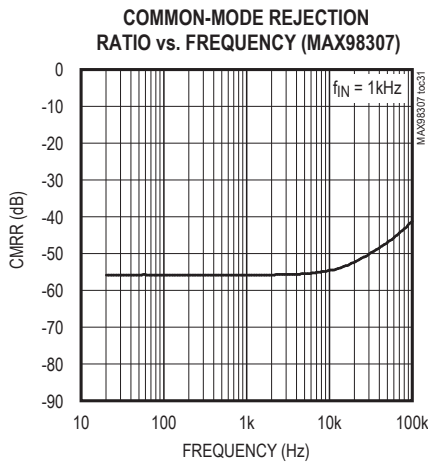

Pin/Bump Configurations

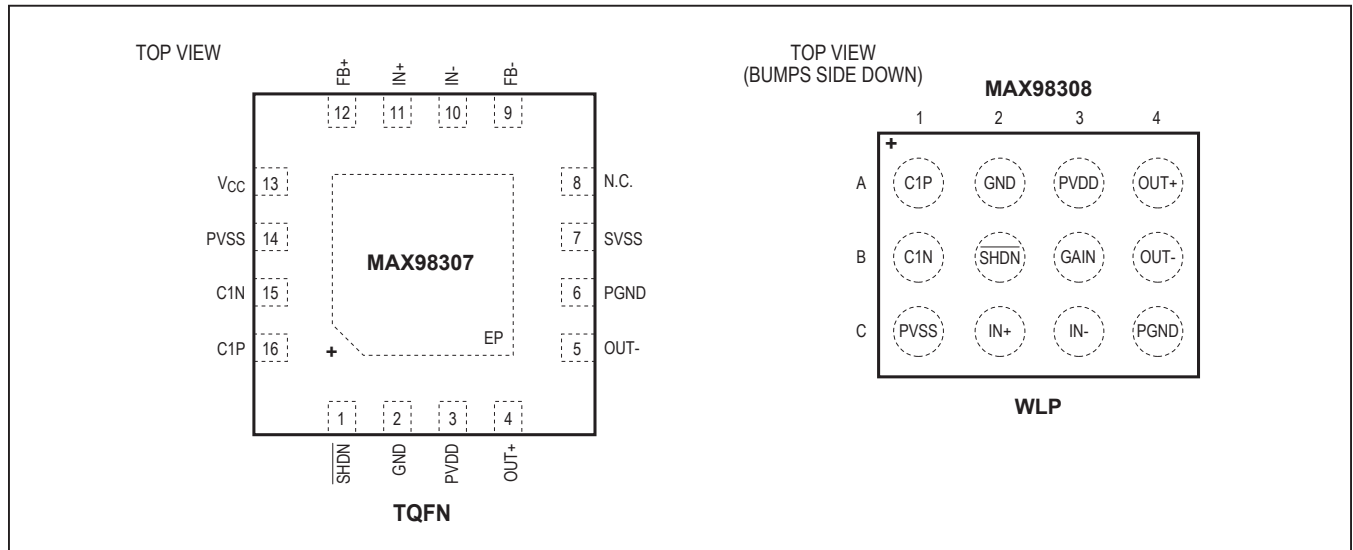

Pin/Bump Description

| PIN | BUMP | NAME | FUNCTION |
|----------|----------|--------------------------|---|
| MAX98307 | MAX98308 | | |
| 1 | B2 | $\overline{\text{SHDN}}$ | Active-Low Shutdown. Connect to GND for shutdown. Connect to PVDD for normal operation. |
| 2 | A2 | GND | Substrate and Signal Ground |
| 3 | A3 | PVDD | Power and Charge-Pump Supply. Bypass to PGND with a 0.1 μF capacitor. |
| 4 | A4 | OUT+ | Positive Amplifier Output |
| 5 | B4 | OUT- | Negative Amplifier Output |
| 6 | C4 | PGND | Power Ground |
| 7 | — | SVSS | Amplifier Negative Power Supply. Connect to PVSS (MAX98307). |
| 8 | — | N.C. | No Connection. Not internally connected. Connect to GND or leave unconnected. |
| 9 | — | FB- | Negative Amplifier Feedback |
| 10 | C3 | IN- | Negative Amplifier Input |
| 11 | C2 | IN+ | Positive Amplifier Input |
| 12 | — | FB+ | Positive Amplifier Feedback |
| — | B3 | GAIN | See Table 1 MAX98308 Gain Configuration for more information. |
| 13 | — | V _{CC} | Signal Supply |
| 14 | C1 | PVSS | Charge-Pump Output. Connect a 10 μF capacitor between PVSS and PGND. |
| 15 | B1 | C1N | Charge-Pump Flying Capacitor Negative Terminal. Connect a 4.7 μF capacitor between C1N and C1P. |
| 16 | A1 | C1P | Charge-Pump Flying Capacitor Positive Terminal. Connect a 4.7 μF capacitor between C1N and C1P. |
| — | — | EP | Exposed Pad (TQFN Only). Internally connected to GND. Connect to a large ground plane with multiple vias to maximize thermal performance. Not intended as an electrical connection point. |

Detailed Description

The MAX98307/MAX98308 fully differential mono Class DG multilevel power amplifiers with integrated inverting charge pumps offer highly efficient, high-power audio solutions for portable applications.

The new Class DG multilevel modulation scheme extends the dynamic range of the output signal by employing a charge-pump-generated negative rail, which is used as needed to extend the supply range. When the negative rail is not needed, the output is drawn entirely from the standard supply. This scheme results in high efficiency over a wide output power range.

The power amplifier incorporates active emissions limiting edge rate and overshoot control circuitry in combination with the multilevel output modulation scheme to greatly reduce EMI. These features eliminate the need for output filtering as compared to traditional Class D amplifiers, which reduces an application's component count.

The MAX98307 has an adjustable gain set by external resistors. The MAX98308 has preset fixed gains of 8.5dB, 11.5dB, 14.5dB, 17.5dB, and 20.5dB set by a gain select input (GAIN).

Class DG Multilevel Operation

The ICs' filterless Class DG multilevel amplifiers feature a proprietary Maxim output stage that offers higher efficiency over a greater output power range than previous amplifiers. The amplifier combines Class D switching output efficiency and Class G supply level shifting with a multilevel output modulation scheme that with a 5V supply has efficiency better than 80% efficiency over the 0.35W to 2.2W output range.

The Class DG multilevel output stage uses pulse-width modulation (PWM), a rail-to-rail digital output signal with variable duty cycle, to approximate an analog input signal as in a Class D amplifier. Rail-to-rail operation ensures that any dissipation at the output is due solely to the $R_{DS(ON)}$ of the power output MOSFETs. The Class DG multilevel output stage also senses the magnitude of the output signal and switches the supply rails as needed

to more efficiently supply the required signal power. For a low output signal swing requirement (below the battery supply rail V_{PVDD}), the output range is between V_{PVDD} and ground. When output swing above V_{PVDD} is required, V_{PVSS} , an internal inverting charge-pump-generated negative rail replaces ground as the lower supply. The high output swing range is then V_{PVDD} to V_{PVSS} , approximately double the low swing range. This approach efficiently manages power consumption by switching the operating rails as needed according to the output swing requirements. Additionally, multilevel output modulation is employed in to draw the maximum possible power from the lower impedance battery supply rail, V_{PVDD} , rather than the higher impedance charge-pump-generated rail V_{PVSS} . This is accomplished by generating PWM signals that swing from ground to V_{PVDD} or from ground to V_{PVSS} at either end of the bridge tied load (BTL) rather than continually swinging from V_{PVDD} to V_{PVSS} . The signals are modulated in such a way that V_{PVSS} is used only as necessary to generate low-end signal swing.

These combined operations ensure that power dissipation due to $R_{DS(ON)}$ loss and charge-pump impedance is minimized, and that efficiency and output power is maximized across the audio range. Class DG multilevel operation is shown as [Figure 1](#).

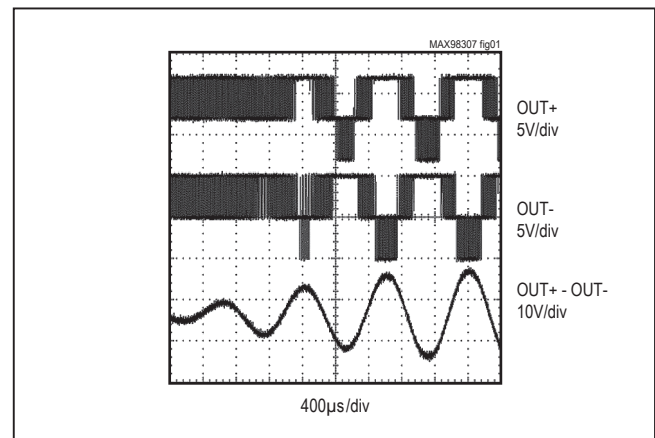


Figure 1. Class DG Multilevel Operation

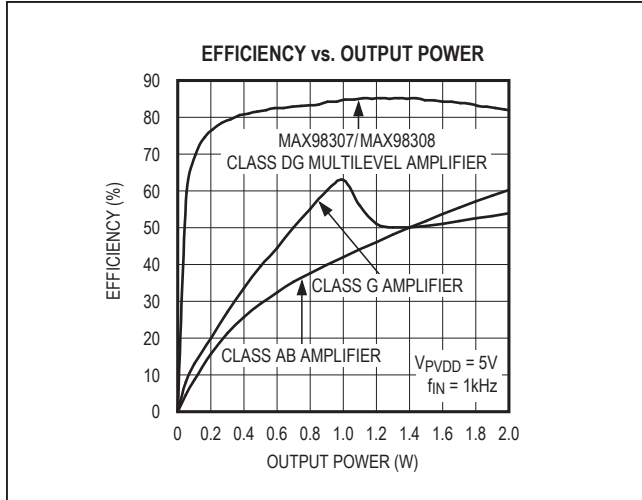


Figure 2. Class DG Multilevel vs. Typical Class G and Class AB Amplifier Efficiency

The Class DG multilevel efficiency compares favorably with Class AB and Class G amplifiers as shown in Figure 2. Note that efficiency at 1W is 85%.

EMI Filterless Output Stage

Traditional Class D amplifiers require the use of external LC filters, or shielding, to meet electromagnetic-interference (EMI) regulation standards. The active emissions limiting edge-rate control circuitry and Class DG multilevel modulation scheme reduce EMI emissions without the need for external filtering components, while maintaining high efficiency (see Figure 3).

Amplifier Current Limit

If the output current of the speaker amplifier exceeds the current limit, the ICs disable the outputs for approximately 100µs. After 100µs, the outputs are reenabled. If the fault condition still exists, the ICs continue to disable and reenable the outputs until the fault condition is removed.

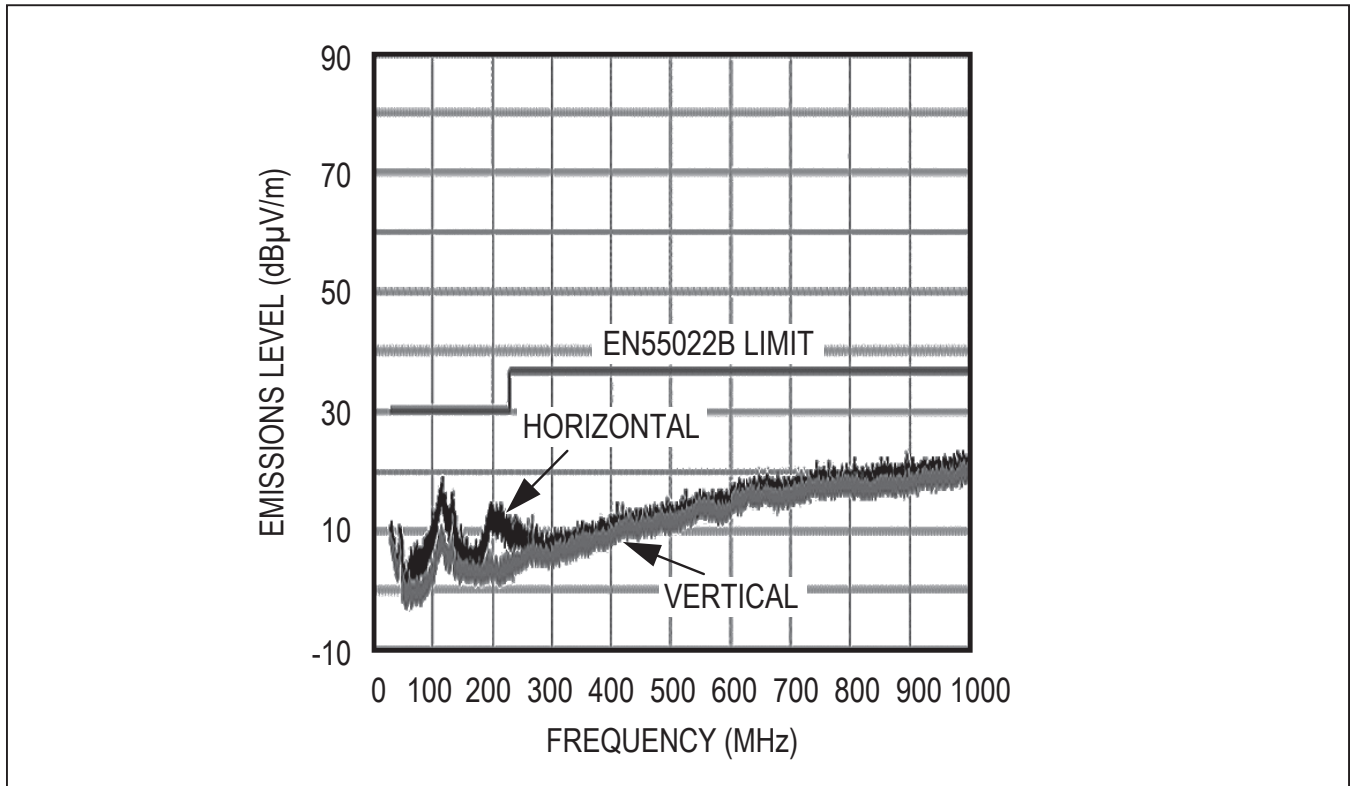


Figure 3. EMI Performance with V_PVDD = 5V, 12in of Speaker Cable, No Output Filter

Click-and-Pop Suppression

The speaker amplifier features Maxim's comprehensive click-and-pop suppression. During startup, the click-and-pop suppression circuitry reduces any audible transient sources internal to the device. When entering shutdown, the differential speaker outputs quickly and simultaneously ramp down to PGND.

Thermal and Short Circuit Protection

The ICs automatically enter thermal shutdown when the die temperature is greater than +160°C and reactivate at less than +135°C. Additionally, if the outputs are shorted to each other or either rail, the amplifier prevents catastrophic loss by disabling the outputs.

Shutdown

The ICs feature a low-power shutdown mode, drawing less than 0.225µA (typ) supply current. Drive $\overline{\text{SHDN}}$ low to put the IC into the shutdown state.

Applications Information

Filterless Class DG Operation

Traditional Class DG amplifiers require an output filter. The filter adds cost and size, as well as decreases efficiency and THD+N performance. The ICs' active emissions limiting and Class DG multilevel output modulation allow for filterless operation while reducing external component count, and thereby, cost.

Because the switching frequency of the ICs is well beyond the bandwidth of most speakers, voice coil movement due to the switching frequency is very small. Use a speaker with a series inductance > 10µH. Typical 8Ω speakers exhibit series inductances in the 20µH to 100µH range.

Differential Input Amplifier

The ICs feature a differential input configuration, making the device compatible with many codecs and offering improved noise immunity as compared to single-ended input amplifiers. In devices such as mobile phones, noisy digital signals can be picked up by an amplifier's input traces. A differential amplifier amplifies the difference of the two inputs, while signals common to both inputs, such as switching noise, are rejected. While both ICs feature

differential amplifiers, their voltage gain is set in differing manners.

The MAX98307 employs external feedback resistors as shown in [Figure 4](#). Voltage gain of the input amplifier is set as:

$$A_V = 20\log\left(\frac{R_{FB+}}{R_{IN+}}\right) (\text{dB}) + 8.5 \text{ dB}$$

where A_V is the desired voltage gain in decibels. R_{IN+} should be equal to R_{IN-} , and R_{FB+} should be equal to R_{FB-} .

In differential input configurations, the common-mode rejection ratio (CMRR) is primarily limited by the external resistor and capacitor matching. Ideally, to achieve the highest possible CMRR, the following external components should be selected where:

$$\frac{R_{FB+}}{R_{IN+}} = \frac{R_{FB-}}{R_{IN-}}$$

and

$$C_{IN+} = C_{IN-}$$

The gain of the MAX98308 is selectable by connecting the gain-select bump GAIN as described in [Table 1](#).

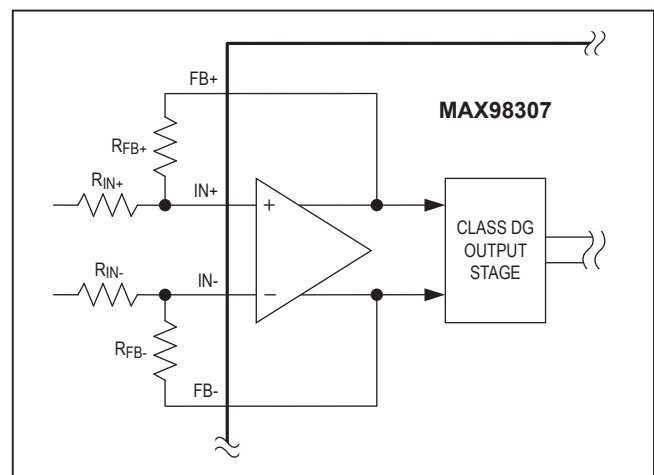


Figure 4. Setting the Voltage Gain of the MAX98307

Table 1. MAX98308 Gain Configuration

| GAIN | PREAMPLIFIER GAIN (dB) | OVERALL GAIN (dB) |
|----------------------------|------------------------|-------------------|
| Unconnected | 0 | 8.5 |
| 100kΩ to V _{PVDD} | 3 | 11.5 |
| Short to V _{PVDD} | 6 | 14.5 |
| 100kΩ to PGND | 9 | 17.5 |
| Short to PGND | 12 | 20.5 |

Note: For both ICs, the Class DG output stage has a fixed gain of 8.5dB. Any gain or attenuation set by the external input stage resistors adds to or subtracts from this fixed gain.

Component Selection

Power-Supply Input (PVDD)

PVDD powers the speaker amplifier and has a range of 2.6V to 5.25V. Bypass PVDD with 0.1μF and 10μF capacitors in parallel to PGND. Apply additional bulk capacitance at the device if long input traces between PVDD and the supply are used.

Input Coupling Capacitors

The AC-coupling capacitors (C_{IN}) and input resistors (R_{IN}) form highpass filters that remove any DC bias from an input signal. See the [MAX98307 Typical Application Circuit](#) and [MAX98308 Typical Application Circuit](#). C_{IN} prevents any DC components from the input signal source appearing at the amplifier outputs. The -3dB point of the highpass filter, assuming zero source impedance due to the input signal source, is given by:

$$f_{-3dB} = \frac{1}{2\pi \times R_{IN} \times C_{IN}}$$

Choose C_{IN} so that f_{-3dB} is well below the lowest frequency of interest. Setting f_{-3dB} too high affects the amplifier's low-frequency response. Use capacitors with adequately low voltage coefficient (X5R or X7R recommended) for best low frequency THD+N performance.

Charge-Pump Capacitor Selection

Use capacitors with an equivalent series resistance (ESR) less than 50mΩ for optimum performance. Low-ESR ceramic capacitors minimize the output resistance of the charge pump. For best performance over the extended temperature range, select capacitors with an X7R dielectric and a rated voltage of at least 6.3V.

Charge-Pump Flying Capacitor

The value of the charge-pump flying capacitor affects the load regulation and output resistance of the charge pump. A charge-pump flying capacitor value that is too small (less than 1μF) degrades the amplifier's ability to provide sufficient current drive. Increasing the value of this flying capacitor and decreasing the ESR improves load regulation and reduces the charge-pump output impedance, which improves the output power and efficiency of the amplifier. A 4.7μF or greater value, low-ESR capacitor is recommended.

Charge-Pump Hold Capacitor

The charge-pump hold capacitor value and ESR directly affect the ripple at the charge-pump rail, PVSS. Increasing the charge-pump hold capacitor value reduces output ripple. Likewise, decreasing the ESR of this capacitor reduces both ripple and output resistance. A 10μF or greater value, low-ESR capacitor is recommended.

Layout and Grounding

Proper layout and grounding are essential for optimum performance. Good grounding improves audio performance and prevents switching noise from coupling into the audio signal.

Use wide, low-resistance output traces. As load impedance decreases, the current drawn from the device increases. At higher current, the resistance of the output traces decreases the power delivered to the load. For example, if 2W is delivered from the device output to an 8Ω load through 100mΩ of total speaker trace, 1.97W is delivered to the speaker. If power is delivered through 10mΩ of total speaker trace, 1.998W is delivered to the speaker. Wide output, supply, and ground traces also improve the power dissipation of the device.

The ICs are inherently designed for excellent RF immunity. For best performance, add ground fills around all signal traces on top or bottom PCB planes.

Thermal Considerations

Class DG multilevel amplifiers provide much better efficiency and thermal performance than a comparable Class AB or Class G amplifier. However, the system's thermal performance must be considered with realistic expectations and include consideration of many parameters. This section examines Class DG multilevel amplifiers using general examples to illustrate good design practices.

MAX98307 (TQFN) Applications Information

The exposed pad is the primary route of keeping heat away from the IC. With a bottom-side exposed pad, the PCB and its copper becomes the primary heatsink for the Class DG multilevel amplifier. Solder the exposed pad to a large copper polygon. Add as much copper as possible from this polygon to any adjacent pin on the amplifier as

well as to any adjacent components, provided these connections are at the same potential. These copper paths must be as wide as possible. Each of these paths contributes to the overall thermal capabilities of the system.

The copper polygon to which the exposed pad is attached should have multiple vias to the opposite side of the PCB. Make this polygon as large as possible within the system's constraints for signal routing.

MAX98308 (WLP) Applications Information

For the latest application details on WLP construction, dimensions, tape carrier information, PCB techniques, bump-pad layout, and recommended reflow temperature profile, as well as the latest information on reliability testing results, refer to Application Note 1891: *Wafer-Level Packaging (WLP) and Its Applications*.

Ordering Information

| PART | GAIN SET | PIN-PACKAGE |
|----------------|----------|-------------|
| MAX98307ETE+ | External | 16 TQFN-EP* |
| MAX98307ETE/V+ | External | 16 TQFN-EP* |
| MAX98308EWC+ | Internal | 12 WLP |

Note: All devices operate over the -40°C to $+85^{\circ}\text{C}$ temperature range.

+Denotes a lead(Pb)-free/RoHS-compliant package.

/V denotes an automotive qualified part.

*EP = Exposed pad.

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|--|
| 16 TQFN-EP | T1633+5 | 21-0136 | 90-0032 |
| 12 WLP | W121A1+1 | 21-0542 | Refer to Application Note 1891 |

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|--|---------------|
| 0 | 6/11 | Initial release | — |
| 1 | 8/11 | Updated output power conditions in the <i>Electrical Characteristics</i> table | 4 |
| 2 | 9/11 | Updated <i>Electrical Characteristics</i> table and TOC 20 | 2, 4, 8 |
| 3 | 9/11 | Added EP to the <i>Pin Description</i> section and removed future product reference for the MAX98308 | 12, 17 |
| 4 | 3/12 | Added R_{IN} typical values for all gains and corrected error on TOCs 1–6 | 3, 6 |
| 5 | 3/15 | Added MAX98307ETE/V+ to <i>Ordering Information</i> | 17 |
| 6 | 6/16 | Updated package code and outline number in <i>Package Information</i> table | 18 |
| 7 | 4/20 | Updated TOC35 in <i>Typical Operating Characteristics</i> section | 11 |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the *Electrical Characteristics* table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.