

# PLC-...24UC/1/S/H

# PLC-...24UC/1/S/L

## PLC INTERFACE With Switch and Integrated Power Contact Relay

### INTERFACE

Data Sheet  
101460\_en\_04

© PHOENIX CONTACT - 03/2008



### 1 Description

The 6.2 mm **PLC-...24UC/1/S...** PLC INTERFACE module supports "Manual", "Zero", and "Automatic" functions. The load can be switched directly using the module.

#### 1.1 Switching Function

Depending on the version, the switch can be operated either by hand or using a screwdriver.

A floating contact provides confirmation for the "Automatic" switching state.

#### 1.2 Optimum Use of Plug-In Bridges

The PLC INTERFACE module achieves maximum efficiency with the user-friendly FBST plug-in bridge system. The PLC-...24UC/1/S... makes effective use of the bridging options for the A1/A2 connection on the coil side, for the supply at connection 13 on the contact side, and for the manual input at connection M. Especially effective here are the 500 mm long color-insulated continuous plug-in bridges that can easily be cut to the required length and quickly

inserted in the bridge shafts. They eliminate the need for complicated and time-consuming loop bridges.

#### 1.3 Additional Advantages

- Environmentally friendly, cadmium-free power contact material for loads up to 250 V AC/6 A
- Integrated input/protective circuit
- Safe isolation according to DIN EN 50178
- Spring-cage and screw connection types available
- 6 kV<sub>rms</sub> electrical isolation between coil and contact
- Floating confirmation contact for "Automatic" switching state



Make sure you always use the latest documentation.  
It can be downloaded at [www.download.phoenixcontact.com](http://www.download.phoenixcontact.com).  
A conversion table is available on the Internet at  
[www.download.phoenixcontact.com/general/7000\\_en\\_00.pdf](http://www.download.phoenixcontact.com/general/7000_en_00.pdf).



This data sheet is valid for all products listed on the following page:

## 2 Ordering Data

### PLC INTERFACE With Switch (Operation by Hand)

| Description                                                                                                                                                                                                                                                      | Type                | Order No. | Pcs./Pck. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------|-----------|
| PLC INTERFACE with switch (operation by hand) and integrated power contact relay for "Manual", "Zero", and "Automatic" functions, with screw connection, for mounting on        | PLC-RSC- 24UC/1/S/H | 2982236   | 10        |
| PLC INTERFACE with switch (operation by hand) and integrated power contact relay for "Manual", "Zero", and "Automatic" functions, with spring-cage connection, for mounting on  | PLC-RSP- 24UC/1/S/H | 2982249   | 10        |

### PLC INTERFACE With Switch (Operation Using a Screwdriver)

| Description                                                                                                                                                                                                                                                                  | Type                | Order No. | Pcs./Pck. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------|-----------|
| PLC INTERFACE with switch (operation using a screwdriver) and integrated power contact relay for "Manual", "Zero", and "Automatic" functions, with screw connection, for mounting on        | PLC-RSC- 24UC/1/S/L | 2834876   | 10        |
| PLC INTERFACE with switch (operation using a screwdriver) and integrated power contact relay for "Manual", "Zero", and "Automatic" functions, with spring-cage connection, for mounting on  | PLC-RSP- 24UC/1/S/L | 2834889   | 10        |



For the protection of input and output, inductive loads must be dampened with an effective protective circuit.

### Accessories

| Description      | Type       | Order No. | Pcs./Pck. |
|------------------|------------|-----------|-----------|
| Insulating plate | PLC-ATP BK | 2966841   | 25        |



The PLC-ATP BK insulating plate should be used in the following cases: always fit at the start and end of a PLC terminal strip for voltages greater than 250 V (L1, L2, L3) between the same terminal points on adjacent modules (FBST 8-PLC... or FBST 500... can be used for potential bridging) and for safe isolation between adjacent modules.

For additional accessories such as power terminal blocks and plug-in bridges, please refer to the INTERFACE catalog or [www.phoenixcontact.com](http://www.phoenixcontact.com).

### 3 Technical Data

#### Input Data

|                                              |                                         |
|----------------------------------------------|-----------------------------------------|
| Input voltage $U_N$                          | 24 V AC/DC, 50 Hz ... 60 Hz             |
| Permissible range (with reference to $U_N$ ) | See "Operating Voltage Range" on page 4 |
| Typical input current at $U_N$               | 11 mA                                   |
| Input circuit                                | Yellow LED, bridge rectifier            |

#### Output Data

|                             |                               |
|-----------------------------|-------------------------------|
| Contact type                | Single contact, 1 N/O contact |
| Contact material            | Silver tin oxide AgSnO        |
| Maximum switching voltage   | 250 V AC/DC <sup>1</sup>      |
| Minimum switching voltage   | 12 V AC/DC                    |
| Limiting continuous current | 6 A                           |
| Maximum inrush current      | On request                    |
| Minimum switching current   | 10 mA                         |
| Maximum shutdown power      | Ohmic load $\tau = 0$ ms      |
|                             | 24 V DC 140 W                 |
|                             | 48 V DC 20 W                  |
|                             | 60 V DC 18 W                  |
|                             | 110 V DC 23 W                 |
|                             | 220 V DC 40 W                 |
|                             | 250 V AC 1500 VA              |
| Minimum switching power     | 120 mW                        |

<sup>1</sup> The PLC-ATP BK insulating plate must be installed for voltages greater than 250 V (L1, L2, L3) between the same terminal points on adjacent modules (see "Accessories"). FBST 8-PLC... or FBST 500... is then used for potential bridging.

#### General Data

|                                                   |                                                                                                                                 |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Rated insulation voltage                          | 250 V AC                                                                                                                        |
| Impulse voltage withstand level                   | 6 kV                                                                                                                            |
| Ambient temperature range                         |                                                                                                                                 |
| Operation                                         | -25°C ... 60°C                                                                                                                  |
| Storage/transport                                 | -20°C ... 85°C                                                                                                                  |
| Nominal operating mode                            | 100% operating factor                                                                                                           |
| Inflammability class according to UL 94 (housing) | V0                                                                                                                              |
| Air and creepage distances between the circuits   | DIN EN 50178/VDE 0160 (safe isolation, reinforced insulation I/O)                                                               |
| Standards/specifications                          | IEC 60664, IEC 60664 A, DIN VDE 0110, DIN EN 50155/VDE 0115-200 (in relevant parts), IEC 60255/DIN VDE 0435 (in relevant parts) |
| Pollution degree                                  | 2                                                                                                                               |
| Surge voltage category                            | III                                                                                                                             |
| Mounting position                                 | Any                                                                                                                             |
| Mounting                                          | Can be aligned without spacing                                                                                                  |
| Conductor cross-section                           |                                                                                                                                 |
| Solid, with screw connection                      | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (26 - 14 AWG)                                                                      |
| Stranded, with screw connection                   | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (26 - 14 AWG)                                                                      |
| Solid, with spring-cage connection                | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (24 - 14 AWG)                                                                       |
| Stranded, with spring-cage connection             | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (24 - 14 AWG)                                                                       |
| Stripping length                                  |                                                                                                                                 |
| Screw connection                                  | 10 mm                                                                                                                           |
| Spring-cage connection                            | 8 mm                                                                                                                            |
| Dimensions (W x H x D)                            | 6.2 mm x 94 mm x 80 mm                                                                                                          |
| Housing material                                  | Polybutylene terephthalate PBT, non-reinforced, green                                                                           |

**Confirmation**

"Automatic" mode, floating

30 V AC/DC / 50 mA, maximum

2 V AC/DC / 1 mA, minimum

**Approvals**

CE

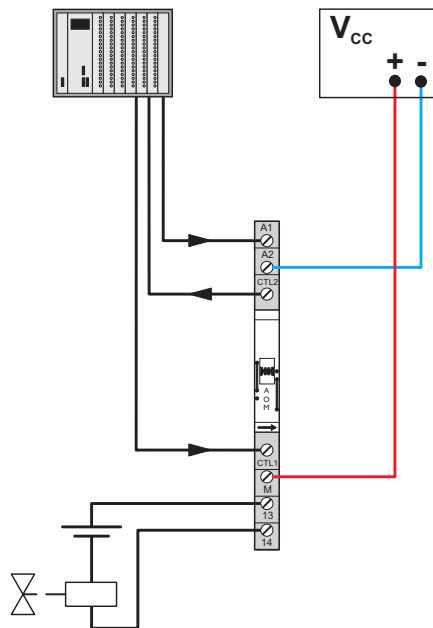
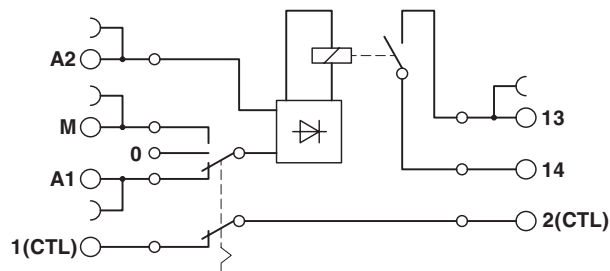
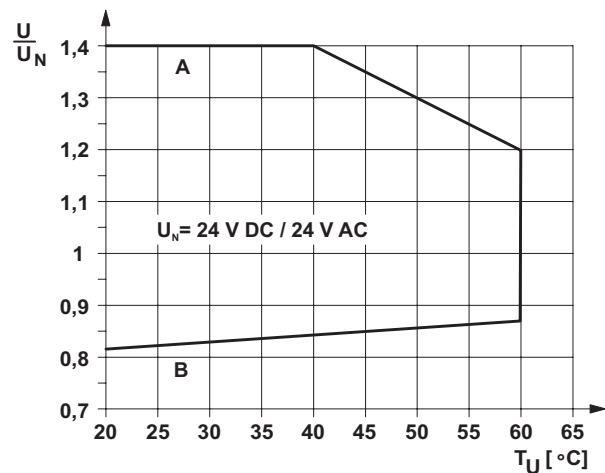
CE

UL/CUL

Applied for

GL

Planned

**4 Application Example****5 Block Diagram****6 Operating Voltage Range****General Conditions**

Direct alignment in the block, all devices 100% operating factor, horizontal or vertical mounting.

**Curve A**

Maximum permissible continuous voltage  $U_{max}$  with limiting continuous current on the contact side

**Curve B**

Minimum permissible relay operate voltage  $U_{op}$  following pre-excitation



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.