



# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet

### 4.7mm Round Type LED Lamps

#### A2703B/SYG/S530-E2

#### ■ Features :

- Low power consumption
- High efficiency and low cost
- Good control and free combinations on the colors of LED lamps
- Good lock and easy to assembly
- Stackable and easy to assembly  
Stackable vertically and easy to assembly
- Versatile mounting on P.C board or panel
- Stackable horizontally and easy to assembly
- Pb free
- The product itself will remain within RoHS compliant version



#### ■ Descriptions :

- ARRAY=Plastic Holder+Combinations of Lamps
- The array will easily mount the applicable lamps on any panel up to

#### ■ Applications :

- 1.Used as indicators of indicating the Degree, Functions, Positions etc, in electronic instruments.


| PART NO.         | Chip     |                    | Lens Color     |
|------------------|----------|--------------------|----------------|
|                  | Material | Emitted Color      |                |
| 7363SYGD/S530-E2 | AlGaInP  | Super Yellow Green | Green Diffused |

# Technical Data Sheet

## 4.7mm Round Type LED Lamps

A2703B/SYG/S530-E2

### Package Dimensions

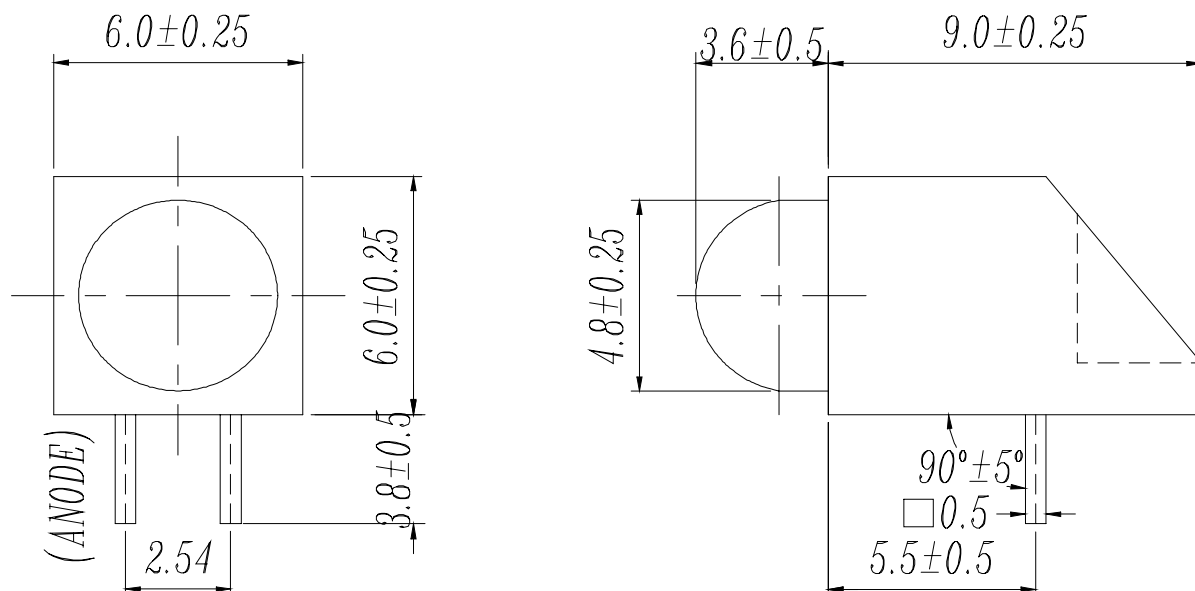

Notes: 1.All dimensions are in millimeters, tolerance is 0.25mm except being specified  
2.Lead spacing is measured where the lead emerge from the package

### Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

| Parameter               | Symbol    | Rating      | Unit             |
|-------------------------|-----------|-------------|------------------|
| Forward Current         | $I_F$     | 25          | mA               |
| Operating Temperature   | $T_{opr}$ | -40 to +85  | $^\circ\text{C}$ |
| Storage Temperature     | $T_{stg}$ | -40 to +100 | $^\circ\text{C}$ |
| Soldering Temperature   | $T_{sol}$ | $260 \pm 5$ | $^\circ\text{C}$ |
| Electrostatic Discharge | ESD       | 2000        | V                |
| Power Dissipation       | $P_d$     | 60          | mW               |
| Reverse Voltage         | $V_R$     | 5           | V                |

Note: \*1:Soldering time  $\leq 5$  seconds.



## Technical Data Sheet

## 4.7mm Round Type LED Lamps

A2703B/SYG/S530-E2

Electro-Optical Characteristics(Ta=25°C)

| Parameter                    | Symbol         | Condition              | Min. | Typ. | Max. | Unit |
|------------------------------|----------------|------------------------|------|------|------|------|
| Forward Voltage              | V <sub>F</sub> | I <sub>F</sub> = 20 mA | /    | 2.0  | 2.4  | V    |
| Reverse Current              | I <sub>R</sub> | V <sub>R</sub> = 5 V   | /    | /    | 10   | μA   |
| Luminous Intensity           | I <sub>v</sub> | I <sub>F</sub> = 20 mA | 40   | 80   | /    | mcd  |
| Viewing Angle                | 2θ 1/2         | I <sub>F</sub> = 20 mA | /    | 45   | /    | deg  |
| Peak Wavelength              | λ <sub>p</sub> | I <sub>F</sub> = 20 mA | /    | 575  | /    | nm   |
| Dominant Wavelength          | λ <sub>d</sub> | I <sub>F</sub> = 20 mA | /    | 573  | /    | nm   |
| Spectrum Radiation Bandwidth | △λ             | I <sub>F</sub> = 20 mA | /    | 20   | /    | nm   |







# Technical Data Sheet

## 4.7mm Round Type LED Lamps

A2703B/SYG/S530-E2

### Typical Electro-Optical Characteristic Curves:

(SYG)

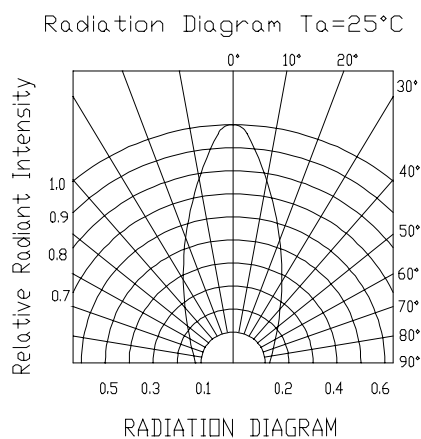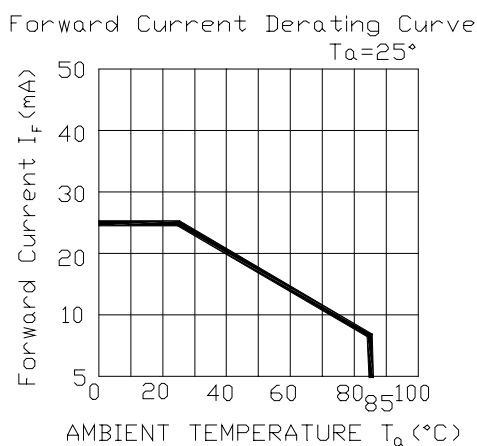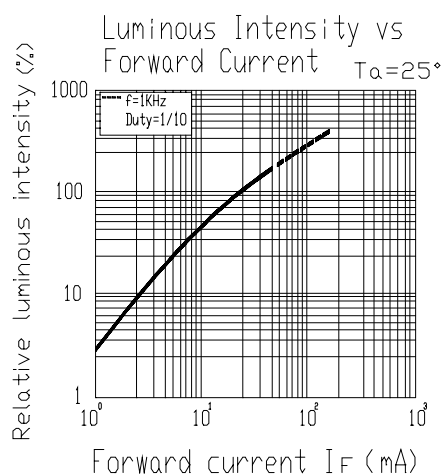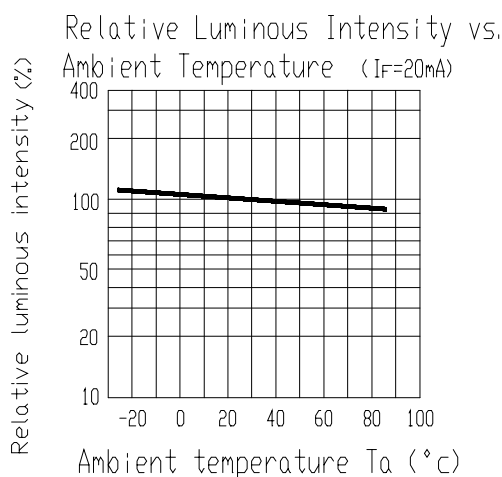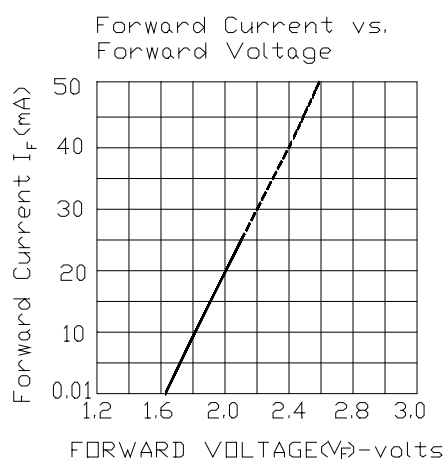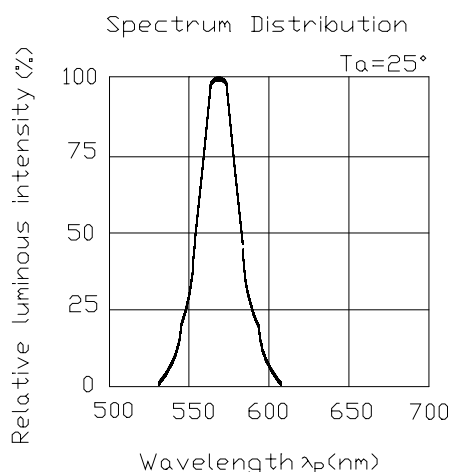



## Technical Data Sheet

## 4.7mm Round Type LED Lamps

A2703B/SYG/S530-E2

## ■ Reliability test items and conditions:

The reliability of products shall be satisfied with items listed below.

Confidence level : 97%

LTPD : 3%

| NO        | Item                             | Test Conditions                                | Test Hours/Cycle | Sample Size | Failure Judgment Criteria                                           | Ac/Re |
|-----------|----------------------------------|------------------------------------------------|------------------|-------------|---------------------------------------------------------------------|-------|
| 1         | Solder Heat                      | TEMP : 260°C ± 5 °C                            | 10 SEC           | 76 PCS      | $I_v \leq I_{vt} * 0.5$<br>or<br>$V_f \geq U$<br>or<br>$V_f \leq L$ | 0/1   |
| 2         | Temperature Cycle                | H : +100°C 15min<br>§ 5 min<br>L : -40°C 15min | 300 CYCLES       | 76 PCS      |                                                                     | 0/1   |
| 3         | Thermal Shock                    | H : +100°C 5min<br>§ 10 sec<br>L : -10°C 5min  | 300 CYCLES       | 76 PCS      |                                                                     | 0/1   |
| 4         | High Temperature Storage         | TEMP : 100°C                                   | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 5         | Low Temperature Storage          | TEMP : -40°C                                   | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 6         | DC Operating Life                | TEMP : 25°C<br>I <sub>F</sub> = 20mA           | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| main with | High Temperature / High Humidity | 85°C / 85% RH                                  | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |

Note : I<sub>vt</sub> : To test I<sub>v</sub> value of the chip before the reliability testI<sub>v</sub> : The test value of the chip that has completed the reliability test

U : Upper Specification Limit

L : Lower Specification Limit



## Technical Data Sheet

### 4.7mm Round Type LED Lamps

A2703B/SYG/S530-E2

#### Packing Quantity Specification

1.500PCS/1Bag , 5Bags/1Box

2. 10Boxes/1Carton

#### Label Form Specification



CPN: Customer' s Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE:Dominant Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

#### Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.

The product itself will remain within RoHS compliant version

for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

3. These specification sheets include materials protected under copyright of EVERLIGHT corporation.

Please don' t reproduce or cause anyone to reproduce them without EVERLIGHT' s consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: (886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.