XMT 5

Competence in Mobile Computing

Rugged, RISC-based Vehicle Mount Terminals

- 7" WVGA LED or 10.4" SVGA LED
- Fully rugged
- Resistive touchscreen
- WLAN with integrated diversity antenna (optional)
- WWAN, CAN, GPS (optional)
- Extreme temperature cycles
- Extreme shock & vibration

Introduction

With an extremely rugged housing XMT 5 is the ideal vehicle mount terminal for harbour and logistic applications. On cranes for container handling as well as on forklifts in warehousing, the XMT 5 is the perfect companion, due to its application required interfaces: WLAN or WWAN, mobile positioning using GPS, CAN bus systems or Ethernet.

Specifications

System	CPU	Marvell® PXA320 up to 806 MHz
	Memory	256 MB SDRAM / 256 MB Flash
Housing		Coated aluminium, fanless design
Dimensions/Weight	XMT 5/7	6.2 in x 11.4 in x 2.8 in, 2.2 kg / 4.8 lbs
	XMT 5/10	11.2 in x 9.1 in x 3.2 in, 3.0 kg / 6.6 lbs
Front keys	XMT 5/7	4 or 17 front keys
	XMT 5/10	4 or 25 front keys
Display	XMT 5/7	7" LED, WVGA 800 x 480, convertible design: portrait and landscape use
	XMT 5/10	10.4" LED, SVGA 800 x 600
Touchscreen		Resistive Touchscreen
Software	Operating System	MS® Windows® CE 6.0
	Emulations	VT100, VT220, IBM 5250, TN 3270, Citrix ICA Client®, RDP Client
Communication	WLAN	IEEE 802.11 b/g, optional
	WWAN	GSM-Quadband 850/900/1800/1900, EDGE 2.5G, optional
	GPS	Optional
	CAN Bus	Optional; ID: CAN 2.0A, CAN 2.0B, J1939 protocol ready
	LAN	RJ45 10/100 Mbps
Interfaces	Serial	1 x RS-232 interface, optionally 2 x RS-232 or 1 x RS-232 and 1 x RS-422/485
		COM 1 optional 5 V or 12 V
	USB	2 x USB 2.0 Host ; 1 x USB 2.0 Client; 1 x Service USB 2.0
Ports		Up to 4 GB (SDHC) extended memory
Audio		Speaker integrated
Power Supply	DC	12/24 or 24/48 VDC, galvanically isolated
		Voltage sags up to 5 VDC can be handled for up to 20 sec
Environmental	IP protection class	IP66
	Certifications	CE/FCC Class A
	TOS Certification (Port)	Navis, SPARCS 3.7 and N4 (Port Terminal Operating System)
	Operating temperature	-30 to +50 °C / -22 to +122 °F
	Relative humidity	10 to 90% @ 40 °C, non condensing
	Shock/Vibration	Class 5M3 according DIN EN 60721-3-5 and MIL-STD 810F (US Highway Truck)

Data sheet V5.31. © by DLoG GmbH 03/2014. Information is subject to change. Product names are in most cases also registered trademarks and are thus subject to law.

XMT 5

Dimensions (in mm) XMT 5/10 and XMT 5/7

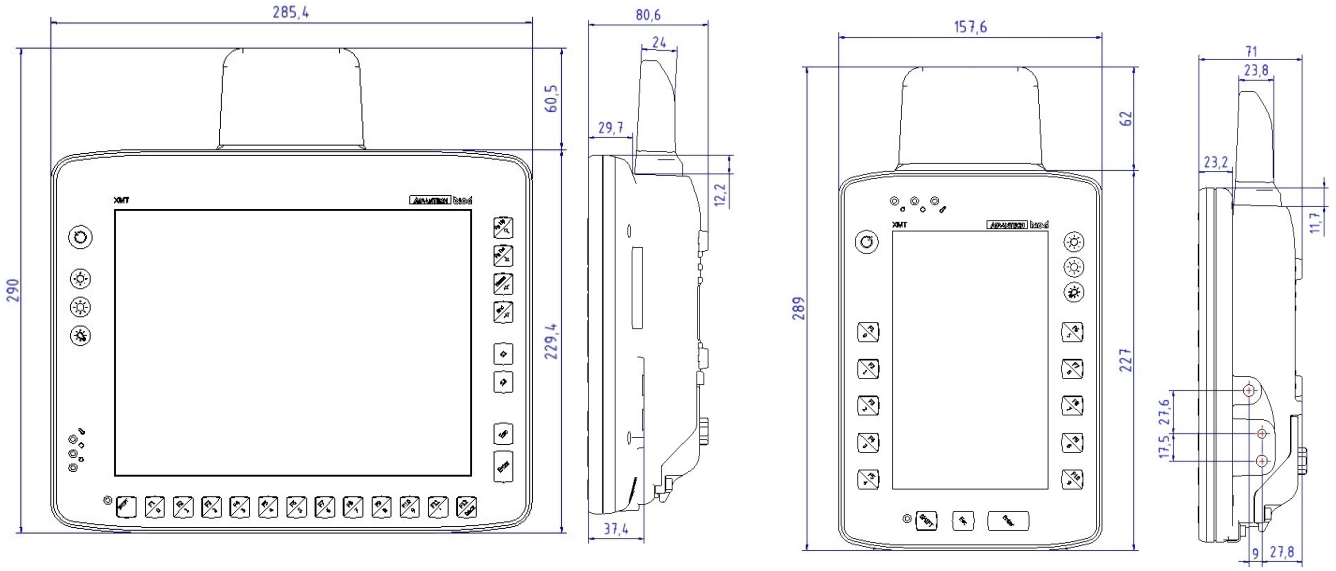

Unit: mm

Connectors

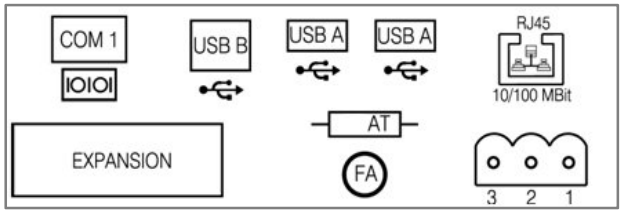

Mounting Variants (Selection)

Advantech-DLoG Partner Contact

Accessories/Options

Scanners and scanner mountings
Keyboards and keyboard mountings
Terminal mountings (wide range of mounting brackets, RAM solutions etc.)
USB Stick
USB Recovery Stick
SD Cards
Mouse
Voice Kit
Remote WLAN Antenna

Data sheet V5.31. © by DLoG GmbH 03/2014. Information is subject to change. Product names are in most cases also registered trademarks and are thus subject to law.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.