


SPC-1840WP SPC-2140WP

18.5" WXGA TFT/21.5" Full HD LED LCD Stationary Multi-Touch Panel Computer



product
design award

2013

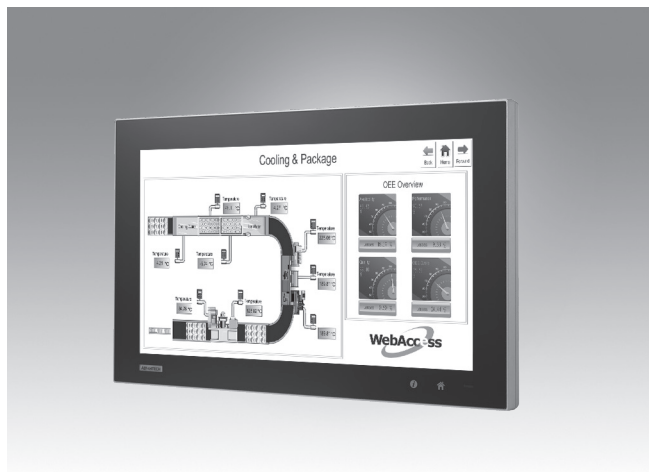

Features

- 21.5" Full HD TFT LED LCD/18.5" WXGA TFT LED LCD
- AMD dual-core T56E 1.65 GHz processor with independent GPU for advanced graphics performance
- 16:9 widescreen with PCAP multi-touch control
- Built-in function key and home key for intuitive operation
- Anti-scratch surface with 7H hardness
- IP65 rating for entire unit with waterproof M12 connector
- Supports expansion via mini PCIe slot
- Front-facing LED indicators for showing operating status
- Fanless cooling system
- Winner of the 2013 iF product design award

Introduction

The SPC-1840WP/2140WP series of multi-touch panel computers feature an 18.5" WXGA/21.5" Full HD TFT LED LCD with a 16:9 widescreen aspect ratio and PCAP multi-touch control. Powered by an AMD T56E 1.65 GHz processor with independent GPU, SPC-1840WP/2140WP can support advanced graphics performance for complex applications. The built-in function key and home key offer enhanced usability and intuitive operation. The SPC-1840WP/2140WP also includes a full-size mini PCIe slot for extending the system functionalities to satisfy diverse application needs. Moreover, to ensure reliable operation in harsh environments, SPC-1840WP/2140WP is IP65 rated for protection from water and dust ingress and features waterproof M12 connectors. Finally, with the provision of vertical I/O connectors, cable routing is convenient and easy to complete regardless of mount variation.

Specifications

General

- Certification** BSMI, CCC, CE, FCC Class A, UL
- Cooling System** Fanless design
- Dimensions (W x H x D)**
 - 21.5": 558.4 x 349.8 x 65 mm (21.98 x 13.77 x 2.56 in)
 - 18.5": 488 x 309 x 65 mm (19.21 x 12.17 x 2.56 in)
- Enclosure**
 - Front bezel: Die cast aluminum alloy
 - Back housing: Die cast aluminum alloy
- Mounting** VESA Arm
- OS Support** Microsoft® Windows 7/8, WES7P, Windows XP, WES2009
- Power Consumption** 35 W Typical
- Power Input** 24 V_{DC}
- Weight (Net)** 9 kg (19.8 lbs)

System Hardware

- CPU** AMD G-series T56N 1.6GHz
- Chipset** AMD A50M FCH
- Memory** 4 GB SODIMM DDR3 SDRAM
- LAN** 10/100/1000BASE-T x 2 (connection: M12 A-coded, 8-pin female)
- Expansion Slots** 1 x Full-sized mini PCIe slot (optional)
- Storage** 1 x 2.5" SATA HDD bracket
- I/O**
 - 1 x RS-232 (connection: M12 A-coded, 8-pin male)
 - 1 x USB 2.0 (connection: M12 A-coded, 8-pin female)
 - 1 x 24 V_{DC} power input (connection: M12 A-coded, 5-pin male)

LCD Display

- Display Type**
 - 21.5": Full HD TFT LED LCD
 - 18.5": WXGA TFT LED LCD
- Display Size** 21.5" / 18.5"
- Max. Resolution**
 - 21.5": 1920 x 1080
 - 18.5": 1366 x 768
- Max. Colors** 16.7M
- Luminance cd/m²** 300
- Viewing Angle (H/V°)**
 - 21.5": 178/178
 - 18.5": 170/160
- Backlight Life** 50,000 hr


Touchscreen

- Light Transmission** ≥88%
- Resolution** 4096*4096 dot
- Type** Projected capacitive

Environment

- Humidity** 10 ~ 95% RH @ 40 °C, non-condensing
Note: Tested for 48 hr
- Ingress Protection** IP65 rating for entire system
- Operating Temperature** 0 ~ 55 °C (32 ~ 131 °F)
- Storage Temperature** -20 ~ 60 °C (-4 ~ 140 °F)
- Vibration Protection** With HDD: 1 Grms (5 ~ 500 Hz)
(Operating, random vibration)


Rear View

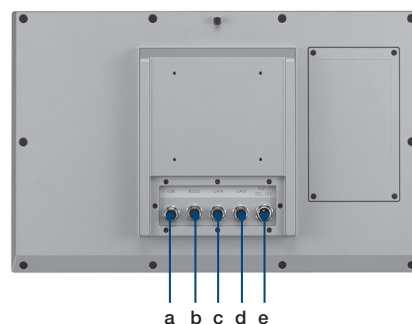

- a. USB 2.0 with M12 connector
- b. COM (RS-232) with M12 connector
- c. LAN 1 with M12 connector
- d. LAN 2 with M12 connector
- e. 24 V_{DC} input with M12 connector

Dimensions

Unit: mm [inch]

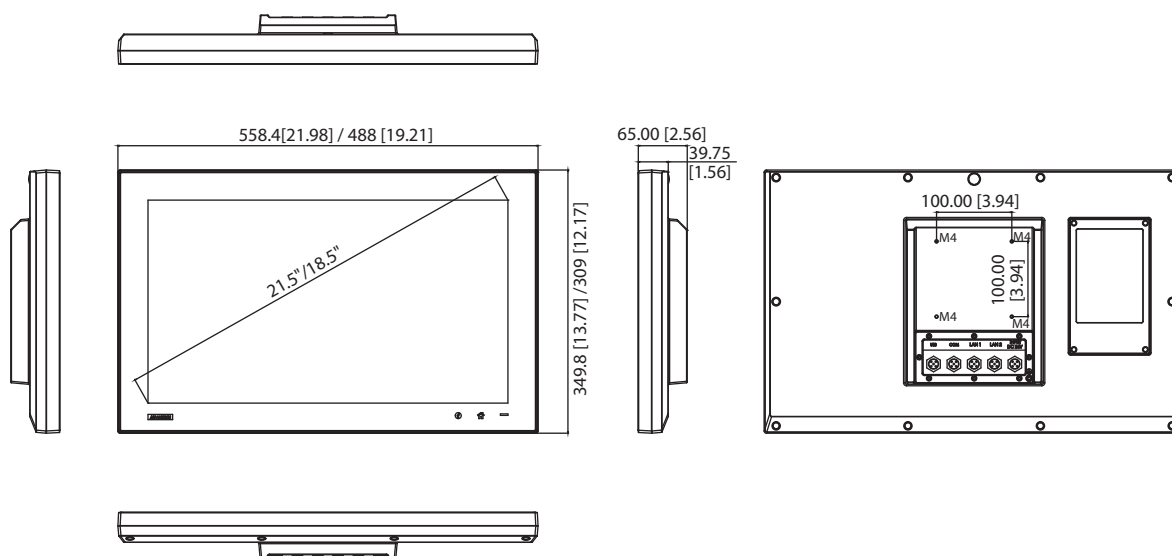

Ordering Information

- **SPC-2140WP-T3AE** 21.5" full-HD stationary Multi-Touch Panel PC, 4GB
- **SPC-1840WP-T3AE** 18.5" WXGA stationary Multi-Touch Panel PC, 4GB

Optional Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596-11** Power Cable China/Australia Plug 1.8 M
- **EWM-W151H01E** 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCle (also need 9656EWMG00E)
- **9656EWMG00E** Half-size miniPCle to Full-size miniPCle bracket set
- **1750007668-01** Waterproof Wireless Antenna R/P SMA.M2dB L=86.7
- **1750003418** Wireless Antenna AN2400-5901RS R/P SMA.M9dB
- **SPC-1840WP-MCKE** M12 cable accessory kit for SPC series
- **SPC-1840WP-MOKE** M12 Connector accessory kit for SPC series

Application Software

WebAccess/SCADA	Advantech WebAccess/SCADA is a 100% browser-based IIoT software platform aimed at supervisory control and data acquisition (SCADA) operations. WebAccess/SCADA provides open interfaces that allow our customers and partners to develop unique IoT applications for different vertical markets. In addition to supporting traditional SCADA functions, the platform features an HTML5-based user interface and intelligent dashboard to facilitate cross-platform, cross-browser data analysis. Moreover, WebAccess/SCADA not only offers built-in widgets, but is also equipped with an innovative Widget Builder that enables customers to build their own widgets.
WebAccess/HMI	Advantech WebAccess/HMI is human-machine interface (HMI) software based on Microsoft's Windows operating system. This software features excellent communication and monitoring capabilities, supports more than 350 PLC communication protocols, and offers a wide choice of screen design objects to satisfy diverse integrations of factory automation and HMI operation and monitoring requirements.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.