STGB15H60DF, STGF15H60DF, STGP15H60DF

Datasheet

Trench gate field-stop IGBT, H series 600 V, 14 A high speed

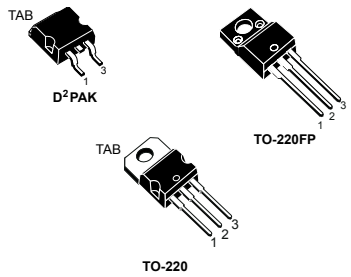



Features

- High speed switching
- Tight parameters distribution
- Safe paralleling
- Low thermal resistance
- Short-circuit rated
- Ultrafast soft recovery antiparallel diode

Applications

- Motor control
- UPS, PFC

Description

These devices are IGBTs developed using an advanced proprietary trench gate field-stop structure. These devices are part of the H series of IGBTs, which represents an optimum compromise between conduction and switching losses to maximize the efficiency of high switching frequency converters. Furthermore, a slightly positive $V_{CE(sat)}$ temperature coefficient and very tight parameter distribution result in safer paralleling operation.

Product status link
STGB15H60DF
STGF15H60DF
STGP15H60DF

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value		Unit
		D^2PAK, TO-220	TO-220FP	
V_{CES}	Collector-emitter voltage (V_{GE} = 0 V)	600		V
I_C	Continuous collector current at T_C = 25 °C	30	30 (1)	A
	Continuous collector current at T_C = 100 °C	15	15 (1)	
I_{CP} (2)	Pulsed collector current	60	60	A
V_{GE}	Gate-emitter voltage	±20		V
I_F	Continuous forward current T_C = 25 °C	30	30 (1)	A
	Continuous forward current at T_C = 100 °C	15	15 (1)	
I_{FP} (2)	Pulsed forward current	60	60	A
V_{ISO}	Insulation withstand voltage (RMS) from all three leads to external heat sink (t = 1 s; T_c = 25 °C)		2500	V
P_{TOT}	Total power dissipation at T_C = 25 °C	115	30	W
T_{STG}	Storage temperature range	-55 to 150		°C
T_J	Operating junction temperature range	-55 to 175		

1. *Limited by maximum junction temperature.*
2. *Pulse width limited by maximum junction temperature.*

Table 2. Thermal data

Symbol	Parameter	Value		Unit
		D^2PAK, TO-220	TO-220FP	
R_{thJC}	Thermal resistance junction-case IGBT	1.3	5	°C/W
R_{thJC}	Thermal resistance junction-case diode	2.78	6.25	°C/W
R_{thJA}	Thermal resistance junction-ambient	62.5	62.5	°C/W

2 Electrical characteristics

T_C = 25 °C unless otherwise specified.

Table 3. Static

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CES}$	Collector-emitter breakdown voltage	V_{GE} = 0 V, I_C = 2 mA	600			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C= 15 A		1.6	2.0	V
		V_{GE} = 15 V, I_C = 15 A T_J = 125 °C		1.7		
		V_{GE} = 15 V, I_C = 15 A T_J = 175 °C		1.8		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 1 mA	5.0	6.0	7.0	V
I_{CES}	Collector cut-off current	V_{CE} = 600 V V_{GE} = 0 V			25	µA
I_{GES}	Gate-emitter leakage current	V_{GE} = ±20 V V_{CE} = 0 V			±250	nA

Table 4. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{ies}	Input capacitance	V_{CE} = 25 V, f = 1 MHz, V_{GE} = 0 V	-	1952	-	pF
C_{oes}	Output capacitance			78		
C_{res}	Reverse transfer capacitance			45		
Q_g	Total gate charge	V_{CC} = 480 V, I_C = 15 A, V_{GE} = 0 to 15 V (see Figure 33. Gate charge test circuit)	-	81	-	nC
Q_{ge}	Gate-emitter charge			8		
Q_{gc}	Gate-collector charge			42		

Table 5. Switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{CE} = 400 V, I_C = 15 A, R_G = 10 Ω, V_{GE} = 15 V (see Figure 32. Test circuit for inductive load switching and Figure 34. Switching waveform)		24.5	-	ns
t_r	Current rise time			8.2		
(di/dt)on	Turn-on current slope			1470		A/µs
$t_{d(on)}$	Turn-on delay time	V_{CE} = 400 V, I_C = 15 A, R_G = 10 Ω, V_{GE} = 15 V T_J = 175 °C (see Figure 32. Test circuit for inductive load switching and Figure 34. Switching waveform)		25		ns
t_r	Current rise time			9		
(di/dt)on	Turn-on current slope			1370		A/µs

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{r(Voff)}$	Off voltage rise time	V_{CE} = 400 V, I_C = 15 A,		18		
$t_{d(off)}$	Turn-off delay time	R_G = 10 Ω, V_{GE} = 15 V (see Figure 32. Test circuit for inductive load switching and Figure 34. Switching waveform)		118		
t_f	Current fall time			69		
$t_{r(Voff)}$	Off voltage rise time	V_{CE} = 400 V, I_C = 15 A,		27	-	ns
$t_{d(off)}$	Turn-off delay time	R_G = 10 Ω, V_{GE} = 15 V		124		
t_f	Current fall time	T_J = 175 °C (see Figure 32. Test circuit for inductive load switching and Figure 34. Switching waveform)		101		
t_{sc}	Short-circuit withstand time	V_{CC} ≤ 360 V, V_{GE} = 15 V, R_G = 10 Ω	3	5	-	µs

Table 6. Switching energy (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
E_{on} (1)	Turn-on switching energy	V_{CE} = 400 V, I_C = 15 A,		136		
E_{off} (2)	Turn-off switching energy	R_G = 10 Ω, V_{GE} = 15 V (see Figure 32. Test circuit for inductive load switching)		207		
E_{ts}	Total switching energy			343		
E_{on} (1)	Turn-on switching energy	V_{CE} = 400 V, I_C = 15 A,	-	224	-	µJ
E_{off} (2)	Turn-off switching energy	R_G = 10 Ω, V_{GE} = 15 V		329		
E_{ts}	Total switching energy	T_J = 175 °C (see Figure 32. Test circuit for inductive load switching)		553		

1. *Including the reverse recovery of the diode.*
2. *Including the tail of the collector current.*

Table 7. Collector-emitter diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_F	Forward on-voltage	I_F = 15 A	-	1.8	2.2	V
		I_F = 15 A, T_J = 175 °C		1.3		
t_{rr}	Reverse recovery time	Vr = 60 V; I_F = 15 A;		103		ns
Q_{rr}	Reverse recovery charge	di_F/dt = 100 A / µs (see Figure 35. Diode reverse recovery waveform)		128		nC
I_{rrm}	Reverse recovery current			2.5		A
t_{rr}	Reverse recovery time	V_r = 60 V; I_F = 15 A;	-	182		ns
Q_{rr}	Reverse recovery charge	di_F/dt = 100 A / µs		437		nC
I_{rrm}	Reverse recovery current	T_J = 175 °C (see Figure 35. Diode reverse recovery waveform)		4.8		A

2.1 Electrical characteristics (curves)

Figure 1. Power dissipation vs case temperature for D²PAK and TO-220

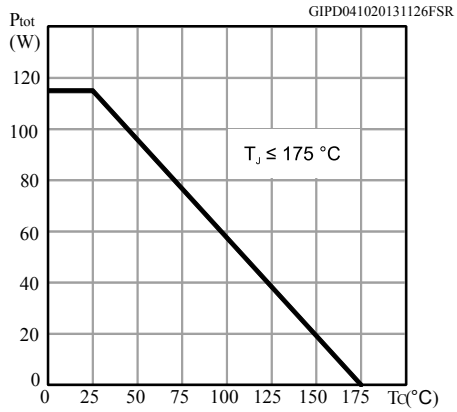

Figure 2. Collector current vs case temperature for D²PAK and TO-220

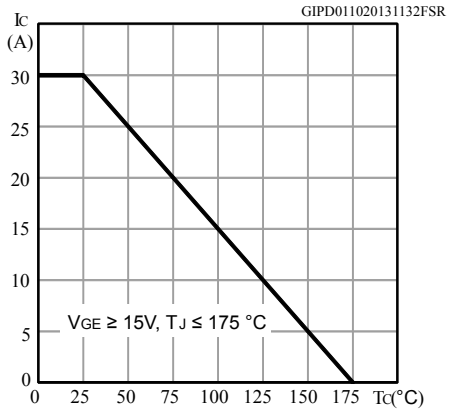

Figure 3. Power dissipation vs case temperature for TO-220FP

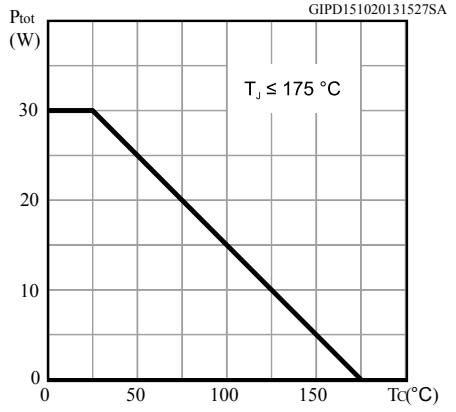

Figure 4. Collector current vs case temperature for TO-220FP

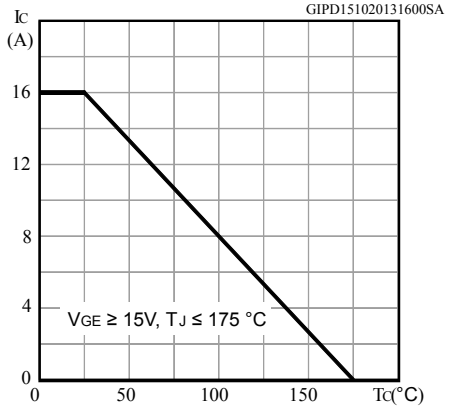

Figure 5. Output characteristics (T_J = 25°C)

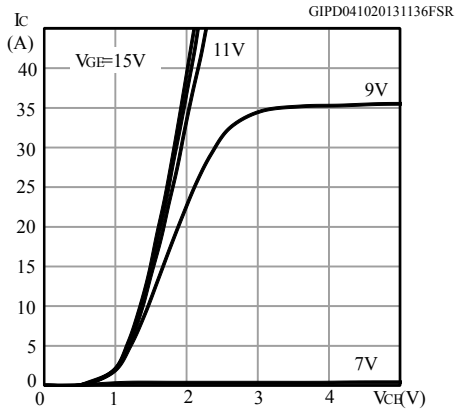

Figure 6. Output characteristics (T_J = 175°C)

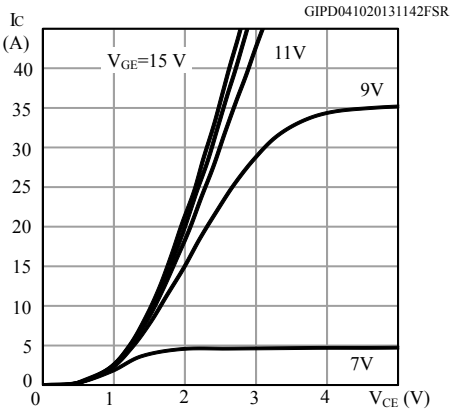

Figure 7. $V_{CE(sat)}$ vs junction temperature

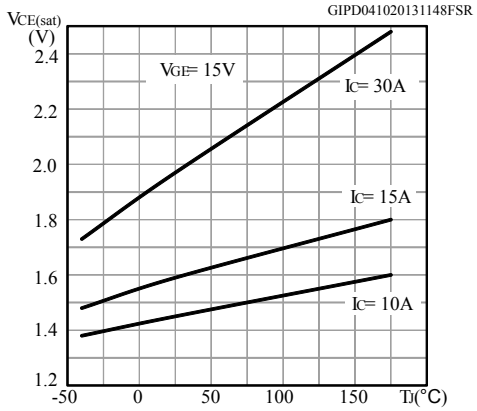

Figure 8. $V_{CE(sat)}$ vs collector current

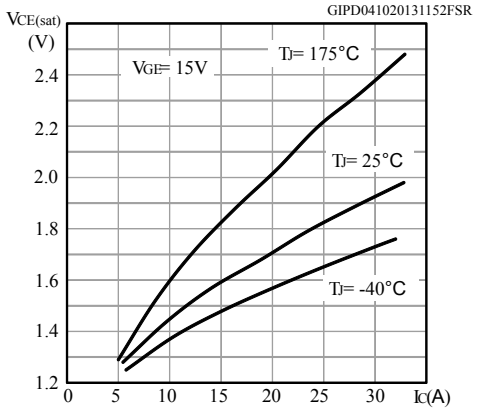

Figure 9. Collector current vs switching frequency for D²PAK and TO-220

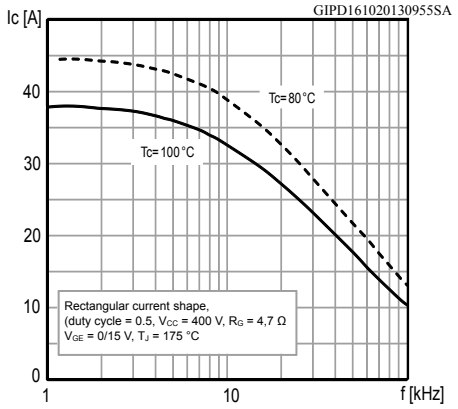

Figure 10. Collector current vs switching frequency for TO-220FP

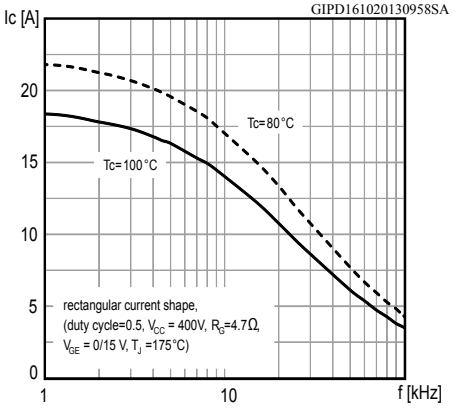

Figure 11. Forward bias safe operating area for D²PAK and TO-220

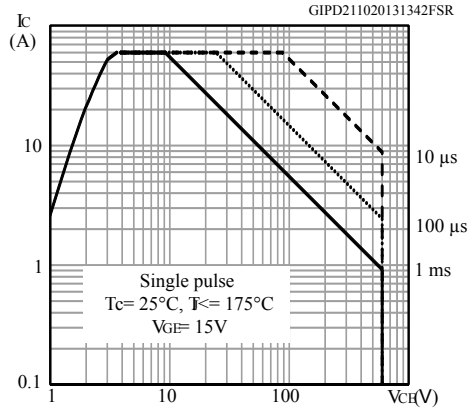

Figure 12. Forward bias safe operating area for TO-220FP

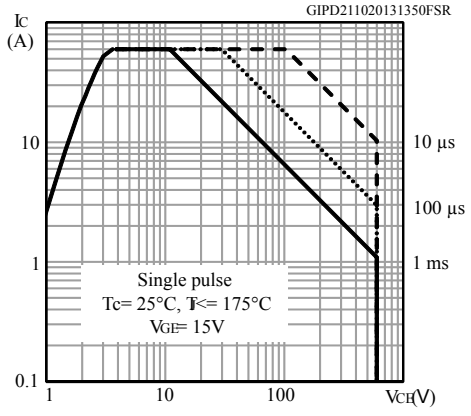

Figure 13. Transfer characteristics

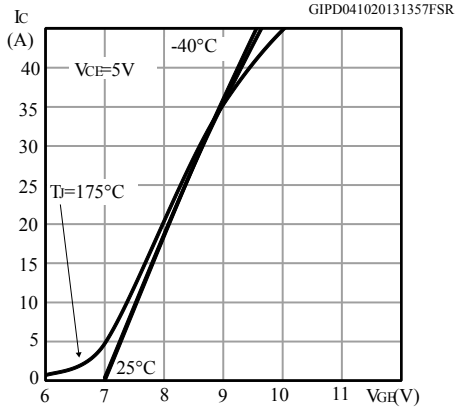

Figure 14. Diode V_F vs forward current

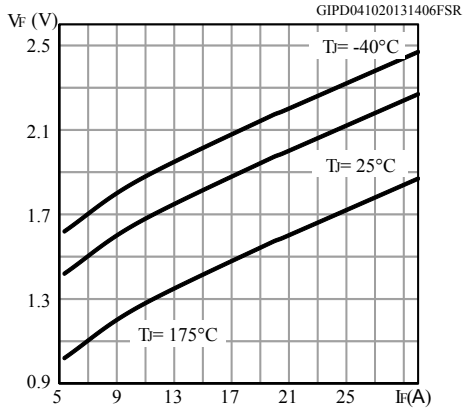

Figure 15. Normalized $V_{GE(th)}$ vs junction temperature

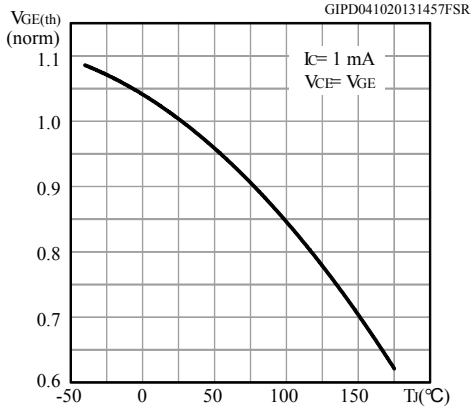

Figure 16. Normalized $V_{(BR)CES}$ vs junction temperature

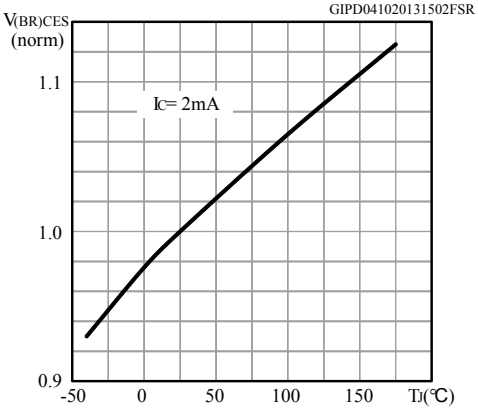

Figure 17. Capacitance variation

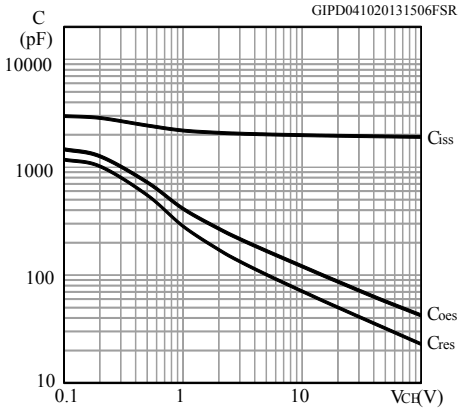

Figure 18. Gate charge vs gate-emitter voltage

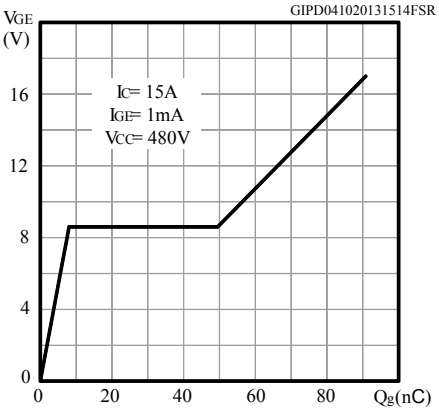

Figure 19. Switching evergy vs collector current

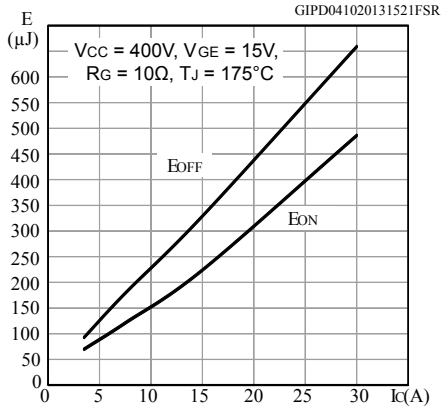

Figure 20. Switching energy vs gate resistance

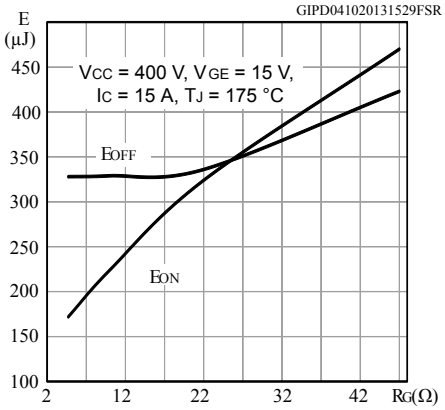

Figure 21. Switching energy vs temperature

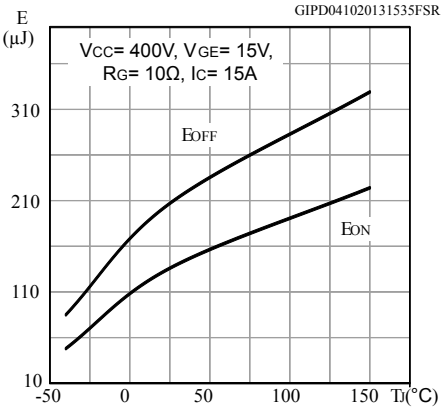

Figure 22. Switching energy vs collector-emitter voltage

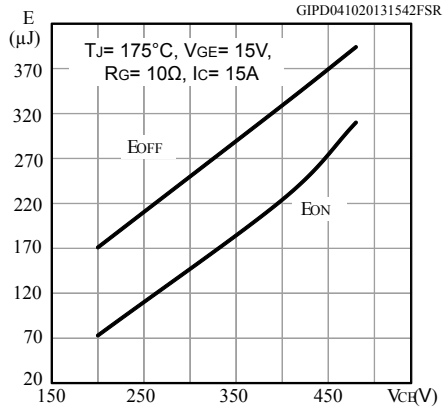

Figure 23. Short-circuit time and current vs V_{GE}

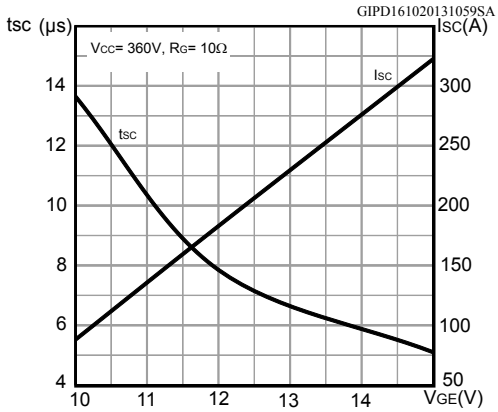

Figure 24. Switching times vs collector current

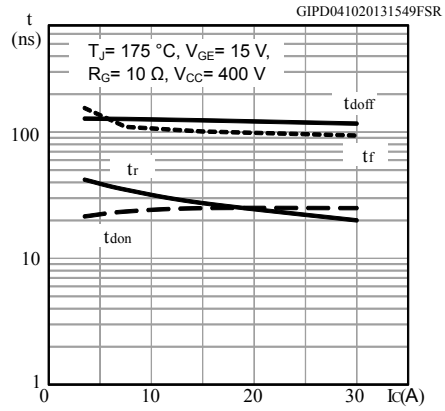

Figure 25. Switching times vs gate resistance

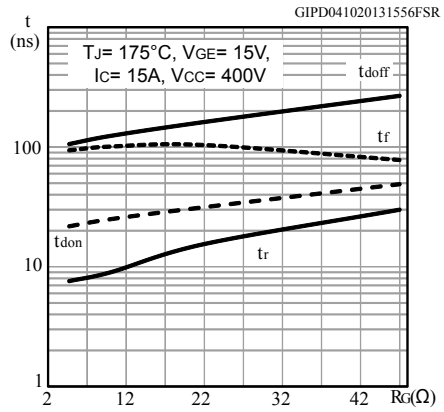

Figure 26. Reverse recovery current vs diode current slope

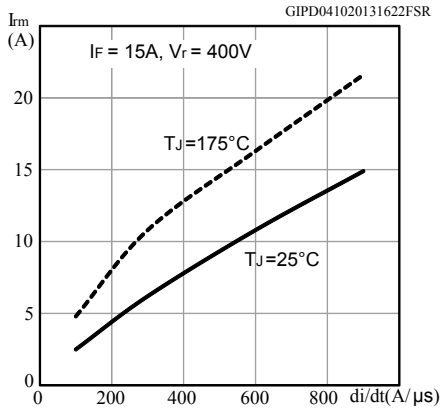

Figure 27. Reverse recovery time vs diode current slope

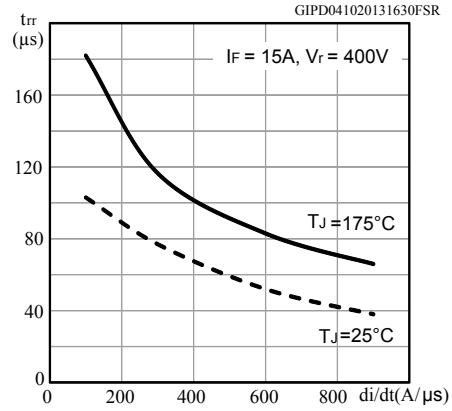

Figure 28. Reverse recovery charge vs diode current slope

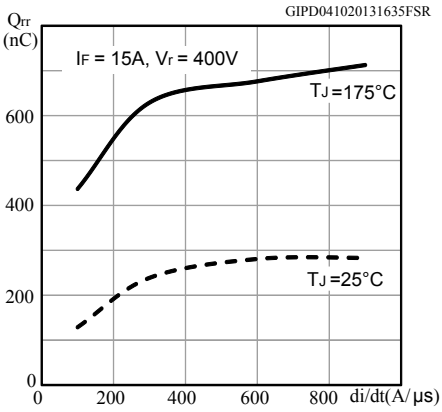

Figure 29. Reverse recovery energy vs diode current slope

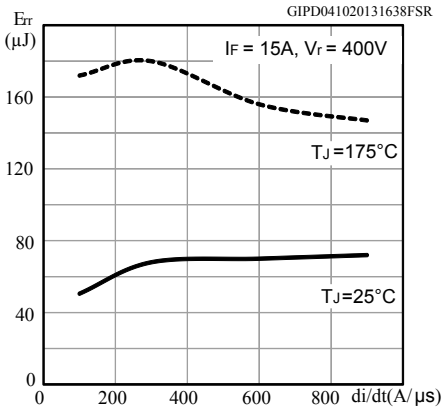

Figure 30. Thermal impedance for IGBT

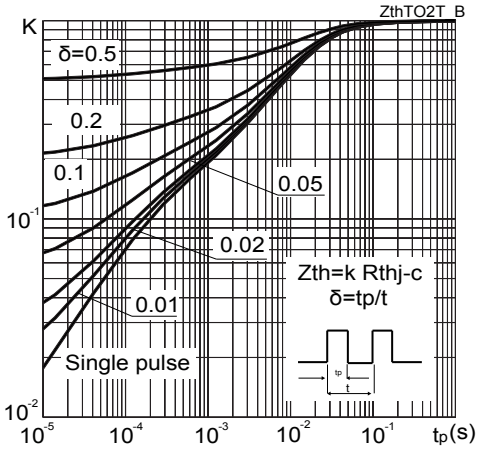

Figure 31. Thermal impedance for diode

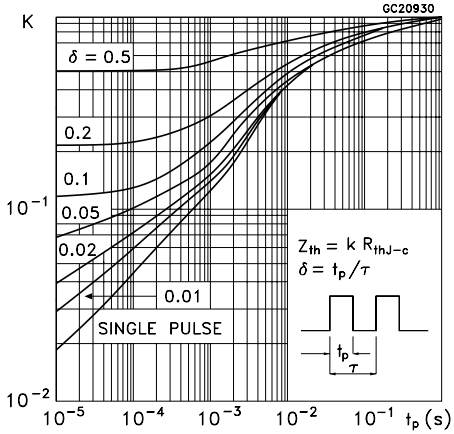

3 Test circuits

Figure 32. Test circuit for inductive load switching

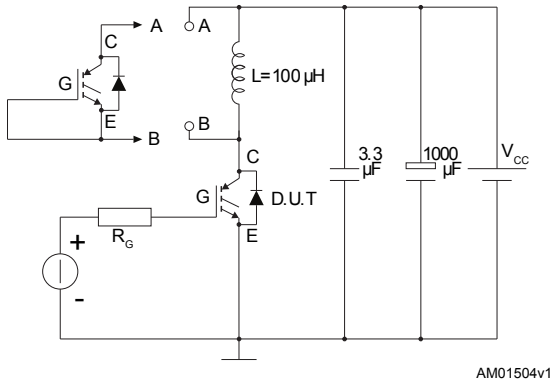

Figure 33. Gate charge test circuit

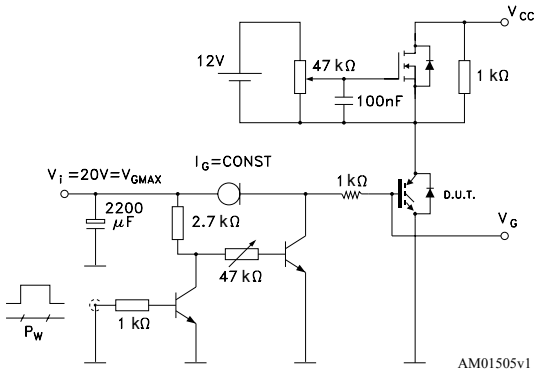

Figure 34. Switching waveform

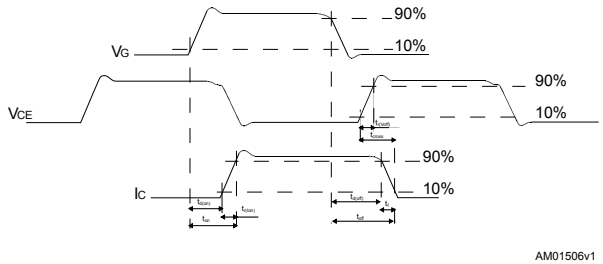

Figure 35. Diode reverse recovery waveform

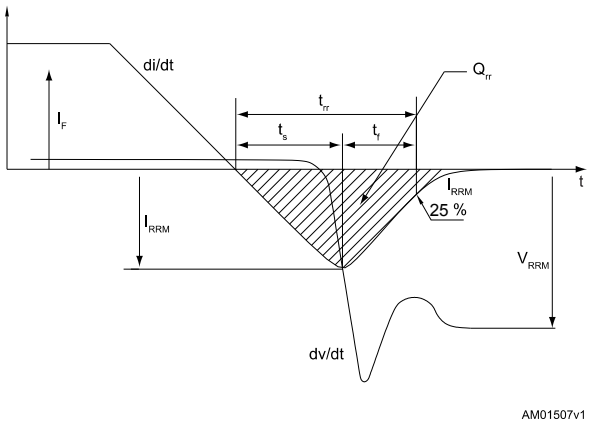

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 D²PAK (TO-263) type A2 package information

Figure 36. D²PAK (TO-263) type A2 package outline

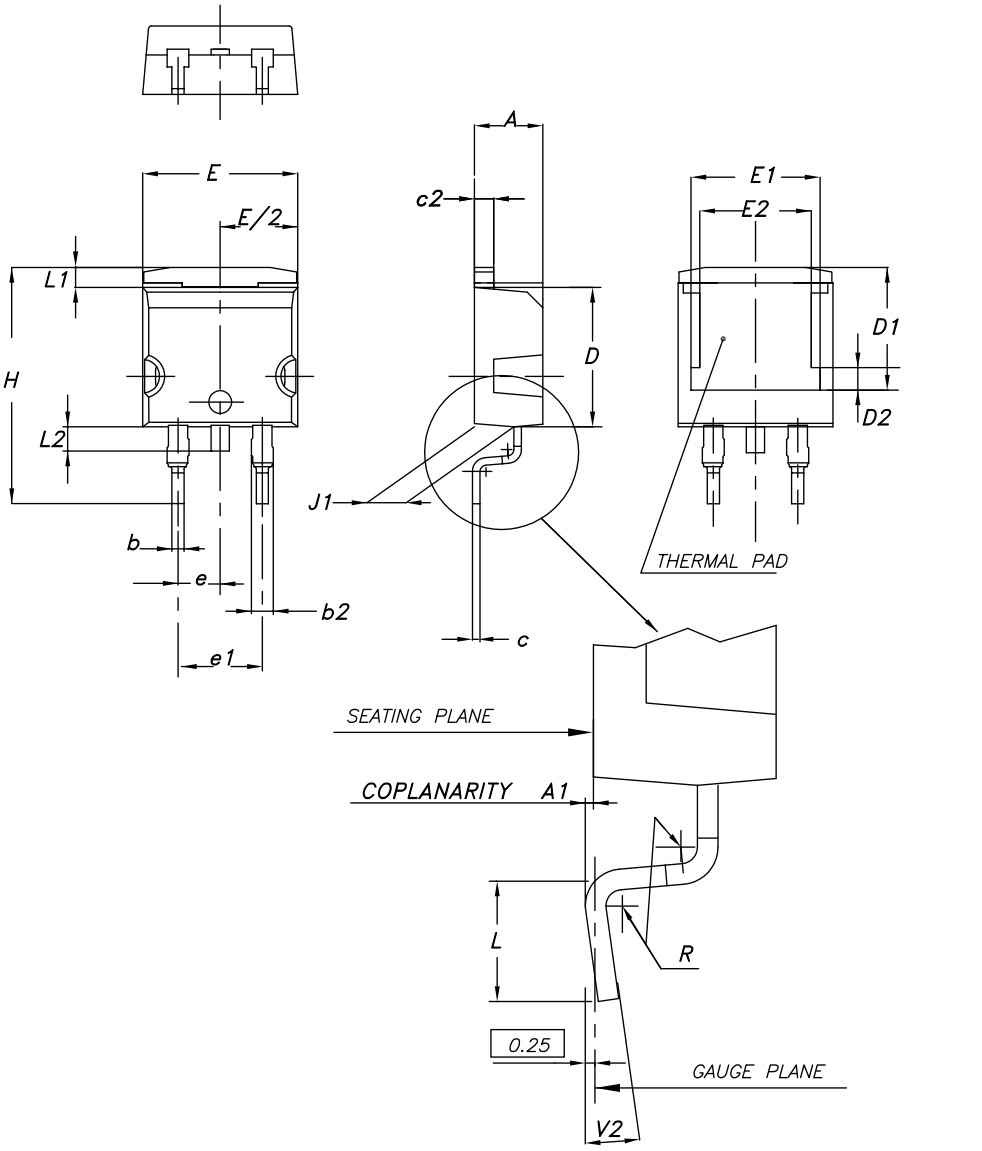

Table 8. **D²PAK (TO-263) type A2 package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
A1	0.03		0.23
b	0.70		0.93
b2	1.14		1.70
c	0.45		0.60
c2	1.23		1.36
D	8.95		9.35
D1	7.50	7.75	8.00
D2	1.10	1.30	1.50
E	10.00		10.40
E1	8.70	8.90	9.10
E2	7.30	7.50	7.70
e		2.54	
e1	4.88		5.28
H	15.00		15.85
J1	2.49		2.69
L	2.29		2.79
L1	1.27		1.40
L2	1.30		1.75
R		0.40	
V2	0°		8°

Figure 37. **D²PAK (TO-263) recommended footprint (dimensions are in mm)**

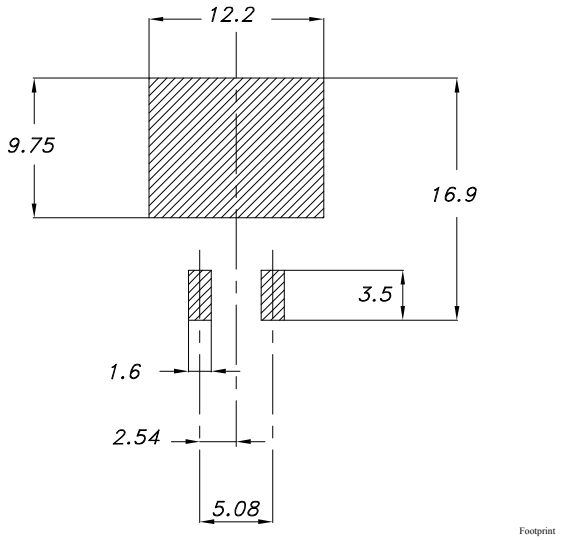

4.2 D²PAK packing information

Figure 38. D²PAK tape outline

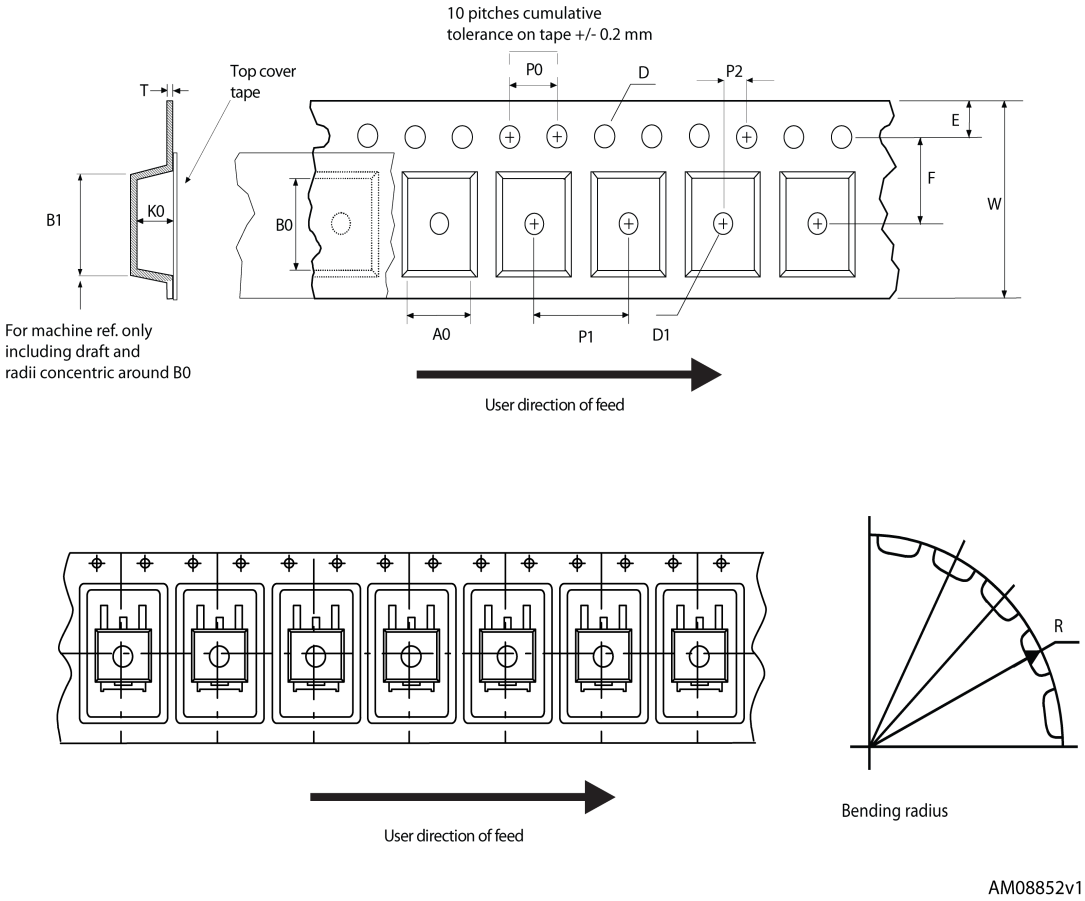

Figure 39. **D²PAK reel outline**

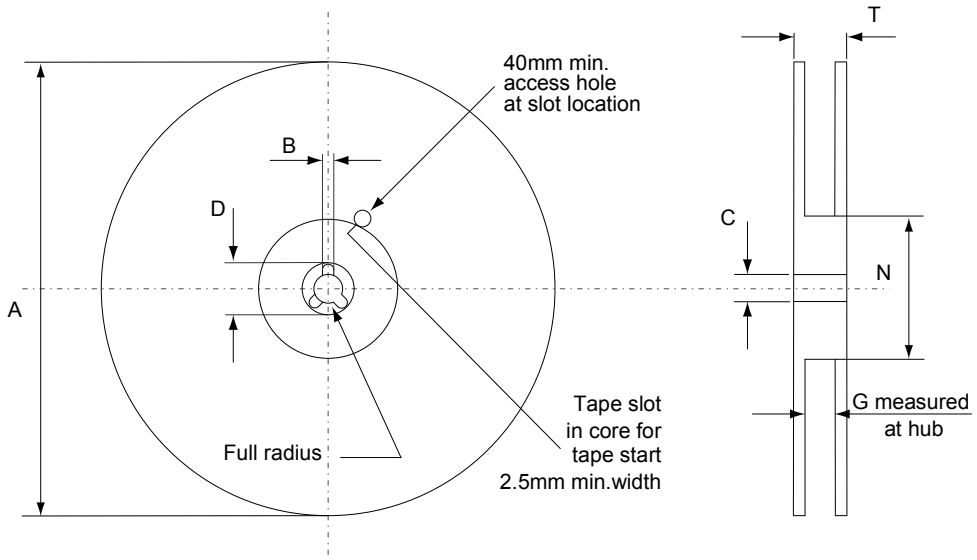

AM06038v1

Table 9. **D²PAK tape and reel mechanical data**

Tape			Reel		
Dim.	mm		Dim.	mm	
	Min.	Max.		Min.	Max.
A0	10.5	10.7	A		330
B0	15.7	15.9	B	1.5	
D	1.5	1.6	C	12.8	13.2
D1	1.59	1.61	D	20.2	
E	1.65	1.85	G	24.4	26.4
F	11.4	11.6	N	100	
K0	4.8	5.0	T		30.4
P0	3.9	4.1			
P1	11.9	12.1	Base quantity		1000
P2	1.9	2.1	Bulk quantity		1000
R	50				
T	0.25	0.35			
W	23.7	24.3			

4.3 TO-220FP package information

Figure 40. **TO-220FP package outline**

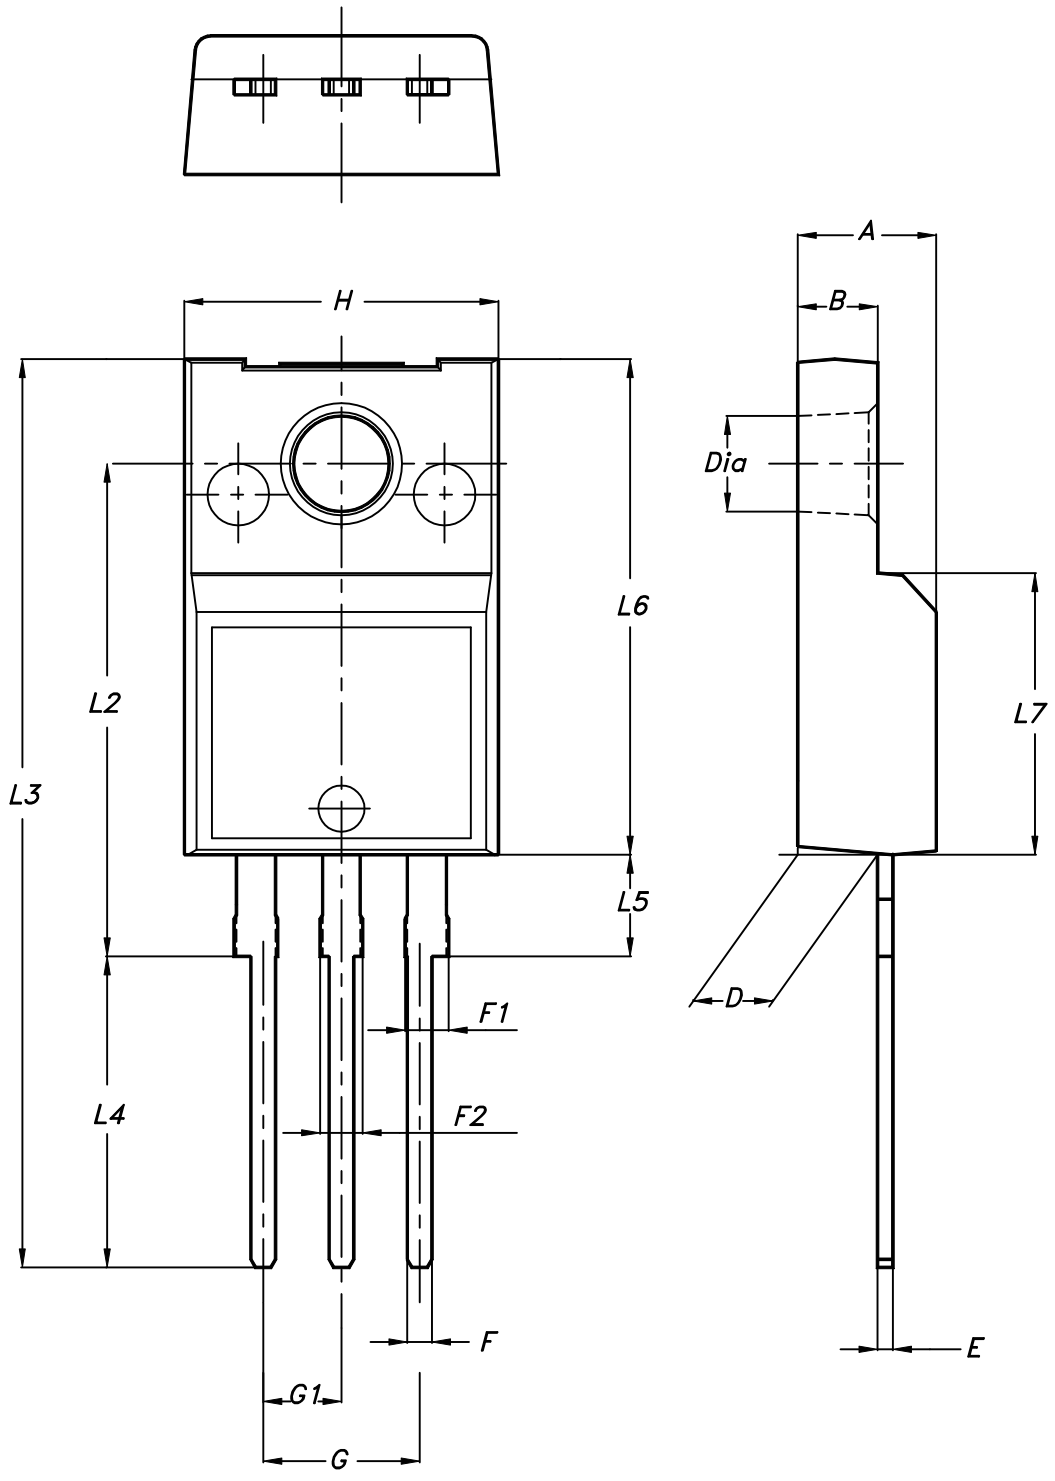

Table 10. **TO-220FP package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.4		4.6
B	2.5		2.7
D	2.5		2.75
E	0.45		0.7
F	0.75		1
F1	1.15		1.70
F2	1.15		1.70
G	4.95		5.2
G1	2.4		2.7
H	10		10.4
L2		16	
L3	28.6		30.6
L4	9.8		10.6
L5	2.9		3.6
L6	15.9		16.4
L7	9		9.3
Dia	3		3.2

4.4 TO-220 type A package information

Figure 41. **TO-220 type A package outline**

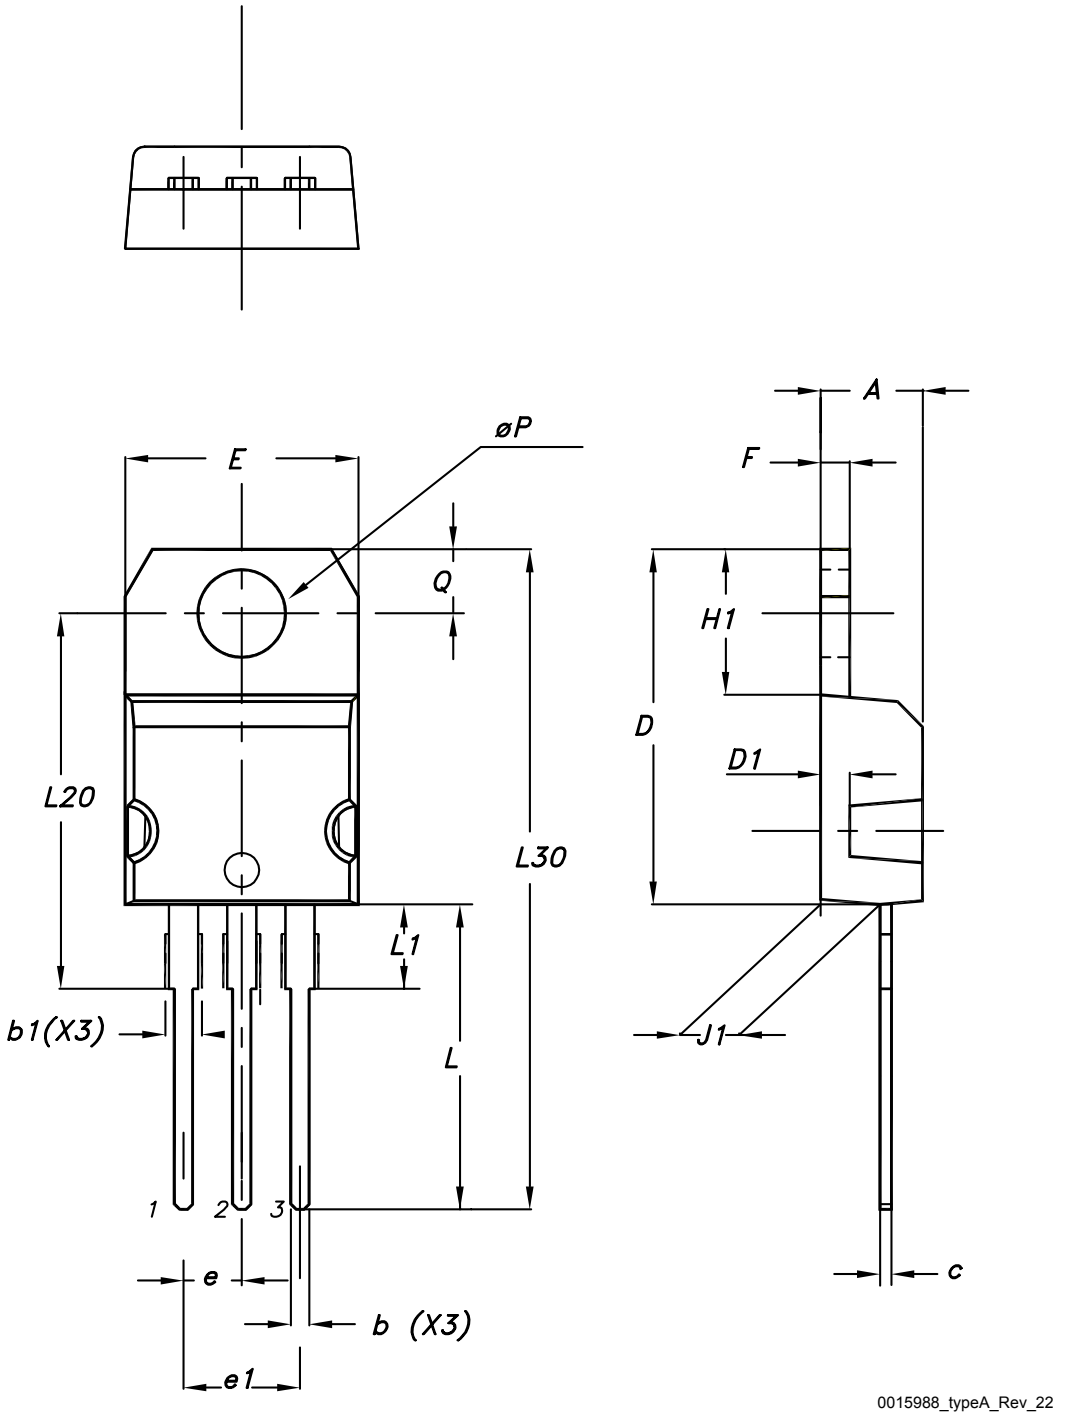

Table 11. **TO-220 type A package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
b	0.61		0.88
b1	1.14		1.55
c	0.48		0.70
D	15.25		15.75
D1		1.27	
E	10.00		10.40
e	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13.00		14.00
L1	3.50		3.93
L20		16.40	
L30		28.90	
øP	3.75		3.85
Q	2.65		2.95

5 Ordering information

Table 12. **Order codes**

Order code	Marking	Package	Packing
STGB15H60DF	GB15H60DF	D^2PAK	Tape and reel
STGF15H60DF	GF15H60DF	TO-220FP	Tube
STGP15H60DF	GP15H60DF	TO-220	

Revision history

Table 13. **Document revision history**

Date	Version	Changes
12-Aug-2013	1	Initial release.
17-Oct-2013	2	Document status promoted form preliminary to production data. Added *Section 2.1: Electrical characteristics (curves)*. Minor text changes.
09-Apr-2019	3	Updated applications and description on cover page. Updated Section 4 Package information. Minor text changes.

Contents

1 **Electrical ratings** 2
2 **Electrical characteristics** 3
2.1 Electrical characteristics (curves) 5
3 **Test circuits** 11
4 **Package information** 12
4.1 D²PAK (TO-263) type A2 package information 12
4.2 D²PAK packing information 14
4.3 TO-220FP package information 16
4.4 TO-220 type A package information 18
5 **Ordering information** 21
Revision history 22

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.