


MOS FET Relays G3VM-61B1/E1

Analog-switching MOS FET Relay for High Switching Currents, with Dielectric Strength of 2.5 kVAC between I/O.

- Upgraded G3VM-61 B/E Series.
- 500 mA continuous load current.
- RoHS Compliant.

■ **Application Examples**

- Measurement devices
- Security systems
- Amusement machines

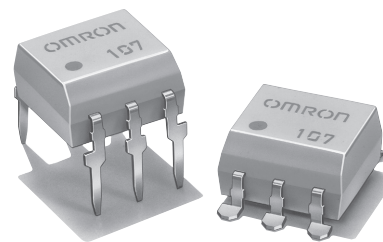

Note: The actual product is marked differently from the image shown here.



■ **List of Models**

| Contact form | Terminals | Load voltage (peak value) | Model | Number per stick | Number per tape |
|--------------|----------------------------|---------------------------|-----------|------------------|-----------------|
| SPST-NO | PCB terminals | 60 VAC | G3VM-61B1 | 50 | --- |
| | Surface-mounting terminals | | G3VM-61E1 | | |
| | | | | G3VM-61E1(TR) | --- |

■ **Dimensions**



Note: All units are in millimeters unless otherwise indicated.

G3VM-61B1

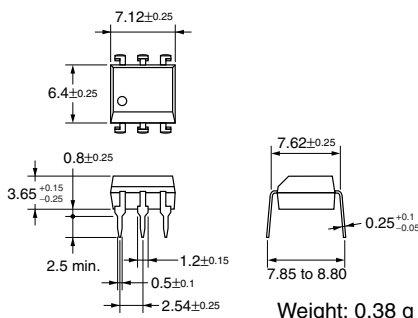

Note: The actual product is marked differently from the image shown here.


G3VM-61E1

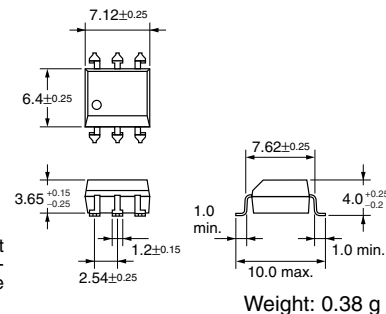


Note: The actual product is marked differently from the image shown here.

■ **Terminal Arrangement/Internal Connections (Top View)**

G3VM-61B1




G3VM-61E1




■ **PCB Dimensions (Bottom View)**

G3VM-61B1

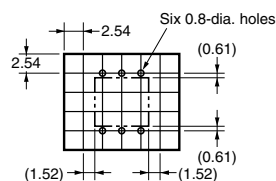

■ **Actual Mounting Pad Dimensions (Recommended Value, Top View)**

G3VM-61E1




■ Absolute Maximum Ratings (Ta = 25°C)

| Item | | Symbol | Rating | Unit | Measurement conditions | |
|--|-------------------------------------|-----------------------------|--------------------------------|-----------|-------------------------------|----------------|
| Input | LED forward current | I_F | 50 | mA | | |
| | Repetitive peak LED forward current | I_{FP} | 1 | A | 100 μ s pulses, 100 pps | |
| | LED forward current reduction rate | $\Delta I_F/^\circ\text{C}$ | -0.5 | mA/°C | Ta \geq 25°C | |
| | LED reverse voltage | V_R | 5 | V | | |
| | Connection temperature | T_J | 125 | °C | | |
| Output | Load voltage (AC peak/DC) | V_{OFF} | 60 | V | | |
| | Continuous load current | Connection A | I_O | 500 | mA | |
| | | Connection B | | 500 | | |
| | | Connection C | | 1,000 | | |
| | ON current reduction rate | Connection A | $\Delta I_{ON}/^\circ\text{C}$ | -0.5 | mA/°C | Ta \geq 25°C |
| | | Connection B | | -0.5 | | |
| | | Connection C | | -10.0 | | |
| Connection temperature | T_J | 125 | °C | | | |
| Dielectric strength between input and output (See note 1.) | | V_{I-O} | 2,500 | V_{rms} | AC for 1 min | |
| Operating temperature | | T_a | -40 to +85 | °C | With no icing or condensation | |
| Storage temperature | | T_{stg} | -55 to +125 | °C | With no icing or condensation | |
| Soldering temperature (10 s) | | --- | 260 | °C | 10 s | |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

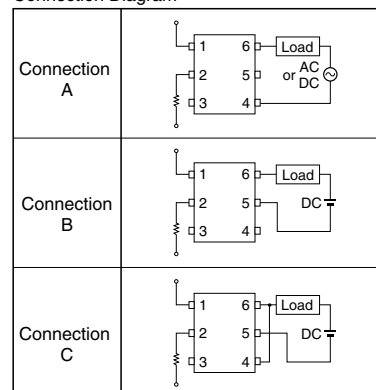

■ Electrical Characteristics (Ta = 25°C)

| Item | | Symbol | Minimum | Typical | Maximum | Unit | Measurement conditions | |
|---|-----------------------------------|--------------|----------|---------|---------|------------|--|--------------------------------|
| Input | LED forward voltage | V_F | 1.0 | 1.15 | 1.3 | V | $I_F = 10$ mA | |
| | Reverse current | I_R | --- | --- | 10 | μ A | $V_R = 5$ V | |
| | Capacity between terminals | C_T | --- | 30 | --- | pF | $V = 0$, $f = 1$ MHz | |
| | Trigger LED forward current | I_{FT} | --- | 1.6 | 3 | mA | $I_O = 500$ mA | |
| Output | Maximum resistance with output ON | Connection A | R_{ON} | --- | 1 | 2 | Ω | $I_F = 5$ mA, $I_O = 500$ mA |
| | | Connection B | | --- | 0.5 | 1 | Ω | $I_F = 5$ mA, $I_O = 500$ mA |
| | | Connection C | | --- | 0.25 | --- | Ω | $I_F = 5$ mA, $I_O = 1,000$ mA |
| Current leakage when the relay is open | | I_{LEAK} | --- | 0.001 | 1.0 | μ A | $V_{OFF} = 60$ V | |
| Capacity between terminals A Connection | | C_{OFF} | --- | 130 | --- | pF | $V = 0$, $f = 1$ MHz | |
| Capacity between I/O terminals | | C_{I-O} | --- | 0.8 | --- | pF | $f = 1$ MHz, $V_s = 0$ V | |
| Insulation resistance | | R_{I-O} | 1,000 | --- | --- | M Ω | $V_{I-O} = 500$ VDC, $R_{OH} \leq 60\%$ | |
| Turn-ON time | | t_{ON} | --- | 0.8 | 2.0 | ms | $I_F = 5$ mA, $R_L = 200 \Omega$, $V_{DD} = 20$ V (See note 2.) | |
| Turn-OFF time | | t_{OFF} | --- | 0.1 | 0.5 | ms | | |

Note: 2. Turn-ON and Turn-OFF Times

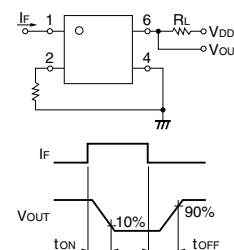


■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item | Symbol | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|---------|------|
| Load voltage (AC peak/DC) | V_{DD} | --- | --- | 48 | V |
| Operating LED forward current | I_F | 5 | 7.5 | 25 | mA |
| Continuous load current (AC peak/DC) | I_O | --- | --- | 500 | mA |
| Operating temperature | T_a | -20 | --- | 65 | °C |

Engineering Data


LED forward current vs. Ambient temperature

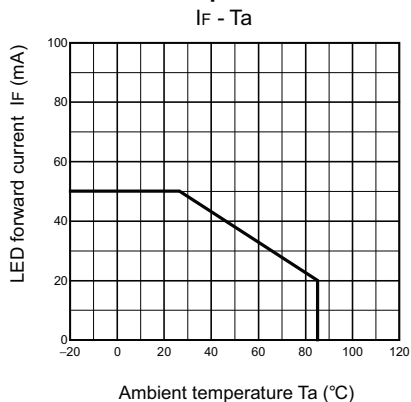


Continuous load current vs. Ambient temperature

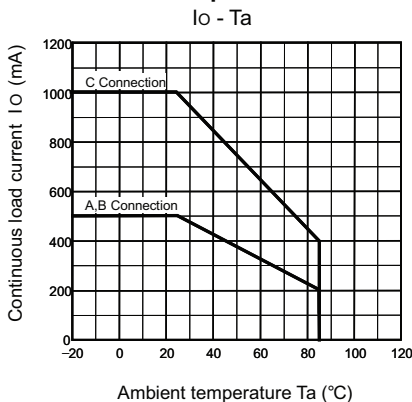


LED forward current vs. LED forward voltage

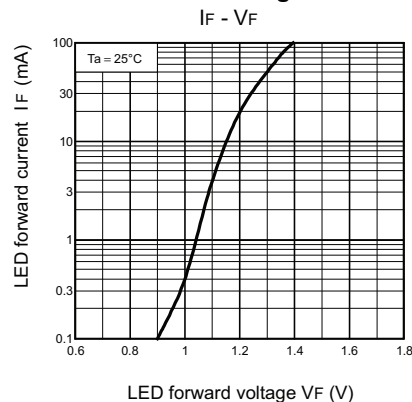


Continuous load current vs. On-state voltage

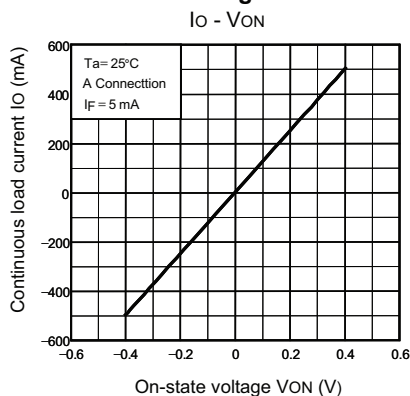


On-state resistance vs. Ambient temperature

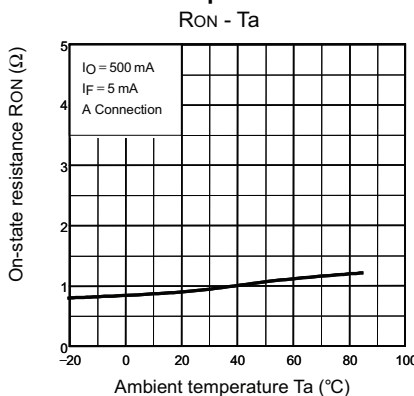


Trigger LED forward current vs. Ambient temperature

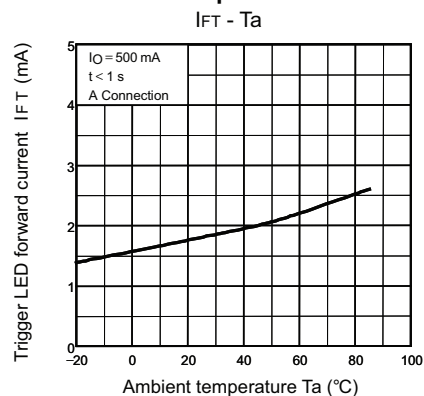


Turn ON, Turn OFF time vs. LED forward current

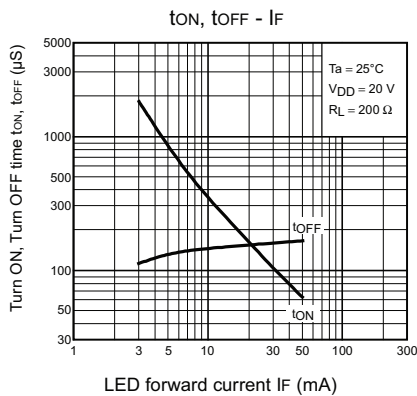

Turn ON, Turn OFF time vs. Ambient temperature

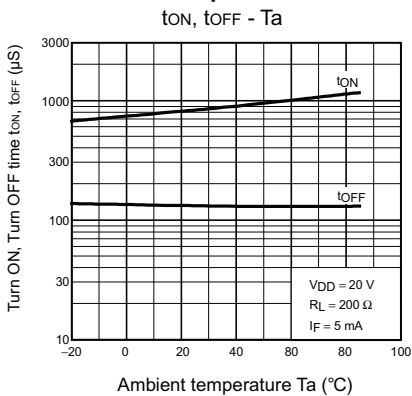

Current leakage vs. Ambient temperature

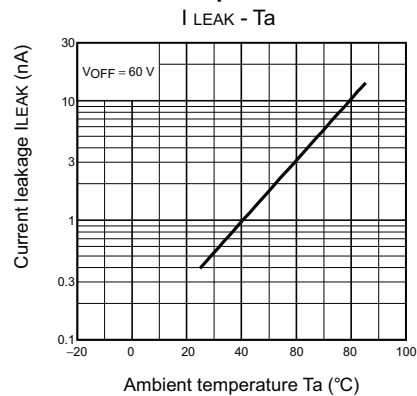

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

Printed in USA



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.