



# AQ1005 Series 30pF 30kV Bidirectional Discrete TVS **AUTOMOTIVE GRADE** **HF** **RoHS** **Pb** **GREEN**



## Pinout



## Functional Block Diagram



## Description

The AQ1005 TVS includes back-to-back breakdown diodes fabricated in a proprietary silicon avalanche technology to provide protection for electronic equipment that may experience destructive electrostatic discharges (ESD). These robust diodes can safely absorb repetitive ESD strikes above the maximum level specified in IEC 61000-4-2 international standard (Level 4,  $\pm 8$  kV contact discharge and  $\pm 15$  kV air discharge) without performance degradation. The back-to-back configuration provides symmetrical ESD protection for data lines.


## Features

- ESD, IEC 61000-4-2,  $\pm 30$ kV contact,  $\pm 30$ kV air
- ESD, ISO 10605, 330pF 330 $\Omega$ ,  $\pm 30$ kV contact,  $\pm 30$ kV air
- EFT, IEC 61000-4-4, 40A (5/50ns)
- Lightning, 8A (8/20 $\mu$ s as defined in IEC 61000-4-5 2<sup>nd</sup> edition)
- Low capacitance of 30pF (@  $V_R=0$ V)
- Low leakage current of 0.1 $\mu$ A at 5V
- SOD882 footprint compatible to 0402 footprint
- AEC-Q101 qualified
- Halogen free, Lead free and RoHS compliant
- PPAP capable

## Applications

- Mobile Phones
- Smart Phones
- Camcorders
- Portable Medical
- Digital Cameras
- MP3/PMP
- Portable Navigation Components
- Tablets
- Point of Sale Terminals
- Automotive Applications

## Application Example

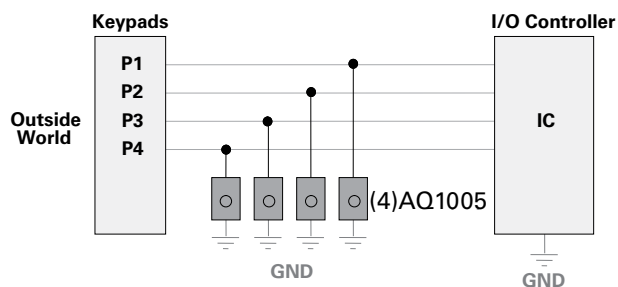

Life Support Note:

### Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

## Absolute Maximum Ratings

| Symbol     | Parameter                        | Value      | Units |
|------------|----------------------------------|------------|-------|
| $I_{PP}$   | Peak Current ( $t_p=8/20\mu s$ ) | 8.0        | A     |
| $T_{OP}$   | Operating Temperature            | -40 to 150 | °C    |
| $T_{STOR}$ | Storage Temperature              | -55 to 150 | °C    |

Notes:

1. CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.

## Electrical Characteristics ( $T_{OP}=25^{\circ}C$ )


| Parameter                          | Symbol        | Test Conditions                        | Min      | Typ  | Max | Units    |
|------------------------------------|---------------|----------------------------------------|----------|------|-----|----------|
| Reverse Standoff Voltage           | $V_{RWM}$     | $I_R=1\mu A$                           |          |      | 6.0 | V        |
| Breakdown Voltage                  | $V_{BR}$      | $I_R=1mA$                              |          | 8.5  | 9.5 | V        |
| Reverse Leakage Current            | $I_{LEAK}$    | $V_R=5V$                               |          | 0.1  | 0.5 | $\mu A$  |
| Clamp Voltage <sup>1</sup>         | $V_C$         | $I_{PP}=1A, t_p=8/20\mu s, I/O$ to I/O |          | 9.3  |     | V        |
|                                    |               | $I_{PP}=2A, t_p=8/20\mu s, I/O$ to I/O |          | 10.0 |     | V        |
| Dynamic Resistance <sup>2</sup>    | $R_{DYN}$     | TLP, $t_p=100ns, I/O$ to I/O           |          | 0.25 |     | $\Omega$ |
| ESD Withstand Voltage <sup>1</sup> | $V_{ESD}$     | IEC 61000-4-2 (Contact Discharge)      | $\pm 30$ |      |     | kV       |
|                                    |               | IEC 61000-4-2 (Air Discharge)          | $\pm 30$ |      |     | kV       |
| Diode Capacitance <sup>1</sup>     | $C_{I/O-I/O}$ | Reverse Bias=0V f=1MHz                 |          | 30   |     | pF       |
|                                    |               | Reverse Bias=2.5V f=1MHz               |          | 23   |     | pF       |

Note:


1.Parameter is guaranteed by design and/or component characterization.

2.Transmission Line Pulse (TLP) with 100ns width, 2ns rise time, and average window  $t_1=70ns$  to  $t_2=90ns$


## Capacitance vs. Reverse Bias

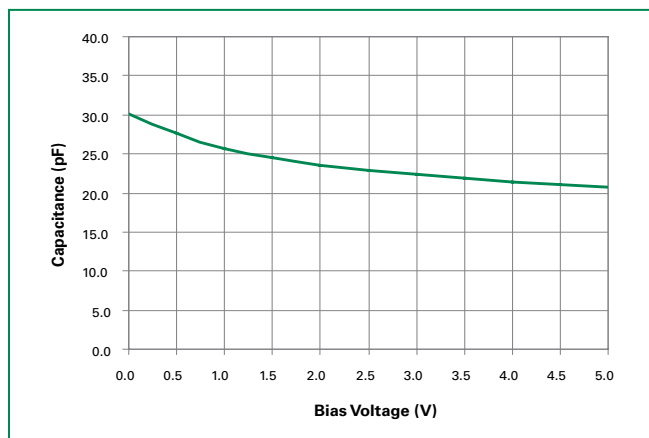


## 8/20 $\mu s$ Pulse Waveform

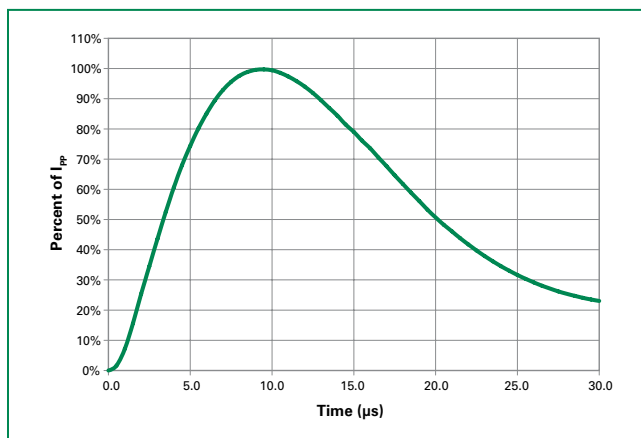


ISO10605 (C:330pF, R:330Ω) contact discharge plot at +8KV

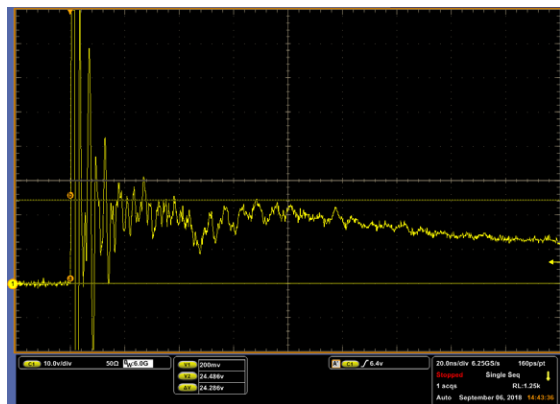


ISO10605 (C:330pF, R:330Ω) contact discharge plot at -8KV

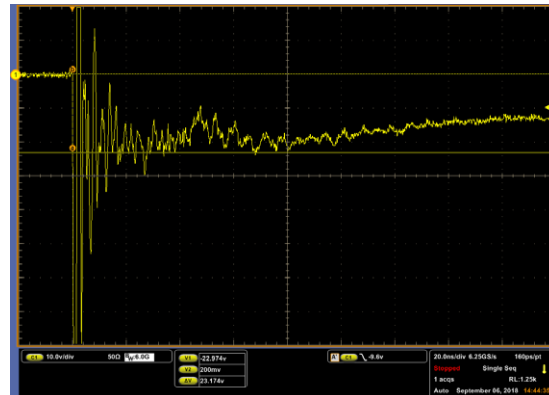


Clamping Voltage vs.  $I_{pp}$

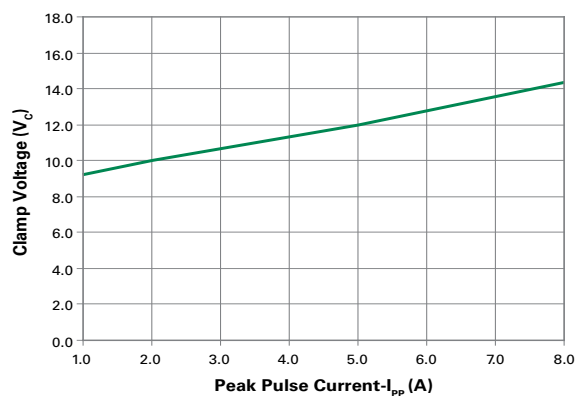

Insertion Loss (S21) I/O to GND

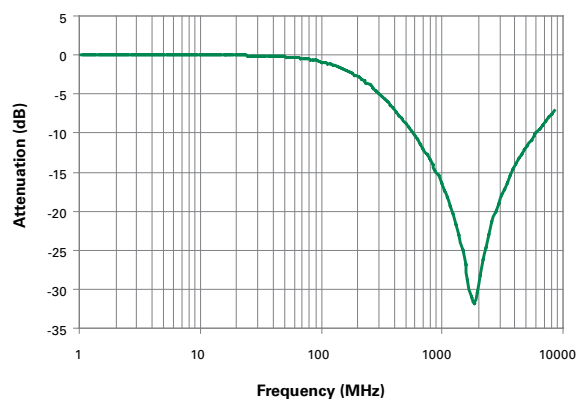


Transmission Line Pulsing(TLP) Plot

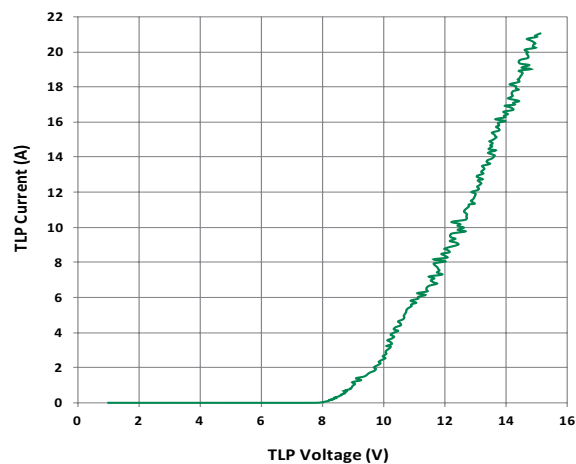


## Soldering Parameters

|                                                                        |                                    |                         |
|------------------------------------------------------------------------|------------------------------------|-------------------------|
| <b>Reflow Condition</b>                                                |                                    | Pb – Free assembly      |
| <b>Pre Heat</b>                                                        | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| <b>Average ramp up rate (Liquidus) Temp (<math>T_L</math>) to peak</b> |                                    | 3°C/second max          |
| <b><math>T_{s(max)}</math> to <math>T_L</math> - Ramp-up Rate</b>      |                                    | 3°C/second max          |
| <b>Reflow</b>                                                          | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                                        | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| <b>Peak Temperature (<math>T_p</math>)</b>                             |                                    | 260 <sup>+0/-5</sup> °C |
| <b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>   |                                    | 20 – 40 seconds         |
| <b>Ramp-down Rate</b>                                                  |                                    | 6°C/second max          |
| <b>Time 25°C to peak Temperature (<math>T_p</math>)</b>                |                                    | 8 minutes Max.          |
| <b>Do not exceed</b>                                                   |                                    | 260°C                   |

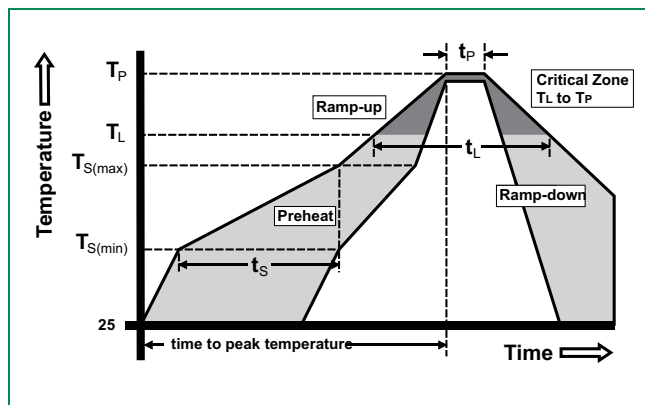


## Part Numbering System

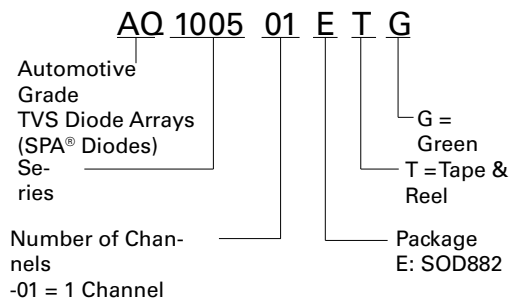

## Product Characteristics

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| <b>Lead Plating</b>       | Pre-Plated Frame                                        |
| <b>Lead Material</b>      | Copper Alloy                                            |
| <b>Substrate material</b> | Silicon                                                 |
| <b>Body Material</b>      | Molded Compound                                         |
| <b>Flammability</b>       | UL Recognized compound meeting flammability rating V-0. |


## Part Marking System



## Ordering Information


| Part Number  | Package | Min. Order Qty. |
|--------------|---------|-----------------|
| AQ1005-01ETG | SOD882  | 10000           |

## Package Dimensions — SOD882

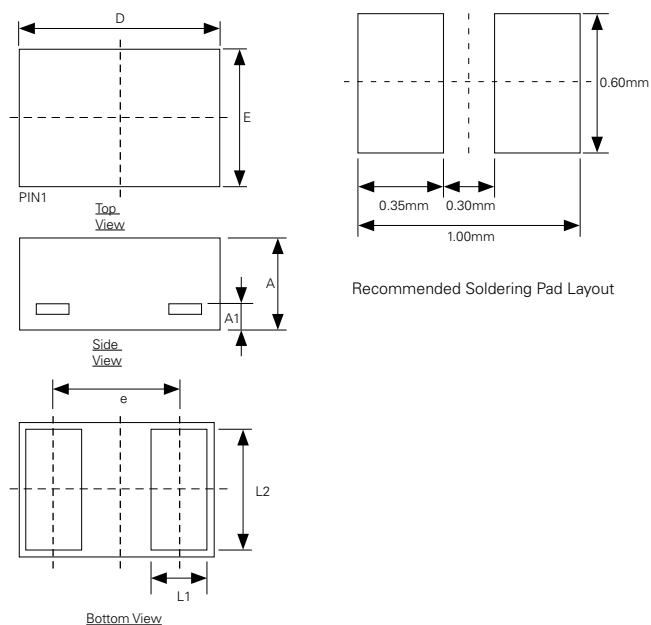


| Symbol    | Dimensions (mm) |      |      | Dimensions (In) |       |       |
|-----------|-----------------|------|------|-----------------|-------|-------|
|           | Min.            | Nor. | Max. | Min.            | Nor.  | Max.  |
| <b>A</b>  | 0.36            | 0.39 | 0.42 | 0.014           | 0.015 | 0.016 |
| <b>A1</b> | 0.127 REF       |      |      | 0.005 REF       |       |       |
| <b>L1</b> | 0.20            | 0.25 | 0.30 | 0.008           | 0.01  | 0.012 |
| <b>L2</b> | 0.45            | 0.50 | 0.55 | 0.018           | 0.020 | 0.023 |
| <b>D</b>  | 0.93            | 1.00 | 1.07 | 0.037           | 0.039 | 0.067 |
| <b>E</b>  | 0.53            | 0.60 | 0.67 | 0.021           | 0.024 | 0.026 |
| <b>e</b>  | 0.65 BSC        |      |      | 0.026 BSC       |       |       |

## Embossed Carrier Tape & Reel Specification — SOD882

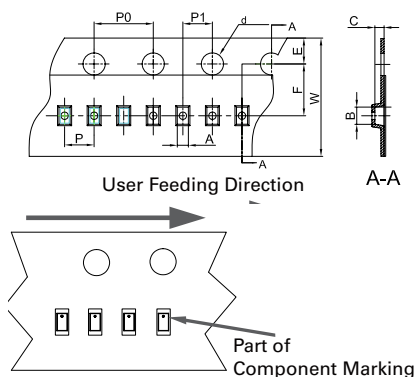

| Symbol    | Millimetres |      | Inches |       |
|-----------|-------------|------|--------|-------|
|           | Min         | Max  | Min    | Max   |
| <b>A</b>  | 0.65        | 0.70 | 0.026  | 0.028 |
| <b>B</b>  | 1.10        | 1.20 | 0.043  | 0.047 |
| <b>C</b>  | 0.50        | 0.60 | 0.020  | 0.024 |
| <b>dØ</b> | 1.40        | 1.60 | 0.055  | 0.063 |
| <b>E</b>  | 1.65        | 1.85 | 0.065  | 0.073 |
| <b>F</b>  | 3.40        | 3.60 | 0.134  | 0.142 |
| <b>P0</b> | 3.90        | 4.10 | 0.154  | 0.161 |
| <b>P</b>  | 1.90        | 2.10 | 0.075  | 0.083 |
| <b>P1</b> | 1.90        | 2.10 | 0.075  | 0.083 |
| <b>W</b>  | 7.90        | 8.10 | 0.311  | 0.319 |



8mm Tape and Reel

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

©2019 Littelfuse, Inc.

Specifications are subject to change without notice.

Revision: 02/07/19



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.