

Ring Varistors

For micro-motors

VAR-18 series

Type: **VAR-18-P (Plane surface electrode type)**
 VAR-18-S (Side surface electrode type)

Issue date: December 2010

- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

Varistors(SrTiO₃) For Micro-motors

Conformity to RoHS Directive

VAR-18 Series

Ring varistors are used in a wide range of applications from micro motor noise absorption to the protection of circuit contacts. TDK has greatly improved the electrical and physical performances of these varistors to meet the latest demands. This varistor line covers the traditional shapes and dimensions as well as the more varied and specialized applications.

FEATURES

ELECTRICAL PERFORMANCES

- The temperature characteristics of the varistor voltage (E_{10} value) are positive. This prevents the varistor voltage from decreasing at high temperatures and from large currents flowing through the varistor. Therefore, these varistors remove design obstacles by eliminating the need for setting the room temperature varistor voltage (E_{10} value) higher—a measure that compromises noise reduction levels.
- Furthermore, the VAR-18 series has also eliminated the problem of the noise level being amplified at low-temperatures and having a negative impact on the life of the motor.
- Because the VAR-18 series has the same large capacitance as the conventional varistors, it has excellent functions to eliminate and control motor noise in high frequency bands.


PHYSICAL PERFORMANCES

- Because copper electrodes are used and the heat resistance of the ceramic elements has been improved, there is no concern for electrode erosion or thermal crack even at the higher soldering temperatures that are used in lead-free soldering.
- The ceramic element has excellent flexure strength as is suitable for automatic motor assembly.

PRODUCT LINEUP

- The varistors in this series come in a wide range of dimensions and so can be accurately used for almost all motors.
- This lineup includes side-surface electrode varistors that can be used with ultra-compact micro motors.

VARISTOR VOLTAGE TEMPERATURE CHARACTERISTICS

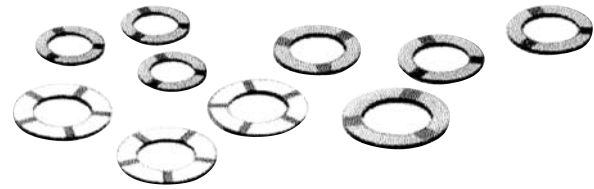

PRODUCT IDENTIFICATIONS

VAR-18 □□□ □□□ □ □ □ □□□
(1) (2) (3) (4) (5) (6) (7)

- (1) Series name
- (2) Outer diameter
080: ø8mm
107: ø10.7mm
- (3) Varistor voltage
053: 5.3V
157: 15.7V
- (4) Varistor voltage tolerance
M: ±20%
- (5) Number of electrodes
3, 5, 7
- (6) Electrode location
P: Plane
S: Side
- (7) TDK classification

PERFORMANCES

| | |
|---|--|
| Operating temperature range | -25 to +85°C |
| Pulse resistance [DC.60V, ON-OFF: 50 cycles] | $\Delta E_{10}, \Delta \alpha_{10} \pm 15\%$ |
| Moisture resistance [60±2°C, 90 to 95(%)RH, 240 hours] | $\Delta E_{10}, \Delta \alpha_{10} \pm 10\%$ |
| Soldering heat resistance [320°C, 3 seconds] | $\Delta E_{10}, \Delta \alpha_{10} \pm 10\%$ |
| Flexure strength | 9.8N min. |
| Electrode tensile strength | 14.7N min. |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

SHAPES AND DIMENSIONS

PLANE SURFACE ELECTRODE TYPE(3-ELECTRODE)



PLANE SURFACE ELECTRODE TYPE(5-ELECTRODE)



| Diameter Symbol | Dimensions(mm) | | | Number of electrodes |
|-----------------|-----------------|----------------|--------|----------------------|
| | ϕD_1 | ϕD_2 | T max. | |
| 024 | 2.45±0.1 | 1.78±0.08 | 0.50 | 3 |
| 030 | 3.0±0.15 | 2.0±0.1 | 0.50 | 3 |
| 030 | 3.0±0.12 | 2.15±0.1 | 0.50 | 3 |
| 042 | 4.2±0.15 | 2.8+0.2, -0.1 | 0.60 | 3 |
| 048 | 4.8+0.1, -0.2 | 3.5+0.2, -0.1 | 0.60 | 3 |
| 060 | 6.0±0.2 | 4.0+0.2, -0.1 | 0.70 | 3 |
| 066 | 6.6±0.2 | 4.7±0.15 | 0.75 | 3 |
| 080 | 8.0±0.3 | 5.0±0.2 | 0.75 | 3 |
| 085 | 8.5±0.2 | 5.0±0.2 | 0.75 | 3 |
| 085 | 8.5±0.3 | 5.8±0.15 | 0.75 | 3 |
| 094 | 9.4±0.3 | 5.78±0.15 | 1.05 | 3 |
| 107 | 10.7+0.2, -0.35 | 6.7+0.25, -0.1 | 1.10 | 3 |
| 120 | 12.0+0.4, -0.1 | 7.5±0.2 | 1.10 | 3 or 5 |
| 160 | 16.0±0.4 | 9.4±0.3 | 1.70 | 5 |

SIDE SURFACE ELECTRODE TYPE(3-ELECTRODE)



SIDE SURFACE ELECTRODE TYPE(6-ELECTRODE)



| Diameter Symbol | Dimensions(mm) | | | Number of electrodes |
|-----------------|----------------|----------------|--------|----------------------|
| | ϕD_1 | ϕD_2 | T max. | |
| 042 | 4.2±0.15 | 2.85+0.2, -0.1 | 0.60 | 3 |
| 066 | 6.6±0.2 | 4.7±0.15 | 0.60 | 3 or 6 |
| 076 | 7.6±0.2 | 5.0±0.2 | 0.60 | 3 or 6 |
| 078 | 7.8±0.2 | 5.35±0.2 | 0.65 | 3 |
| 086 | 8.6±0.2 | 5.0±0.2 | 0.75 | 3 |

ELECTRICAL CHARACTERISTICS (EXAMPLE: OD ϕ 10.7mm type)

| Varistor voltage Tolerance | Nominal varistor voltage E_{10mA} (V) | α_{10} [1 to 10mA] | Rated power (mW) | Varistor voltage temperature coefficient (%/°C) [25 to 50°C] | Capacitance (nF) [at 1kHz] |
|----------------------------|---|---------------------------|------------------|--|----------------------------|
| 032Y | 2.0 to 4.5 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 053M | 4.0 to 6.6 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 077M | 5.9 to 9.4 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 115M | 9.0 to 14.0 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 157M | 13.0 to 18.4 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 218M | 17.6 to 26.0 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 240M | 19.0 to 29.0 | 2.3 | 500 | ±0.2 | 1 to 100 |
| 320M | 26.0 to 38.0 | 2.3 | 500 | ±0.2 | 1 to 100 |

• All specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.