
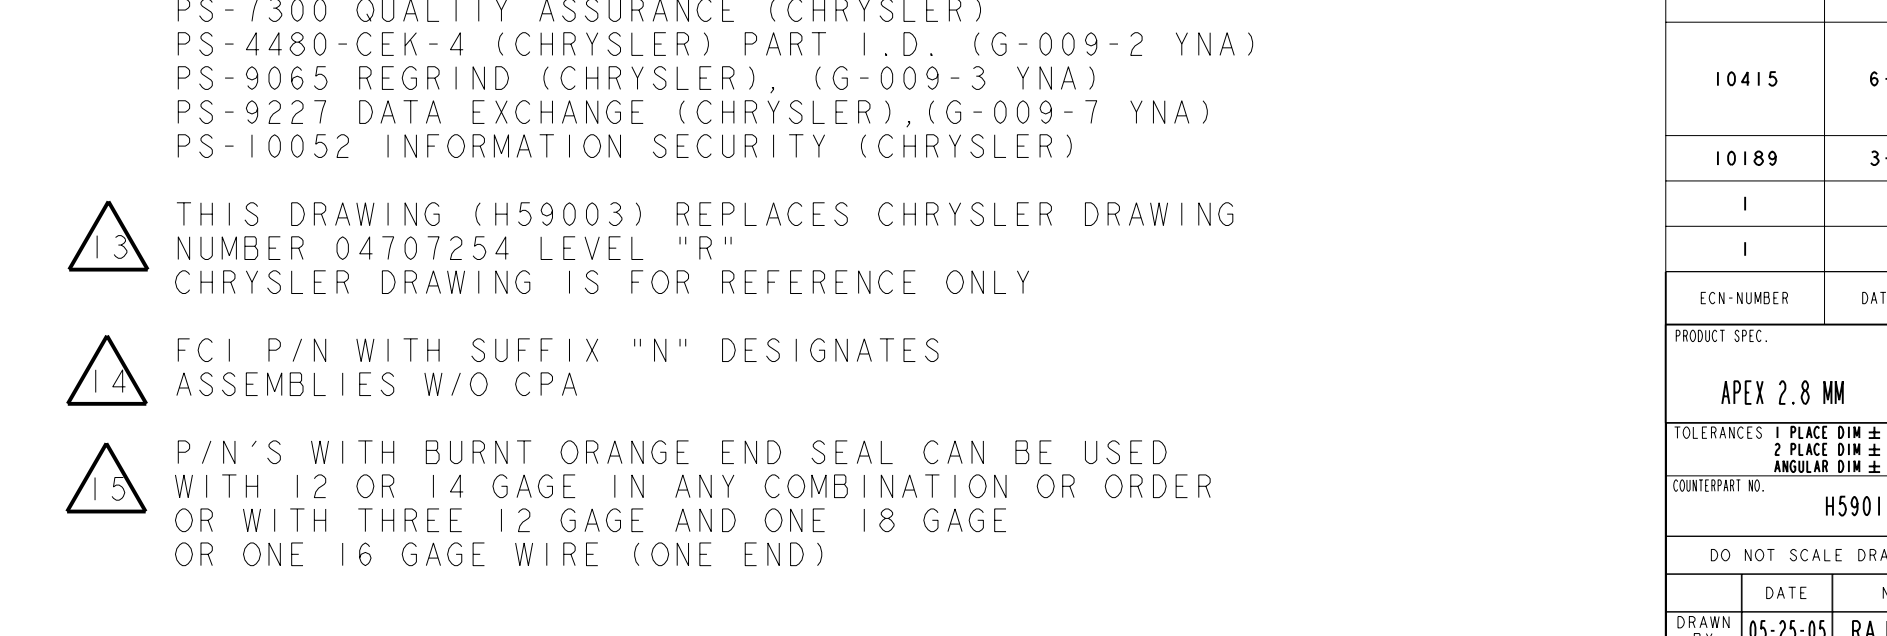
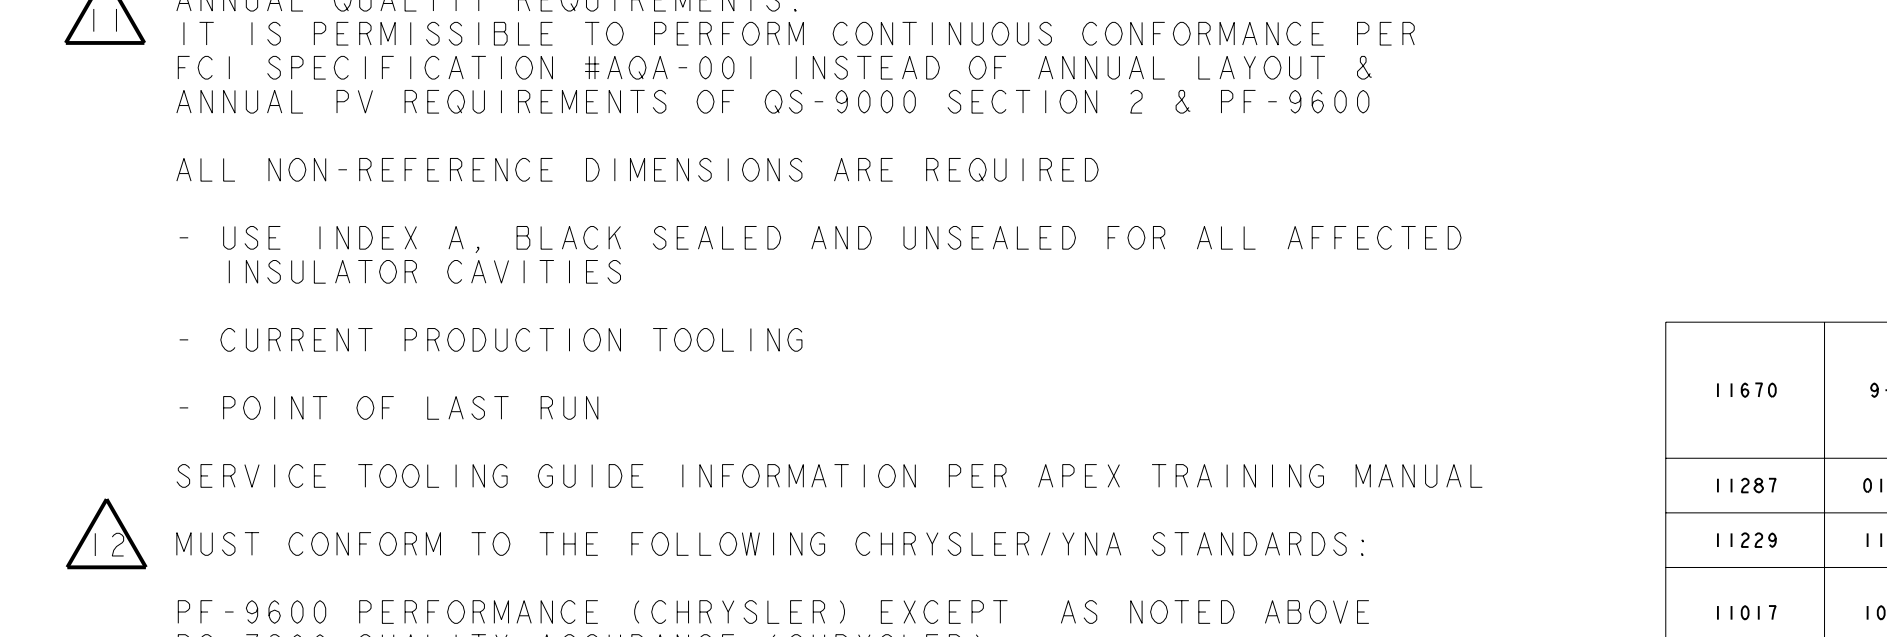
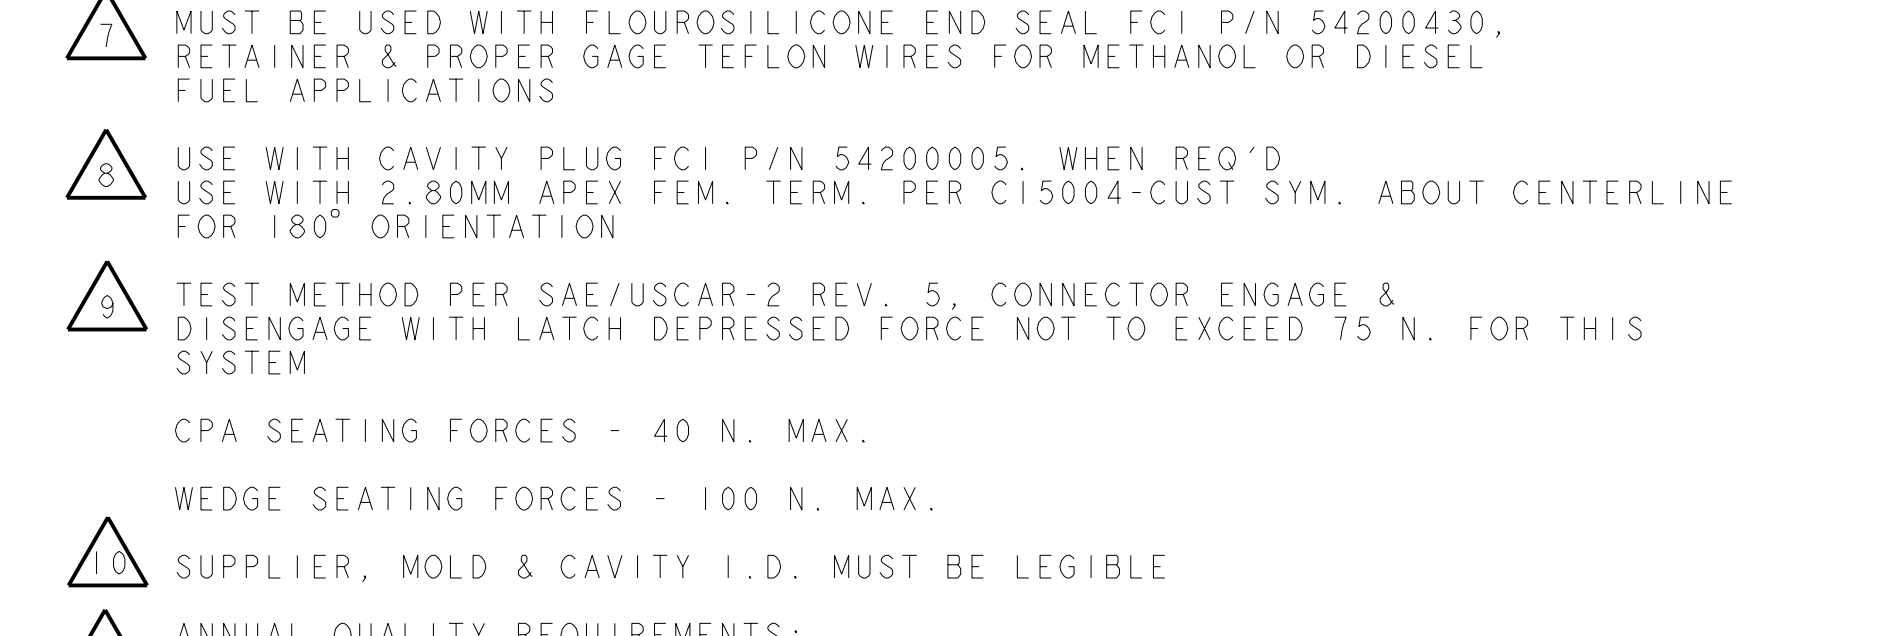
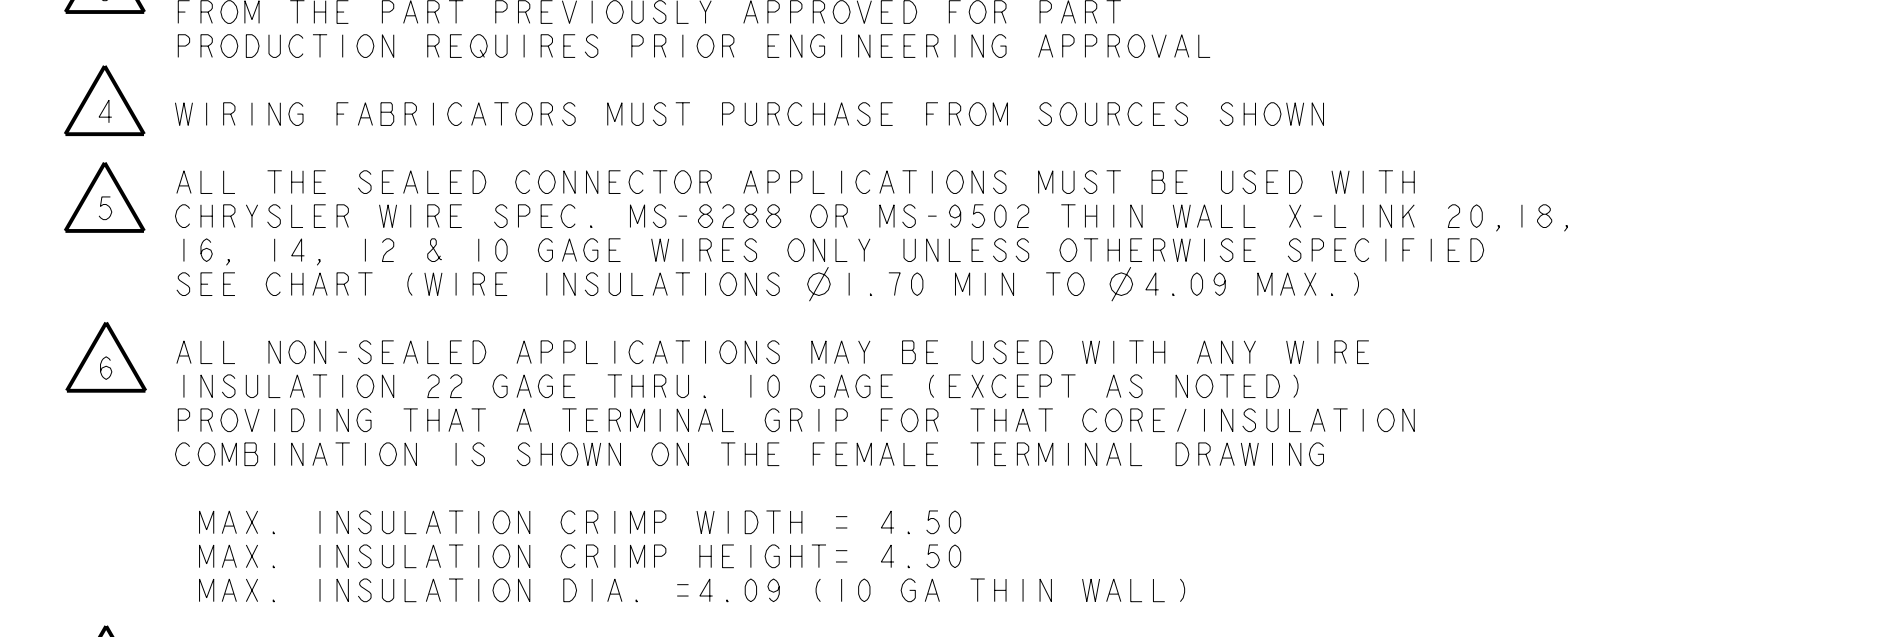
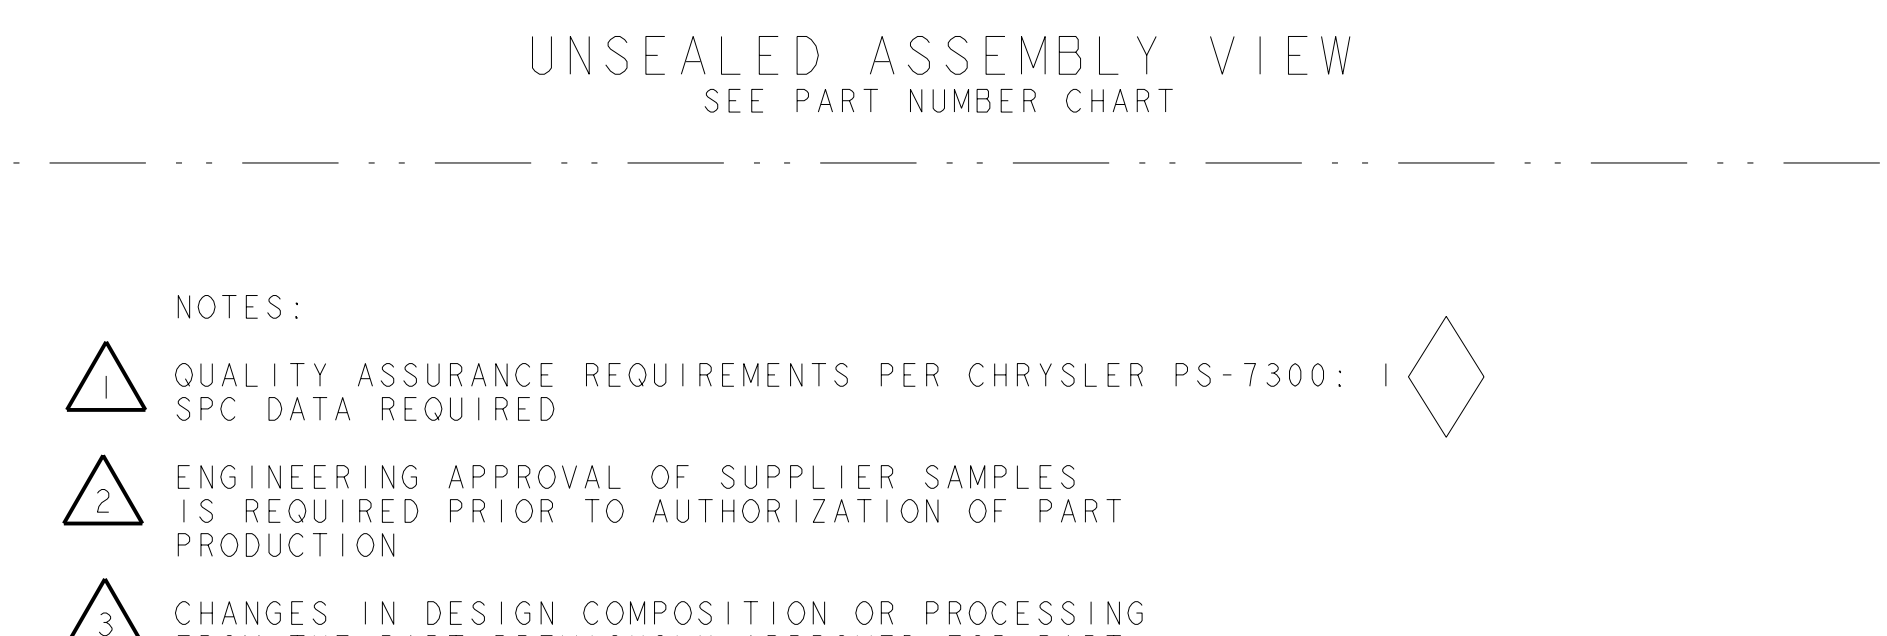
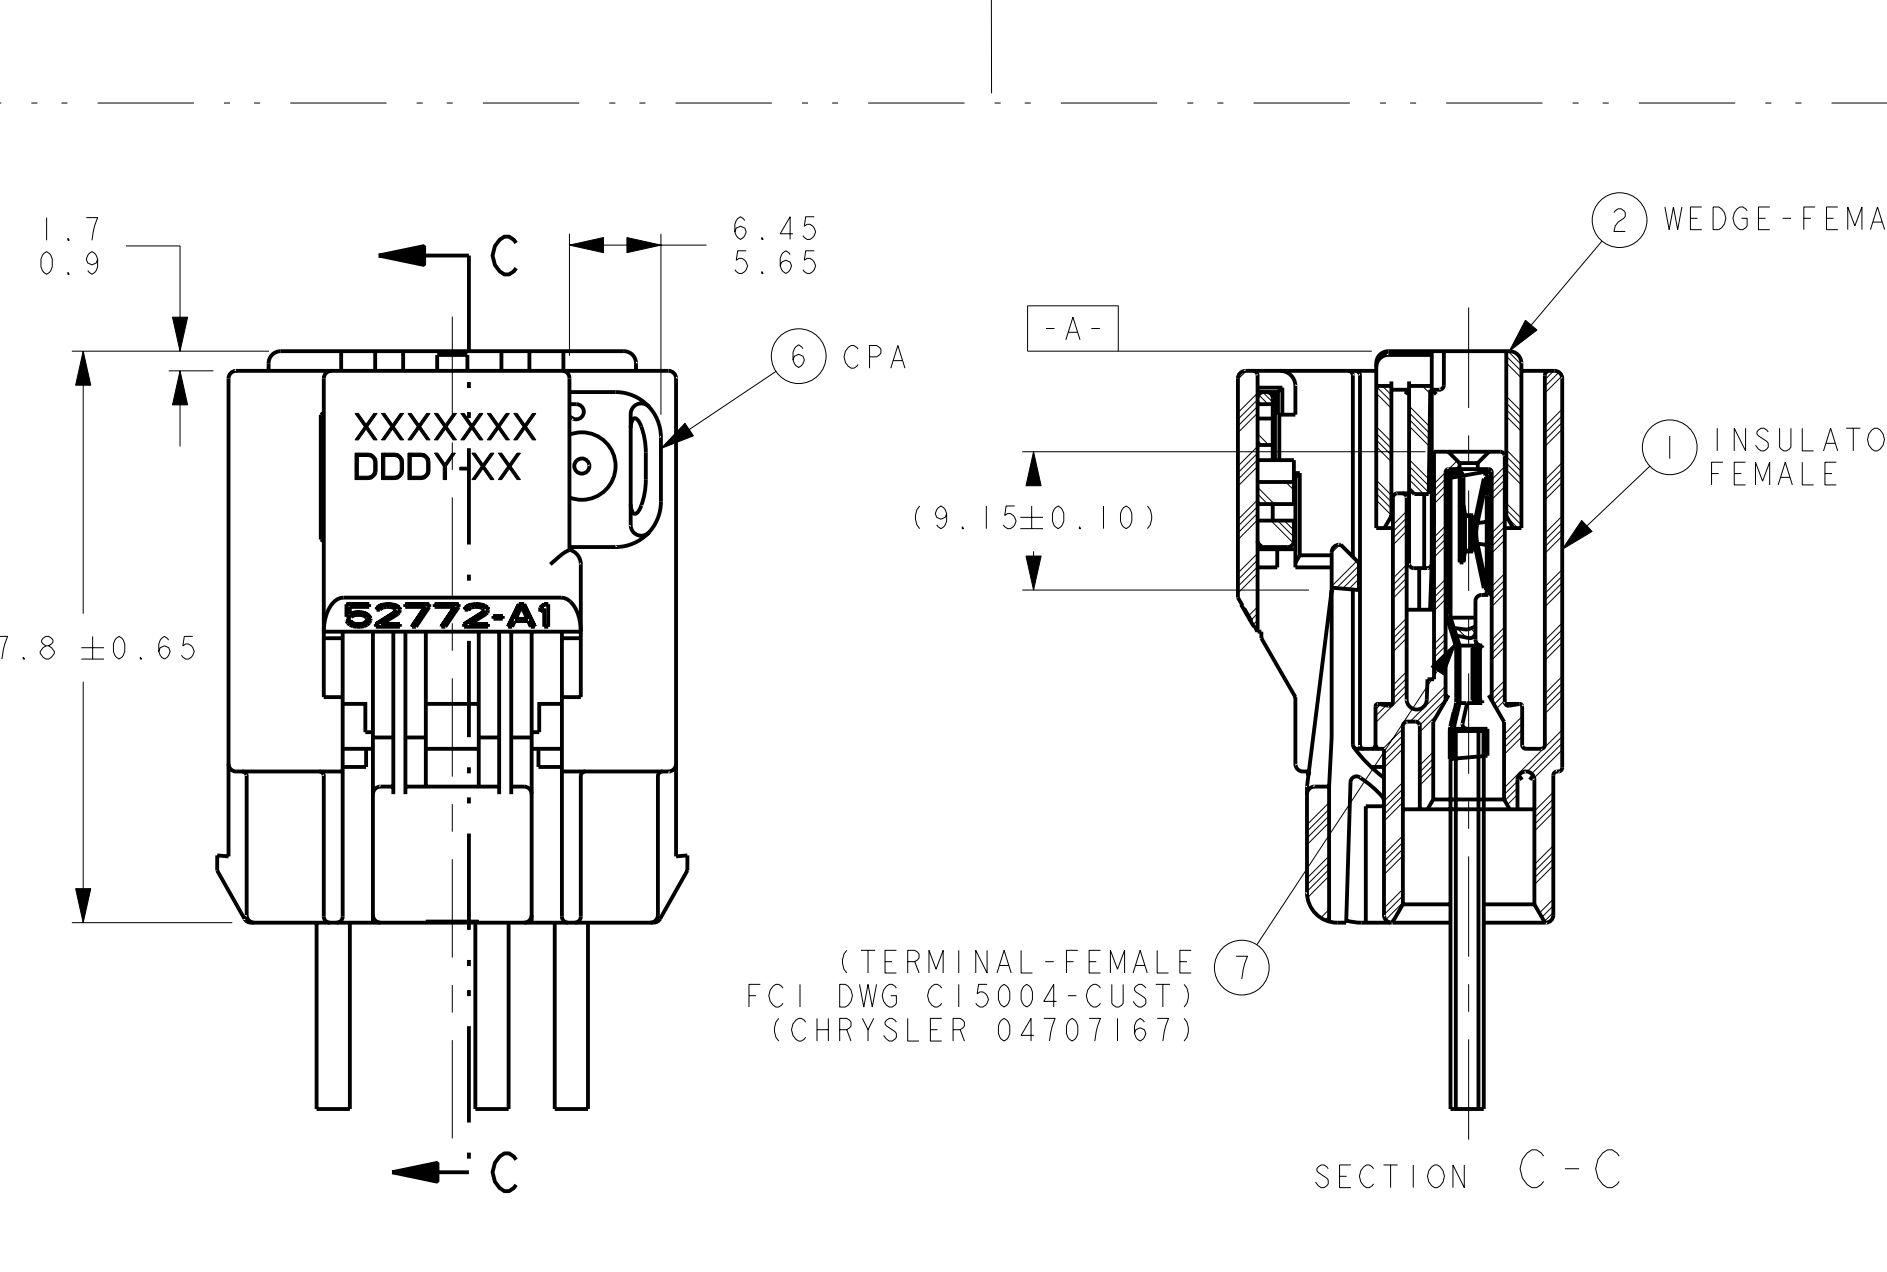
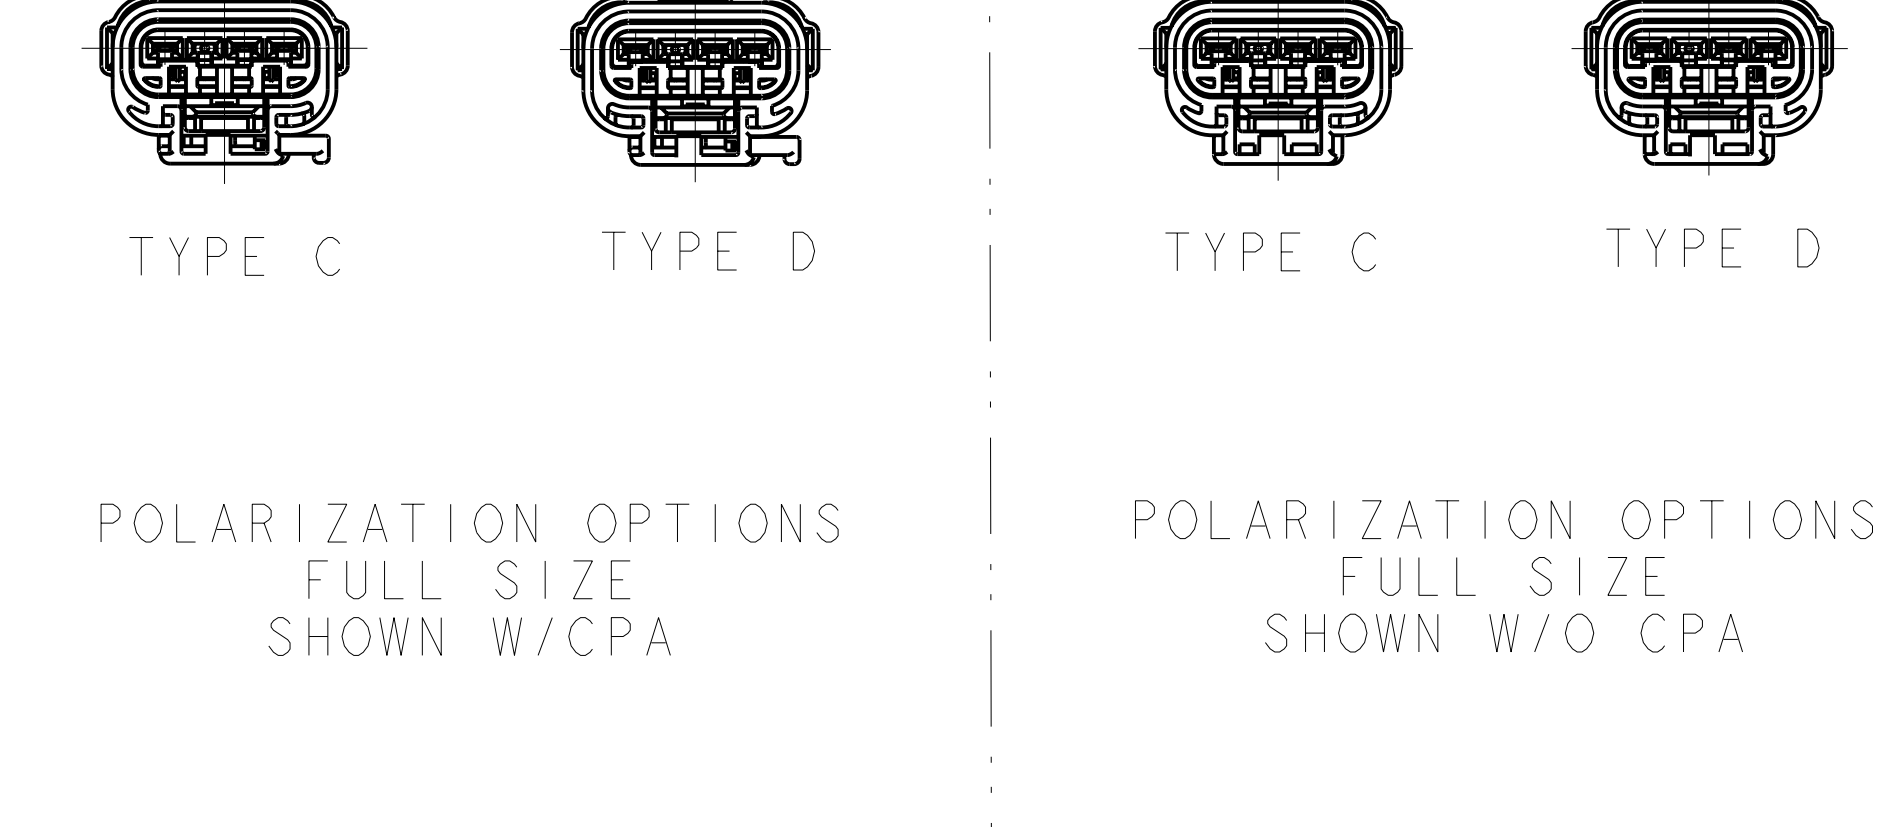
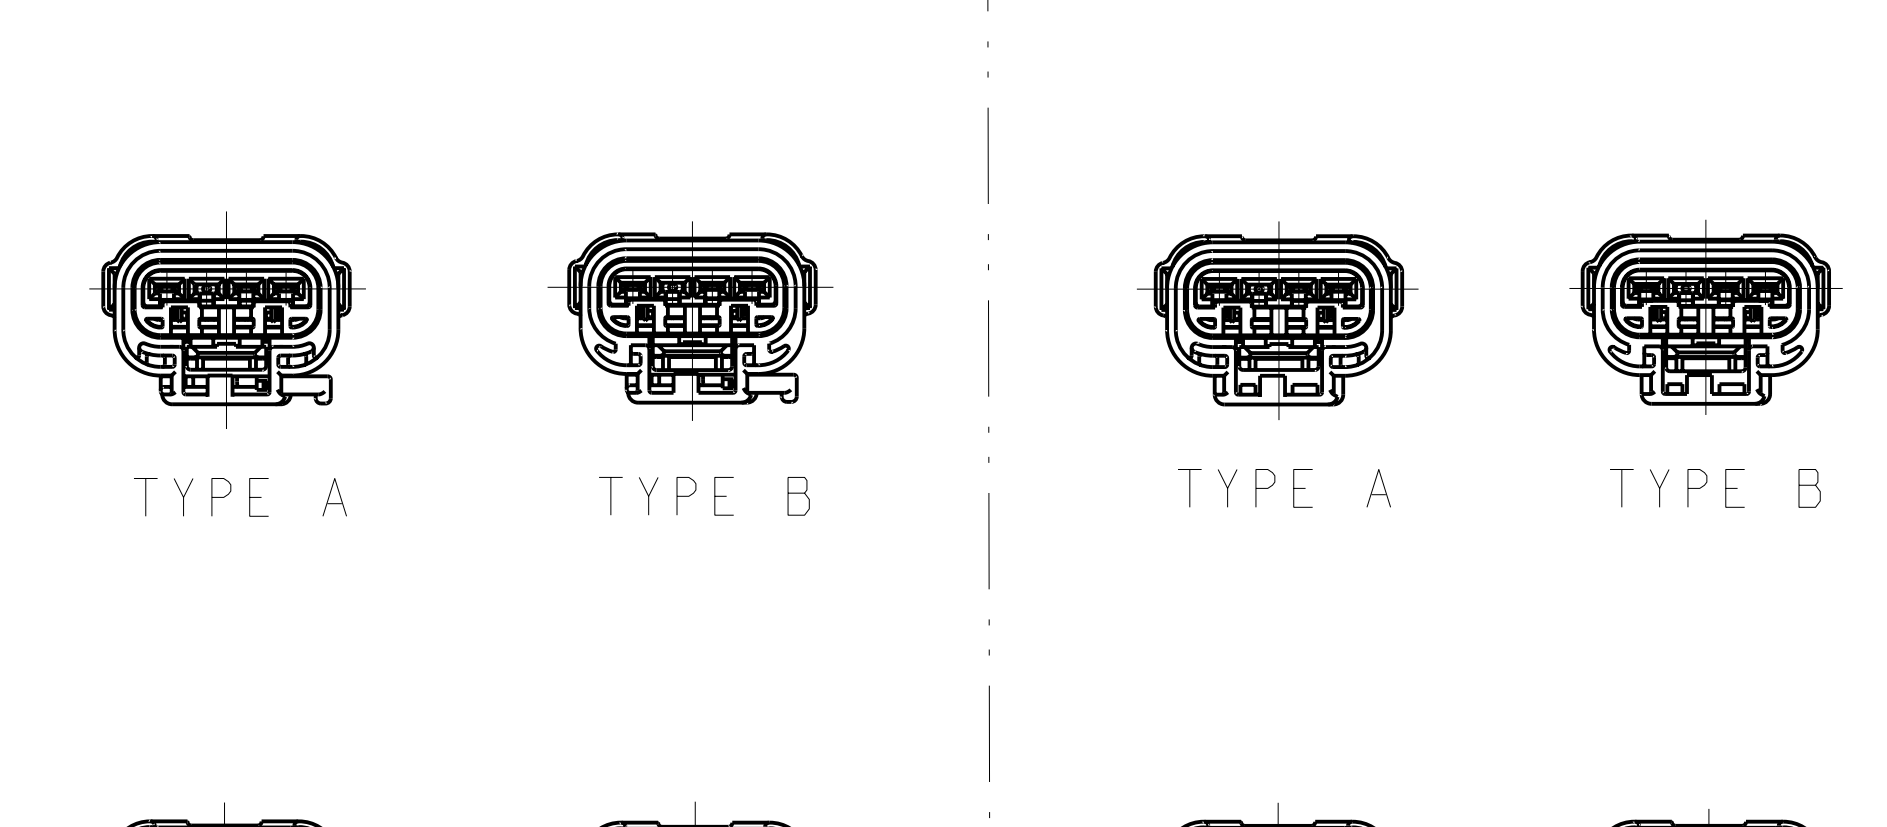
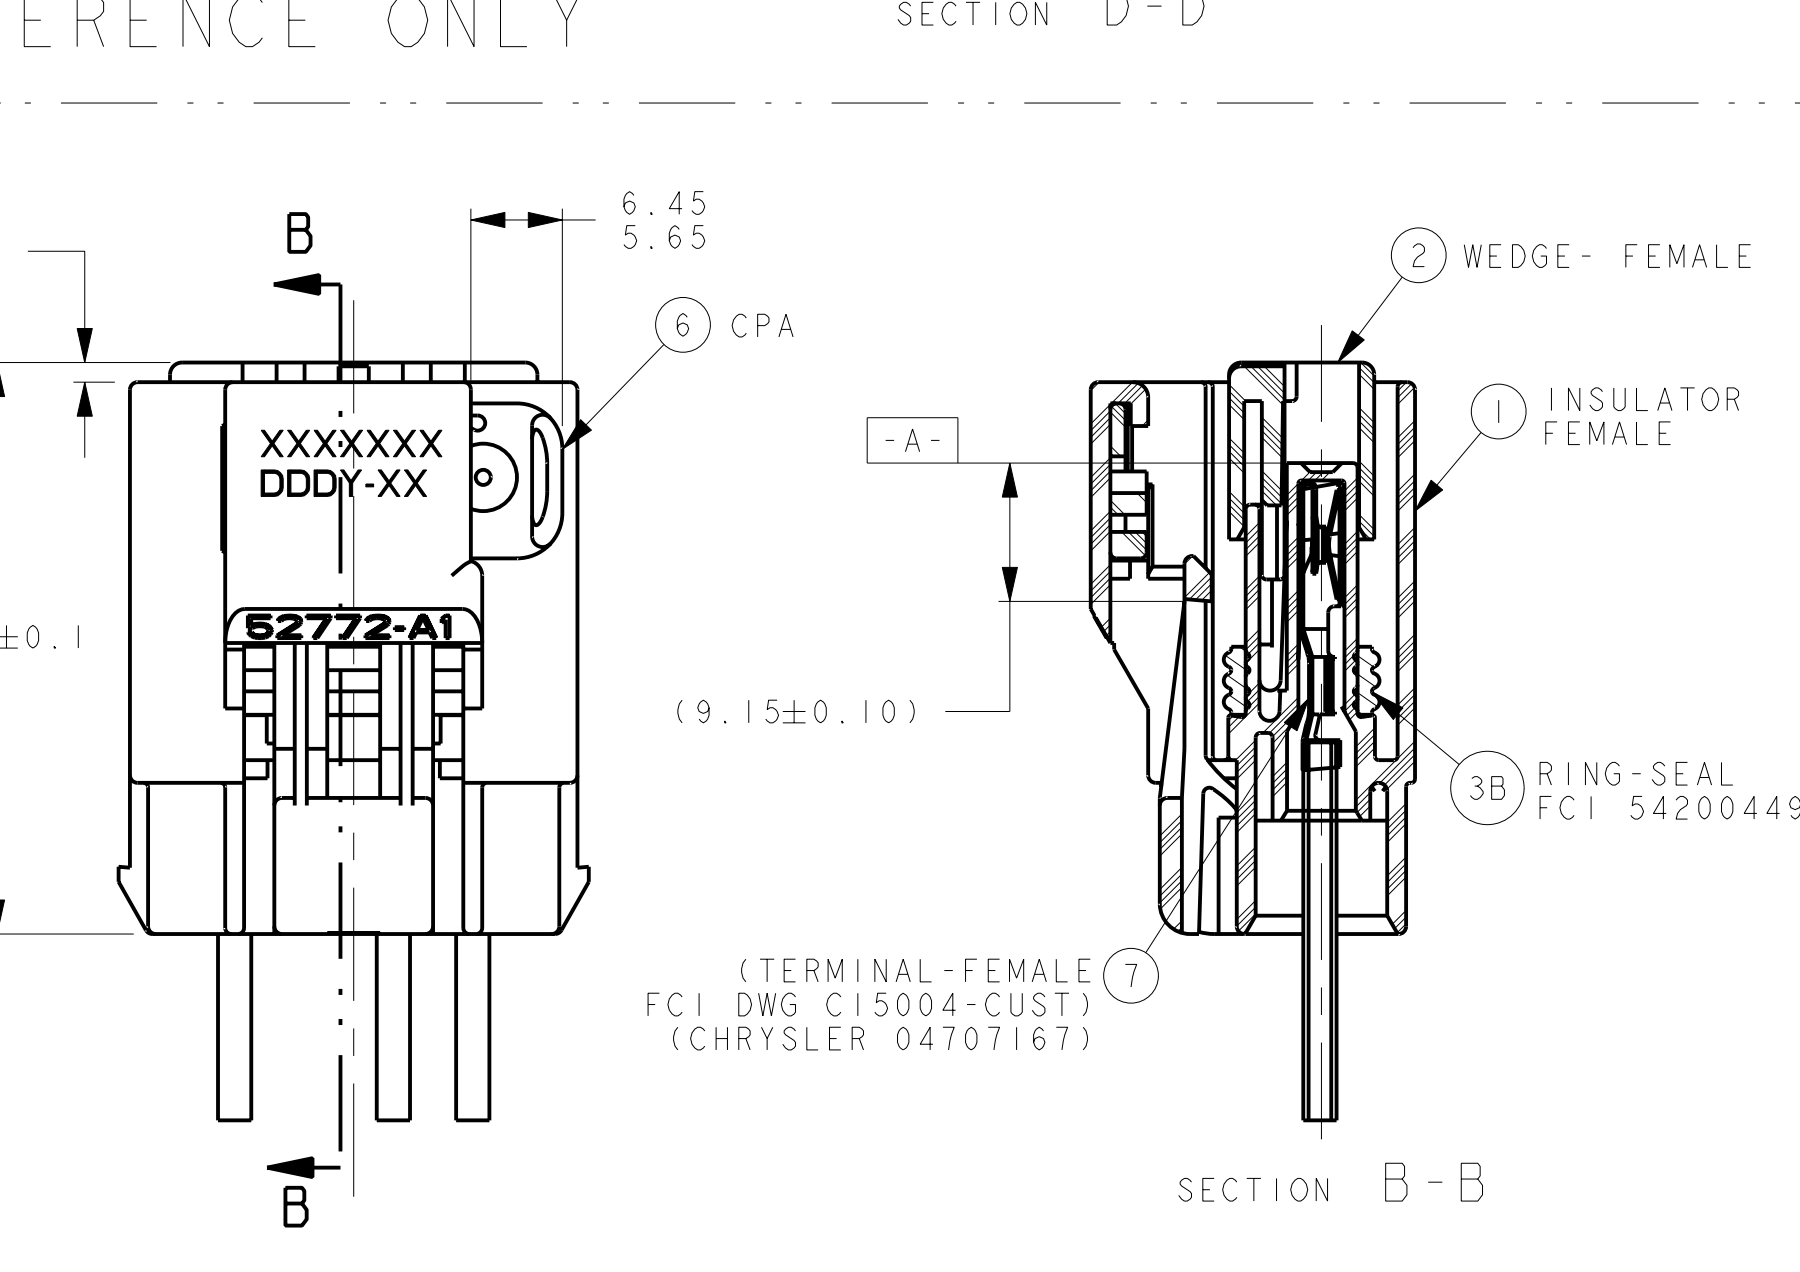
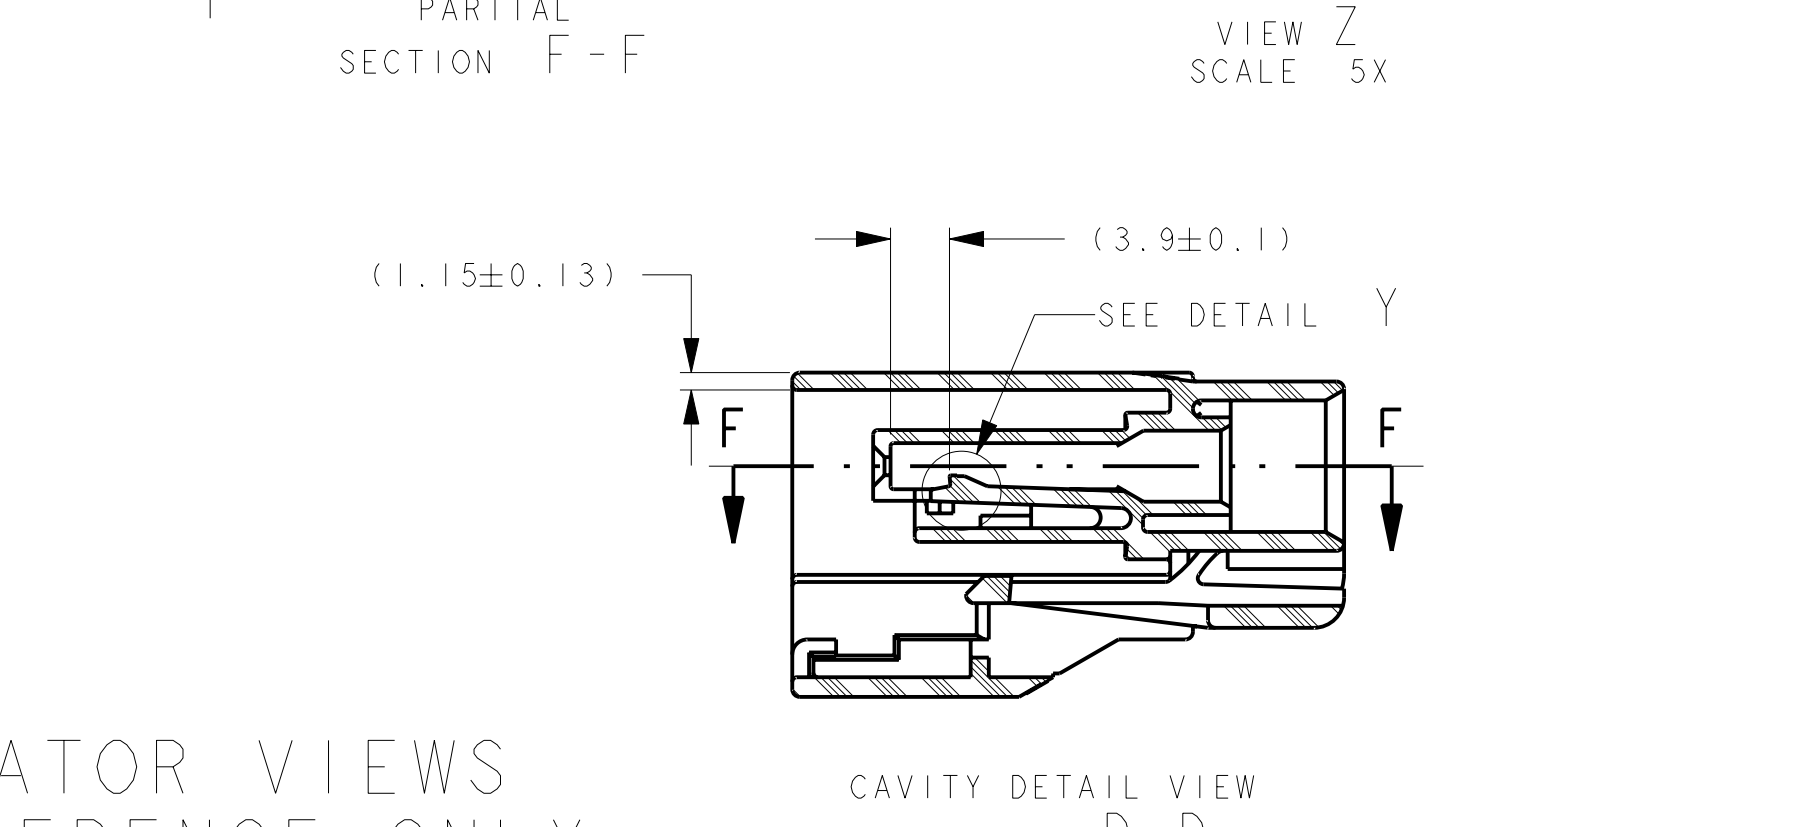
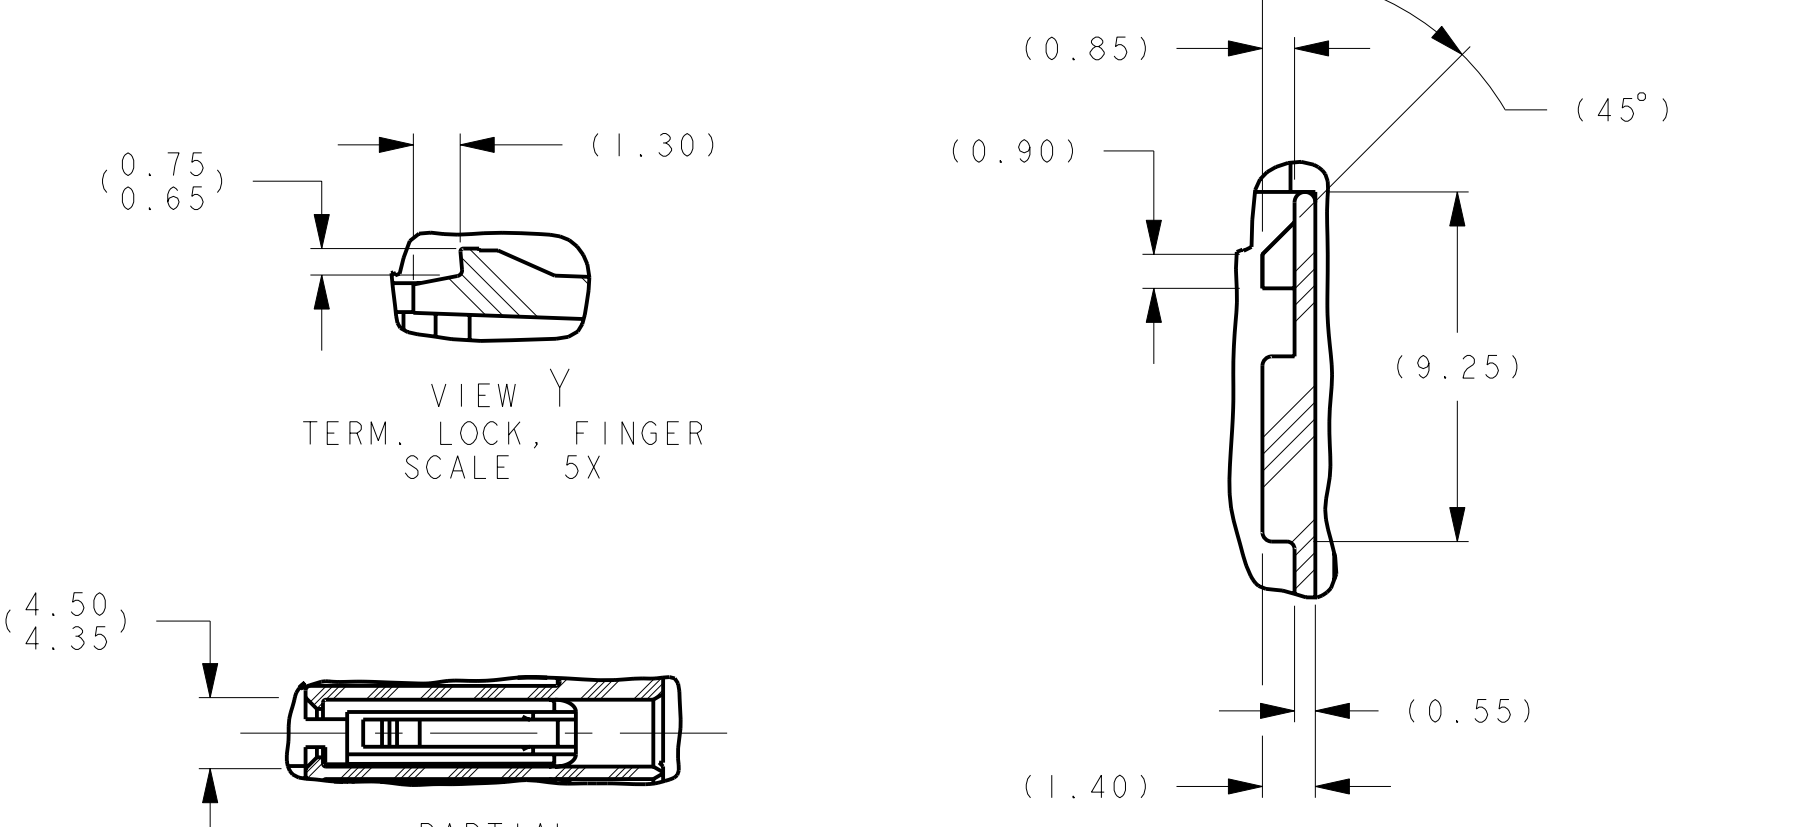

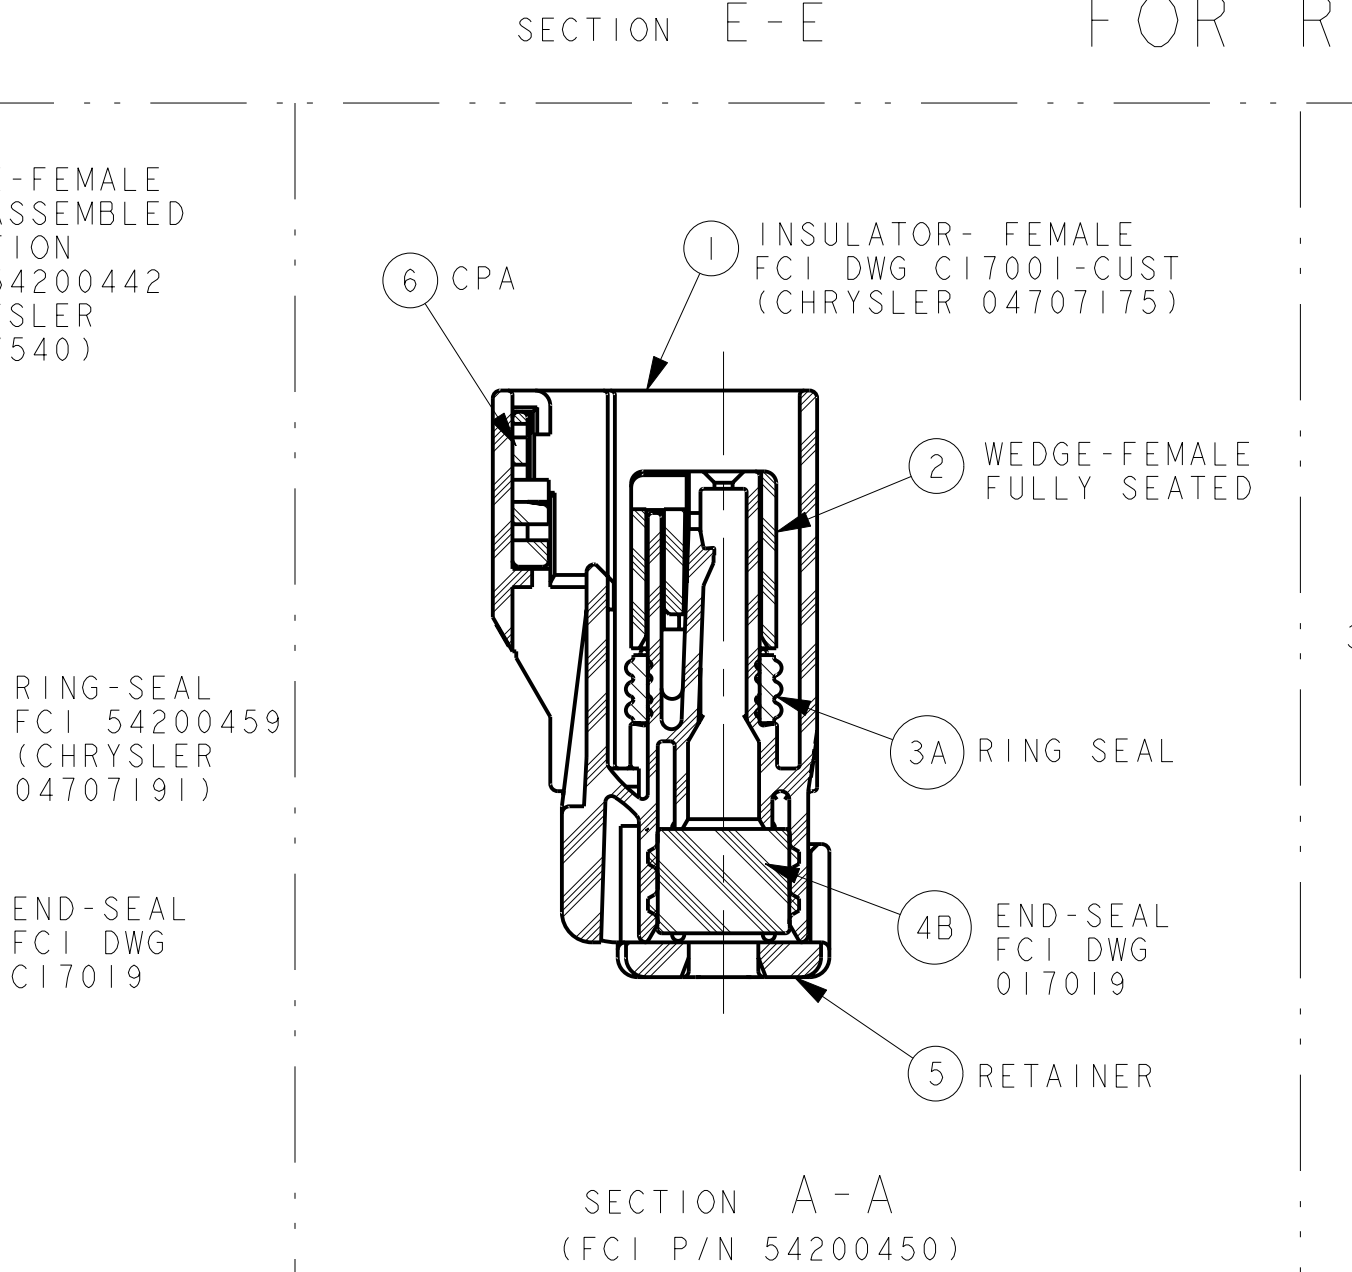
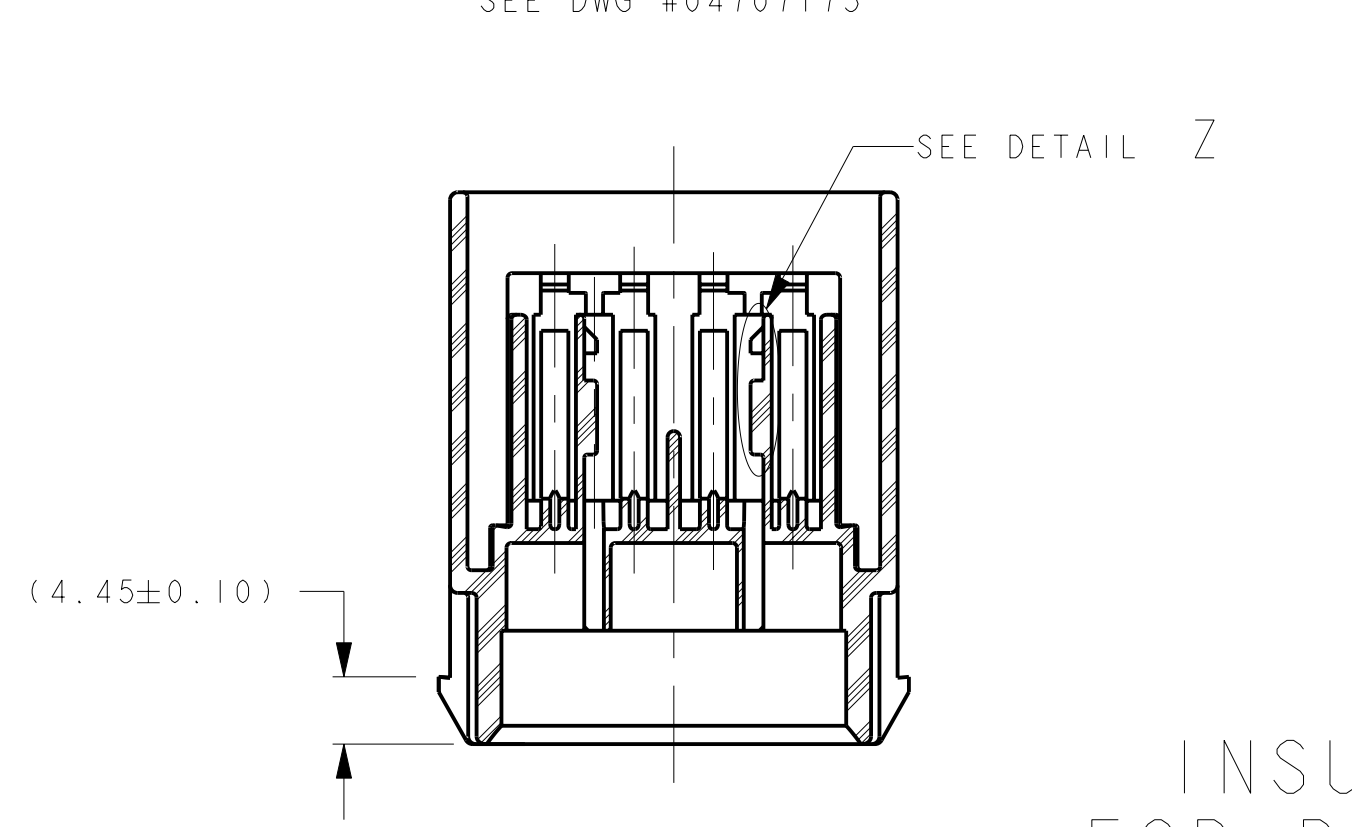
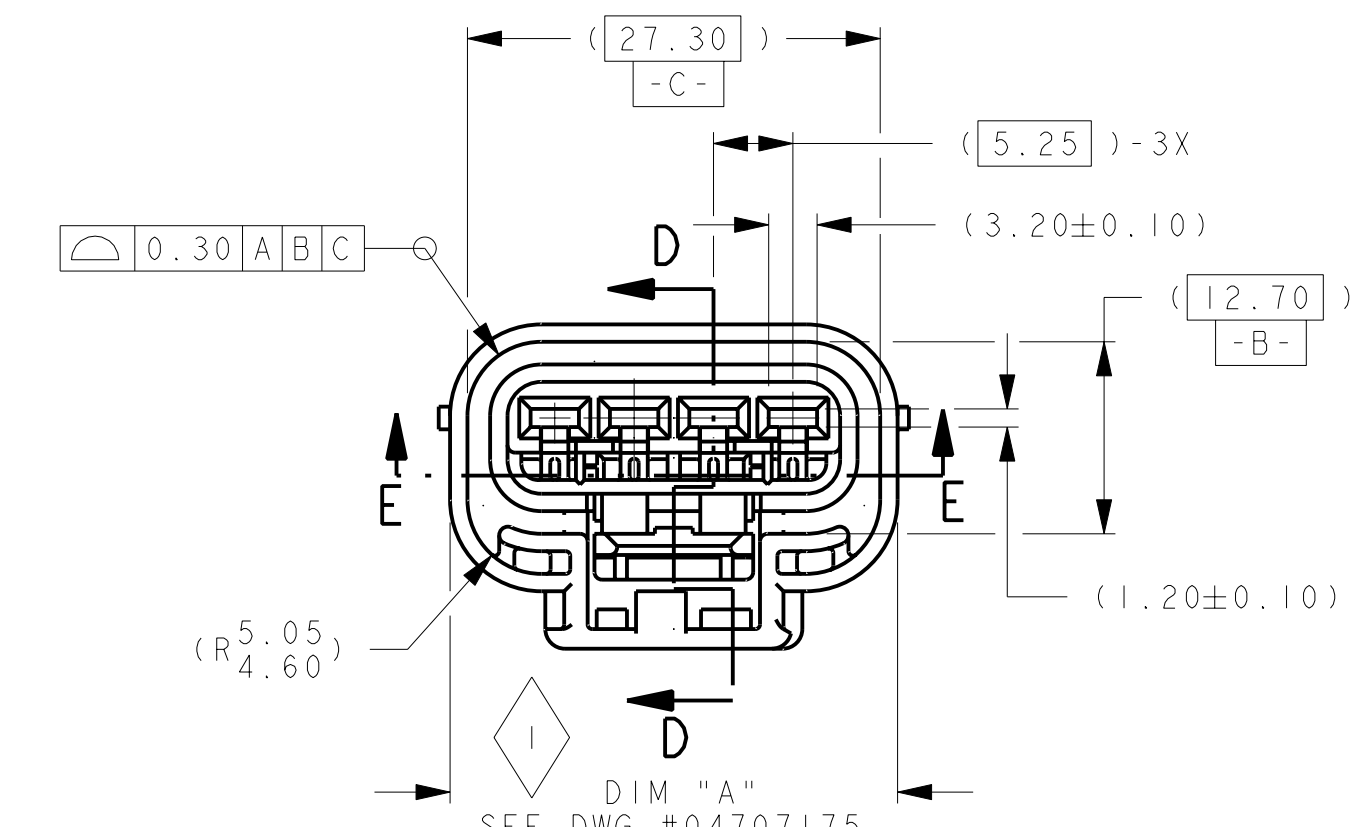
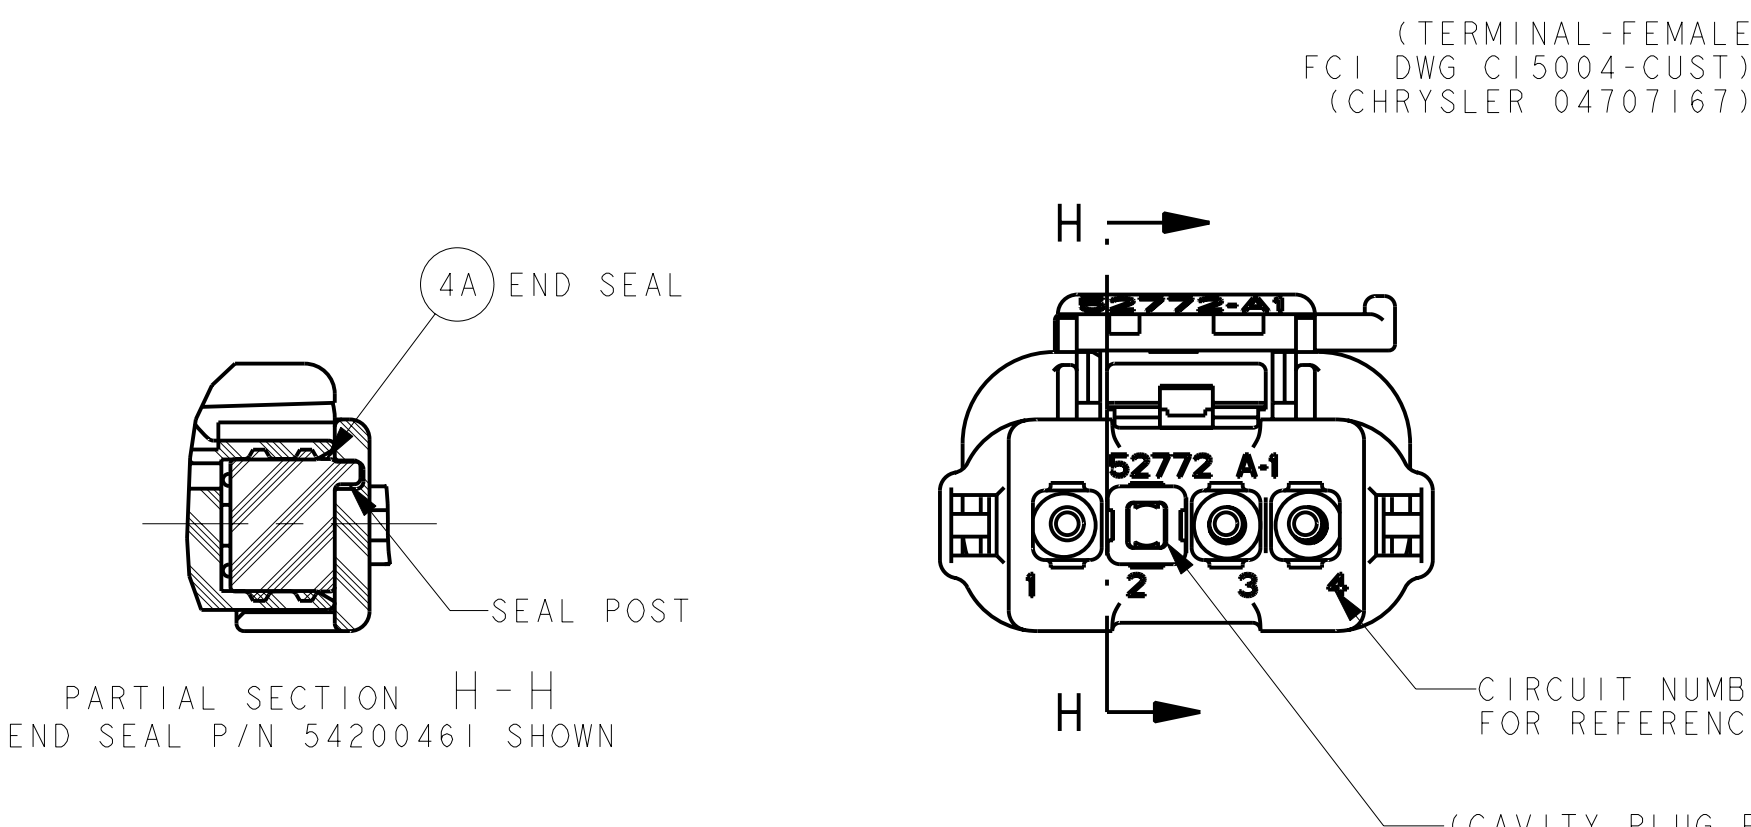
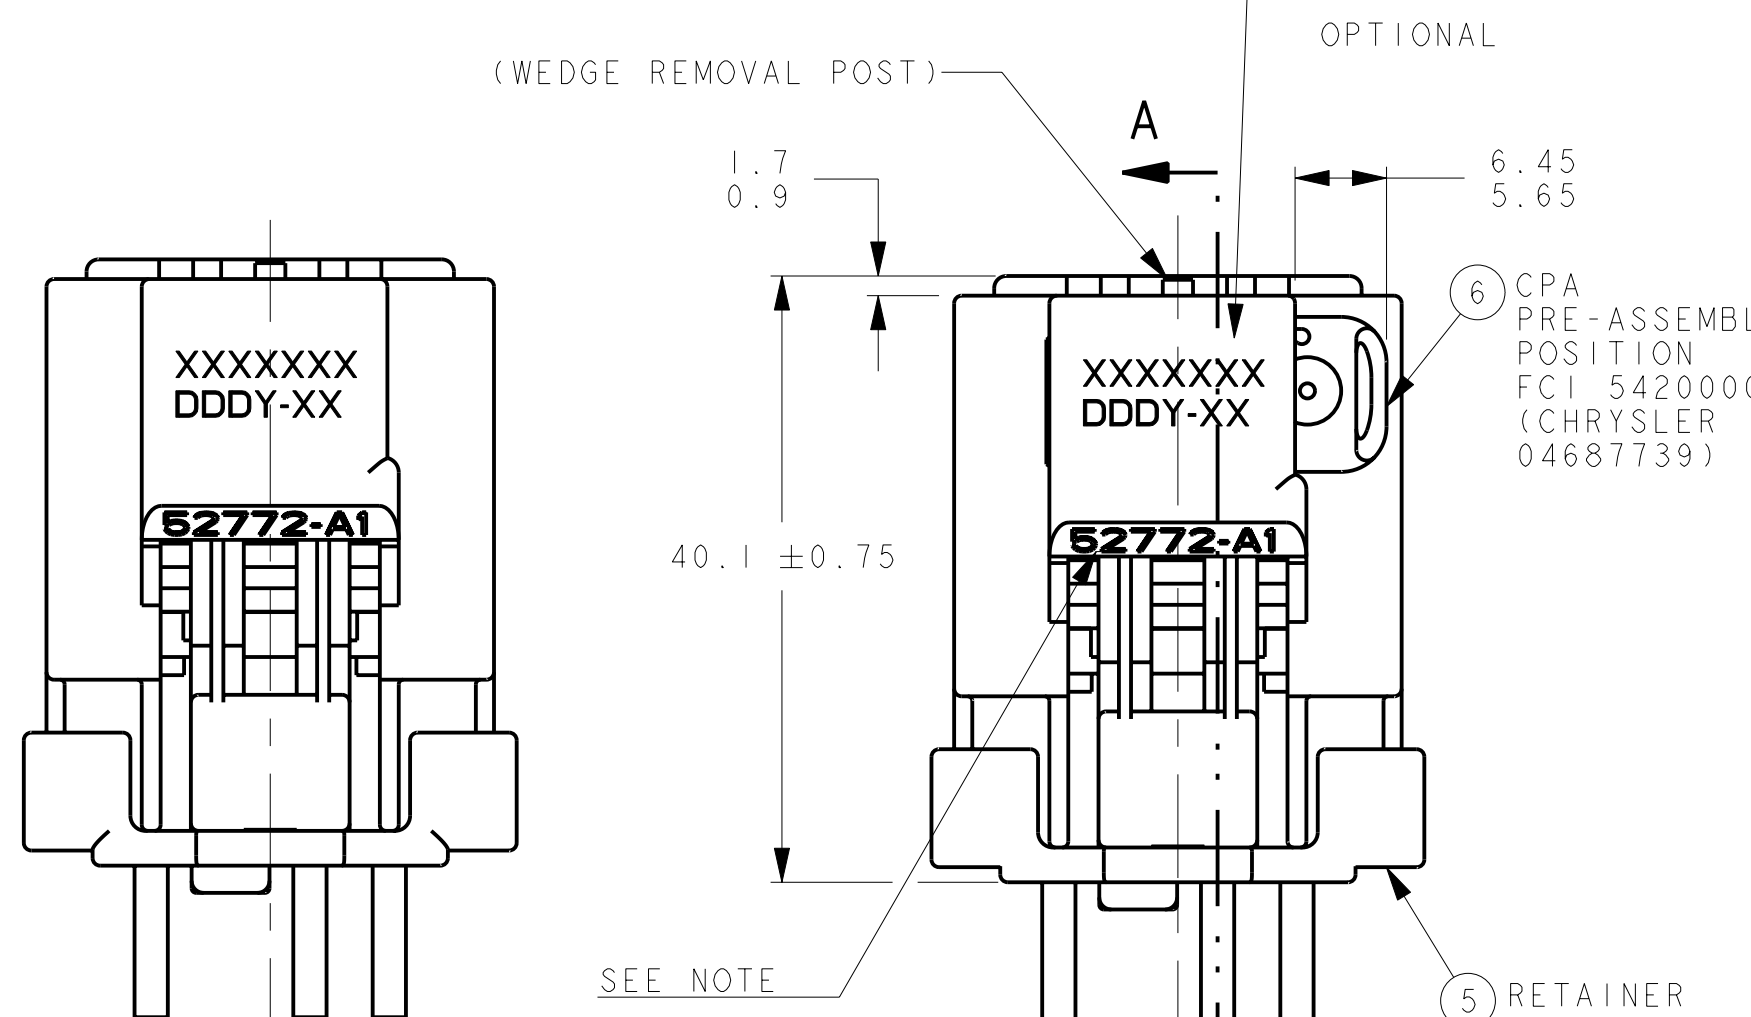


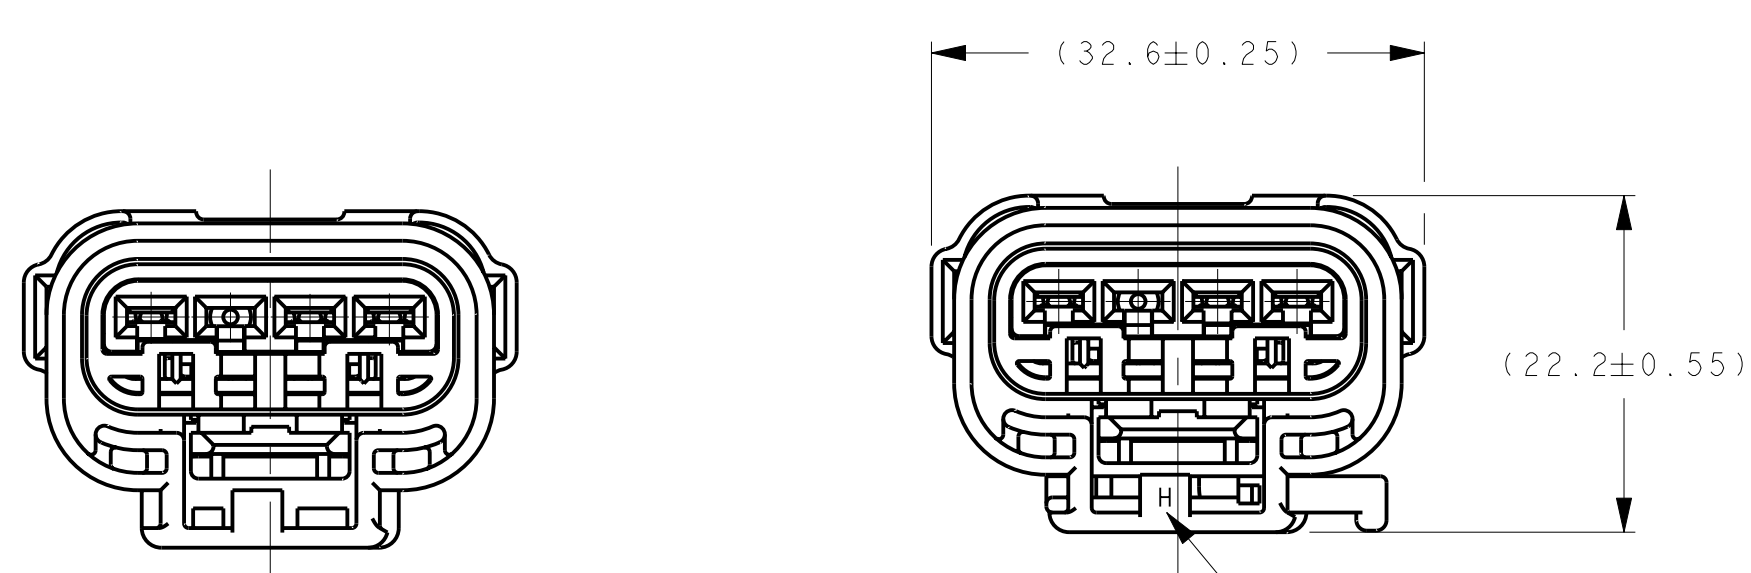

INSULATOR VIEWS FOR REFERENCE ONLY

POLARIZATION OPTIONS FULL SIZE SHOWN W/CPA

POLARIZATION OPTIONS FULL SIZE SHOWN W/O CPA

- NOTES:
- QUALITY ASSURANCE REQUIREMENTS PER CHRYSLER PS-7300: 1 SPC NUMBER REQUIRED
 - ENGINEERING APPROVAL OF SUPPLIER SAMPLES IS REQUIRED PRIOR TO AUTHORIZATION OF PART PRODUCTION
 - CHANGES IN DESIGN COMPOSITION OR PROCESSING FROM THE PART PREVIOUSLY APPROVED FOR PART PRODUCTION REQUIRES PRIOR ENGINEERING APPROVAL
 - WIRING FABRICATORS MUST PURCHASE FROM SOURCES SHOWN
 - ALL THE SEALED CONNECTOR APPLICATIONS MUST BE USED WITH CHRYSLER WIRE SPEC. MS-8288 OR MS-9502 THIN WALL X 16, 18, 20, 18, 16, 14, 12 & 10 GAGE WIRES ONLY UNLESS OTHERWISE SPECIFIED. SEE CHART (WIRE INSULATIONS Ø1.70 MIN TO Ø4.09 MAX.)
 - ALL NON-SEALED APPLICATIONS MAY BE USED WITH ANY WIRE INSULATION 22 GAGE THRU, 10 GAGE (EXCEPT AS NOTED) PROVIDING THAT A TERMINAL GRIP FOR THAT CORE/INSULATION COMBINATION IS SHOWN ON THE FEMALE TERMINAL DRAWING
 - MAX. INSULATION CRIMP WIDTH = 4.50 MAX. INSULATION CRIMP HEIGHT = 4.50 MAX. INSULATION DIA. = 4.09 (10 GA THIN WALL)
 - MUST BE USED WITH FLOUROSILICONE END SEAL FCI P/N 54200430, RETAINER & PROPER GAGE TEFLON WIRES FOR METHANOL OR DIESEL FUEL APPLICATIONS
 - USE WITH CAVITY PLUG FCI P/N 54200005, WHEN REQ'D. USE WITH 2.8MM APEX FEM. TERM. PER C15004-CUST YMA. ABOUT CENTERLINE FOR 180° ORIENTATION
 - TEST METHOD PER SAE/USCAR-2 REV. 5, CONNECTOR ENGAGE & DISENGAGE WITH LATCH DEPRESSED FORCE NOT TO EXCEED 75 N. FOR THIS SYSTEM
 - CPA SEATING FORCES - 40 N. MAX.
 - WEDGE SEATING FORCES - 100 N. MAX.
 - SUPPLIER, MOLD & CAVITY I.D. MUST BE LEGIBLE
 - ANNUAL QUALITY REQUIREMENTS: IT IS PERMISSIBLE TO PERFORM CONTINUOUS CONFORMANCE PER FCI SPECIFICATION HAQA-001 INSTEAD OF ANNUAL LAYOUT & ANNUAL PV REQUIREMENTS OF QS-9000 SECTION 2 & PF-9600
 - ALL NON-REFERENCE DIMENSIONS ARE REQUIRED
 - USE INDEX A, BLACK SEALED AND UNSEALED FOR ALL AFFECTED INSULATOR CAVITIES
 - CURRENT PRODUCTION TOOLING
 - POINT OF LAST RUN
 - SERVICE TOOLING GUIDE INFORMATION PER APEX TRAINING MANUAL
 - MUST CONFORM TO THE FOLLOWING CHRYSLER/YMA STANDARDS:
 - PF-9600 PERFORMANCE (CHRYSLER) EXCEPT AS NOTED ABOVE PS-7300 QUALITY ASSURANCE (CHRYSLER)
 - PS-4480-CEK-4 (CHRYSLER) PART I.D. (G-009-2 YNA)
 - PS-9065 REGRIND (CHRYSLER), (G-009-3 YNA)
 - PS-9227 DATA EXCHANGE (CHRYSLER), (G-009-7 YNA)
 - PS-10052 INFORMATION SECURITY (CHRYSLER)
 - THIS DRAWING (H59003) REPLACES CHRYSLER DRAWING NUMBER 04707254 LEVEL "R" CHRYSLER DRAWING IS FOR REFERENCE ONLY
 - FCI P/N WITH SUFFIX "N" DESIGNATES ASSEMBLIES W/O CPA
 - P/N'S WITH BURNT ORANGE END SEAL CAN BE USED WITH 12 OR 14 GAGE IN ANY COMBINATION OR ORDER OR WITH THREE 12 GAGE AND ONE 18 GAGE OR ONE 16 GAGE WIRE (ONE END)

MATING PART NUMBER CHART					
D	NATURAL	UNSEALED	54200404N	N/A	
		UNSEALED	54200404A	C 56038053	
		SEALED	5420040412N	N/A	
		SEALED	5420040412	C 04707264	
	BLACK	SEALED	F915600	N/A	F225600
C	DK GREY	UNSEALED	54200403N	N/A	
		UNSEALED	54200403A	C 56038193	
		SEALED	542004041N	N/A	
		SEALED	542004041	C 04707263	
	BLACK	SEALED	55200428	N/A	
B	LT GREY	SEALED	F815600	N/A	
		UNSEALED	54200402N	C 04688849	
		SEALED	54200450N	N/A	
		SEALED	54200450A	C 04707510	
A	BLACK	SEALED	54200444N	C 04801217AA	
		SEALED	54200427N	N/A	
		SEALED	54200422	C 04759394AA	
		SEALED	54200410N	N/A	
INDEX TYPE	COLOR	SEALED/UNSEALED	FCI	CUSTOMER	
		SEALED/UNSEALED	FCI	CUSTOMER	
		SEALED/UNSEALED	FCI	CUSTOMER	
		SEALED/UNSEALED	FCI	CUSTOMER	
CUSTOMER: CHRYSLER - C					
GENERAL MOTORS - GM					
FCI 52772 OR 52772 H SEE CHART					
VENDOR VENDOR CODE P/N					

ASSEMBLY PART NUMBER CHART									
UNSEALED		SEALED							
W/O CPA		W/CPA		W/CPA				W/O CPA	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.