

# 30A-40A SERIES

## 30kV to 40kV High Voltage Biasing Supplies

The 30A-40A Series of regulated, high-voltage DC-DC converters are an extension of the A Series, directly addressing the needs of the miniature PCB or chassis-mount  $\geq 30\text{kV}$  application. Designed and built utilizing state-of-the-art power conversion topology, these units feature surface-mount technology and encapsulation techniques providing high reliability and low cost. Typical applications for the 30A-40A Series include the following: electrostatic discharge testers, plasma, electrostatic, x-ray, and wire testers.

- 0 to 30kV, 35kV or 40kV output
- 4, 15 or 30 watts of output power
- Maximum Iout capability down to 0 Volts
- Wide input voltage range
- Indefinite output short-circuit protection



- Output current & voltage monitors
- Fixed-frequency, low-stored-energy design
- >400,000 hour MTBF @65°C
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

PARAMETER	CONDITIONS	MODELS									UNITS	
INPUT		12V			24V							
Voltage Range	Full Power	+ 11 to 16			+ 23 to 30						VDC	
Voltage Range	Derated Power Range	+ 9 to 32			+ 9 to 32						VDC	
Current	Standby / Disable	< 30			< 30						mA	
Current	No Load, Max Eout	30A < 0.25, 35A < 0.35, 40A < 0.38			30A < 0.30, 35A < 0.20, 40A < 0.38						A	
Current	Max Load, Max Eout	~ 800			~1800						mA	
AC Ripple Current	Nominal Input, Full Load	< 80			< 80						mA p-p	
OUTPUT		30A			35A			40A				
Voltage Range	Nominal Input	0 to 30,000			0 to 35,000			0 to 40,000			VDC	
Nominal Input Voltage / Model		12	24	24	12	24	24	12	24	24	VDC	
Power	Nominal Input, Max Eout	4	15	30	4	15	30	4	15	30	Watts	
Current	Iout Entire Output Voltage Range	0.13	0.50	1.0	0.11	0.42	0.86	0.10	0.37	0.75	mA	
Current Scale Factor	Full Load	.140	.173	.181	.158	.179	.184	.077	.089	.092	mA/V	
Voltage Monitor Scaling		1000:1 $\pm$ 2% into 10M $\Omega$									-	
Ripple	Full Load, Max Eout, 300pF bypass Cap.	0.025	0.039	0.058	0.025	0.040	0.075	0.030	0.060	0.064	%V p-p	
Ripple with -F-M Option	Full Load, Max Eout, 300pF bypass Cap.	0.021	0.028	0.048	0.016	0.034	0.040	0.007	0.025	0.053	%V p-p	
Dynamic Load Regulation	1/2 to Full Load, Max Eout per 0.1mA	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	V pk	
Line Regulation	Nom. Input, Max Eout, Full Power	< 0.01 %									VDC	
Static Load Regulation	No Load to Full Load, Max Eout	< 0.01 %									VDC	
Stability	30 Min. warmup, per 8 hr/ per day	< 0.01% / < 0.02%									VDC	
PROGRAMMING & CONTROLS		ALL TYPES										
Input Impedance	Nominal Input	+ Output Models 1.1M $\Omega$ to GND, - Output Models 1.1M $\Omega$ to +5 Vref									M $\Omega$	
Adjust Resistance	Typical Potentiometer Values	10K to 100K (Pot across Vref. & Signal GND, Wiper to Adjust)									$\Omega$	
Adjust Logic	0 to +5 for +Out, +5 to 0 for - Out	+4.64 VDC for +Output or +0.36 for -Output = Nominal Eout									-	
Output Voltage & Impedance	T= $\pm$ 25°C	+ 5.00VDC $\pm$ 2%, Zout = 464 $\Omega$ $\pm$ 1%									-	
Enable/Disable		0 to +0.5 Disable, +2.4 to 32 Enable (Default = Enable)									VDC	
ENVIRONMENTAL		STANDARD					-25PPM					
Operating	Full Load, Max Eout, Case Temp.	-40 to +65					+10 to +45					°C
Coefficient	Over the Specified Temperature	$\pm$ 50					$\pm$ 25					PPM/°C
Thermal Shock	Mil-Std 810, Method 503-4, Proc. II	-40 to +65									°C	
Storage	Non-Operating, Case Temp.	-55 to +105									°C	
Humidity	All Conditions, Standard Package	0 to 95% non-condensing									-	
Altitude	Standard Package, All Conditions	Sea Level through Vacuum (Vacuum may require -P2 option, contact factory for details.)									-	
Shock	Mil-Std-810, Method 516.5, Proc. IV	20 (Standard), 40 (-C Option)									G's	
Vibration	Mil-Std-810, Method 514.5, Fig.514.5C-3	10 (Standard), 20 (-C Option)									G's	

Specifications subject to change without notice.




Making High Voltage Easier!®

Higher Service, Higher Performance, Higher Reliability

©2011, UltraVolt Inc. All rights reserved.

# 30A-40A SERIES

## 30kV to 40kV High Voltage Biasing Supplies

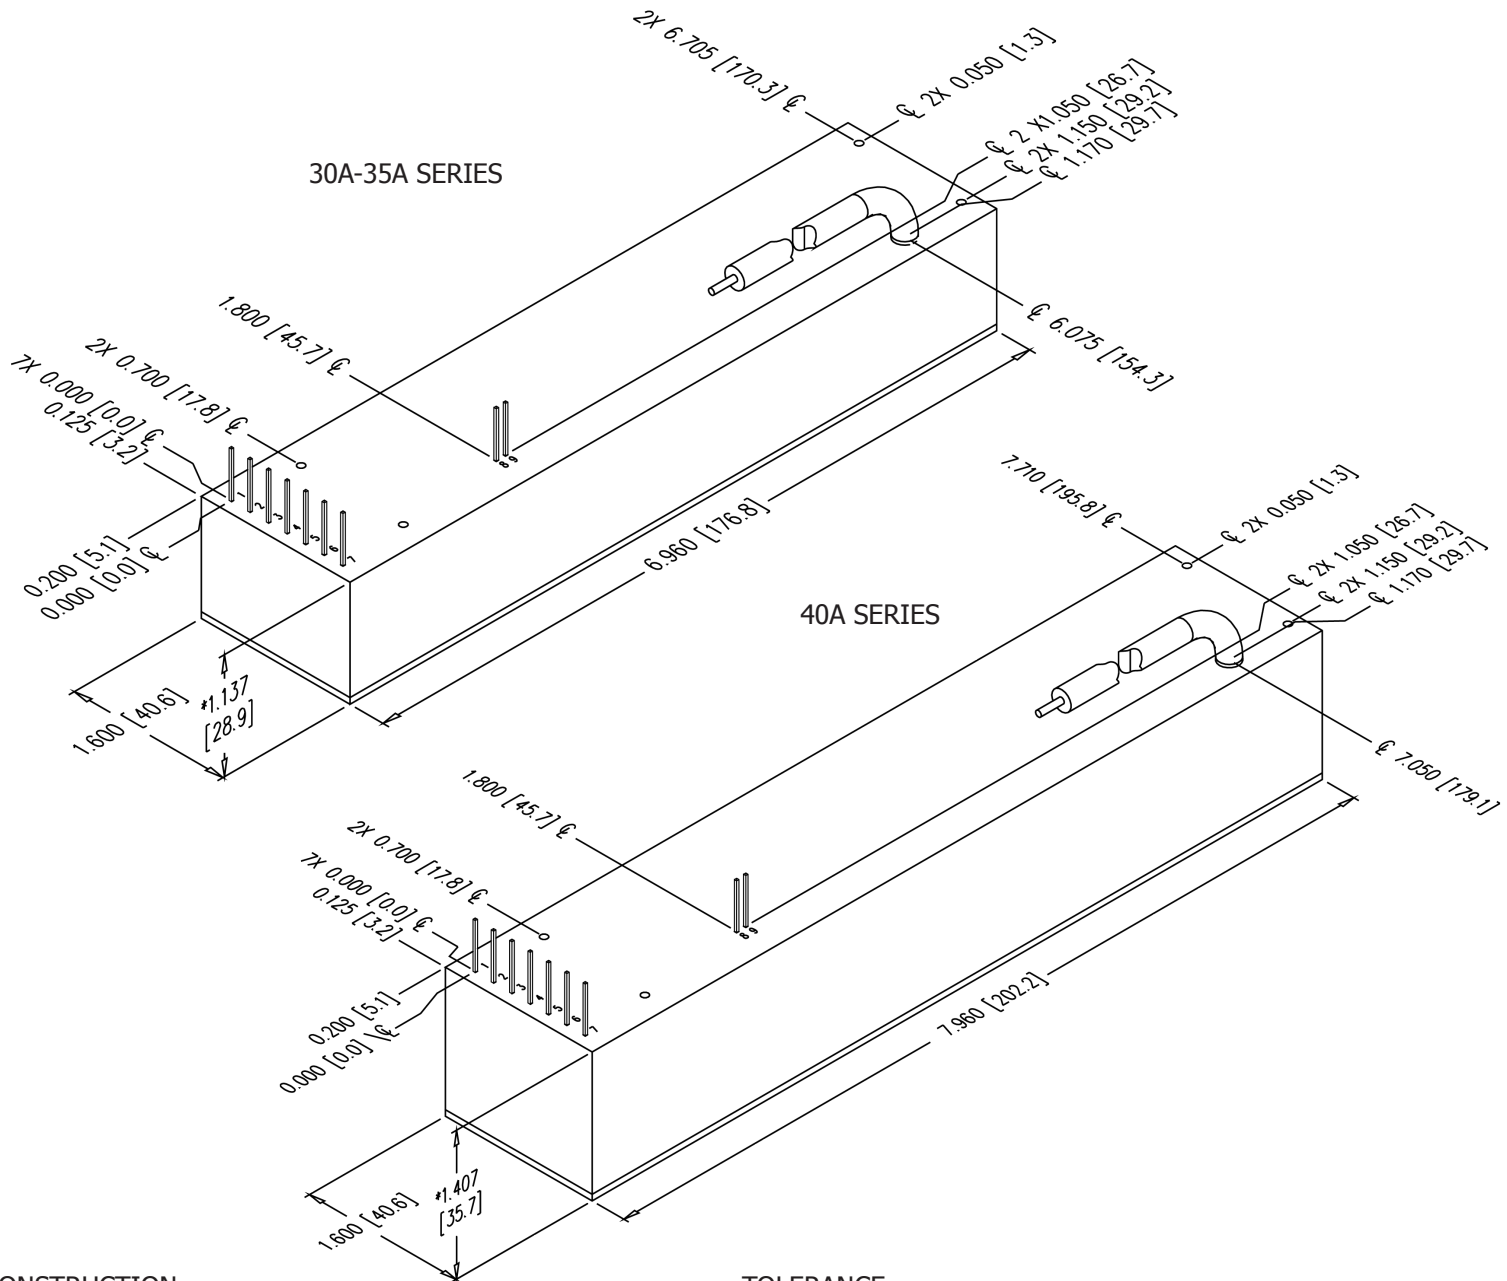

### CONSTRUCTION

Epoxy-filled DAP box certified to ASTM-D-5948 with -C Option:  
Aluminum Alloy 5052-H32, Finish: MIL-A-8625 Type II (Anodizing)

### SIZE

Volume:  
30A/35A: 12.66 in<sup>3</sup> (207.46cc), w/-C Option 20.00 in<sup>3</sup> (327.80cc)  
40A: 17.92 in<sup>3</sup> (293.66cc), w/-C Option 27.00 in<sup>3</sup> (442.53cc)  
Weight:  
30A/35A: 15.00 oz (425.24g), w/-C Option 22.00 oz (623.69g)  
40A: 21.00 oz (595.34g), w/-C Option 30.00 oz (850.49g)

### TOLERANCE

Overall  $\pm 0.050''$  (1.27)  
Pin to Pin  $\pm 0.015''$  (0.38)  
Mounting hole locations  $\pm 0.025''$  (0.64)

### NOTES

-M equipped units are an additional 0.030'' (0.76) for each dimension.  
Contact [UV Customer Service](#) for drawings of models equipped with -E, -C, or -H options.

[Downloadable drawings \(complete with mounting & pin information\) and 3D models are available online.](#)



**Making High Voltage Easier!®**

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 [www.ultravolt.com](http://www.ultravolt.com)

# 30A-40A SERIES

## 30kV to 40kV High Voltage Biasing Supplies

CONNECTIONS	
PIN	FUNCTION
1	Input-Power Ground Return
2	Positive Power Input
3	Iout Monitor
4	Enable/Disable
5	Signal Ground Return
6	Remote Adjust Input
7	+5VDC Reference Output
8	HV Ground Return
9	Eout Monitor


All grounds joined internally. Power-supply mounting points isolated from internal grounds by  $>100k\Omega$ ,  $.01\mu F / 50V$  (Max) on all models except -M (15W and above), -M-E, -M-C, and -M-H configurations which are  $0\Omega$ .

ORDERING INFORMATION		
Type	0 to 30,000 VDC Output	30A
	0 to 35,000 VDC Output	35A
	0 to 40,000 VDC Output	40A
Input	12VDC Nominal (4W only)	12
	24VDC Nominal (15W and 30W only)	24
Polarity	Positive Output	-P
	Negative Output	-N
Power	Watts Output (12 V Only)	4
	Watts Output (24 V Only)	15
	Watts Output (24 V Only)	30
Case	Plastic Case - Diallyl Phthalate	(Standard)
	'Eared' Heatsink Plate (Plastic Case)	-E
	RF-Tight Aluminum Enclosure	-C
Heatsink	.400" High (sized to fit case)	-H
Shield	Six-sided Mu-Metal Shield	-M
Ripple Stripper®	Integral Output Filter (See -F Option Data Sheet) and Mu-Metal	-F -M
Lead Options	Shielded Flying Lead	-AS
	Protected Flying Lead	-AP
	Terminated Flying Lead (Contact Customer Service)	-ATxx
Temp. Coefficient	25PPM Temperature Coefficient	-25PPM



Non-RoHS compliant units are available. Please contact the factory for more information.

Manufactured in USA

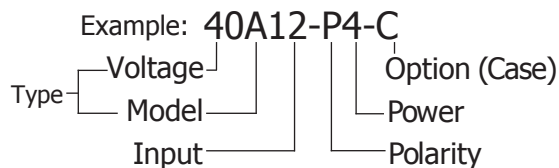

Popular accessories ordered with this product include CONN-KIT, BR-5 and BR-9 mounting bracket kits, and our full range of high voltage output connectors (see Accessories & Connectors datasheet).





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.