

FMM5061VF

X-Band Power Amplifier MMIC

FEATURES

- High Output Power: Pout=33.0dBm (typ.)
- High Linear Gain: GL=27.0dB (typ.)
- Broad Band: 9.5~13.3GHz
- Impedance Matched Zin/Zout=50Ω
- Small Hermetic Metal-Ceramic Package(VF)

DESCRIPTION

The FMM5061VF is a MMIC amplifier that contains a three-stage amplifier, internally matched, for standard communications band in the 9.5 to 13.3GHz frequency range.



Eudyna Devices's stringent Quality Assurance Program assures the highest reliability and consistent performance.

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V _{DD}		10	V
Gate-Source Voltage	V _{GG}		-7	V
Input Power	P _{in}		26	dBm
Channel Temperature	T _{ch}		+175	°C
Storage Temperature	T _{stg}		-55~125	°C

RECOMMENDED OPERATING CONDITION

Item	Symbol	Condition	Recommend	Unit
Drain-Source Voltage	V _{DD}		6	V
Gate-Source Voltage	V _{GG}		-5	V
Input Power	P _{in}		≤12	dBm
Operating Case Temperature	T _C		-40~+85	°C

ELECTRICAL CHARACTERISTICS (Case Temperature T_C=25°C)

Item	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
Frequency Range	f	V _{DD} =6V	9.5	-	13.3	GHz
Output Power at 1dB G.C.P.	P _{1dB}	V _{GG} =-5V Z _S =Z _L =50ohm	31 ^{*1} 29 ^{*2}	33 ^{*1} 31 ^{*2}	-	dBm
Power Gain at 1dB G.C.P.	G _{1dB}	*1:f=9.5~11.7GHz *2:f=11.7~13.3GHz	24 ^{*1} 22 ^{*2}	26 ^{*1} 24 ^{*2}	-	dB
Power-added Efficiency at 1dB G.C.P.	η _{add}		-	21 ^{*1} 15 ^{*2}	-	%
Third Order Intermodulation*	IM ₃	*3:Δf=10MHz ,	-42 ^{*3}	-45 ^{*3}	-	dBc
Drain Current at 1dB G.C.P.	I _{DD}	2-Tone Test, P _{out} =19dBm S.C.L.	-	1700 ^{*1} 1500 ^{*2}	2400 ^{*1} 2400 ^{*2}	mA
Gate Current	I _{GG}		-	25	-	mA
Input Return Loss (at Pin=-20dBm)	RL _{in}		-	-8	-	dB
Output Return Loss (at Pin=-20dBm)	RL _{out}		-	-8	-	dB

CASE STYLE: VF

G.C.P.:Gain Compression Point, S.C.L.:Single Carrier Level


ESD	Class 0	~ 199 V
-----	---------	---------

Note : Based on EIAJ ED-4701 C-111A(C=100pF, R=1.5kΩ)


FMM5061VF

X-band Power Amplifier MMIC


OUTPUT POWER vs. FREQUENCY

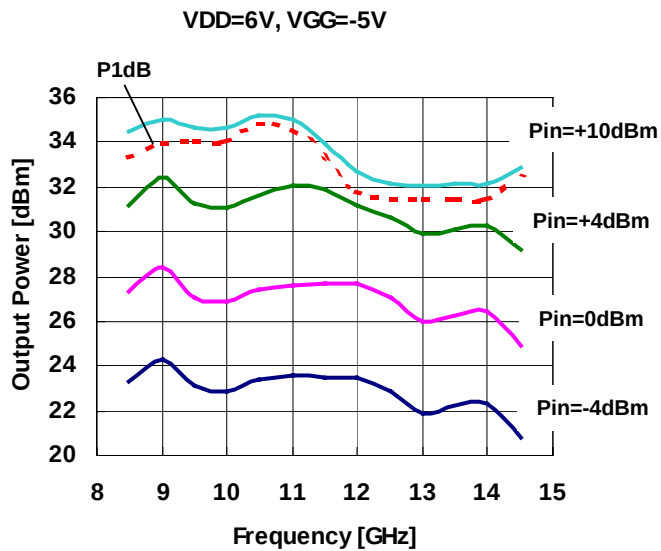

OUTPUT POWER, DRAIN CURRENT vs. INPUT POWER

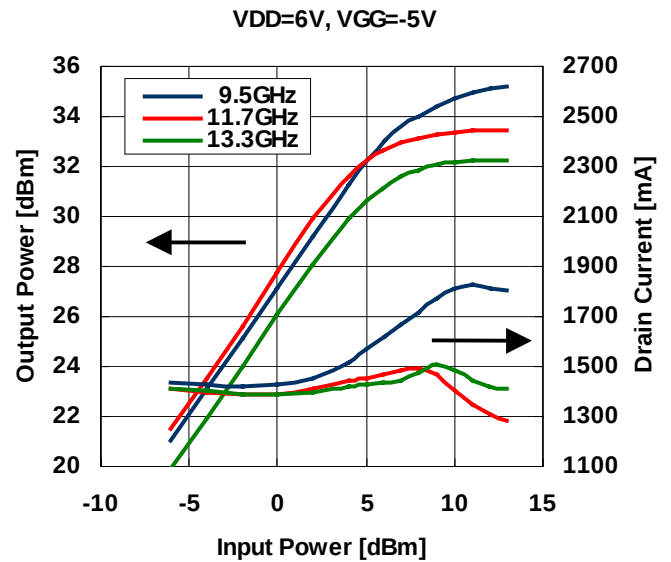

POWER ADDED EFFICIENCY vs FREQUENCY

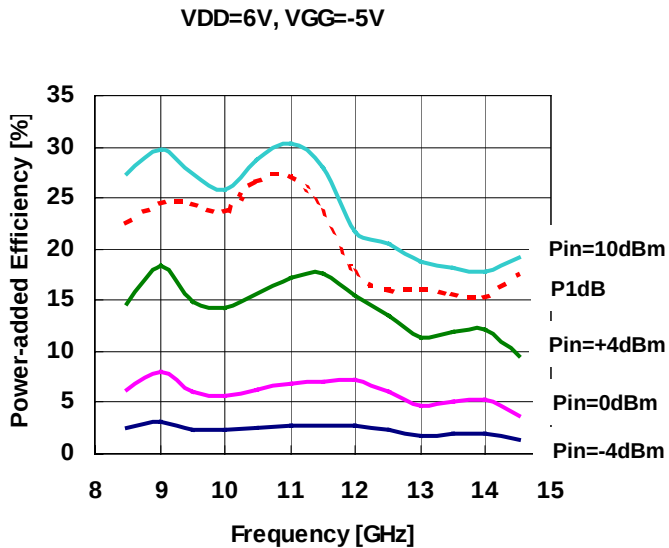


FMM5061VF

X-Band Power Amplifier MMIC


IMD vs. FREQUENCY

VDD=6V, VGG=-5V, Pout=19dBm S.C.L.

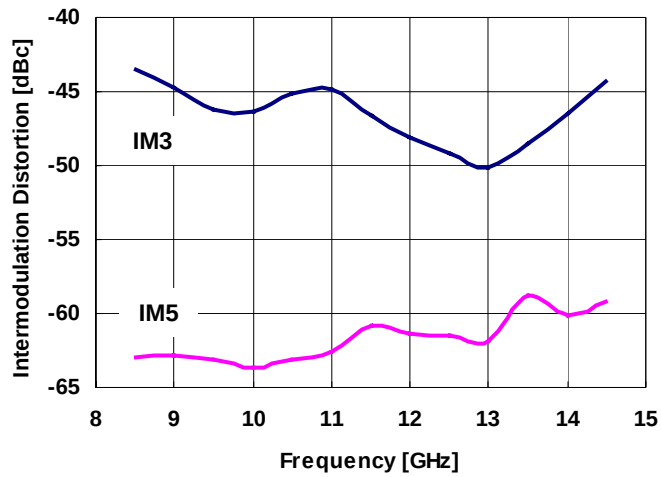

IMD vs. OUTPUT POWER


VDD=6V, VGG=-5V

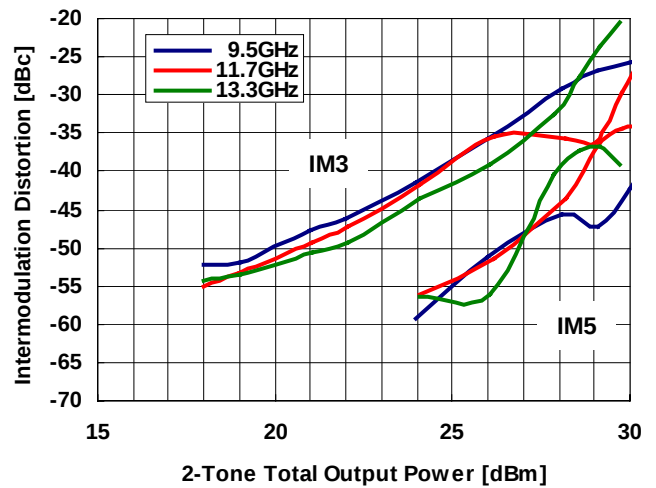


FMM5061VF

X-band Power Amplifier MMIC


OUTPUT POWER, DRAIN CURRENT
vs. INPUT POWER by Drain Voltage

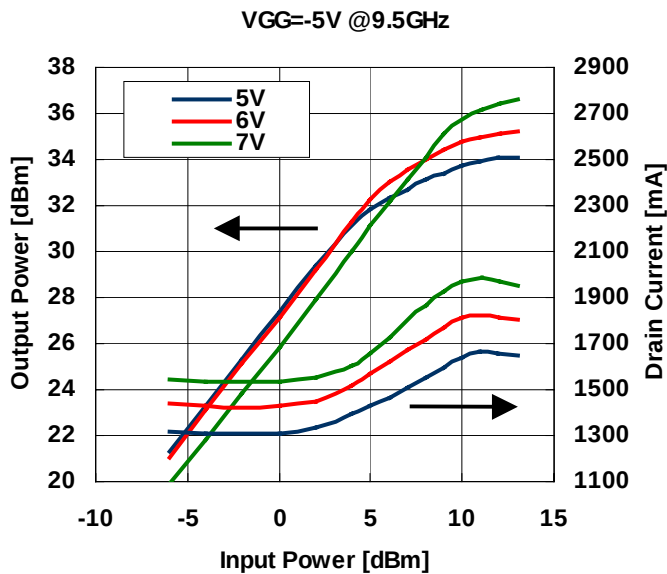


OUTPUT POWER, DRAIN CURRENT
vs. INPUT POWER by Drain Voltage

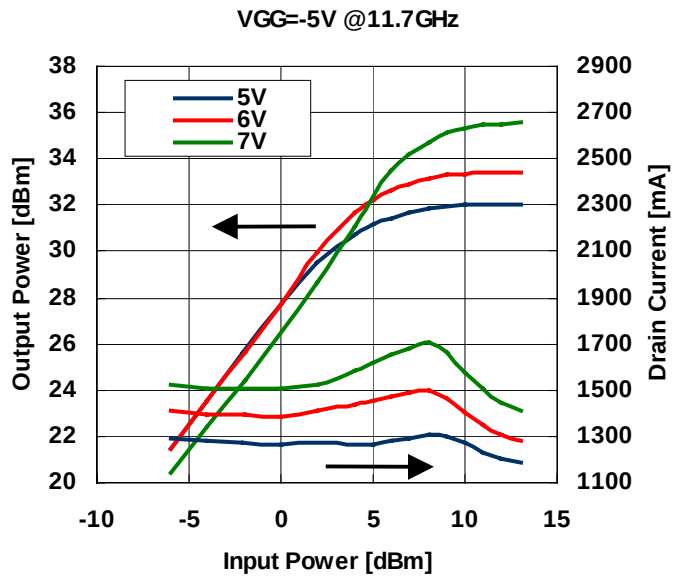

OUTPUT POWER, DRAIN CURRENT
vs. INPUT POWER by Drain Voltage

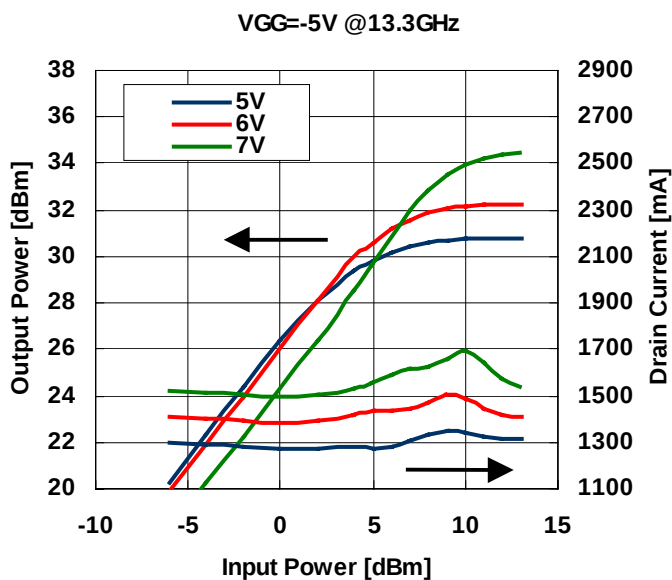


OUTPUT POWER, GAIN vs. DRAIN VOLTAGE

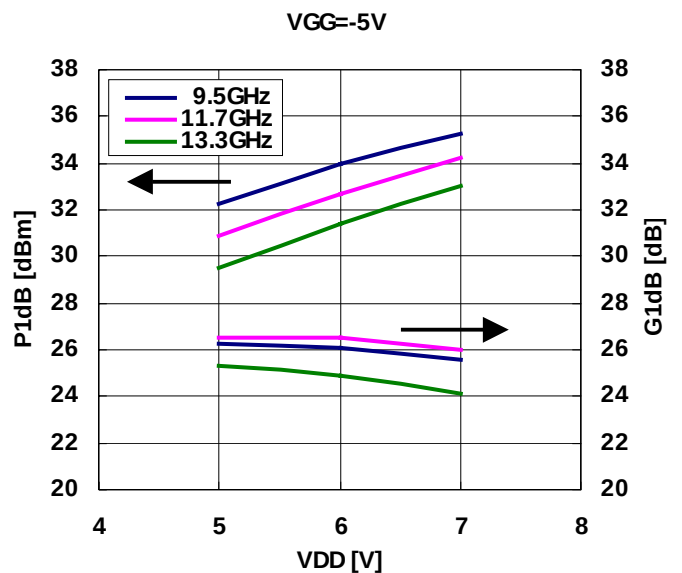


FMM5061VF

X-Band Power Amplifier MMIC


OUTPUT POWER, DRAIN CURRENT
vs. INPUT POWER by Gate Voltage

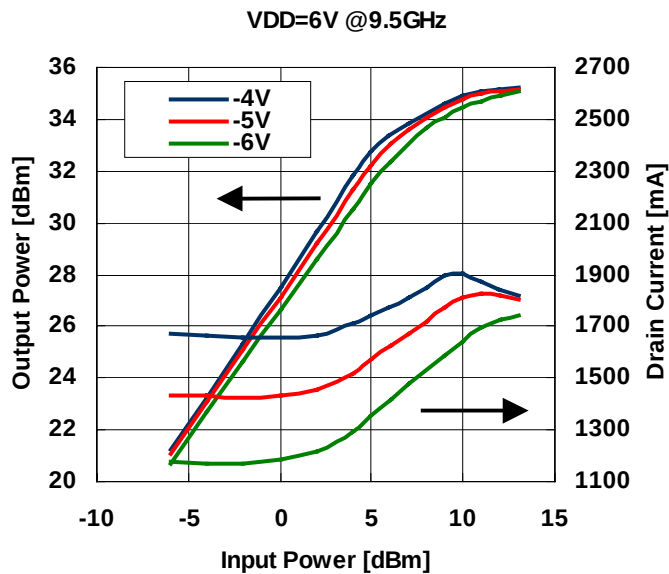


OUTPUT POWER, DRAIN CURRENT
vs. INPUT POWER by Gate Voltage

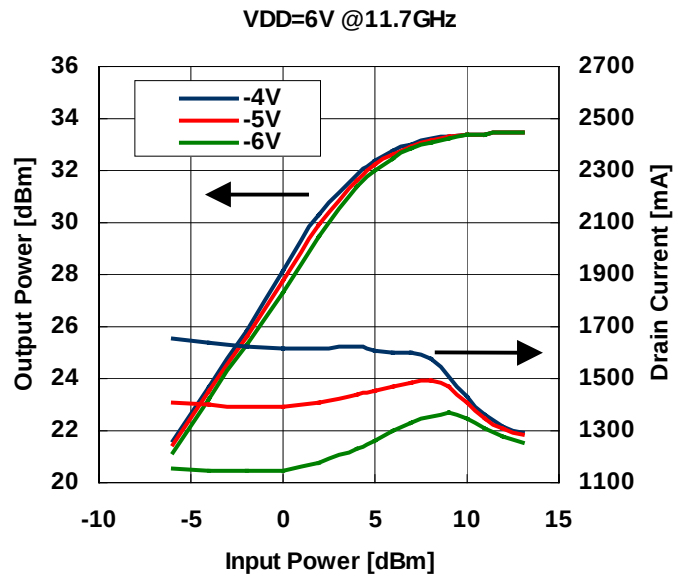

OUTPUT POWER, DRAIN CURRENT
vs. INPUT POWER by Gate Voltage

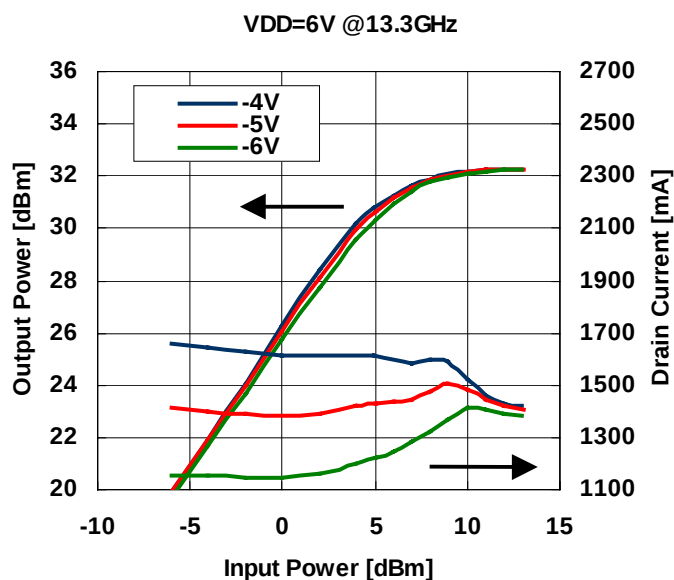

OUTPUT POWER, GAIN vs. GATE VOLTAGE

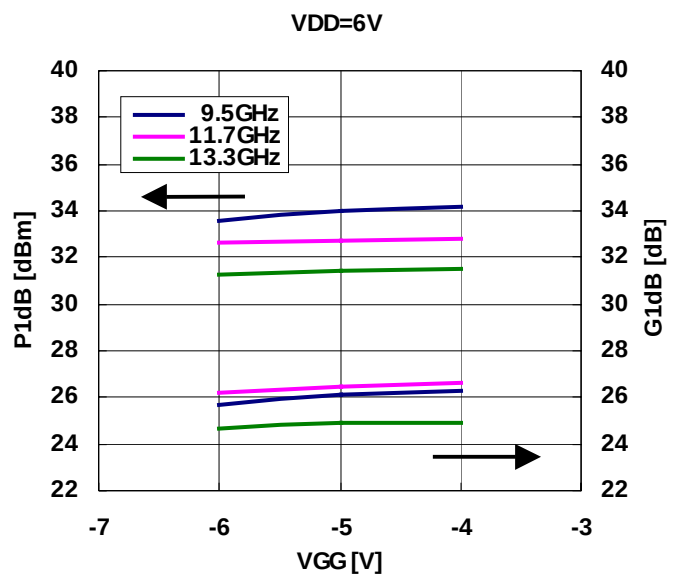


Eudyna

FMM5061VF

X-band Power Amplifier MMIC


IMD PERFORMANCE vs OUTPUT POWER
by Drain Voltage

VGG=-5V @9.5GHz

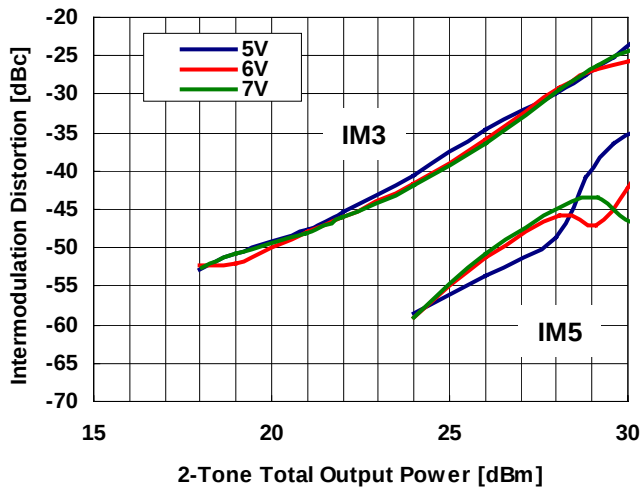


IMD PERFORMANCE vs OUTPUT POWER
by Drain Voltage

VGG=-5V @11.7GHz

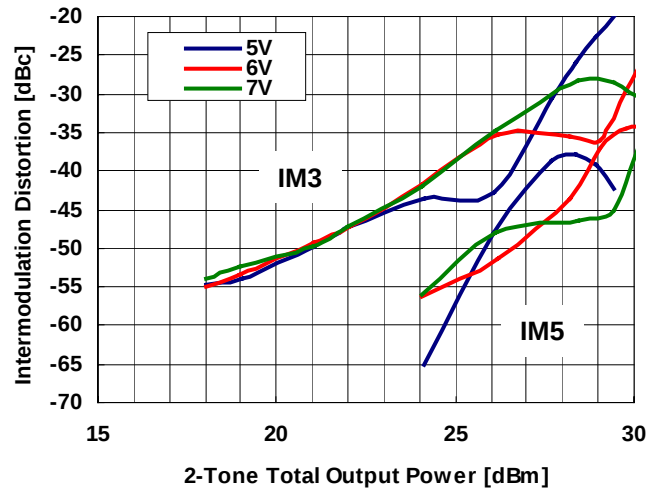

IMD PERFORMANCE vs OUTPUT POWER
by Drain Voltage

VGG=-5V @13.3GHz

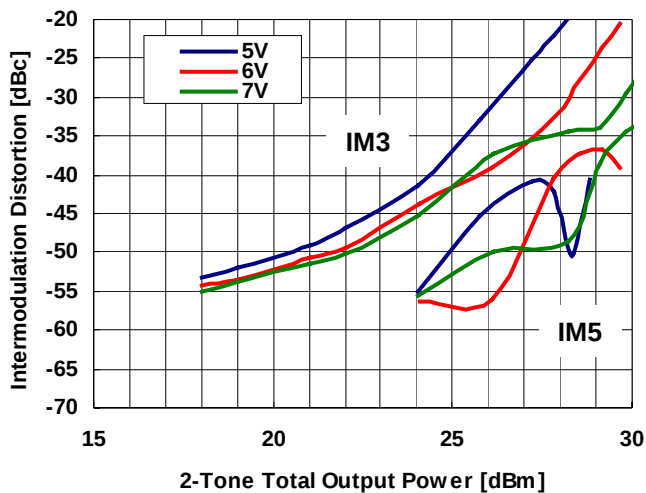


FMM5061VF

X-Band Power Amplifier MMIC


IMD PERFORMANCE vs OUTPUT POWER
by Gate Voltage

VDD=6V @9.5GHz

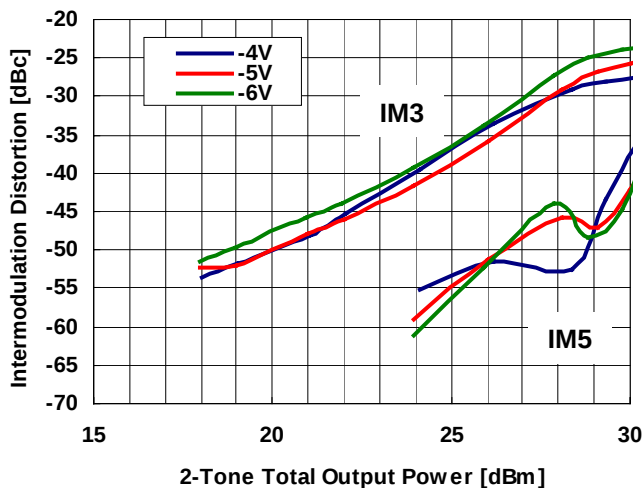


IMD PERFORMANCE vs OUTPUT POWER
by Gate Voltage

VDD=6V @11.7GHz

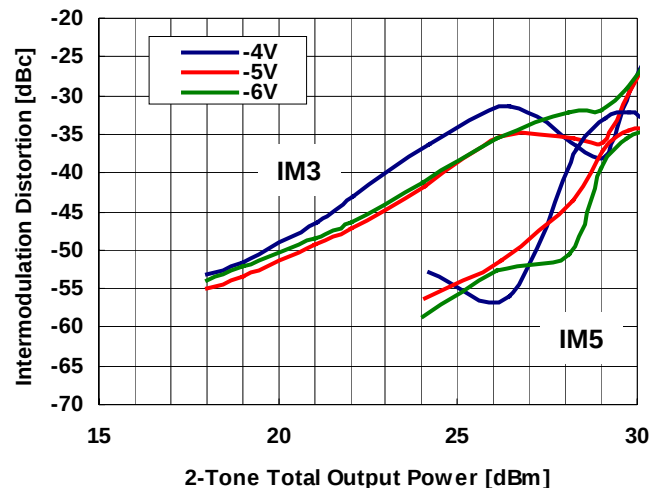

IMD PERFORMANCE vs OUTPUT POWER
by Gate Voltage


VDD=6V @13.3GHz

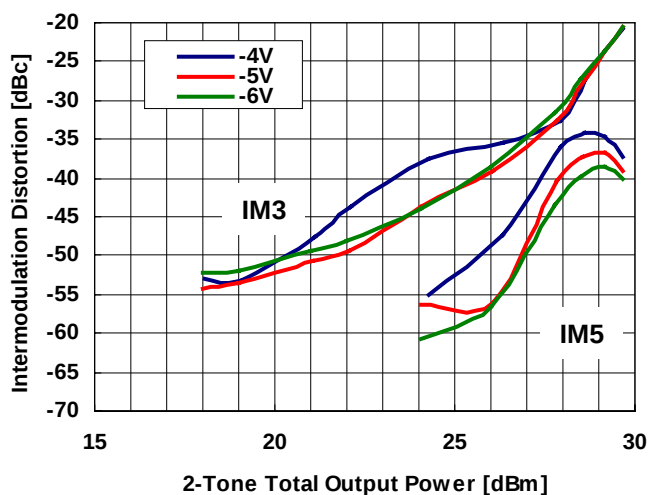


FMM5061VF

X-band Power Amplifier MMIC


OUTPUT POWER, DRAIN CURRENT vs.
INPUT POWER by Temperature

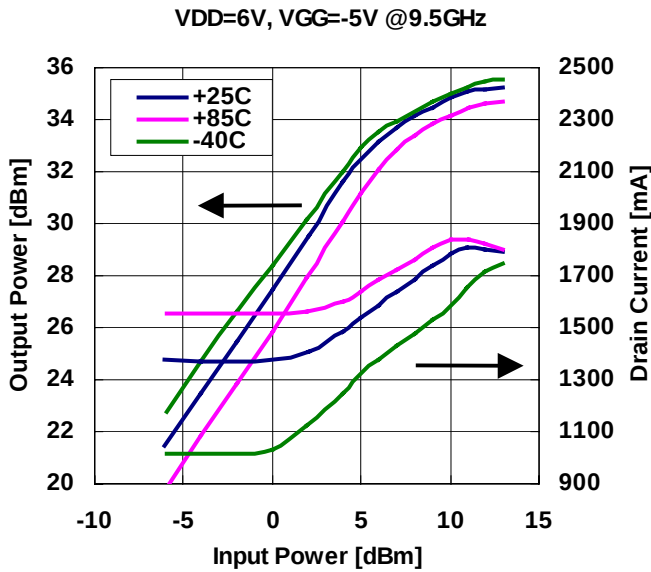


OUTPUT POWER, DRAIN CURRENT vs.
INPUT POWER by Temperature

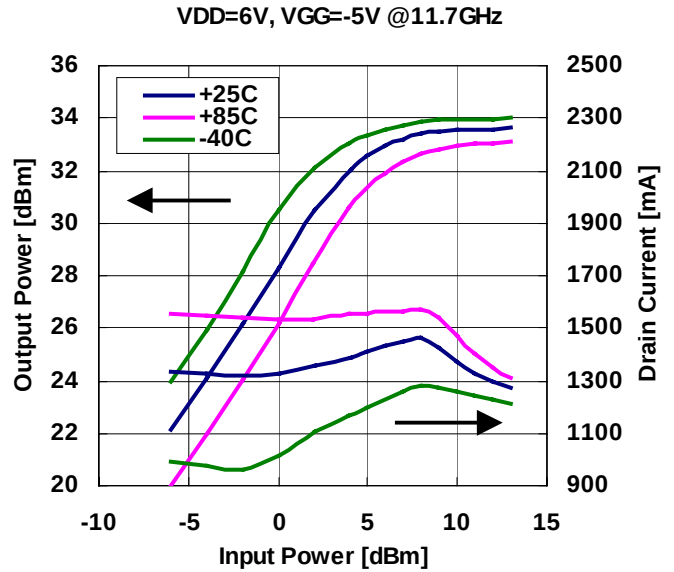

OUTPUT POWER, DRAIN CURRENT vs.
INPUT POWER by Temperature

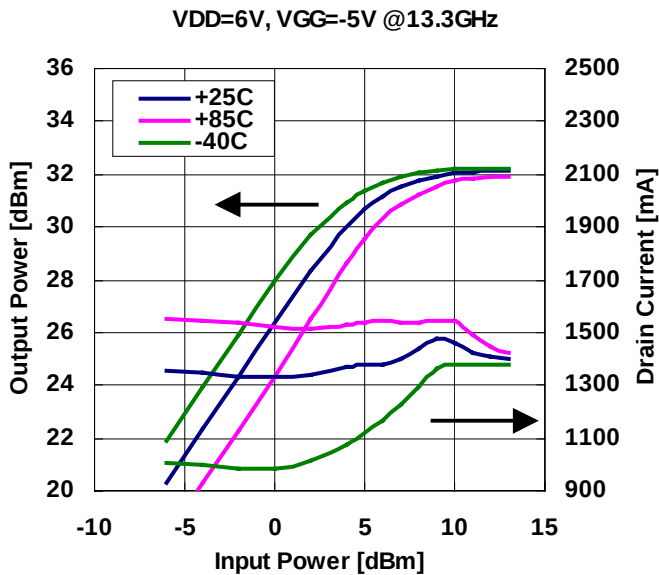

OUTPUT POWER, GAIN vs. TEMPERATURE


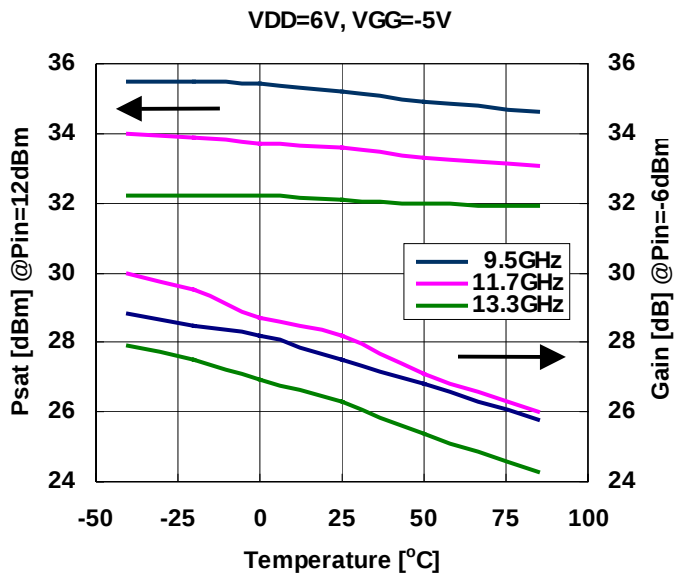


Eudyna

FMM5061VF

X-Band Power Amplifier MMIC

■ S-PARAMETER

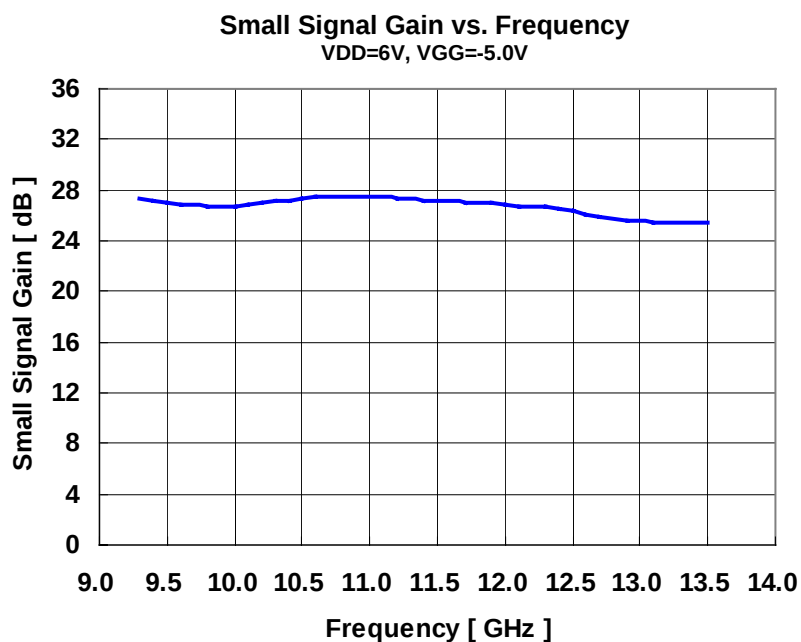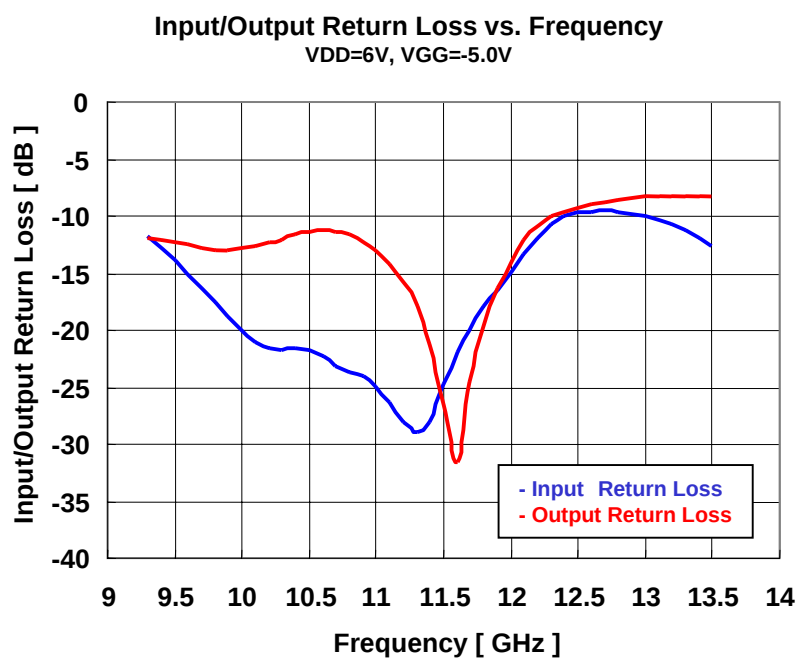

FMM5061VF

X-band Power Amplifier MMIC

■ S-PARAMETER

VDD=6.0V, VGG=-5.0V


Frequency [GHz]	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
9.30	0.261	-99.9	23.106	-71.0	0.003	-155.4	0.252	-41.8
9.40	0.231	-104.9	22.787	-85.3	0.003	-162.6	0.250	-46.1
9.50	0.204	-107.9	22.461	-99.3	0.003	-166.3	0.243	-50.7
9.60	0.177	-111.0	22.034	-113.0	0.003	-169.3	0.236	-53.9
9.70	0.154	-114.3	21.842	-126.2	0.003	-168.3	0.228	-56.2
9.80	0.133	-116.1	21.705	-139.2	0.003	-170.0	0.225	-57.6
9.90	0.116	-114.8	21.602	-151.7	0.003	-175.1	0.225	-58.1
10.00	0.100	-112.4	21.781	-164.4	0.003	-179.7	0.228	-58.8
10.10	0.089	-108.2	21.916	-177.4	0.003	-179.4	0.232	-59.6
10.20	0.083	-103.6	22.244	169.8	0.003	178.1	0.241	-60.6
10.30	0.082	-98.8	22.665	156.8	0.003	174.8	0.250	-62.4
10.40	0.084	-96.7	22.982	143.4	0.003	169.9	0.261	-64.6
10.50	0.083	-97.2	23.362	129.3	0.003	168.6	0.272	-68.4
10.60	0.077	-97.2	23.583	115.3	0.003	171.2	0.275	-73.6
10.70	0.070	-97.8	23.710	101.3	0.002	172.9	0.271	-79.1
10.80	0.066	-96.7	23.685	87.6	0.003	176.6	0.261	-84.3
10.90	0.063	-95.5	23.626	73.4	0.003	174.2	0.244	-89.7
11.00	0.057	-93.2	23.536	59.2	0.003	173.1	0.223	-95.1
11.10	0.048	-86.6	23.513	46.0	0.003	172.1	0.196	-99.9
11.20	0.040	-74.5	23.249	32.3	0.003	176.4	0.163	-104.3
11.30	0.036	-52.8	23.074	18.8	0.003	173.4	0.128	-108.0
11.40	0.040	-30.0	22.920	4.9	0.003	171.7	0.087	-108.7
11.50	0.057	-19.9	22.825	-8.5	0.003	168.7	0.048	-99.7
11.60	0.080	-10.9	22.875	-22.0	0.003	167.8	0.027	-35.6
11.70	0.100	-11.2	22.517	-35.9	0.003	165.0	0.059	9.9
11.80	0.128	-12.8	22.305	-49.7	0.004	161.1	0.105	15.3
11.90	0.151	-14.1	22.229	-63.5	0.004	153.6	0.153	13.6
12.00	0.180	-18.9	21.987	-76.9	0.004	146.3	0.201	9.4
12.10	0.217	-22.2	21.654	-90.7	0.004	135.0	0.248	3.4
12.20	0.253	-27.9	21.530	-104.2	0.004	123.8	0.287	-3.3
12.30	0.294	-36.0	21.516	-118.9	0.003	110.5	0.315	-10.3
12.40	0.314	-45.8	21.151	-133.1	0.002	105.4	0.329	-15.4
12.50	0.328	-54.8	20.750	-146.8	0.002	107.4	0.342	-19.2
12.60	0.330	-62.1	19.987	-160.7	0.002	111.3	0.354	-22.1
12.70	0.334	-69.4	19.742	-174.6	0.002	113.0	0.364	-25.0
12.80	0.329	-75.1	19.461	172.1	0.002	117.2	0.374	-27.6
12.90	0.321	-82.9	19.175	158.9	0.002	112.3	0.380	-30.0
13.00	0.317	-88.7	18.916	145.3	0.001	111.7	0.386	-32.4
13.10	0.302	-95.8	18.807	131.9	0.001	114.6	0.389	-34.4
13.20	0.294	-102.4	18.700	117.4	0.001	110.7	0.390	-36.1
13.30	0.272	-109.3	18.763	104.0	0.001	104.2	0.390	-38.1
13.40	0.256	-118.4	18.833	89.6	0.001	110.1	0.389	-39.4
13.50	0.234	-125.4	18.766	74.6	0.001	108.7	0.387	-40.6

FMM5061VF

X-Band Power Amplifier MMIC


ΔT_{ch} vs. DRAIN VOLTAGE
(Reference Data)

$V_{GG} = -5V$

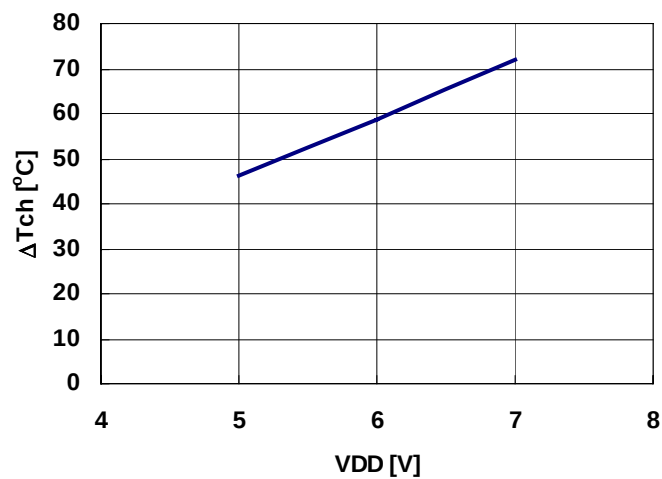

Note : ΔT_{ch} : Case to Channel Temperature Rise

MTTF vs. T_{ch}

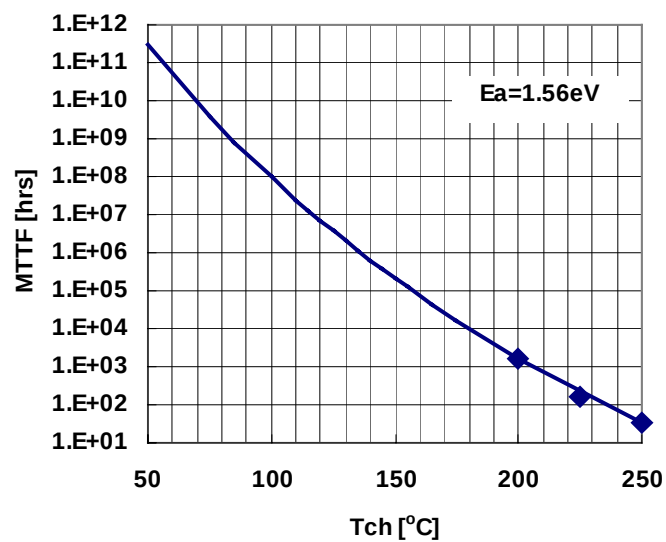


Eudyna

FMM5061VF

X-band Power Amplifier MMIC

■ Package Out Line

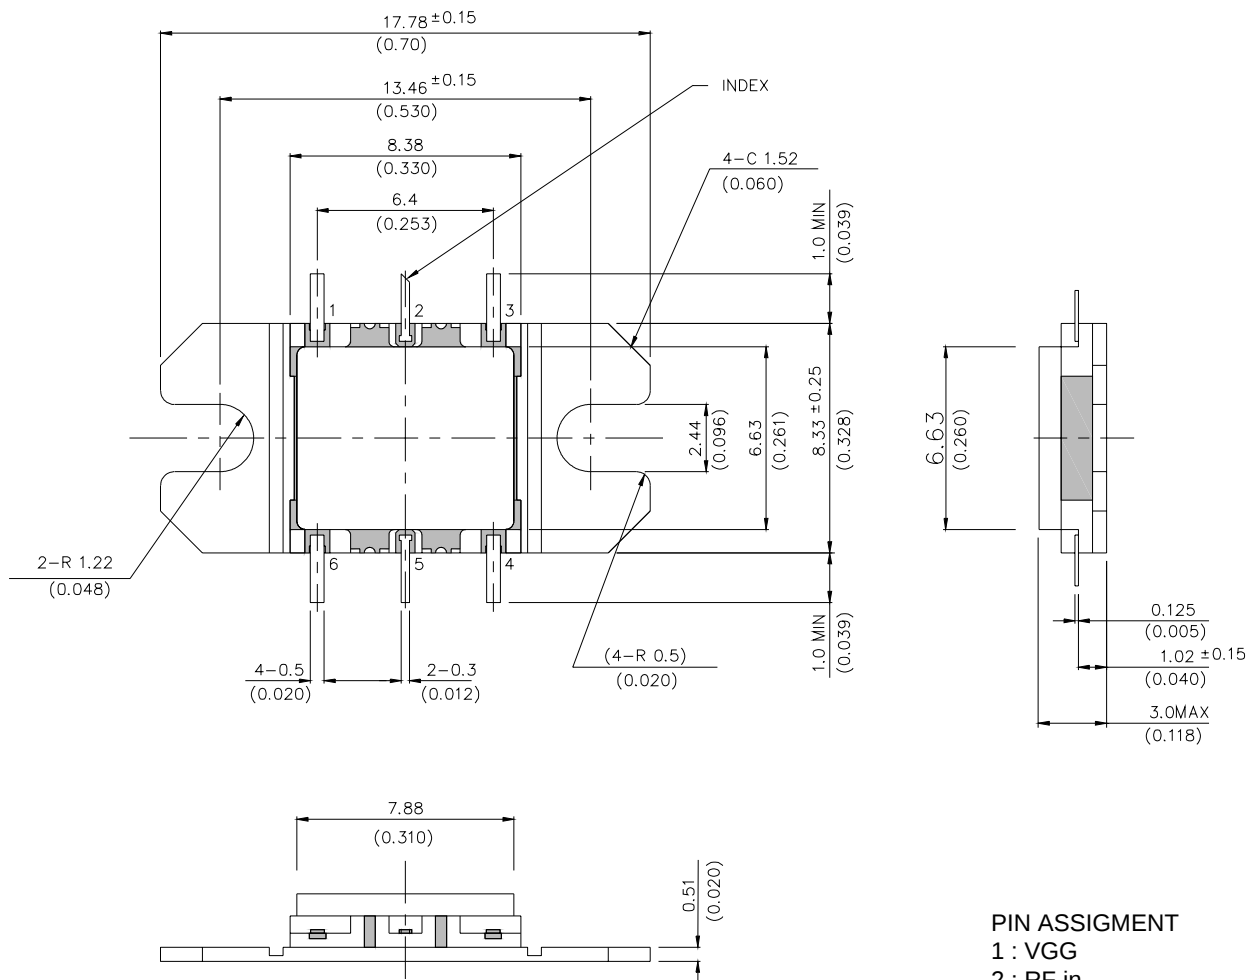

PIN ASSIGNMENT

- 1 : VGG
- 2 : RF in
- 3 : N.C.
- 4 : VDD
- 5 : RF out
- 6 : VDD

FMM5061VF

X-Band Power Amplifier MMIC

■ Mounting Instructions for VF Package

1. Screw Mounting

- (1) The flange of package may be attached using screws. Torque conditions are shown in table 1.

Table 1. Recommended and Maximum Torque for Screw Mounting

Package	Recommended screw	Recommended Torque	Maximum Torque
VF	M2.0	10 N-cm (0.9 lb-in)	15 N-cm (1.3 lb-in)

- (2) First, tighten the screws with a torque driver set to 5 N-cm.
- (3) The surface finish of the heat sink should be better than 0.8 μm , and the surface flatness must be better than 10 μm .
- (4) Silicon based heat sink compounds should not be used for thermal conductive grease. They cause poor grounding of the source flange, contamination and long term degradation of thermal resistance between the FET package and heat sink.


2. Solder Mounting

- (1) Recommended solder are Tin-Lead solder (63Sn/37Pb), Lead-Free solder (Sn-3.0Ag-0.5Cu)*¹ or equivalent.
- (2) For soldering, Tin-Lead solder (63Sn/37Pb) or Lead-Free solder (Sn-3.0Ag-0.5Cu)*¹ shall be used. (*1: The figure displays with weight %. A predominantly tin-rich alloy with 3.0% silver and 0.5% copper.)
- (3) Recommended Flux is Rosin type with chlorine content: 0.2% or less and a low halogen content. After soldering, the flux residue should be removed by appropriate cleaning methods.
- (4) The recommended soldering conditions are as follows:
Partial heating method (soldering iron, spot laser/air)
Product terminal temperature: 260 deg-C, max. 10 s./terminal
or 400 deg-C, max. 3 s./terminal

FMM5061VF

X-band Power Amplifier MMIC

■ Recommended board layout

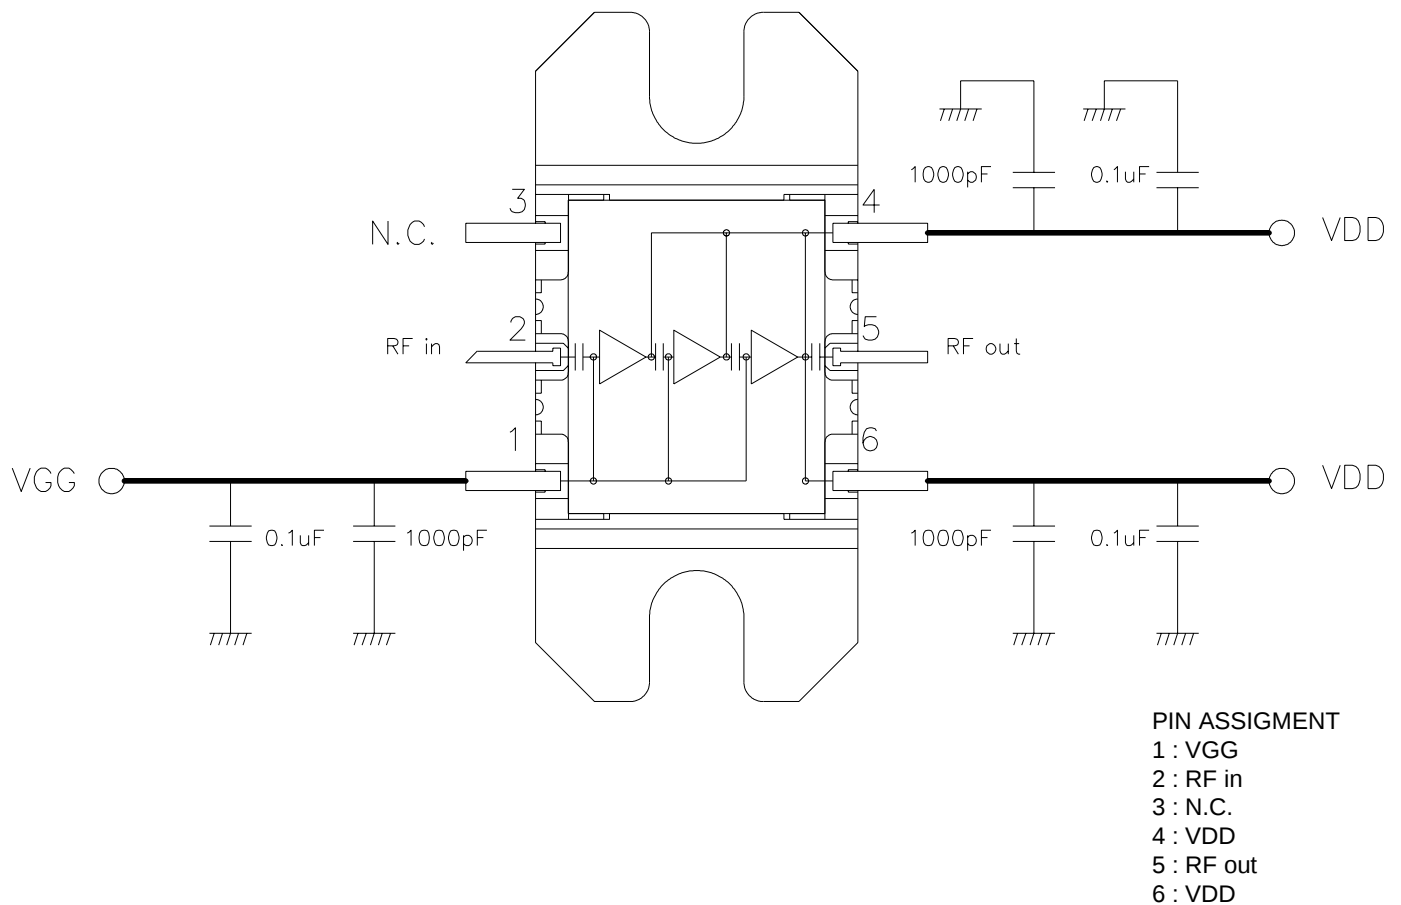

Note 1: The capacitors are recommended on the bias supply line, close to the package, in order to prevent video oscillations which could damage the module.

Note 2: Two pins named VDD are internally connected.

FMM5061VF

X-Band Power Amplifier MMIC

Eudyna Devices USA Inc.
2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
TEL: (408) 232-9500
FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.
Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
United Kingdom
TEL: +44 (0) 1628 504800
FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte. Ltd.
Hong Kong Branch
Rm.1101,Ocean Centre, 5 Canton Road
Tsim Sha Tsui, Kowloon, Hong Kong
TEL: +852-2377-0227
FAX: +852-2377-3921

Eudyna Devices Inc.
1000 Kamisukiahara, showa-cho
Nakakomagun, Yamanashi
409-3883, Japan
(Kokubo Industrial Park)
TEL +81-55-275-4411
FAX +81-55-275-9461
Sales Division
1, Kanai-cho, Sakae-ku
Yokohama, 244-0845, Japan
TEL +81-45-853-8156
FAX +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
Printed in U.S.A.

The Eudyna logo, featuring the word "Eudyna" in a stylized, italicized red font.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.