

F

E

D

C

B

A

F


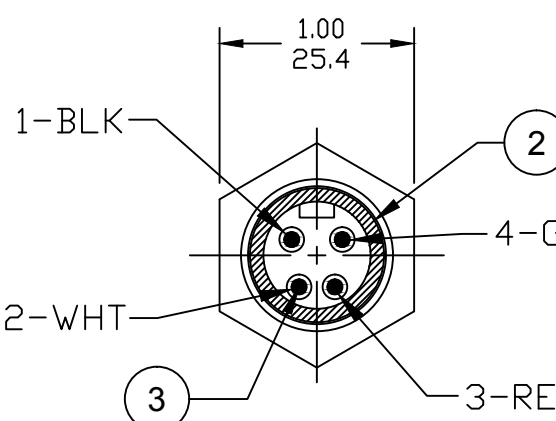
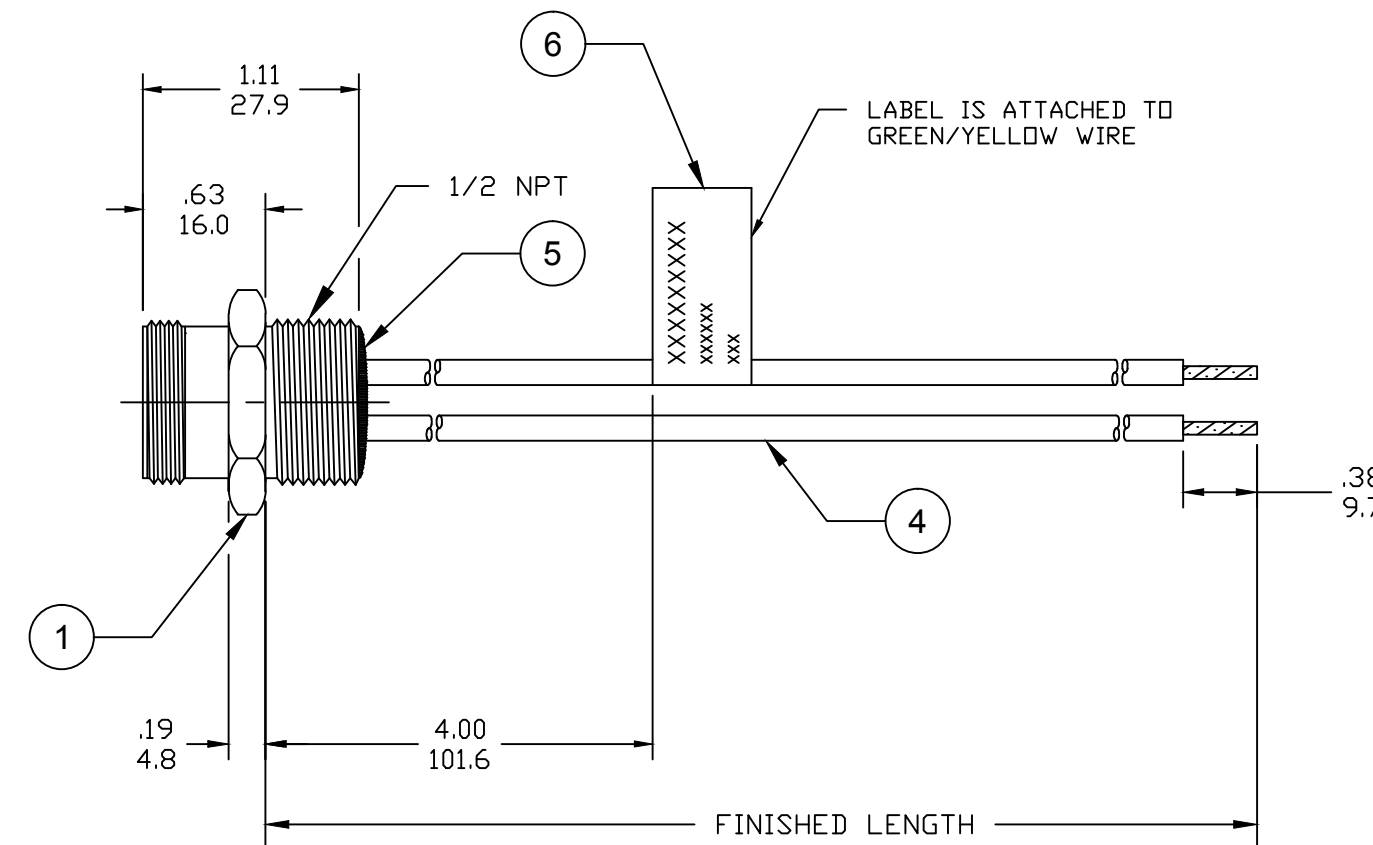
E

D

C

B

A

10	9	8	7	6	5	4	3	2	1																																																	
PART NUMBER			ENGINEERING NUMBER			FINISH LENGTH			PART NUMBER LEGEND 1R4006A28M005G FINISHED LENGTH: M005= 0.5 METER M010= 1 METER M100= 10 METER CABLE LENGTH TOLERANCES >.3M [1FT]: +19mm-0 [+.75in-0] .3 - .9M [1 - 3FT]: +44.5mm-0 [+1.75in-0] .9 - 1.8M [3 - 6FT]: +55.6mm-0 [+2.19in-0] 1.8 - 3.7M [6 - 12FT]: +88.9mm-0 [+3.50in-0] 3.7 - 7.3M [12 - 24FT]: +165.1mm-0 [+6.50in-0] 7.3-14.6M [24 - 48FT]: +317.5mm-0 [+12.50in-0] 14.6 - 30.5M [48-100FT]: +622.3mm-0 [+24.50in-0] OVER 30M [100FT] +2% OF FINISHED LENGTH																																																	
1300660090			1R4006A28M005G			1.64' [0.5M]																																																				
1300660092			1R4006A28M010G			3.28' [1M]																																																				
1300660093			1R4006A28M020G			6.56' [2M]																																																				
Ø.880 22.35  REF. KNOCKOUT HOLE 1-BLK 2 4-GRN/YEL 2-WHT 3 3-RED  NOTES: 1. MATERIAL: AS NOTED 2. FINISH: AS NOTED 3. ELECTRICAL: VOLTAGE: 483V PER IEC60664 600V PER UL2237 CURRENT: 15A 4. TEMP RATING: -20°TO +90°C 5. PROTECTION: IP67 (WHEN MATED) 6. COUPLING THREAD: 7/8-16UN 7. UL LISTED FILE E258922 8. ALL DIMS ARE FOR REFERENCE UNLESS NOTED OTHERWISE <table><tr><td>6</td><td>FLAG LABEL</td><td>VINYL</td><td>BLACK/YELLOW</td></tr><tr><td>5</td><td>POTTING MATERIAL</td><td>EPOXY</td><td></td></tr><tr><td>4</td><td>WIRE, 14 AWG, UL 1015(B)</td><td>PVC INSULATION</td><td>SEE FACE VIEW</td></tr><tr><td>3</td><td>CONTACT PIN</td><td>COPPER ALLOY</td><td>GOLD PLATED</td></tr><tr><td>2</td><td>MALE INSERT</td><td>PVC</td><td>BLACK</td></tr><tr><td>1</td><td>RECEPTACLE SHELL</td><td>ZINC DIE-CAST</td><td>BLACK</td></tr><tr><td>ITEM</td><td>DESCRIPTION</td><td>MATERIAL</td><td>FINISH</td></tr></table> UL 1015 WAS THHN EC NO: IPG2019-0320 DRWN: JCAPPOZZ 2019/01/09 CHKD: RSTONE 2019/01/09 APPR: BWOODMAN2017/01/26 DESCRIPTION REV QUALITY SYMBOLS ▽=0 ▽C=0 GENERAL TOLERANCES (UNLESS SPECIFIED)<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±---</td></tr><tr><td>2 PLACES</td><td>±---</td><td>±---</td></tr><tr><td>1 PLACE</td><td>±---</td><td>±---</td></tr><tr><td colspan="3">ANGULAR ±---°</td></tr><tr><td colspan="3">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td></tr></table> DIMENSION STYLE INCH/MM DRAWN BY RSTONE DATE 2017/01/11 CHECKED BY M ZIELIN DATE 2017/01/26 APPROVED BY BWOODMAN DATE 2017/01/26 MATERIAL NO. SEE P/N CHART SIZE B SCALE --- DESIGN UNITS INCH THIRD ANGLE PROJECTION MINI-CHANGE RECEPTACLE MALE, 4P, 14 AWG 1/2 NPT, AC COLOR MOLEX MOLEX INCORPORATED DOCUMENT NO. SD-130066-080 SHEET NO. 1 OF 1 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION 1 2 3 4 5 6  1.11 27.9 .63 16.0 1/2 NPT 1 4.00 101.6 FINISHED LENGTH .19 4.8 .38 9.7 6 5 4 3 2 1 LABEL IS ATTACHED TO GREEN/YELLOW WIRE										6	FLAG LABEL	VINYL	BLACK/YELLOW	5	POTTING MATERIAL	EPOXY		4	WIRE, 14 AWG, UL 1015(B)	PVC INSULATION	SEE FACE VIEW	3	CONTACT PIN	COPPER ALLOY	GOLD PLATED	2	MALE INSERT	PVC	BLACK	1	RECEPTACLE SHELL	ZINC DIE-CAST	BLACK	ITEM	DESCRIPTION	MATERIAL	FINISH		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±---	1 PLACE	±---	±---	ANGULAR ±---°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		
6	FLAG LABEL	VINYL	BLACK/YELLOW																																																							
5	POTTING MATERIAL	EPOXY																																																								
4	WIRE, 14 AWG, UL 1015(B)	PVC INSULATION	SEE FACE VIEW																																																							
3	CONTACT PIN	COPPER ALLOY	GOLD PLATED																																																							
2	MALE INSERT	PVC	BLACK																																																							
1	RECEPTACLE SHELL	ZINC DIE-CAST	BLACK																																																							
ITEM	DESCRIPTION	MATERIAL	FINISH																																																							
	mm	INCH																																																								
4 PLACES	±---	±---																																																								
3 PLACES	±---	±---																																																								
2 PLACES	±---	±---																																																								
1 PLACE	±---	±---																																																								
ANGULAR ±---°																																																										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																																																										

10

9

8

7

6

5

4

3

2

1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.