


## High Speed, Dual Channel Power MOSFET Drivers

The EL7202, EL7212, EL7222 ICs are matched dual-drivers that improve the operation of the industry standard DS0026 clock drivers. The Elantec versions are very high speed drivers capable of delivering peak currents of 2.0 amps into highly capacitive loads. The high speed performance is achieved by means of a proprietary "Turbo-Driver" circuit that speeds up input stages by tapping the wider voltage swing at the output. Improved speed and drive capability are enhanced by matched rise and fall delay times. These matched delays maintain the integrity of input-to-output pulse-widths to reduce timing errors and clock skew problems. This improved performance is accompanied by a 10 fold reduction in supply currents over bipolar drivers, yet without the delay time problems commonly associated with CMOS devices. Dynamic switching losses are minimized with non-overlapped drive techniques.

## Pinouts

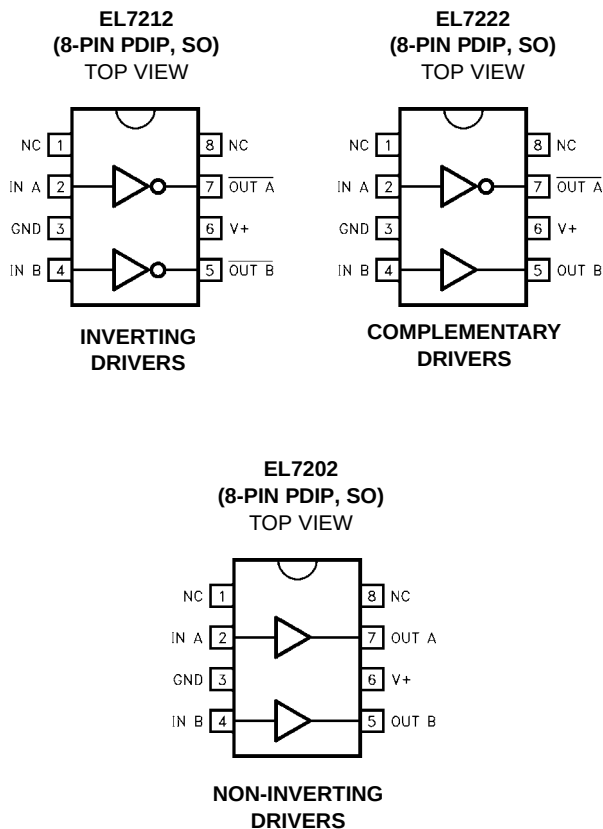

Manufactured under U.S. Patent Nos. 5,334,883, #5,341,047

## Features

- Industry standard driver replacement
- Improved response times
- Matched rise and fall times
- Reduced clock skew
- Low output impedance
- Low input capacitance
- High noise immunity
- Improved clocking rate
- Low supply current
- Wide operating voltage range
- Pb-Free available (RoHS compliant)

## Applications

- Clock/line drivers
- CCD Drivers
- Ultra-sound transducer drivers
- Power MOSFET drivers
- Switch mode power supplies
- Class D switching amplifiers
- Ultrasonic and RF generators
- Pulsed circuits

## Ordering Information

| Part Number                 | PART MARKING | TAPE & REEL | PACKAGE                 | PKG. DWG. # |
|-----------------------------|--------------|-------------|-------------------------|-------------|
| EL7202CN                    | EL7202CN     | -           | 8 Ld PDIP               | MDP0031     |
| EL7202CS                    | 7202CS       | -           | 8 Ld SOIC               | MDP0027     |
| EL7202CS-T7                 | 7202CS       | 7"          | 8 Ld SOIC               | MDP0027     |
| EL7202CS-T13                | 7202CS       | 13"         | 8 Ld SOIC               | MDP0027     |
| EL7202CSZ<br>(See Note)     | 7202CSZ      | -           | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7202CSZ-T7<br>(See Note)  | 7202CSZ      | 7"          | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7202CSZ-T13<br>(See Note) | 7202CSZ      | 13"         | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7212CN                    | EL7212CN     | -           | 8 Ld PDIP               | MDP0031     |
| EL7212CNZ                   | EL7212CN Z   | -           | 8 Ld PDIP*<br>(Pb-free) | MDP0031     |
| EL7212CS                    | 7212CS       | -           | 8 Ld SOIC               | MDP0027     |
| EL7212CS-T7                 | 7212CS       | 7"          | 8 Ld SOIC               | MDP0027     |
| EL7212CS-T13                | 7212CS       | 13"         | 8 Ld SOIC               | MDP0027     |
| EL7212CSZ<br>(See Note)     | 7212CSZ      | -           | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7212CSZ-T7<br>(See Note)  | 7212CSZ      | 7"          | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7212CSZ-T13<br>(See Note) | 7212CSZ      | 13"         | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7222CN                    | EL7222CN     | -           | 8 Ld PDIP               | MDP0031     |
| EL7222CS                    | 7222CS       | -           | 8 Ld SOIC               | MDP0027     |
| EL7222CS-T7                 | 7222CS       | 7"          | 8 Ld SOIC               | MDP0027     |
| EL7222CS-T13                | 7222CS       | 13"         | 8 Ld SOIC               | MDP0027     |
| EL7222CSZ<br>(See Note)     | 7222CSZ      | -           | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7222CSZ-T7<br>(See Note)  | 7222CSZ      | 7"          | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |
| EL7222CSZ-T13<br>(See Note) | 7222CSZ      | 13"         | 8 Ld SOIC<br>(Pb-free)  | MDP0027     |

NOTE: Intersil Pb-free products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

\*Pb-free PDIPs can be used for through hole wave solder processing only. They are not intended for use in Reflow solder processing applications.

## Absolute Maximum Ratings (T<sub>A</sub> = 25°C)

Supply (V+ to Gnd) ..... 16.5V  
 Input Pins ..... -0.3V to +0.3V above V+  
 Combined Peak Output Current ..... 4A  
 Storage Temperature Range ..... -65°C to +150°C  
 Ambient Operating Temperature ..... -40°C to +85°C

Operating Junction Temperature ..... 125°C  
 Power Dissipation  
     SOIC ..... 570mW  
     PDIP ..... 1050mW

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**IMPORTANT NOTE:** All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: T<sub>J</sub> = T<sub>C</sub> = T<sub>A</sub>

## DC Electrical Specifications

T<sub>A</sub> = 25°C, V = 15V unless otherwise specified


| parameter           | Description               | Test Conditions                                                | Min | Typ             | Max               | Units |
|---------------------|---------------------------|----------------------------------------------------------------|-----|-----------------|-------------------|-------|
| <b>INPUT</b>        |                           |                                                                |     |                 |                   |       |
| V <sub>IH</sub>     | Logic "1" Input Voltage   |                                                                | 2.4 |                 |                   | V     |
| I <sub>IH</sub>     | Logic "1" Input Current   | @V+                                                            |     | 0.1             | 10                | μA    |
| V <sub>IL</sub>     | Logic "0" Input Voltage   |                                                                |     |                 | 0.8               | V     |
| I <sub>IL</sub>     | Logic "0" Input Current   | @0V                                                            |     | 0.1             | 10                | μA    |
| V <sub>HVS</sub>    | Input Hysteresis          |                                                                |     | 0.3             |                   | V     |
| <b>OUTPUT</b>       |                           |                                                                |     |                 |                   |       |
| R <sub>OH</sub>     | Pull-Up Resistance        | I <sub>OUT</sub> = -100mA                                      |     | 3               | 6                 | Ω     |
| R <sub>OL</sub>     | Pull-Down Resistance      | I <sub>OUT</sub> = +100mA                                      |     | 4               | 6                 | Ω     |
| I <sub>PK</sub>     | Peak Output Current       | Source<br>Sink                                                 |     | 2<br>2          |                   | A     |
| I <sub>DC</sub>     | Continuous Output Current | Source/Sink                                                    | 100 |                 |                   | mA    |
| <b>POWER SUPPLY</b> |                           |                                                                |     |                 |                   |       |
| I <sub>S</sub>      | Power Supply Current      | Inputs High/EL7202<br>Inputs High/EL7212<br>Inputs High/EL7222 |     | 4.5<br>1<br>2.5 | 7.5<br>2.5<br>5.0 | mA    |
| V <sub>S</sub>      | Operating Voltage         |                                                                | 4.5 |                 | 15                | V     |

## AC Electrical Specifications

T<sub>A</sub> = 25°C, V = 15V unless otherwise specified

| parameter                        | Description         | Test Conditions                                   | Min | Typ       | Max | Units |
|----------------------------------|---------------------|---------------------------------------------------|-----|-----------|-----|-------|
| <b>SWITCHING CHARACTERISTICS</b> |                     |                                                   |     |           |     |       |
| t <sub>R</sub>                   | Rise Time           | C <sub>L</sub> = 500pF<br>C <sub>L</sub> = 1000pF |     | 7.5<br>10 | 20  | ns    |
| t <sub>F</sub>                   | Fall Time           | C <sub>L</sub> = 500pF<br>C <sub>L</sub> = 1000pF |     | 10<br>13  | 20  | ns    |
| t <sub>D1</sub>                  | Turn-On Delay Time  | See Timing Table                                  |     | 18        | 25  | ns    |
| t <sub>D2</sub>                  | Turn-Off Delay Time | See Timing Table                                  |     | 20        | 25  | ns    |

## Timing Table

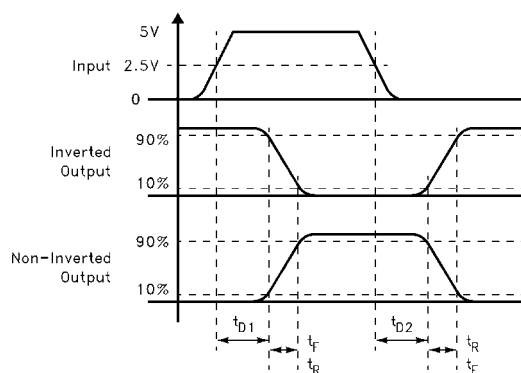

## Standard Test Configuration




## Simplified Schematic




## Typical Performance Curves


MAX POWER/DERATING CURVES

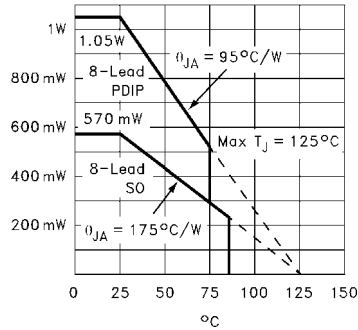


SWITCH THRESHOLD vs SUPPLY VOLTAGE




INPUT CURRENT vs VOLTAGE

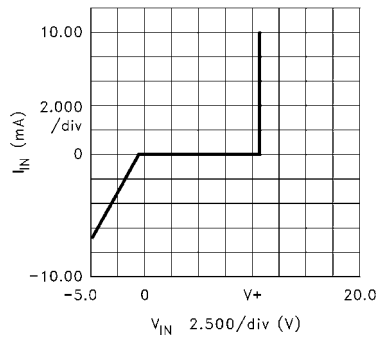

PEAK DRIVE vs SUPPLY VOLTAGE

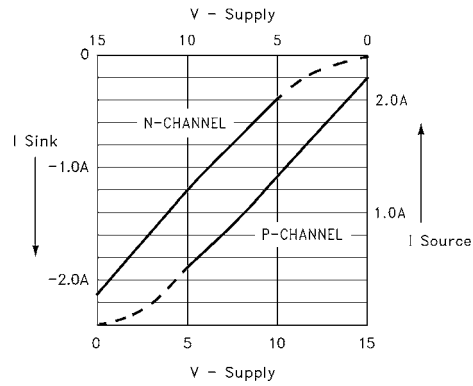


QUIESCENT SUPPLY CURRENT







CASE:


| Device | Input Level | Curve |
|--------|-------------|-------|
| EL7202 | GND         | A     |
| EL7202 | GND, V+     | B     |
| EL7202 | V+          | C     |
| EL7212 | GND         | C     |
| EL7212 | GND, V+     | D     |
| EL7212 | V+          | E     |
| EL7222 | GND         | B     |
| EL7222 | GND, V+     | C     |
| EL7222 | V+          | D     |

"ON" RESISTANCE vs SUPPLY VOLTAGE



## Typical Performance Curves (Continued)

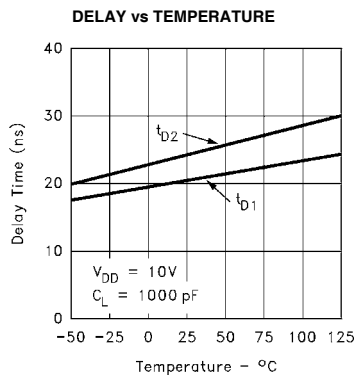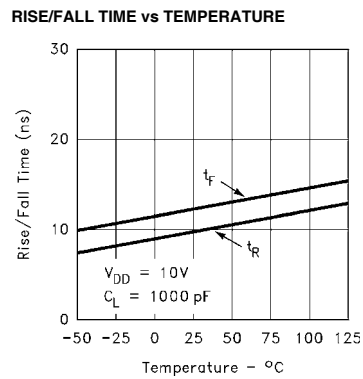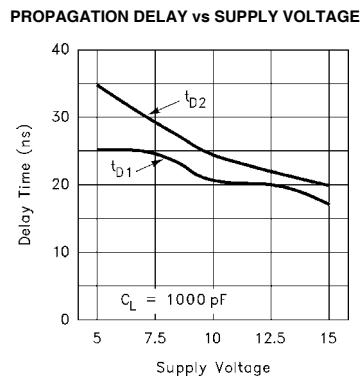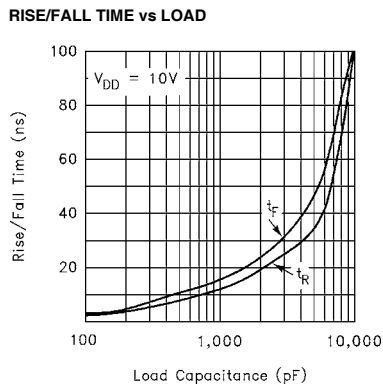



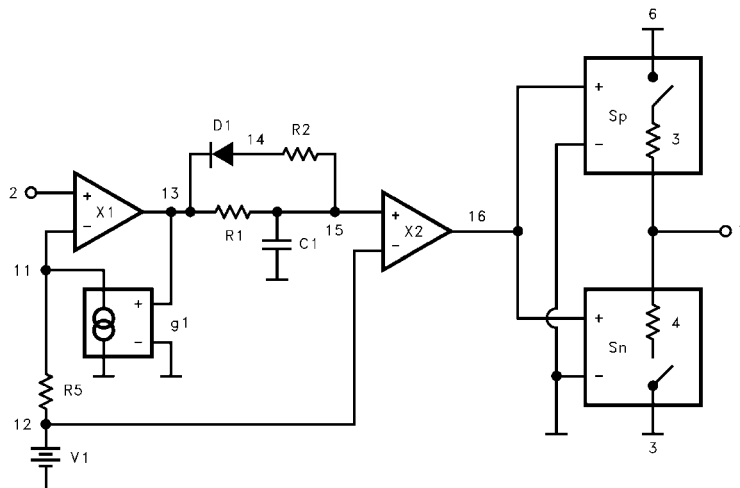


```

**** EL7212 model ****
*
*                               input
*                               |   gnd
*                               |   |   Vsupply
*                               |   |   Vout
*                               |   |   |
.subckt M7212                2   3   6   7
V1 12 3 1.6
R1 13 15 1k
R2 14 15 5k
R5 11 12 100
C1 15 3 43.3 pF
D1 14 13 dmod
X1 13 11 2 3 comp1
X2 16 12 15 3 comp1
sp 6 7 16 3 spmod
sn 7 3 16 3 snmod
g1 11 0 13 0 938µ
.model dmod d
.model spmod vswitch ron3 roff2meg von1 voff1.5
.model snmod vswitch ron4 roff2meg von3 voff2
.ends M7212
.subckt comp1 out inp inm vss
e1 out vss table { (v(inp) v(inm))* 5000} (0,0) (3.2,3.2)
Rout out vss 10meg
Rinp inp vss 10meg
Rinm inm vss 10meg
.ends comp1

```

# Small Outline Package Family (SO)

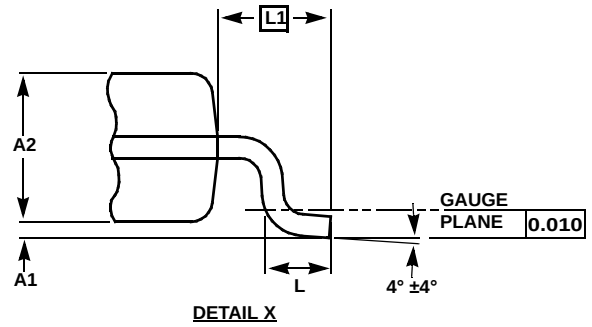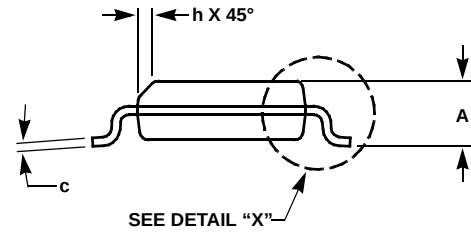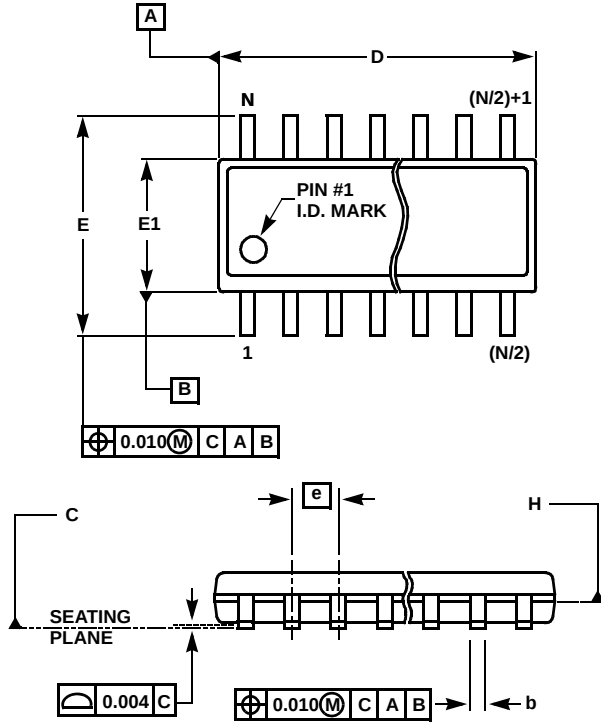

## MDP0027

### SMALL OUTLINE PACKAGE FAMILY (SO)


| SYMBOL | SO-8  | SO-14 | SO16<br>(0.150") | SO16 (0.300")<br>(SOL-16) | SO20<br>(SOL-20) | SO24<br>(SOL-24) | SO28<br>(SOL-28) | TOLERANCE   | NOTES |
|--------|-------|-------|------------------|---------------------------|------------------|------------------|------------------|-------------|-------|
| A      | 0.068 | 0.068 | 0.068            | 0.104                     | 0.104            | 0.104            | 0.104            | MAX         | -     |
| A1     | 0.006 | 0.006 | 0.006            | 0.007                     | 0.007            | 0.007            | 0.007            | $\pm 0.003$ | -     |
| A2     | 0.057 | 0.057 | 0.057            | 0.092                     | 0.092            | 0.092            | 0.092            | $\pm 0.002$ | -     |
| b      | 0.017 | 0.017 | 0.017            | 0.017                     | 0.017            | 0.017            | 0.017            | $\pm 0.003$ | -     |
| c      | 0.009 | 0.009 | 0.009            | 0.011                     | 0.011            | 0.011            | 0.011            | $\pm 0.001$ | -     |
| D      | 0.193 | 0.341 | 0.390            | 0.406                     | 0.504            | 0.606            | 0.704            | $\pm 0.004$ | 1, 3  |
| E      | 0.236 | 0.236 | 0.236            | 0.406                     | 0.406            | 0.406            | 0.406            | $\pm 0.008$ | -     |
| E1     | 0.154 | 0.154 | 0.154            | 0.295                     | 0.295            | 0.295            | 0.295            | $\pm 0.004$ | 2, 3  |
| e      | 0.050 | 0.050 | 0.050            | 0.050                     | 0.050            | 0.050            | 0.050            | Basic       | -     |
| L      | 0.025 | 0.025 | 0.025            | 0.030                     | 0.030            | 0.030            | 0.030            | $\pm 0.009$ | -     |
| L1     | 0.041 | 0.041 | 0.041            | 0.056                     | 0.056            | 0.056            | 0.056            | Basic       | -     |
| h      | 0.013 | 0.013 | 0.013            | 0.020                     | 0.020            | 0.020            | 0.020            | Reference   | -     |
| N      | 8     | 14    | 16               | 16                        | 20               | 24               | 28               | Reference   | -     |

Rev. L 2/01

#### NOTES:

1. Plastic or metal protrusions of 0.006" maximum per side are not included.
2. Plastic interlead protrusions of 0.010" maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994

## Plastic Dual-In-Line Packages (PDIP)

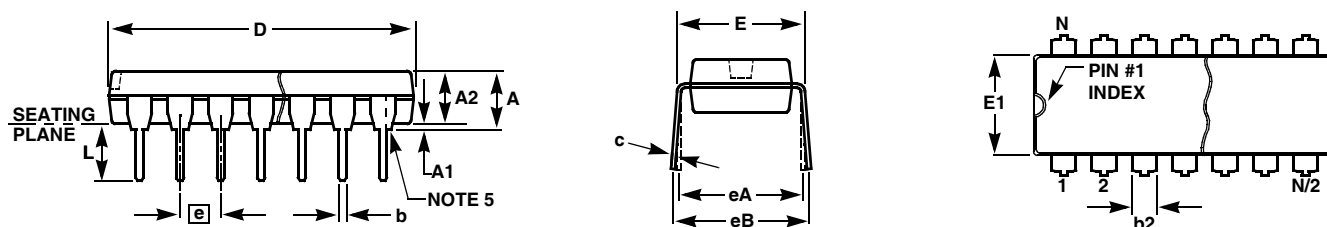

### MDP0031

#### PLASTIC DUAL-IN-LINE PACKAGE

| SYMBOL | PDIP8 | PDIP14 | PDIP16 | PDIP18 | PDIP20 | TOLERANCE       | NOTES |
|--------|-------|--------|--------|--------|--------|-----------------|-------|
| A      | 0.210 | 0.210  | 0.210  | 0.210  | 0.210  | MAX             |       |
| A1     | 0.015 | 0.015  | 0.015  | 0.015  | 0.015  | MIN             |       |
| A2     | 0.130 | 0.130  | 0.130  | 0.130  | 0.130  | $\pm 0.005$     |       |
| b      | 0.018 | 0.018  | 0.018  | 0.018  | 0.018  | $\pm 0.002$     |       |
| b2     | 0.060 | 0.060  | 0.060  | 0.060  | 0.060  | $+0.010/-0.015$ |       |
| c      | 0.010 | 0.010  | 0.010  | 0.010  | 0.010  | $+0.004/-0.002$ |       |
| D      | 0.375 | 0.750  | 0.750  | 0.890  | 1.020  | $\pm 0.010$     | 1     |
| E      | 0.310 | 0.310  | 0.310  | 0.310  | 0.310  | $+0.015/-0.010$ |       |
| E1     | 0.250 | 0.250  | 0.250  | 0.250  | 0.250  | $\pm 0.005$     | 2     |
| e      | 0.100 | 0.100  | 0.100  | 0.100  | 0.100  | Basic           |       |
| eA     | 0.300 | 0.300  | 0.300  | 0.300  | 0.300  | Basic           |       |
| eB     | 0.345 | 0.345  | 0.345  | 0.345  | 0.345  | $\pm 0.025$     |       |
| L      | 0.125 | 0.125  | 0.125  | 0.125  | 0.125  | $\pm 0.010$     |       |
| N      | 8     | 14     | 16     | 18     | 20     | Reference       |       |

Rev. B 2/99

#### NOTES:

1. Plastic or metal protrusions of 0.010" maximum per side are not included.
2. Plastic interlead protrusions of 0.010" maximum per side are not included.
3. Dimensions E and eA are measured with the leads constrained perpendicular to the seating plane.
4. Dimension eB is measured with the lead tips unconstrained.
5. 8 and 16 lead packages have half end-leads as shown.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.