




**Features**

- Dual Independent Digitally Controlled VGAs
- Bandwidth of 500MHz (-3dB)
- Gain Control Range=31dB (1dB Step Size)
- Differential Input and Output
- Max Gain=19.0dB@180MHz
- Noise Figure: 7.5dB@Maximum Gain
- High OIP3/P1dB=+42/21dBm @180MHz
- Relative Phase Shift < 1°
- Single +5V Supply
- Dual 5-Bit Parallel Control Interface
- Individual Enable Control for Each VGA
- Current Adjustable for IP3 Trade Offs
- Small 32-Pin, 5.0mmx5.0mm, QFN

**Applications**

- Differential ADC Drivers
- Main and Diversity IF Sampling Receivers
- Wideband Multichannel Receivers
- Instrumentation

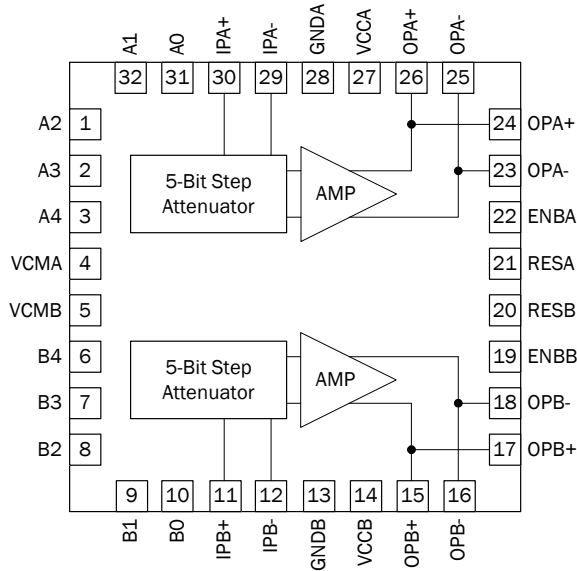

Functional Block Diagram

**Product Description**

RFMD's RFDA0035 is a dual-channel, digitally controlled variable gain amplifier featuring high linearity over the entire 32 gain control steps. It features independent channel power-up enable, independent channel current adjustability for optimizing DC versus IP3 and a 200Ω differential input and output impedance.

**Ordering Information**

RFDA0035SR	7" Sample reel with 100 pieces
RFDA0035SQ	25 piece Sample bag
RFDA0035TR7	7" Reel with 750 pieces
RFDA0035TR13	13" Reel with 2500 pieces
RFDA0035PCK-410	50MHz to 500MHz PCBA with 5-piece sample bag

**Optimum Technology Matching® Applied**

- |                                      |   |                                     |                                    |
|--------------------------------------|---|-------------------------------------|------------------------------------|
| <input type="checkbox"/> GaAs HBT    | <input checked="" type="checkbox"/> SiGe BiCMOS | <input type="checkbox"/> GaAs pHEMT | <input type="checkbox"/> GaN HEMT  |
| <input type="checkbox"/> GaAs MESFET | <input type="checkbox"/> Si BiCMOS              | <input type="checkbox"/> Si CMOS    | <input type="checkbox"/> BiFET HBT |
| <input type="checkbox"/> InGaP HBT   | <input type="checkbox"/> SiGe HBT               | <input type="checkbox"/> Si BJT     | <input type="checkbox"/> LD MOS    |

RF MICRO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and registered trademarks are the property of their respective owners. ©2006, RF Micro Devices, Inc.

## Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage	+6.0	V <sub>DC</sub>
DC Supply Current	300	mA
Power Dissipation	1600	mW
Max RF Input Power	27	dBm
Operating Temperature (T <sub>CASE</sub> )	-40 to +85	°C
Storage Temperature	-40 to +150	°C
Junction Temperature	125	°C
ESD Rating (HBM)	500	V
Moisture Sensitivity Level	2	



**Caution!** ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.



RFMD Green: RoHS compliant per EU Directive 2002/95/EC, halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.


Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
<b>Overall</b>					T=25 °C, V <sub>CC</sub> =V <sub>DD</sub> =5V, Standard Application Circuit
Frequency Range	50		500	MHz	-3dB Bandwidth
Max Gain		19.3		dB	Attenuation=0dB, 180MHz
GainControlRange		31		dB	
Step Accuracy	+/- (0.1+ 1.5% attenuation setting)			dB	Major State Error up to 400MHz
Output P1dB		21		dBm	At 180MHz, Upper 24dB Steps
Output IP3		42		dBm	At 180MHz, P <sub>OUT</sub> =5dBm/Tone, 1MHz Spacing
Control Interface		5		bit	Parallel Interface
Relative Phase Shift			1	°	50MHz~300MHz
Settling Time		15		ns	t <sub>ON</sub> , t <sub>OFF</sub> (10%/90% RF)
Noise Figure		7.5		dB	Attenuation=0dB
Impedance		200		Ω	Differential
Input Return Loss			-12	dB	
Output Return Loss			-15	dB	
Total Supply Voltage	4.75	5.0	5.25	V	
Supply Current		240		mA	Both Channels Are Enabled. Can be Adjusted by External Resistors from RESA/B to Ground.

## Typical RF Performance at Key Operating Frequencies


Parameter	Unit	100MHz	180MHz	300MHz
Max Small Signal Gain	dB	19.3	19.3	19.0
Output P1dB	dBm	21	21	21
Output IP3 [1]	dBm	43	42	40
Input Return Loss	dB	-15	-13	-15
Output Return Loss	dB	-17	-20	-17
Noise Figure	dB	7.0	7.2	7.5

Note: [1] OIP3 is tested at P<sub>OUT</sub>=5dBm/Tone and 1MHz spacing.


**Gain (dB) versus Attenuation at Different Frequencies**

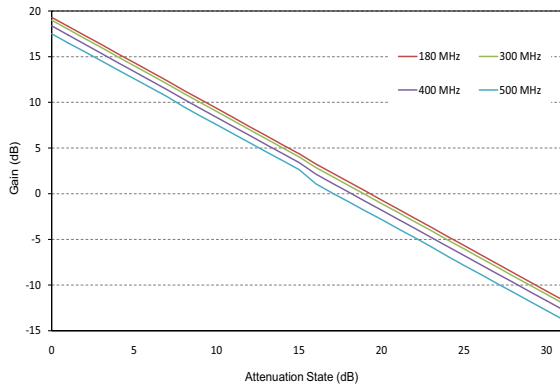


**Major Attenuation States Bit Error (dB) versus Frequency**

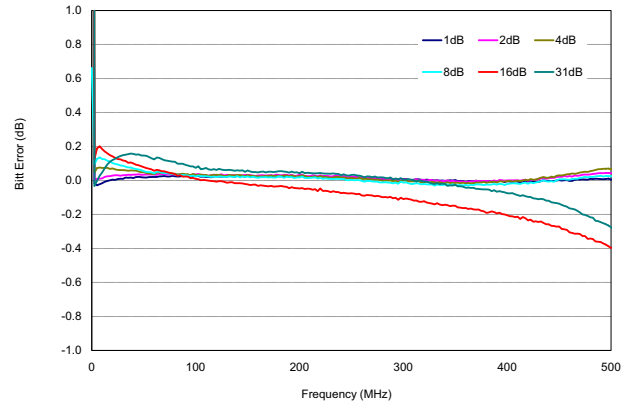


**All States' Gain (dB) versus Frequency**

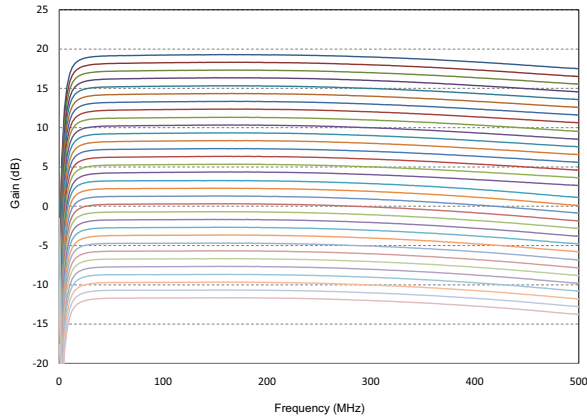


**Bit Error (dB) versus Attenuation State**

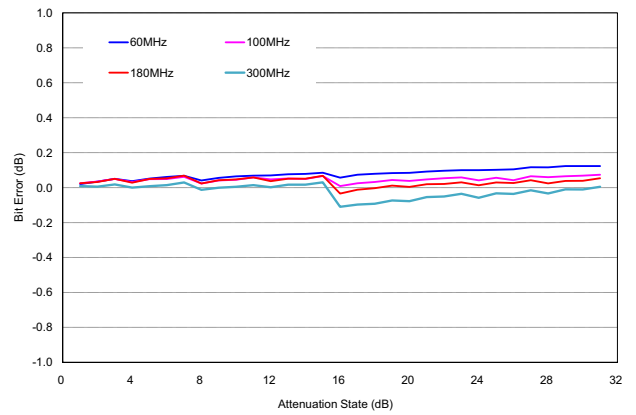


**Max Gain (dB) versus Frequency, Three Temperatures**

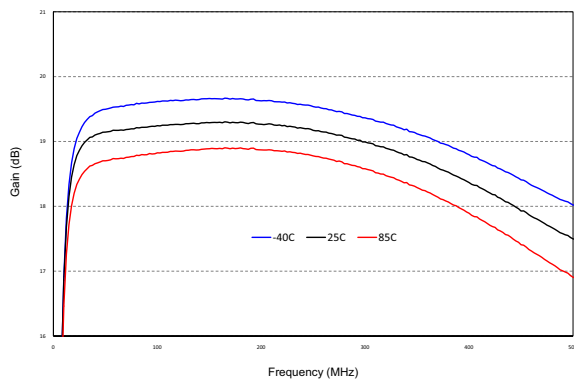


**Worst Case Step Error (dB) Between Successive Attenuation States**

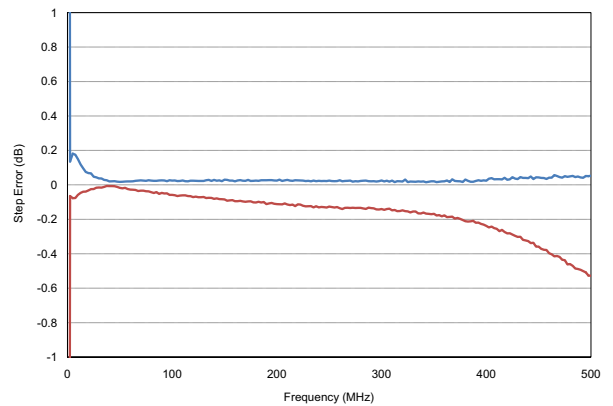


Relative Phase ° Related to Max Gain Step

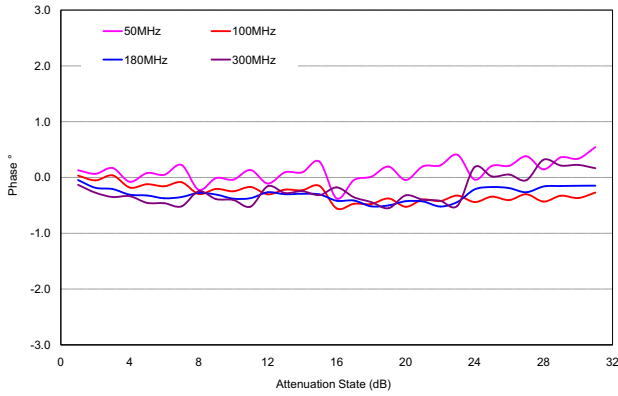


Max Gain Output IP3 (dBm) versus P<sub>OUT</sub>, Frequency 180MHz

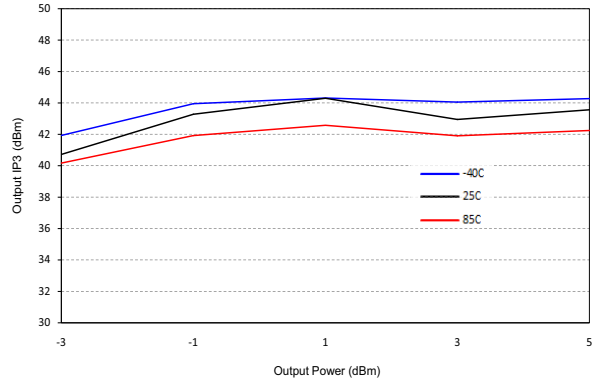


Input Return Loss (dB) versus Frequency

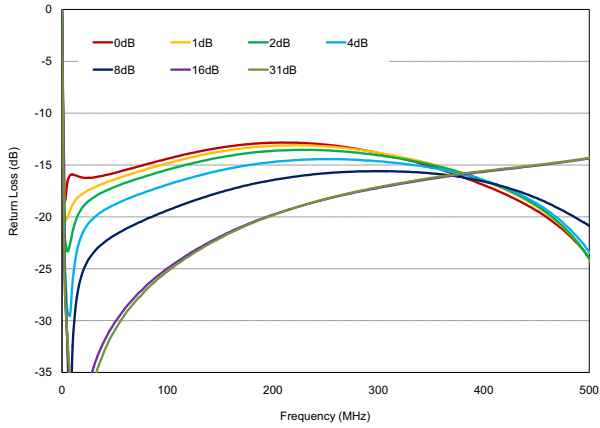


25dB Attenuation State Output IP3 (dBm) versus P<sub>OUT</sub>, Frequency 180MHz






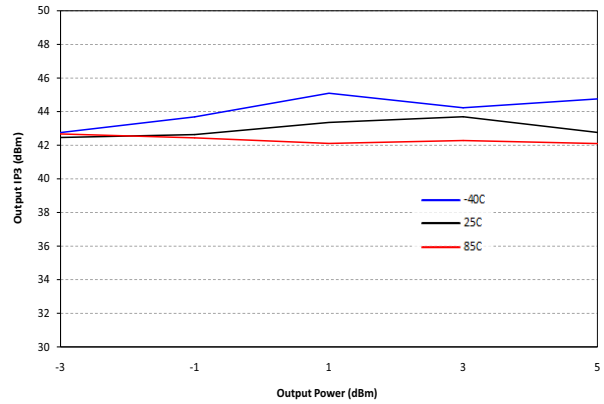


Output Return Loss (dB) versus Frequency

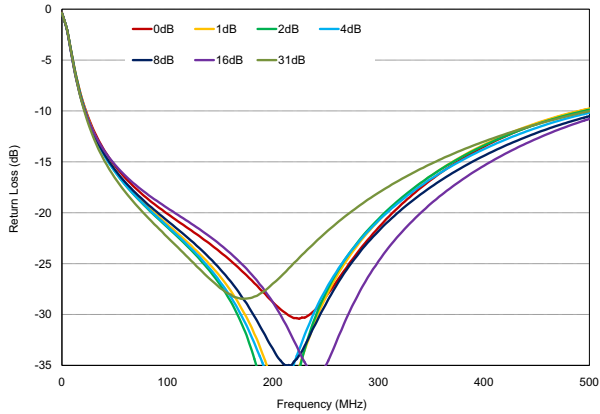


Output IP3 (dBm) versus Frequency, P<sub>OUT</sub> 5dBm/Tone

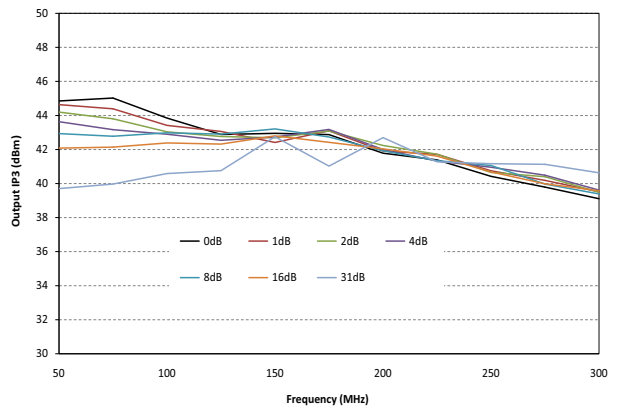


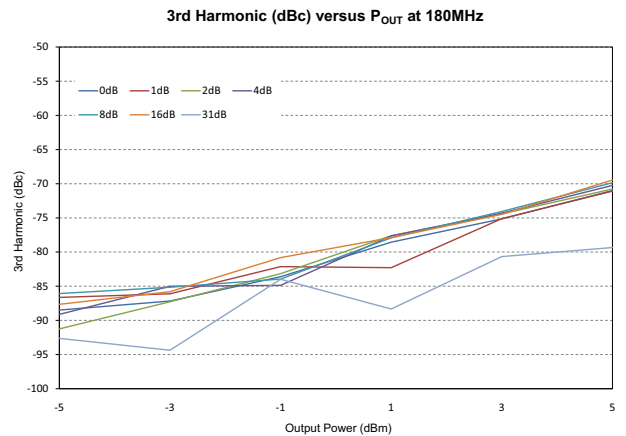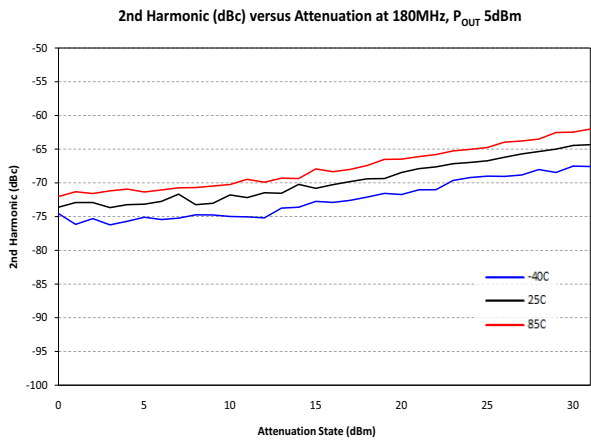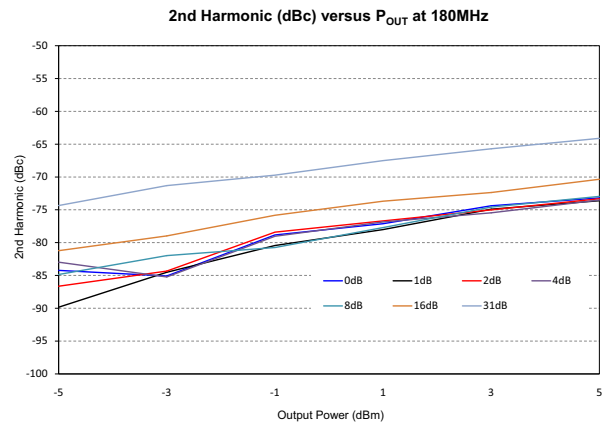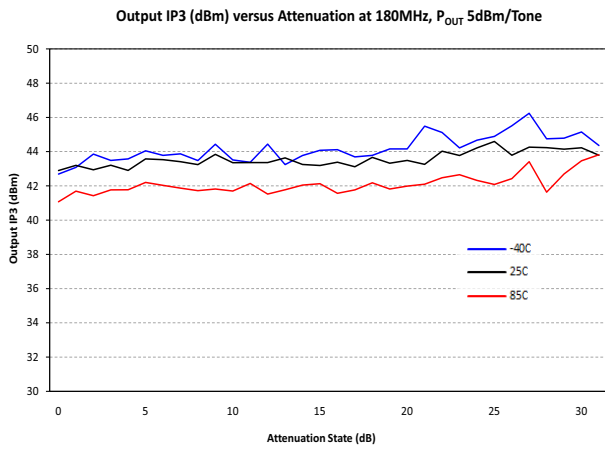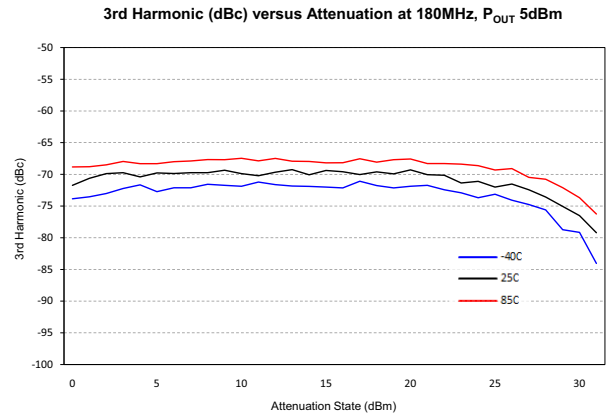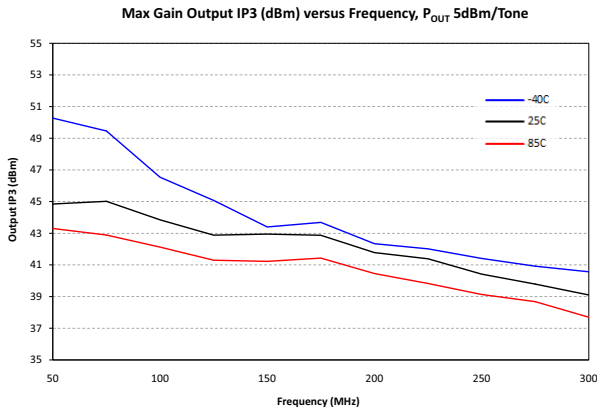


180MHz Output P1dB (dBm) versus Attenuation States

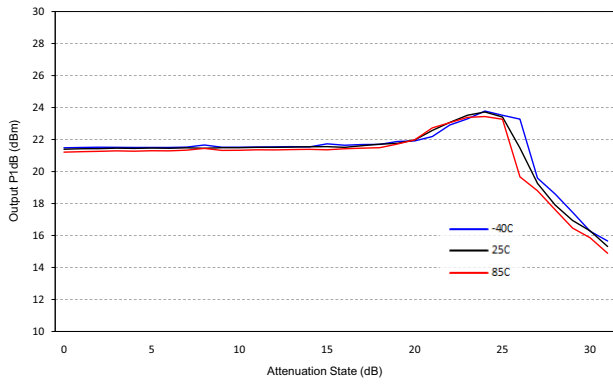


Max Gain Noise Figure (dB) versus Frequency

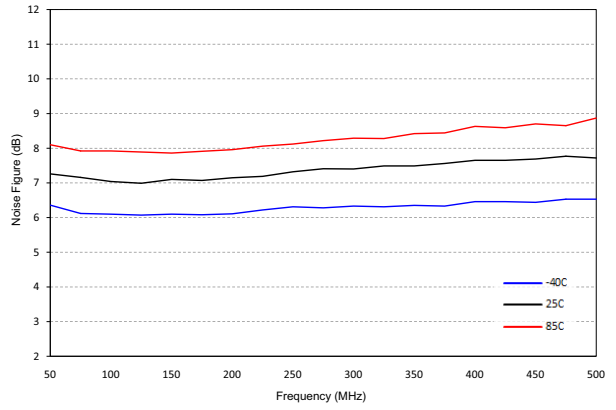

Max Gain Output P1dB (dBm) versus Frequency

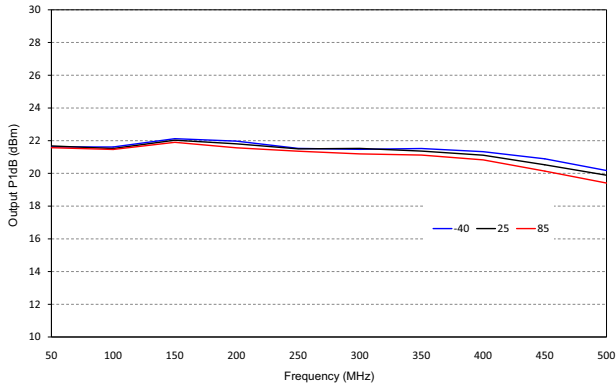

Max Gain Channel Isolation (dB) (Output to Output) versus Frequency

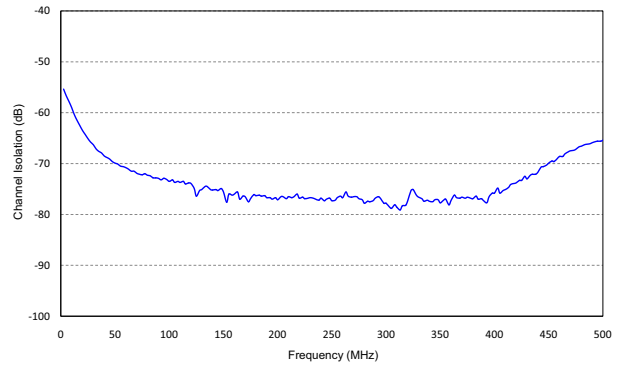

**Truth Table**

Control Bits					Gain Relative to Maximum Gain
A4/B4	A3/B3	A2/B2	A1/B1	A0/B0	
0	0	0	0	0	0dB
0	0	0	0	1	-1dB
0	0	0	1	0	-2dB
0	0	0	1	1	-3dB
0	0	1	0	0	-4dB
0	0	1	0	1	-5dB
0	0	1	1	0	-6dB
0	0	1	1	1	-7dB
0	1	0	0	0	-8dB
0	1	0	0	1	-9dB
0	1	0	1	0	-10dB
0	1	0	1	1	-11dB
0	1	1	0	0	-12dB
0	1	1	0	1	-13dB
0	1	1	1	0	-14dB
0	1	1	1	1	-15dB
1	0	0	0	0	-16dB
1	0	0	0	1	-17dB
1	0	0	1	0	-18dB
1	0	0	1	1	-19dB
1	0	1	0	0	-20dB
1	0	1	0	1	-21dB
1	0	1	1	0	-22dB
1	0	1	1	1	-23dB
1	1	0	0	0	-24dB
1	1	0	0	1	-25dB
1	1	0	1	0	-26dB
1	1	0	1	1	-27dB
1	1	1	0	0	-28dB
1	1	1	0	1	-29dB
1	1	1	1	0	-30dB
1	1	1	1	1	-31dB


Logic Voltage Levels	
State	Logic
Low	0.0V to 1.0V
High	1.8V to 5.0V

## Pin Names and Descriptions


Pin	Function	Description
1	A2	MSB - 2 for the Gain Control Interface for Channel A.
2	A3	MSB - 1 for the Gain Control Interface for Channel A.
3	A4	MSB for the 5-Bit Gain Control Interface for Channel A.
4	VCMA	Channel A Input Common-Mode Voltage. Typically Bypassed to Ground Through Capacitor.
5	VCMB	Channel B Input Common-Mode Voltage. Typically Bypassed to Ground Through Capacitor.
6	B4	MSB for the 5-Bit Gain Control Interface for Channel B.
7	B3	MSB - 1 for the Gain Control Interface for Channel B.
8	B2	MSB - 2 for the Gain Control Interface for Channel B.
9	B1	LSB + 1 for the Gain Control Interface for Channel B.
10	B0	LSB for the Gain Control Interface for Channel B.
11	IPB+	Channel B Positive Input.
12	IPB-	Channel B Negative Input.
13	GNDB	Device Common (DC Ground) for Channel B.
14	VCCB	Positive Supply Pin for Channel B. Should be Bypassed to Ground Using Suitable Bypass Capacitor.
15	OPB+	Positive Output Pins (Open Collector) for Channel B. Require DC Bias of +5V Nominal.
16	OPB-	Negative Output Pins (Open Collector) for Channel B. Require DC Bias of +5V Nominal.
17	OPB+	Positive Output Pins (Open Collector) for Channel B. Require DC Bias of +5V Nominal.
18	OPB-	Negative Output Pins (Open Collector) for Channel B. Require DC Bias of +5V Nominal.
19	ENBB	Power Enable Pin for Channel B. Channel B is Enabled with a Logic High and Disabled with a Logic Low.
20	RESB	Current Adjust Pin. Connect a Resistor from RESB to Ground can Adjust the Channel B DC Current from 90mA to 120mA. Leave Pin Floating for Nominal Bias of 120mA.
21	RESA	Current Adjust Pin. Connect a Resistor from RESA to Ground can Adjust the Channel A DC Current from 90mA to 120mA. Leave Pin Floating for Nominal Bias of 120mA.
22	ENBA	Power Enable Pin for Channel A. Channel A is Enabled with a Logic High and Disabled with a Logic Low.
23	OPA-	Negative Output Pins (Open Collector) for Channel A. Require DC Bias of +5V Nominal.
24	OPA+	Positive Output Pins (Open Collector) for Channel A. Require DC Bias of +5V Nominal.
25	OPA-	Negative Output Pins (Open Collector) for Channel A. Require DC Bias of +5V Nominal.
26	OPA+	Positive Output Pins (Open Collector) for Channel A. Require DC Bias of +5V Nominal.
27	VCCA	Positive Supply Pins for Channel A. Should be Bypassed to Ground Using Suitable Bypass Capacitor.
28	GNDA	Device Common (DC Ground) for Channel A
29	IPA-	Channel A Negative Input.
30	IPA+	Channel A Positive Input.
31	A0	LSB for the Gain Control Interface for Channel A.
32	A1	LSB + 1 for the Gain Control Interface for Channel A.




**Package Drawing**  
5.0mmx5.0mm, 32 lead, QFN

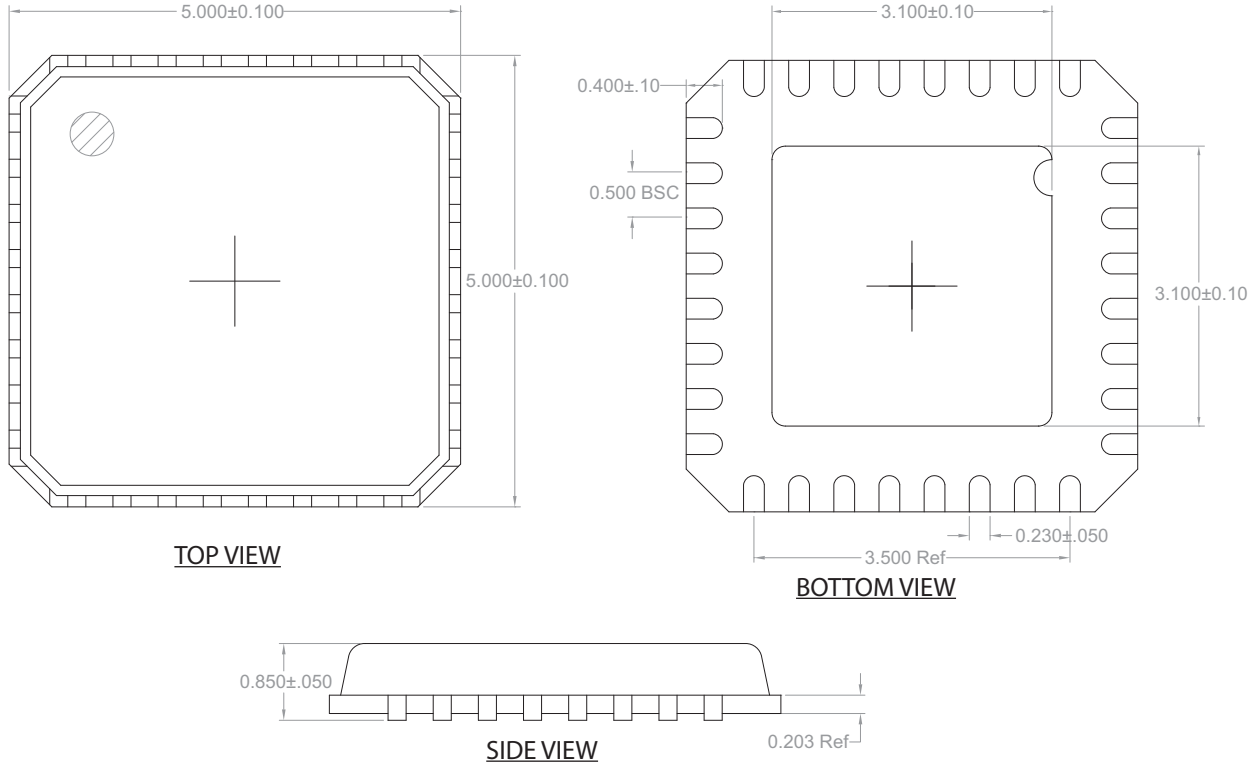

## Evaluation Board Assembly Drawing

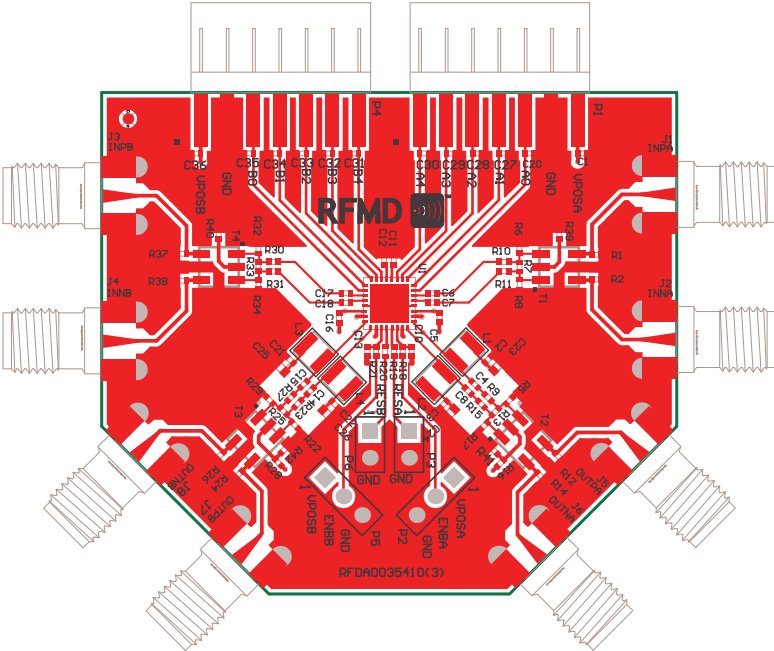

Application Schematic

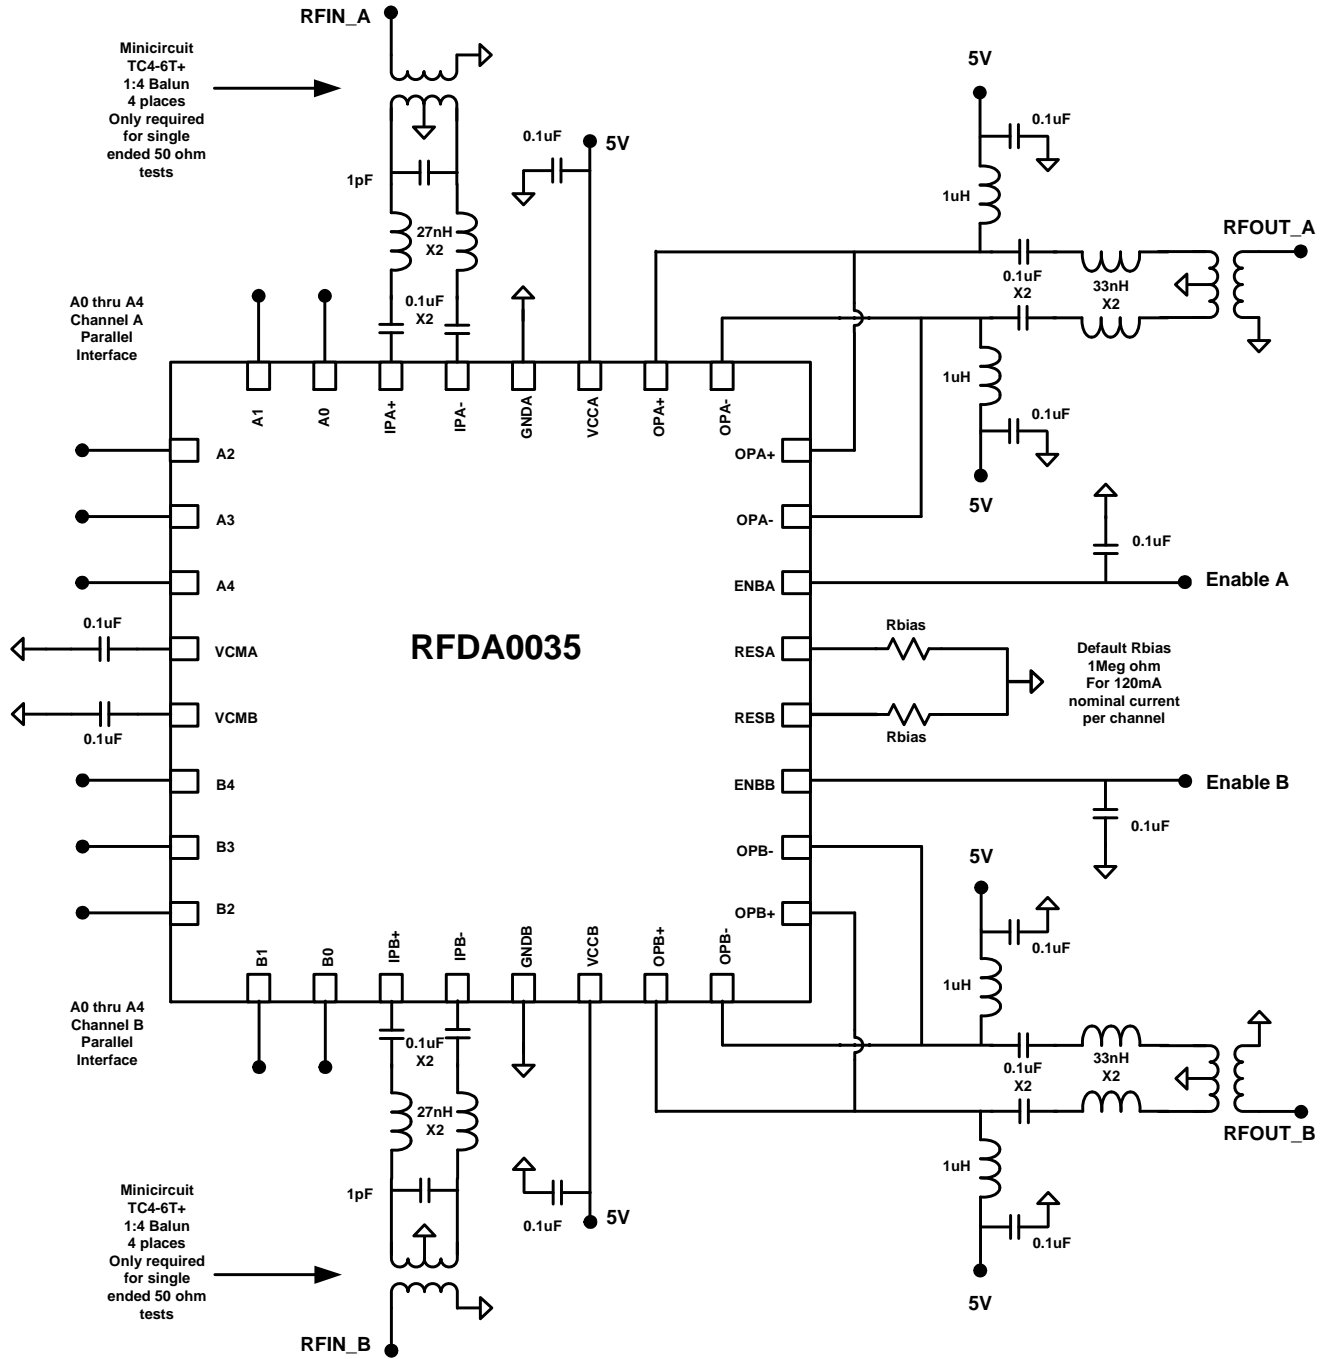



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.