

TSM240N03CX

30V N-Channel Power MOSFET

SOT-23



Pin Definition:

1. Gate
2. Source
3. Drain

Key Parameter Performance


| Parameter | Value | Unit |
|--------------------|-----------------|------|
| V_{DS} | 30 | V |
| $R_{DS(on)}$ (max) | $V_{GS} = 10V$ | 24 |
| | $V_{GS} = 4.5V$ | 34 |
| Q_g | 4.1 | nC |

Ordering Information

| Part No. | Package | Packing |
|-----------------|---------|----------------|
| TSM240N03CX RFG | SOT-23 | 3kpcs / 7+Reel |

Note: %G+denotes for Halogen- and Antimony-free as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds

Block Diagram

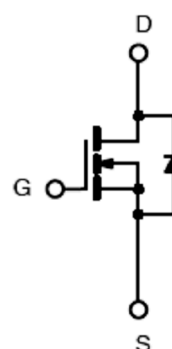

N-Channel MOSFET

Absolute Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Limit | Unit |
|---|-----------|---------------------------|------------------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Continuous Drain Current | I_D | $T_C = 25^\circ\text{C}$ | 6.5 |
| | | $T_C = 100^\circ\text{C}$ | 4.1 |
| Pulsed Drain Current ^(Note 1) | I_{DM} | 26 | A |
| Single Pulse Avalanche Energy ^(Note 2) | E_{AS} | 32 | mJ |
| Power Dissipation @ $T_C = 25^\circ\text{C}$ | P_D | 1.56 | W |
| Operating Junction Temperature | T_J | 150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 to +150 | $^\circ\text{C}$ |

Thermal Performance

| Parameter | Symbol | Limit | Unit |
|--|----------|-------|--------------------|
| Thermal Resistance - Junction to Ambient | R_{JA} | 80 | $^\circ\text{C/W}$ |

Electrical Specifications ($T_C = 25^\circ\text{C}$ unless otherwise noted)


| Parameter | Conditions | Symbol | Min | Typ | Max | Unit |
|---|--|--------------|-----|------|-----------|---------|
| Static | | | | | | |
| Drain-Source Breakdown Voltage | $V_{GS} = 0V, I_D = 250\mu A$ | BV_{DSS} | 30 | -- | -- | V |
| Drain-Source On-State Resistance | $V_{GS} = 10V, I_D = 6A$ | $R_{DS(on)}$ | -- | 17 | 24 | m |
| | $V_{GS} = 4.5V, I_D = 4A$ | | -- | 22 | 34 | |
| Gate Threshold Voltage | $V_{DS} = V_{GS}, I_D = 250\mu A$ | $V_{GS(TH)}$ | 1.2 | 1.4 | 2.5 | V |
| Zero Gate Voltage Drain Current | $V_{DS} = 30V, V_{GS} = 0V$ | I_{DSS} | -- | -- | 1 | μA |
| | $V_{DS} = 24V, T_J = 125^\circ\text{C}$ | | -- | -- | 10 | |
| Gate Body Leakage | $V_{GS} = \pm 20V, V_{DS} = 0V$ | I_{GSS} | -- | -- | ± 100 | μA |
| Forward Transconductance ^(Note 3) | $V_{DS} = 10V, I_D = 4A$ | g_{fs} | -- | 6.5 | -- | S |
| Dynamic | | | | | | |
| Total Gate Charge ^(Note 3,4) | $V_{DS} = 15V, I_D = 6A,$ $V_{GS} = 4.5V$ | Q_g | -- | 4.1 | -- | nC |
| Gate-Source Charge ^(Note 3,4) | | Q_{gs} | -- | 1 | -- | |
| Gate-Drain Charge ^(Note 3,4) | | Q_{gd} | -- | 2.1 | -- | |
| Input Capacitance | $V_{DS} = 25V, V_{GS} = 0V,$ $f = 1.0\text{MHz}$ | C_{iss} | -- | 345 | -- | pF |
| Output Capacitance | | C_{oss} | -- | 55 | -- | |
| Reverse Transfer Capacitance | | C_{rss} | -- | 32 | -- | |
| Switching | | | | | | |
| Turn-On Delay Time ^(Note 3,4) | $V_{DD} = 15V, I_D = 1A,$ $V_{GS} = 10V, R_G = 6$ | $t_{d(on)}$ | -- | 2.8 | -- | ns |
| Turn-On Rise Time ^(Note 3,4) | | t_r | -- | 7.2 | -- | |
| Turn-Off Delay Time ^(Note 3,4) | | $t_{d(off)}$ | -- | 15.8 | -- | |
| Turn-Off Fall Time ^(Note 3,4) | | t_f | -- | 4.6 | -- | |
| Source-Drain Diode Ratings and Characteristic | | | | | | |
| Maximum Continuous Drain-Source Diode Forward Current | Integral reverse diode in the MOSFET | I_S | -- | -- | 6.5 | A |
| Maximum Pulse Drain-Source Diode Forward Current | | I_{SM} | -- | -- | 26 | A |
| Diode-Source Forward Voltage | $V_{GS} = 0V, I_S = 1A$ | V_{SD} | -- | -- | 1 | V |

Note:


- Pulse width limited by safe operating area
- $L = 1\text{mH}, I_{AS} = 8A, V_{DD} = 25V, R_G = 25$, Starting $T_J = 25^\circ\text{C}$
- Pulse test: pulse width $m300\mu s$, duty cycle $m2\%$
- Switching time is essentially independent of operating temperature.

Electrical Characteristics Curve


Continuous Drain Current vs. T_C

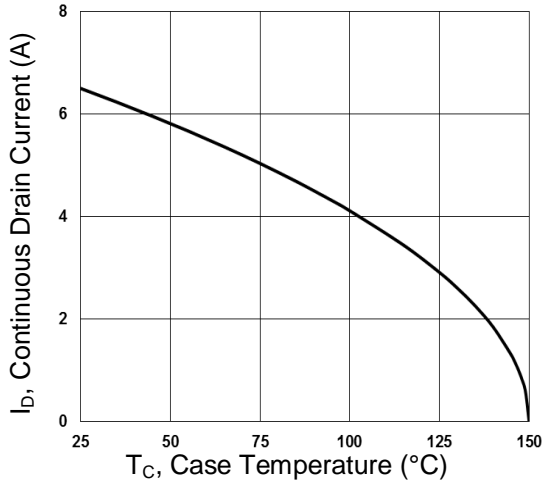


Gate Charge

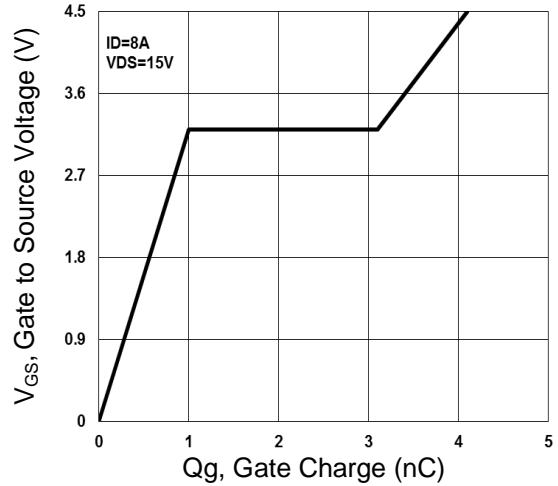


On-Resistance vs. Junction Temperature

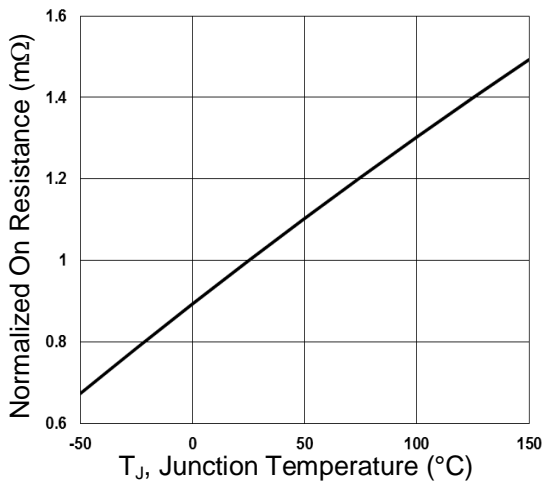


Threshold Voltage vs. Junction Temperature

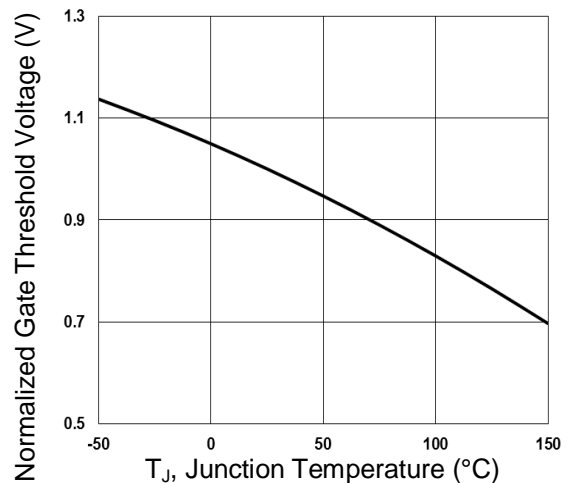


Maximum Safe Operating Area

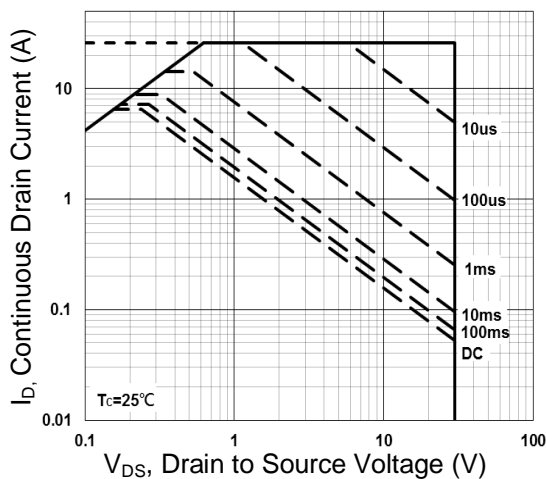

Normalized Thermal Transient Impedance Curve

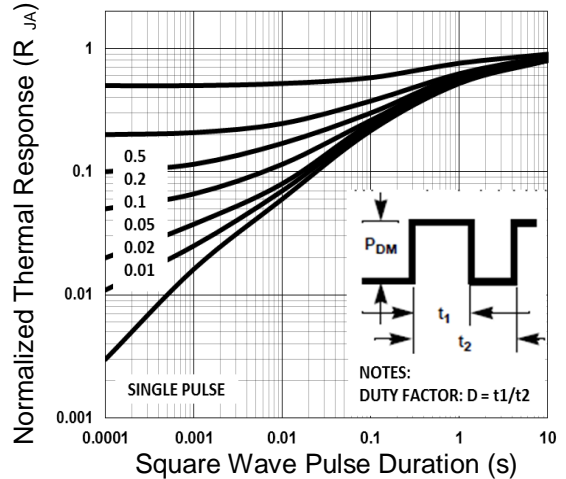


SOT-23 Mechanical Drawing

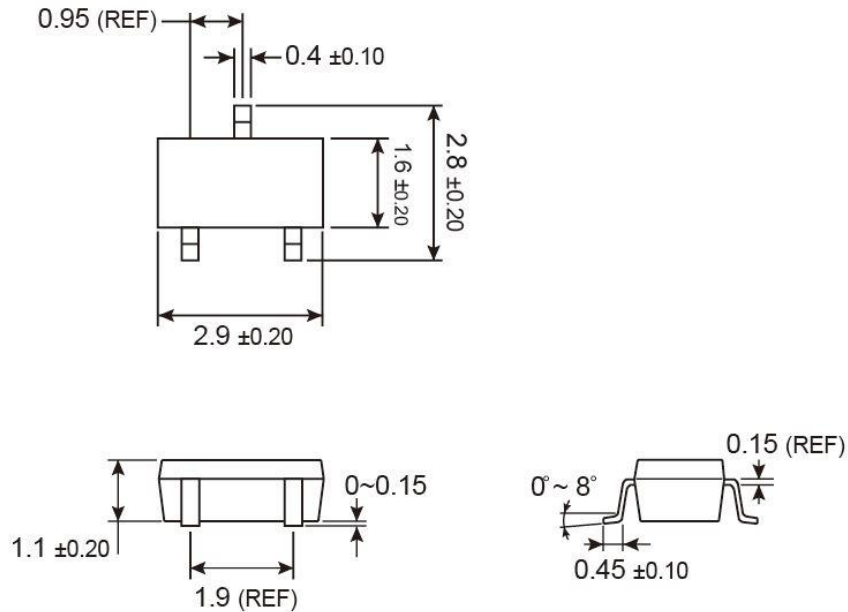

Unit: Millimeters

Marking Diagram



- 24** = Device Code
- Y** = Year Code
- M** = Month Code for Halogen Free Product
(**O**=Jan, **P**=Feb, **Q**=Mar, **R**=Apr, **S**=May, **T**=Jun, **U**=Jul, **V**=Aug, **W**=Sep, **X**=Oct, **Y**=Nov, **Z**=Dec)
- L** = Lot Code

TSM240N03CX

30V N-Channel Power MOSFET

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.