

**HIGH VOLTAGE POWER SCHOTTKY RECTIFIER**
**MBR5H150**

### General Description

High voltage schottky rectifier suited for switch mode power supplies and other power converters. This device is intended for use in medium voltage operation, and particularly, in high frequency circuits where low switching losses and low noise are required.

The MBR5H150 is available in standard DO-27 and DO-27(A) packages.

### Features

- High Surge Capacity
- Low Forward Voltage Drop
- 175°C Operating Junction Temperature
- Guard-Ring for Stress Protection
- Pb-Free and Halogen-Free Packages are available
- The Plastic Material Carries UL Recognition 94V-0

### Main Product Characteristics

$I_{F(AV)}$	5A
$V_{RRM}$	150V
$T_J$	175°C
$V_{F(max)}$	0.92V

### Mechanical Characteristics

- Case: JEDEC DO-201AD Molded Plastic
- Epoxy Meets UL 94 V-0@ 0.125 in
- Weight (Approximately): 1.2 Grams
- Finish: All External Surfaces Corrosion Resistant and Terminal

### Applications

- Power Supply – Output Rectification
- Power Management
- Instrumentation

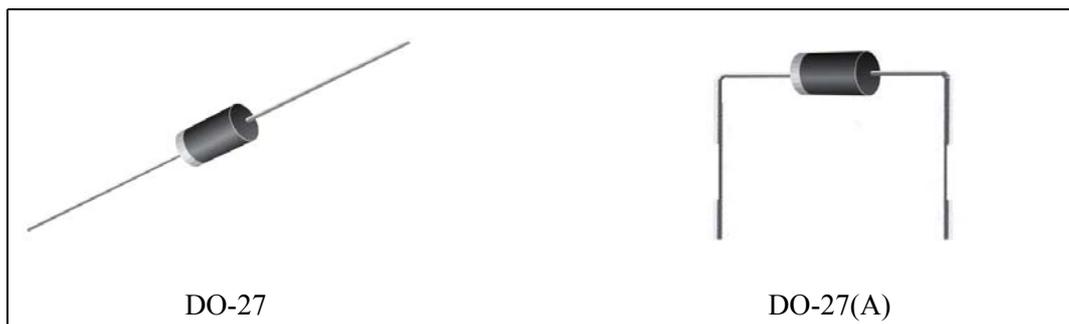


Figure 1. Package Type of MBR5H150

**HIGH VOLTAGE POWER SCHOTTKY RECTIFIER**

**MBR5H150**

**Pin Configuration**


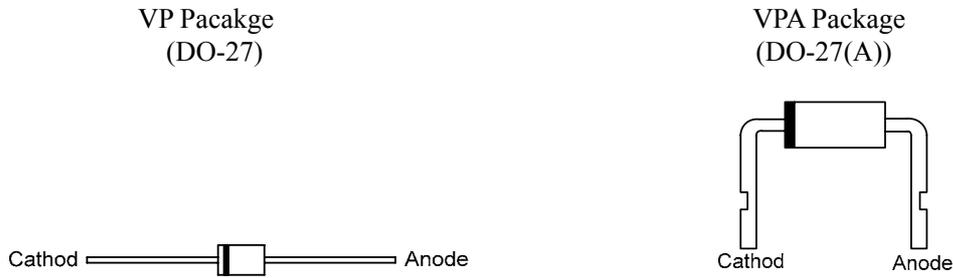


Figure 2. Pin Configuration of MBR5H150 (Top View)

**Ordering Information**

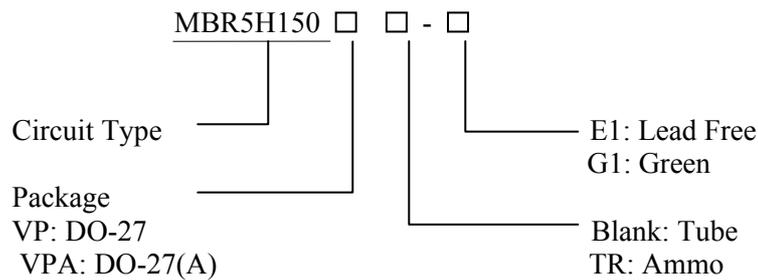

Package	Part Number		Marking ID		Packing Type
	Lead Free	Green	Lead Free	Green	
DO-27	MBR5H150VP-E1	MBR5H150VP-G1	515VP	515VPG	Bulk
	MBR5H150VPTR-E1	MBR5H150VPTR-G1	515VP	515VPG	Ammo
DO-27(A)	MBR5H150VPA-E1	MBR5H150VPA-G1	515VP	515VPG	Bulk

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**HIGH VOLTAGE POWER SCHOTTKY RECTIFIER****MBR5H150****Absolute Maximum Ratings ( Per Diode Leg) (Note 1)**

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	150	V
Average Rectified Forward Current (Rated $V_R$ ) $T_C = 150^\circ\text{C}$	$I_{F(AV)}$	5	A
Non repetitive Peak Surge Current (Surge applied at rated load conditions half wave, single phase, 60Hz)	$I_{FSM}$	125	A
Operating Junction Temperature Range (Note 2)	$T_J$	175	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to 175	$^\circ\text{C}$
Voltage Rate of Change (Rated $V_R$ )	dv/dt	10000	V/ $\mu\text{s}$
ESD Ratings: Machine Model = C Human Body Model =3B		> 400 > 8000	V

Note 1: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

Note 2: The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/\theta_{JA}$ .

**Recommended Operating Conditions**

Parameter	Symbol	Condition	Value	Unit
Maximum Thermal Resistance	$\theta_{JC}$	Junction to Case	TBD	$^\circ\text{C}/\text{W}$
	$\theta_{JA}$	Junction to Ambient	TBD	

**Electrical Characteristics**

Parameter	Symbol	Conditions	Value	Units
Maximum Instantaneous Forward Voltage Drop (Note 3)	$V_F$	$I_F=5\text{A}$ , $T_C=25^\circ\text{C}$	0.92	V
Maximum Instantaneous Reverse Current (Note 3)	$I_R$	Rated DC Voltage, $T_C=25^\circ\text{C}$	8.0	$\mu\text{A}$
		Rated DC Voltage, $T_C=150^\circ\text{C}$	50.0	mA

Note 3: Pulse Test: Pulse Width = 300 $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .



### Typical Performance Characteristics

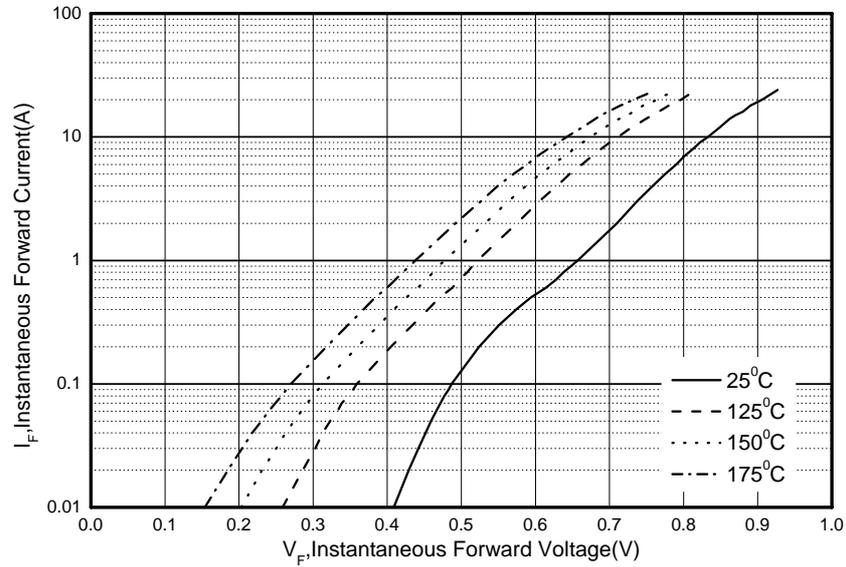


Figure 3. Typical Forward Characteristics

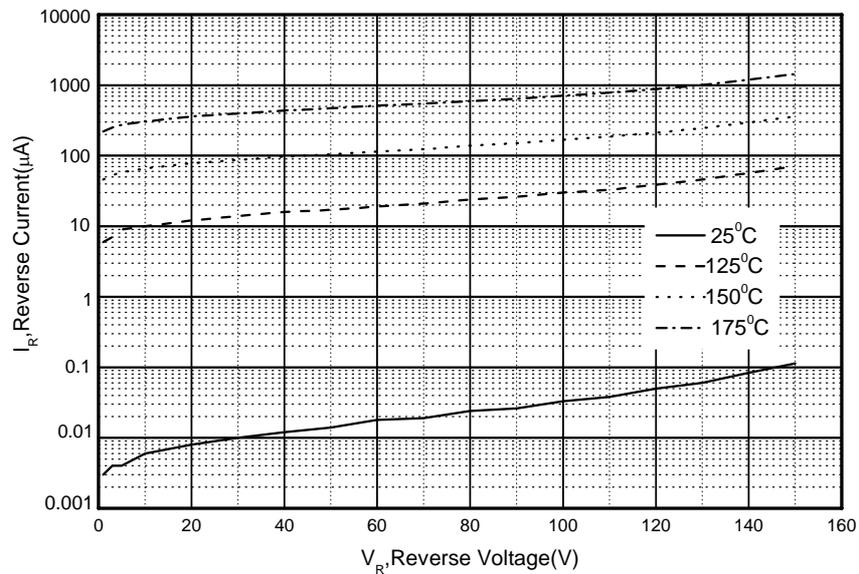


Figure 4. Typical Reverse Characteristics




**HIGH VOLTAGE POWER SCHOTTKY RECTIFIER**


**MBR5H150**

**Mechanical Dimensions**

**DO-27**

**Unit: mm(inch)**

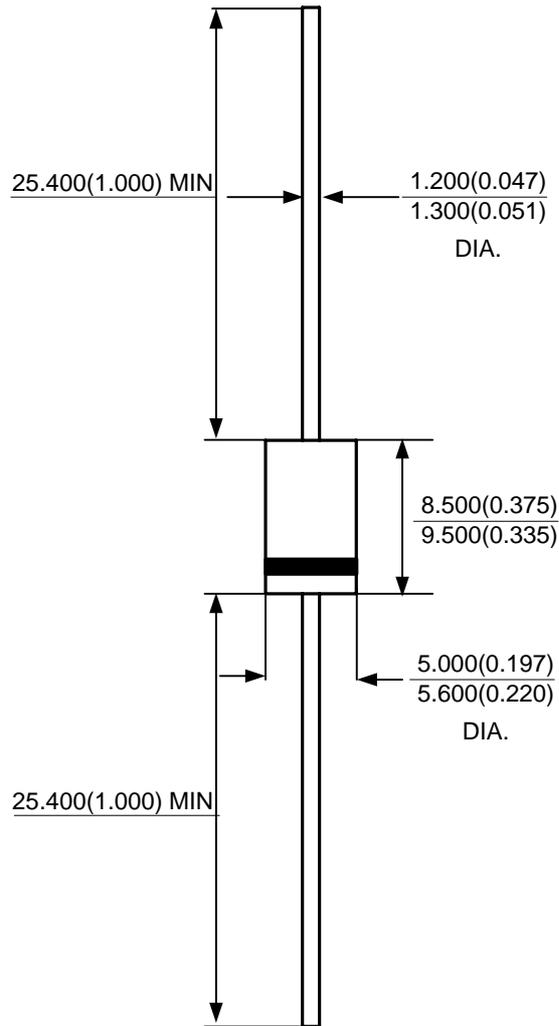

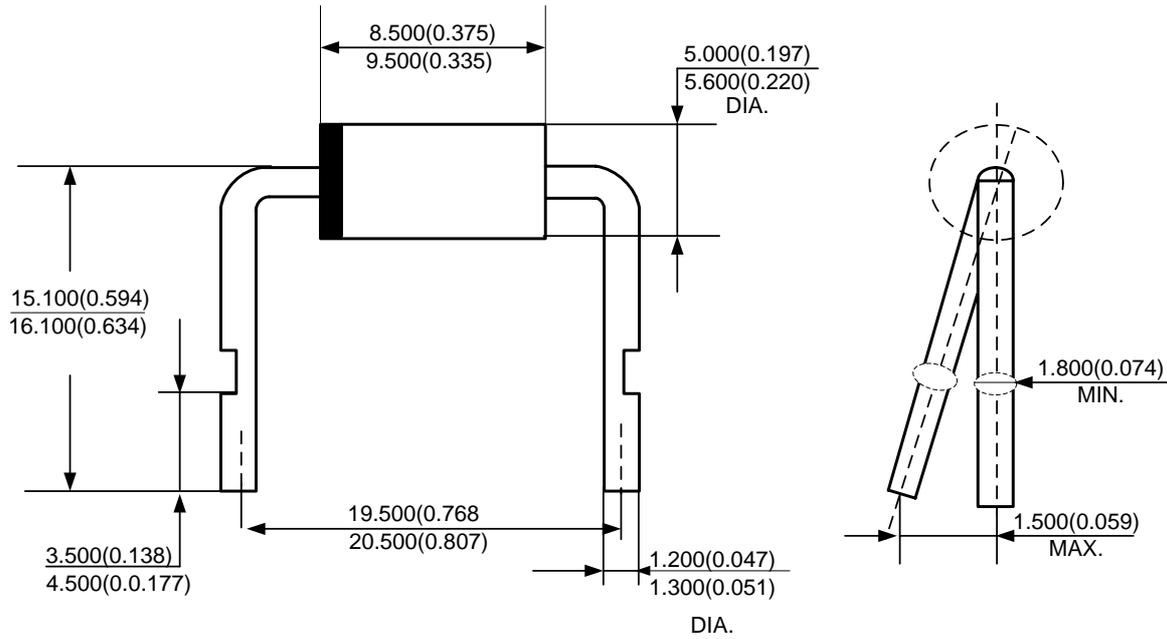**HIGH VOLTAGE POWER SCHOTTKY RECTIFIER****MBR5H150****Mechanical Dimensions (Continued)****DO-27(A)****Unit: mm(inch)**



## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai Zizhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

**Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**  
Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen,  
518026, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

**BCD Semiconductor (Taiwan) Company Limited**  
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,  
Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

**BCD Semiconductor Corp.**  
30920 Huntwood Ave. Hayward,  
CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.