

AIMB-274

**Intel® Core™ i7/i5/i3 LGA 1150 Mini-ITX
with VGA/DP⁺⁺/HDMI(DP⁺⁺)/LVDS(eDP),
2 COM, Dual LAN, PCIe x16**

NEW



Features

- Supports Intel® 4th Gen Core™ i processor (LGA1150) with Intel Q87 chipset
- Two 204-pin SO-DIMM up to 16 GB DDR3/DDR3L 1333/1600 MHz SDRAM
- Supports triple display of VGA/DP/HDMI(DP)/LVDS(eDP)
- Supports PCIe x16 (Gen 3) and two mini PCIe
- Supports Intel vPro, AMT 9.0, PECI 3.0, Software RAID 0,1,5,10, TPM 1.2 (optional)
- Supports iManager, SUSIAccess and Embedded Software APIs

Software APIs:



SMBus



H/W Monitor



Watchdog



GPIO



Brightness

Utilities:



BIOS flash




Monitoring

Specifications

Processor System	CPU	E3-1268L V3	i7-4770S	i7-4770TE	i5-4570S	i5-4570TE	i3-4330	i3-4330TE	Pentium G3420	Pentium G3320TE	
	Core Number	4	4	4	4	2	2	2	2	2	
	Max Speed	2.3GHz	3.1 GHz	2.3 GHz	2.9 GHz	2.7 GHz	3.5 GHz	2.4 GHz	3.2 GHz	2.3 GHz	
	L3 Cache	8M	8M	8M	6M	4M	4M	4M	3M	3M	
	TDP (W)	45W	65W	45W	65W	35W	54W	35W	54W	35W	
	Chipset	Q87									
	BIOS	AMI EFI 128 Mbit SPI									
Expansion Slot	PCI	-									
	Mini-PCIe	2, F/S x 1 support mSATA, H/S x 1 with SIM card holder									
Memory	PCIe x16 (Gen3)	16 GB/s per direction, 1 slot									
	Technology	Dual Channel DDR3/DDR3L @ 1.5V 1333/1600 MHz SDRAM									
	Max. Capacity	16 GB/8 GB per SO-DIMM									
	Socket	2 x 204 PIN DDR3 SO-DIMM (Non-ECC)									
Graphics	Controller	Supports DirectX11.1, OpenGL 4.0 and OpenCL 1.2									
	VRAM	Shared system memory, 2 GB and above, total system memory shared 1 GB maximum video memory									
	CRT	Yes, supports max. resolution 1920 x 1200 @ 60 Hz									
	LVDS	Supports dual channel 48-bit up to 1920 x 1200									
	HDMI	Yes, supports max. resolution 1920 x 1200									
	eDP	Yes, with internal pin header, supports max. resolution 3840 x 2160 @ 60 Hz									
	Display Port 1.2	Yes, supports max. resolution 3840 x 2160 @ 60 Hz									
Ethernet	Triple Display	VGA+LVDS+HDMI, VGA+LVDS+DP, VGA+DP+HDMI; VGA+DP+DP; VGA+eDP+HDMI, VGA+eDP+DP, LVDS+DP+HDMI, LVDS+DP+DP, eDP+DP+HDMI, eDP+DP+DP									
	Interface	10/100/1000 Mbps									
	Controller	GbE LAN1: Intel I217LM; LAN2: Intel I211AT									
	Connector	RJ-45 x 2									
SATA	Max Data Transfer Rate	600 MB/s (SATA 3.0)									
	Channel	4									
Rear I/O	CRT	1									
	HDMI (DP ⁺⁺)	1, shared with DP by auto detection									
	Display Port 1.2	1									
	Ethernet	2									
	USB	4 (USB 3.0)									
	Audio	3 (Mic-in, Line-out, Line-in)									
	Serial	1 (RS-232, supports 5V/12V)									
	eSATA	1									
Internal Connector	USB	6 (USB 2.0)									
	LVDS/inverter	1									
	Serial	1 (RS-232/422/485)									
	IDE	-									
	SATA	4 (SATA 3.0)									
	Mini-PCIe	2 (F/S x 1 & H/S x 1)									
	Parallel	-									
	IrDA	-									
Watchdog Timer	GPIO	8-bit									
	Output	System reset									
Power Requirements	Interval	Programmable 1 ~ 255 sec/min									
	Input power	ATX									
Environment		Win Idle 18.725 W (Intel Core i7-4770S 3.1GHz / DDR3 1600MHz 8GB x 2)									
	Temperature	Non-Operating									
Physical Characteristics	Dimensions	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution									
		-40 ~ 85° C (-40 ~ 185° F)									
		170 mm x 170 mm (6.69" x 6.69")									

Block Diagram

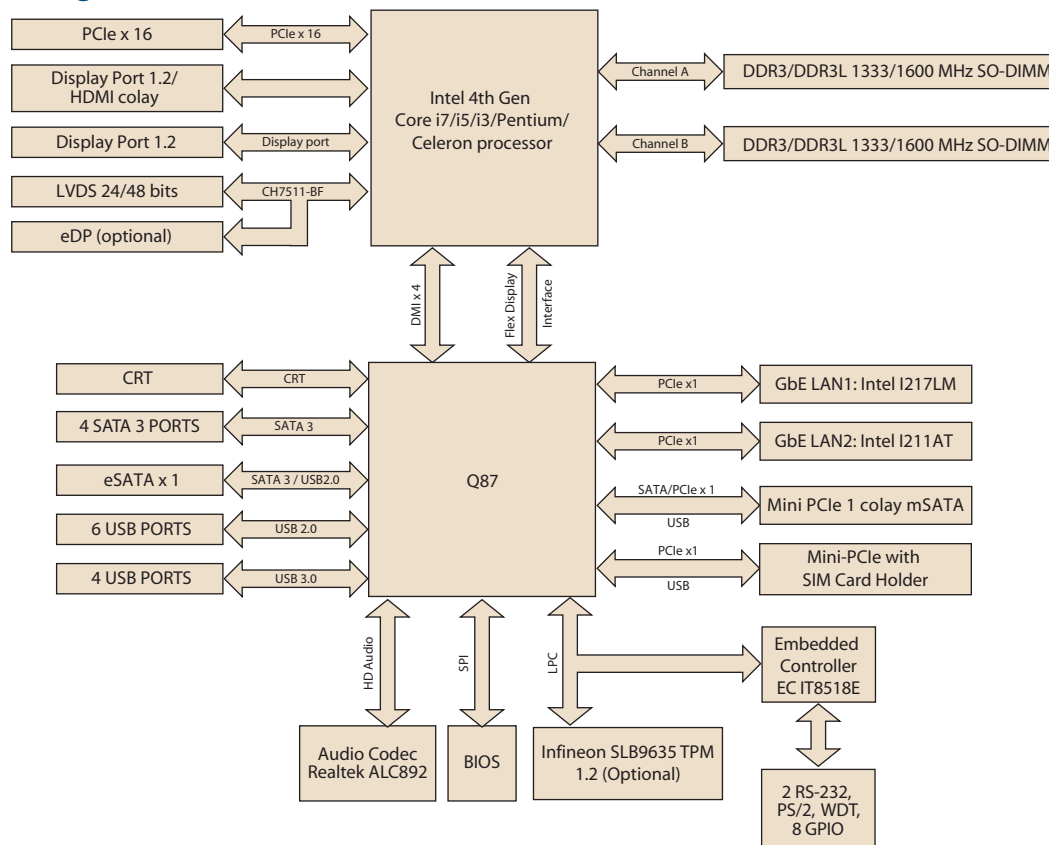

Ordering Information

P/N	Chipset	DP	CRT	LVDS/eDP	HDMI/DP	GbE LAN	COM	eSATA	SATA	USB 3.0/2.0	MiniPCIe	TPM	AMP	PCIex16
AIMB-274G2-00A1E	Q87	1	1	1 (1)	1 (CEC)	2	2	1	4	4/6	2 (1 x F/S; 1 x H/S)	(1)	(1)	1
AIMB-274L-00A1E	Q87	0	1	0	1	1	2	0	2	4/6	1 (F/S)	0	0	1

*() BOM options available on MP version.

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2 for G2 sku, 0 for L sku
1700018785	SATA power cable	2
1700001788	Serial port cable, 30cm	1
1960060539T000	I/O port bracket	1 for G2 sku
1960060539T100	I/O port bracket	1 for L sku
2006027410	Startup manual	1
2066027400	Driver CD	1

Optional Accessories

Part Number	Description
1703100121	USB cable with two ports, 12 cm
1703100261	USB cable with two ports, 26 cm
1703100350	USB cable with two ports, 34.5 cm
1703060191	KB/MS cable 1*6P-2.0/M-DIN 6P(F)*2, 19cm
1960053207N001	LGA1150 CPU cooler for CPU TDP ≤ 65W, 92.9 (W) x 92.9 (L) x 46 (H) mm
1960060732N001	LGA1150 CPU cooler for CPU TDP ≤ 45W, 80 (W) x 80 (L) x 32.2 (H) mm

Note: Purchasing AIMB-274's proprietary CPU cooler from Advantech is a must, other brand's CPU cooler are NOT compatible with AIMB-274.

Optional Chassis

Part Number	Description
AIMB-B2000-15ZE	Mini-ITX chassis with 150W ATX power supply

I/O View



AIMB-274G2-00A1E



AIMB-274L-00A1E

Embedded OS/API

OS/API	Part No.	Description
WES7	2070012179	WES7E AIMB-274 x86 V5.1.6 Eng/Jpn/Cht/Chn
WES8	2070012425	WES8E AIMB-274 x86 V6.0.0 Eng
iManager		Software APIs for hardware monitoring ,smart fan, watchdog, GPIO, brightness control



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.