


.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

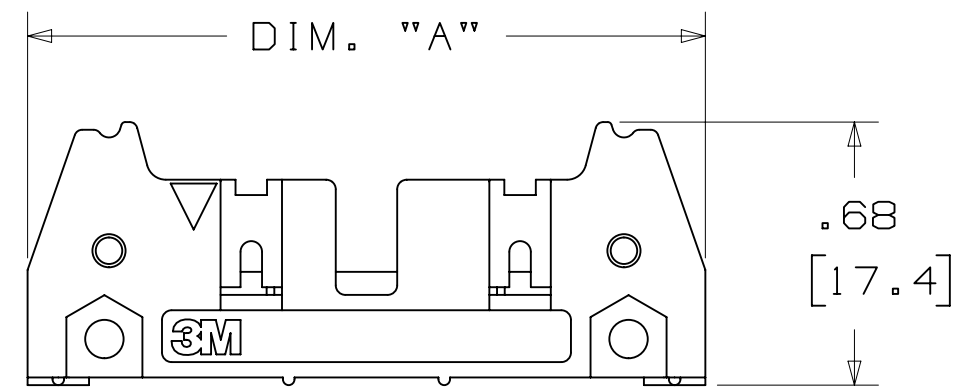

Technical drawing of a mechanical part showing dimensions and tolerances:

- Top left dimension: $.573 \pm .010$
- Top left dimension in brackets: $[14.55 \pm 0.25]$
- Left side dimension: $.08$
- Left side dimension in brackets: $[2.0]$
- Right side dimension: (1.07)
- Right side dimension in brackets: $[(27.2)]$

UL[®]
US
UL FILE NO: E68080

- * MILITARY (WITH 3M'S N3518 POLARIZING KEY) AND CENTERBUMP POLARIZATION.
- * LOW PROFILE.
- * OPTIONAL EJECTOR LATCHES.
- * MOUNTING HOLES FOR SECURING HEADER TO BOARD.
- * THREE WALL SHROUD PROVIDES DESIGN FLEXIBILITY.
- * SOLDER TAIL AND WRAP TAIL OPTIONS.
- * OPTIONAL POLARIZING POSTS AVAILABLE.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.

INSULATOR:
MATERIAL: GLASS FILLED POLYESTER (PCT)
FLAMMABILITY: UL94V-0
COLOR: BLACK
CONTACT:
MATERIAL: COPPER ALLOY
PLATING:
UNDER PLATING: 100μ" [2.54μm] NICKEL-OVERALL
WIPING AREA: 30μ" [0.76μm] AVG. GOLD
SOLDER TAILS: 200μ" [5.08μm] TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

INSULATION RESISTANCE: $>1 \times 10^9 \Omega$ AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL

TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)

NOTES

1. REGULATORY INFORMATION: ROHS COMPLIANT. SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF WWW.3MCONNECTORS.COM FOR COMPLIANCE INFORMATION.
2. IN THE EVENT OF CONFLICT CONTAINED IN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENCE.
3. NOTCHES A & C WILL ACCOMMODATE 3M POLARIZING KEY: N3518).
4. MOUNTING HARDWARE: FROM SOLDER SIDE OF PC BOARD USE #4-24 THREAD CUTTING SCREW (3M PART #3341-5) WITH $\varnothing .116$ [2.95] MOUNTING HOLE. FOR RIGHT ANGLE VERSION ONLY: #2-56 BOLT AND NUT (3M PART #3341-6) WITH $\varnothing .106$ [2.69] MOUNTING HOLE MAY BE USED.
5. THE RECOMMENDED PCB HOLE SIZE FOR THE KINKED TAIL POSITIONS ON THE .112 SOLDER TAIL CONNECTOR IS $\varnothing .035 \pm .002$. (SEE K2 VERSION).

DESIGN REFERENCE		NEXT ASSEMBLY		REV.	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACROSS CODES				BPM	CASTIGLIONE	DATE	AUG 05, 2014	MFG	DATE
				CHKD		DATE		APPRV.	R. SCHERER
								DATE	SEP 05, 2014
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2015					
Interconnect Solutions		EMSD		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.					
DO NOT SCALE DRAWING		SCALE $\frac{2}{1}$		TOLERANCES EXCEPT AS NOTED					
 THIRD ANGLE PROJECTION		INCHES		.00 ± .01 .000 ± .005 .0000 ±		TITLE HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA			
		MILLIMETERS		0 ± .0 ± .3 .00 ± .13 .000 ±		CAGE NUMBER D 78-5100-0771-5			
		MAX SURFACE ROUGHNESS MAX SURFACES ☒ MARKED ONLY		ANGLES		MODEL 3000 SERIES			
						DET. STS ☒ YES ☒ NO		SHT 1 OF 4	

Imaged: H.1 3/6/2015 12:53 PM UTC-06:00

.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE



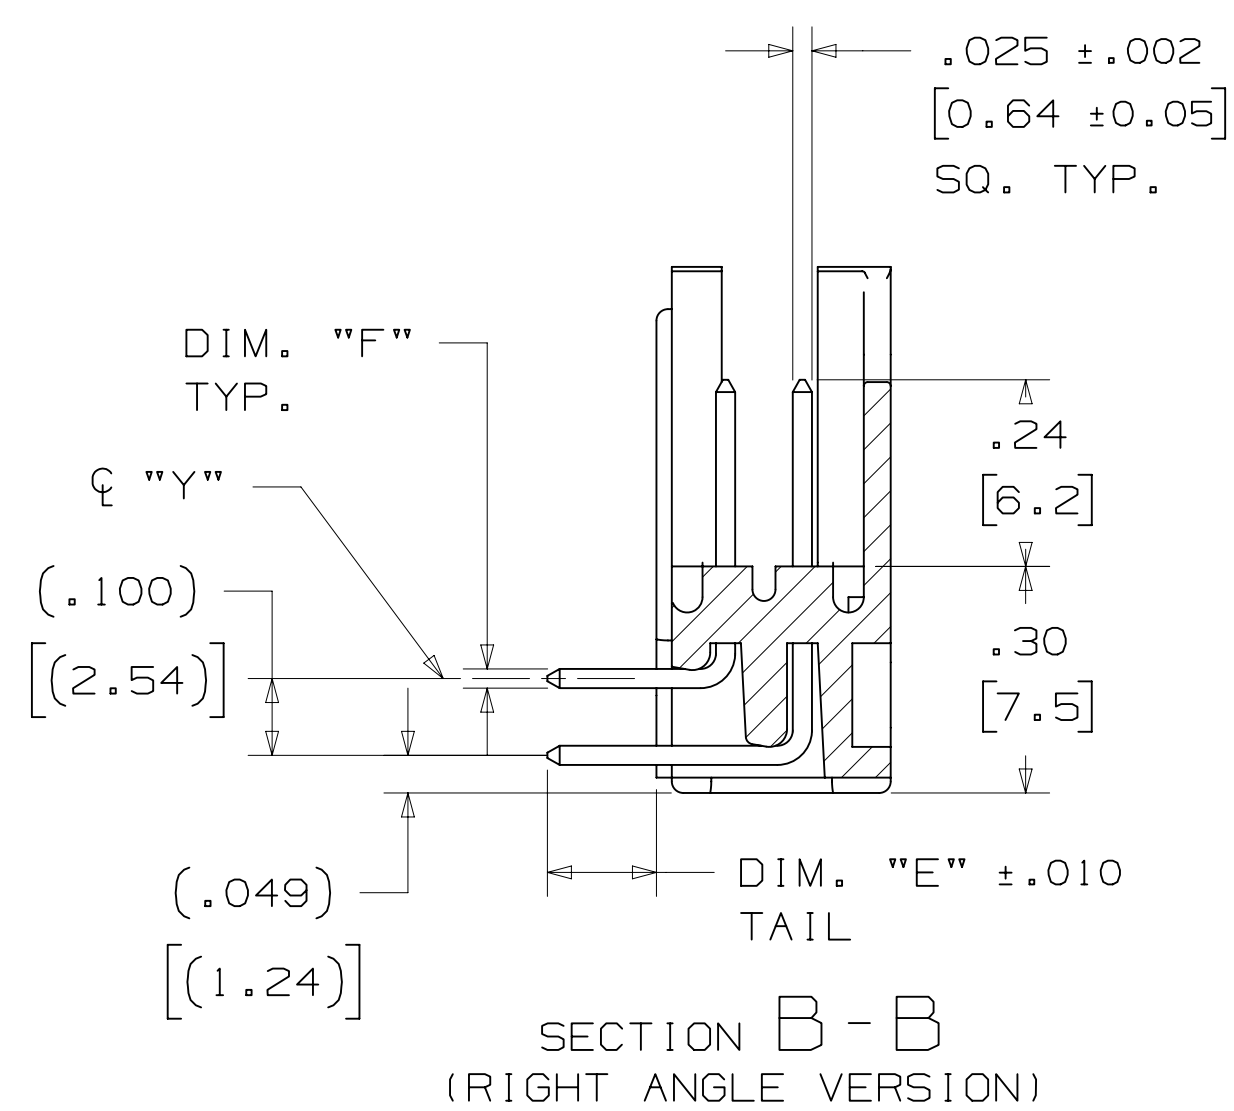


TABLE 1							
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
10	3793	1.26 [32.1]	1.105 [28.04]	.865 [21.97]	.71 [18.0]	BC	10
14	3314	1.46 [37.2]	1.305 [33.12]	1.065 [27.05]	.91 [23.1]	BC	14
16	3408	1.56 [39.7]	1.405 [35.66]	1.165 [29.59]	1.01 [25.6]	ABC	16
20	3428	1.76 [44.8]	1.604 [40.74]	1.365 [34.67]	1.21 [30.7]	ABC	20
26	3429	2.06 [52.4]	1.905 [48.36]	1.665 [42.29]	1.51 [38.3]	ABC	26
34	3431	2.46 [62.6]	2.305 [58.52]	2.065 [52.45]	1.91 [48.5]	ABC	34
40	3432	2.76 [70.2]	2.605 [66.14]	2.365 [60.07]	2.21 [56.1]	ABC	40
50	3433	3.26 [82.9]	3.105 [78.84]	2.865 [72.77]	2.71 [68.8]	ABC	50
60	3372	3.76 [95.6]	3.605 [91.54]	3.365 [85.47]	3.21 [81.5]	ABC	60
64	3764	3.96 [100.7]	3.805 [96.62]	3.565 [90.55]	3.41 [86.6]	ABC	64

TABLE 2						
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"	PIN CROSS SECTION			DIM. "G"
-1XX2	.062 [1.57] THICK PC BOARD	.112 [2.84]	DIM. "F"	DIAGONALS	CORNER RADIUS	.035+/- .003 [.89] SEE NOTE 5
-2XX2			.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 REF. [.191]	
-1X03	.094 [2.39] TO .125 [3.18] THICK PC BOARD	.155 [3.94]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 REF. [.191]	.035+/- .003 [.89]
-2X03						

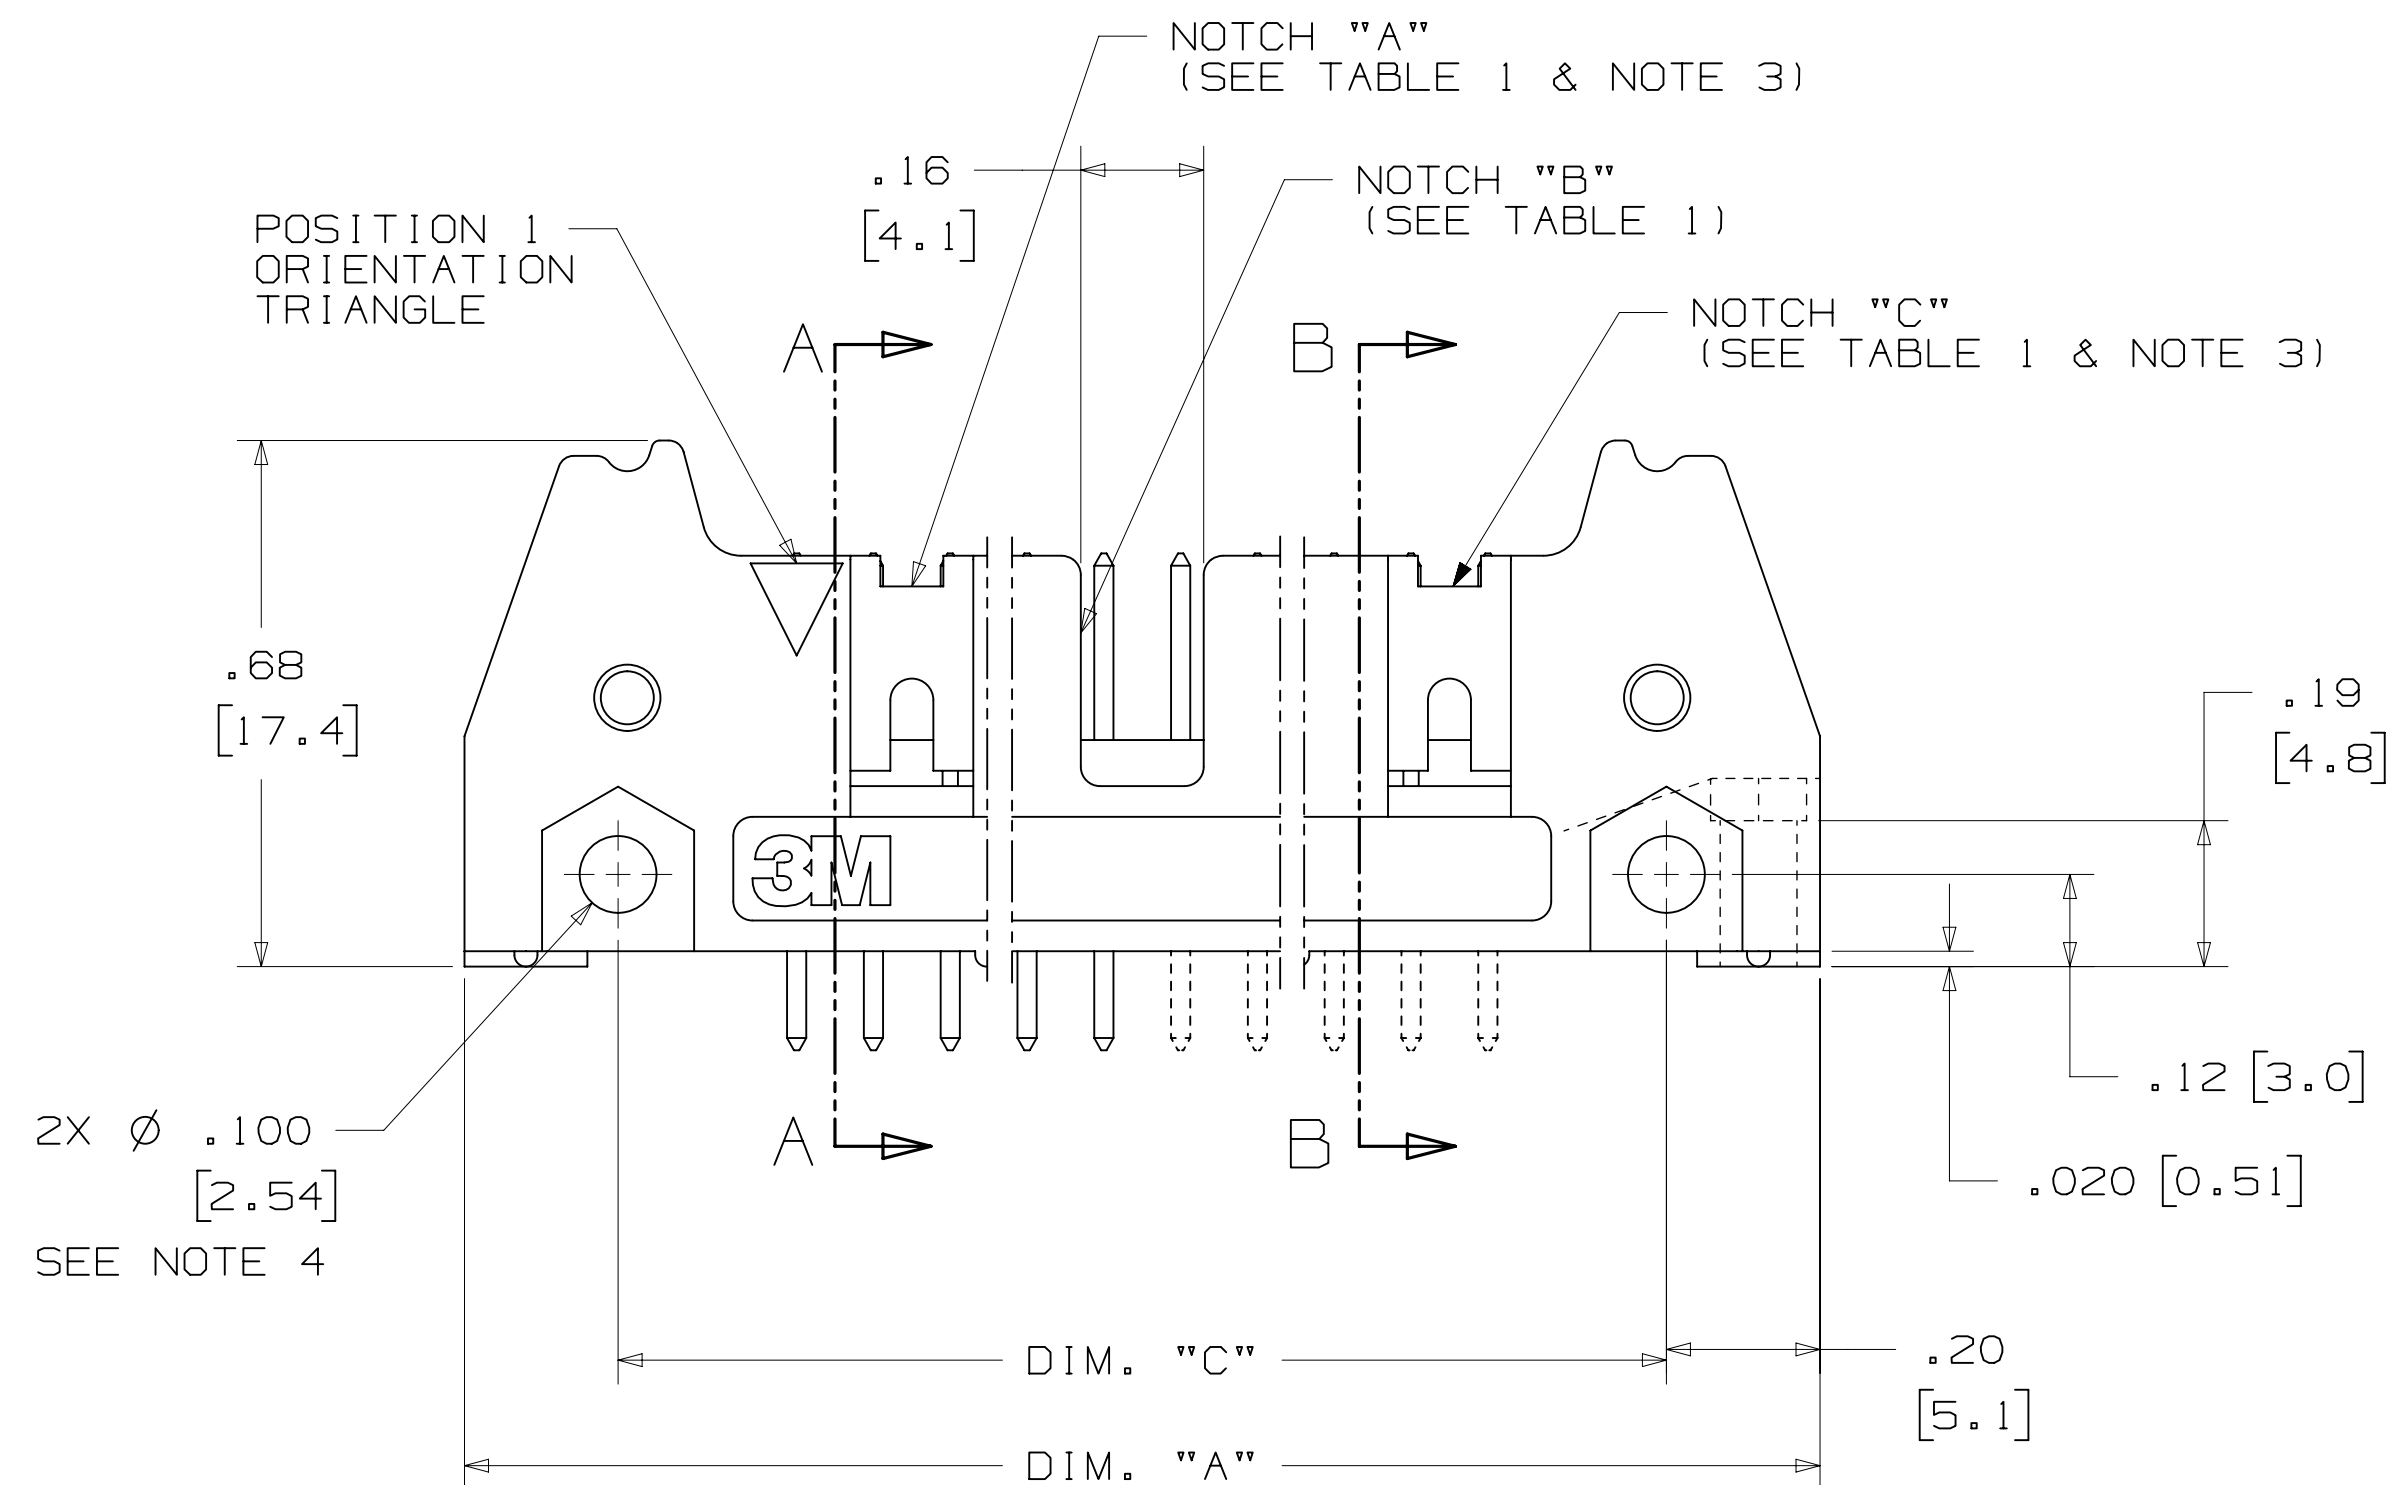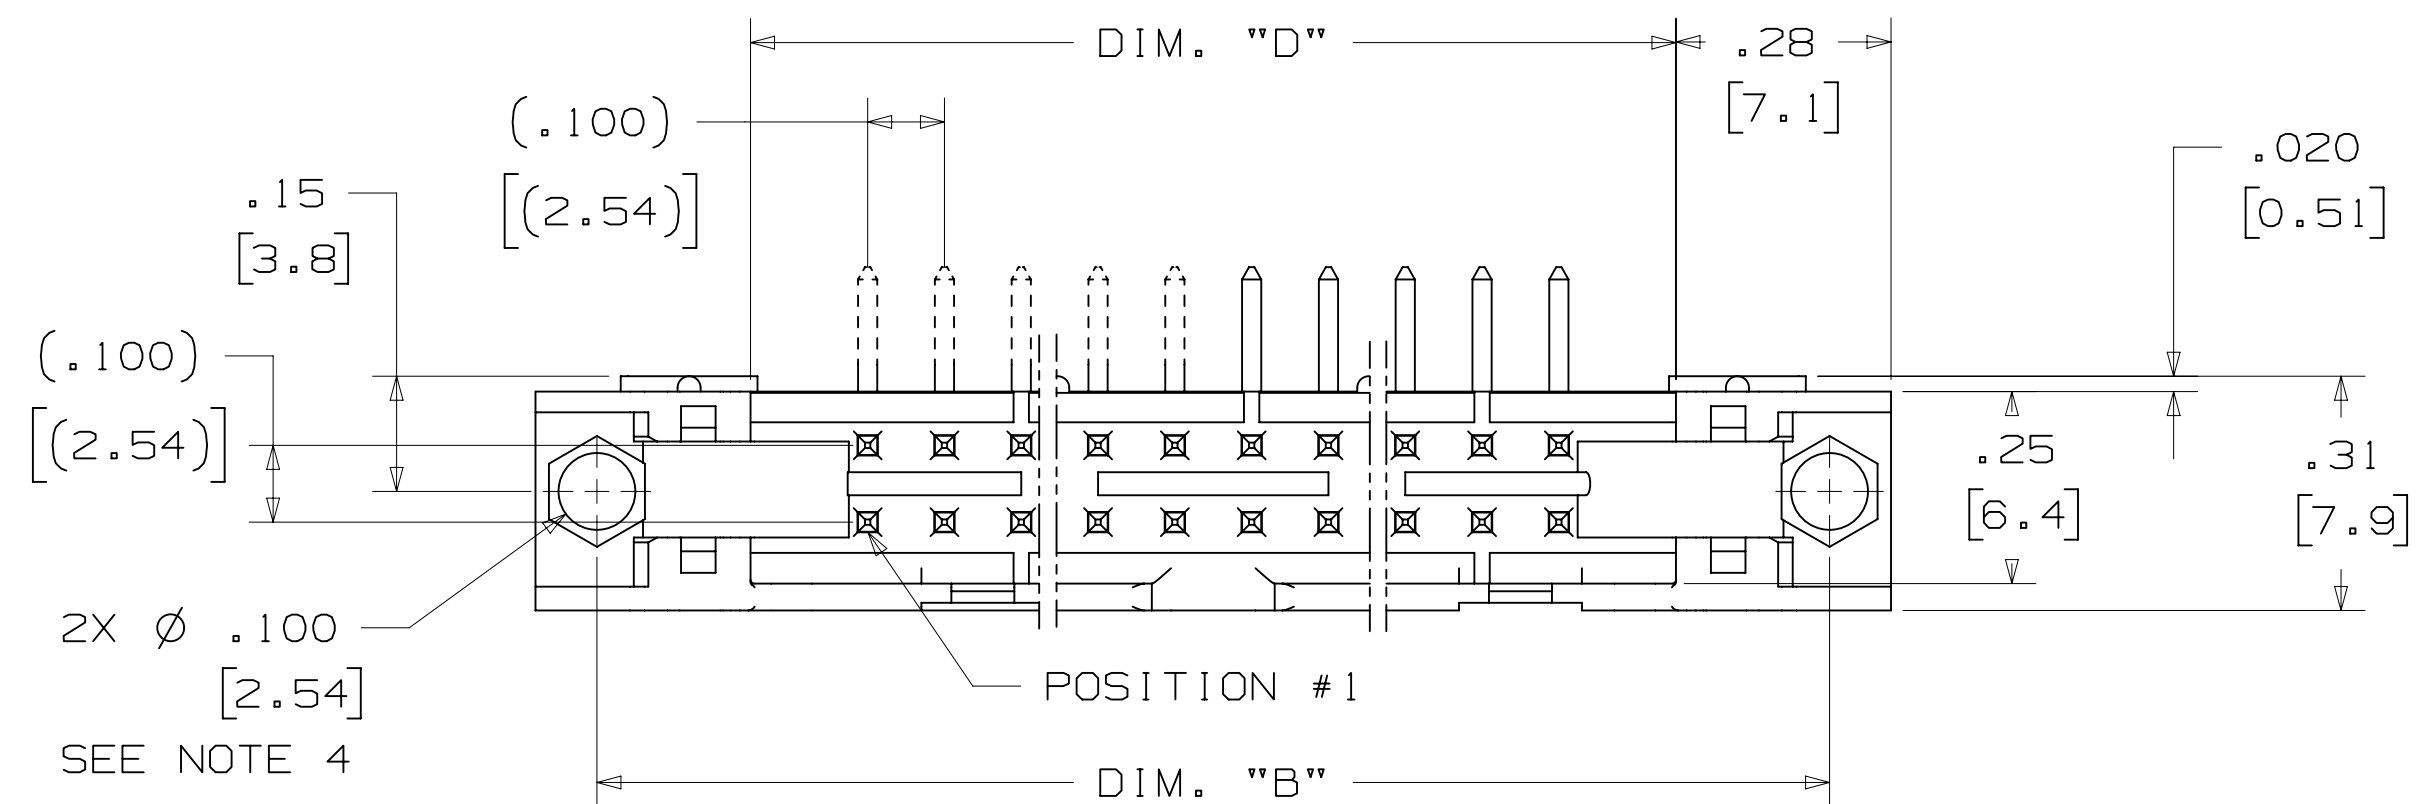

H	60056	MAR 06,2015			JNC	RS
		REVISED ORDERING				
		NUMBER				
G	56068	AUG 05,2014			JNC	RS
		REVISED AND REDRAWN				
REV	ECO	ISSUE DATE AND DESCRIPTION			DRFT	CHKD
DRFT CASTIGLIONE		DATE AUG 05,2014	MFG	DATE		
CHKD		DATE	APPROVAL R. SCHERER		DATE SEP 05,2014	
 3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without the written 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.				
TITLE						
HEADER , 3-WALL , .100 X .100 LATCH/EJECTOR , STRAIGHT & RA						
CAGE NUMBER		SIZE	DRAWING NO.			REV.
D		78-5100-0771-5			H	
MODEL		3000 SERIES		DET. LISTS ☐ YES ☒ NO SHT 2 OF 4		

DESIGN REFERENCE		NEXT ASSEMBLY	
ACROSS CODES			
DIVISION		DIVISION CODE	
Interconnect Solutions		EMSD	
DO NOT SCALE DRAWING	SCALE 4 1	TOLERANCES EXCEPT AS NOTED	
 THIRD ANGLE PROJECTION		INCHES	
		.00 ± .00 ± .01 .000 ± .005 .0000 ±	
INTERPRET PER ASME Y14.5 - 2009		MILLIMETER	
MAX. SURFACE ROUGHNESS ✓ ☐ DIM. SURFACES ☐ MARKED ONLY		.00 ± .00 ± .13 .000 ±	
		ANGLES ±	


.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE



THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.


BOTH SNAP-IN AND ROLL PIN LATCHES MAY BE ORDERED SEPARATELY. SNAP-IN AND ROLL PIN STYLE LATCHES ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT. IF ORDERING SNAP-IN OR ROLL PIN STYLE LATCHES SEPARATELY, PLEASE USE THE BELOW CHART.

```
* SELECTIVE PIN REMOVAL (ATA OR OTHER COMPATABILITY)
* WIRE WRAP TAILS STYLE
```

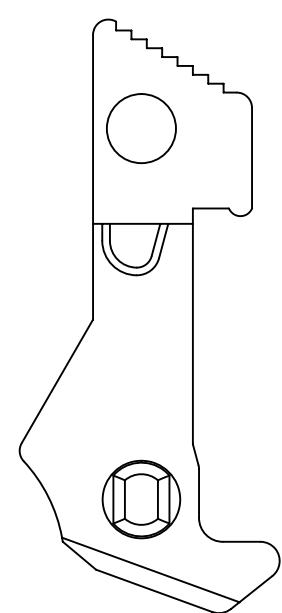

SHORT

NOTE:
SNAP-IN LATCHES CAN ONLY BE ORDERED
SEPARATELY AND ARE THE CUSTOMERS
RESPONSIBILITY TO INSTALL.




NOTE:
INSERT POST INTO ONE MOUNTING
HARDWARE HOLE ON BOTTOM OF HEADER.
SET POST TO PROTRUDE .115 [2.92]

KINKED TAIL DETAIL:


- KINK IS LOCATED .05" BELOW BOTTOM SURFACE OF PLASTIC.
- EXTERNAL RADIUS OF KINK TOWARD PART CENTERLINE.

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO
ADHERE KEYS.

DESIGN REFERENCE		NEXT ASSEMBLY		REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD	
ACROSS				BPR		CASTIGLIONE		DATE		MFG		DATE			
								DATE		R. SCHERER		DATE		SEP 05, 2014	
DIVISION		Interconnect Solutions		DIVISION CODE		EMSD				© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.					
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED											
		INCHES		.00 ± .01 .000 ± .005 .0000 ±		TITLE									
		THIRD ANGLE PROJECTION		MILLIMETERS 0 ± .0 ± .3 .00 ± .13 .000 ±		HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA									
INTERPRET PER ASME Y14.5 - 2009		MAY SURFACE ROUGHNESS		ALL SURFACES		CAGE NUMBER		SIZE		DRAWING NO.		REV.			
☒ MARKED ONLY						D		78-5100-0771-5		H					
				MODEL		3000 SERIES		DET. LISTS		YES X NO		SHT 3 OF 4			

3M™ THREE-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE


MOUNTING HARDWARE

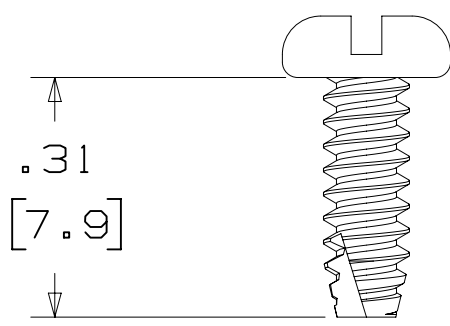

3341-5
(INSTALL FROM BOTTOM OF BOARD)
PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL




3341-6
HEX HEAD BOLT, NUT AND WASHER:
BOLT - #2-56 X 1/2"
MATERIAL: STAINLESS STEEL

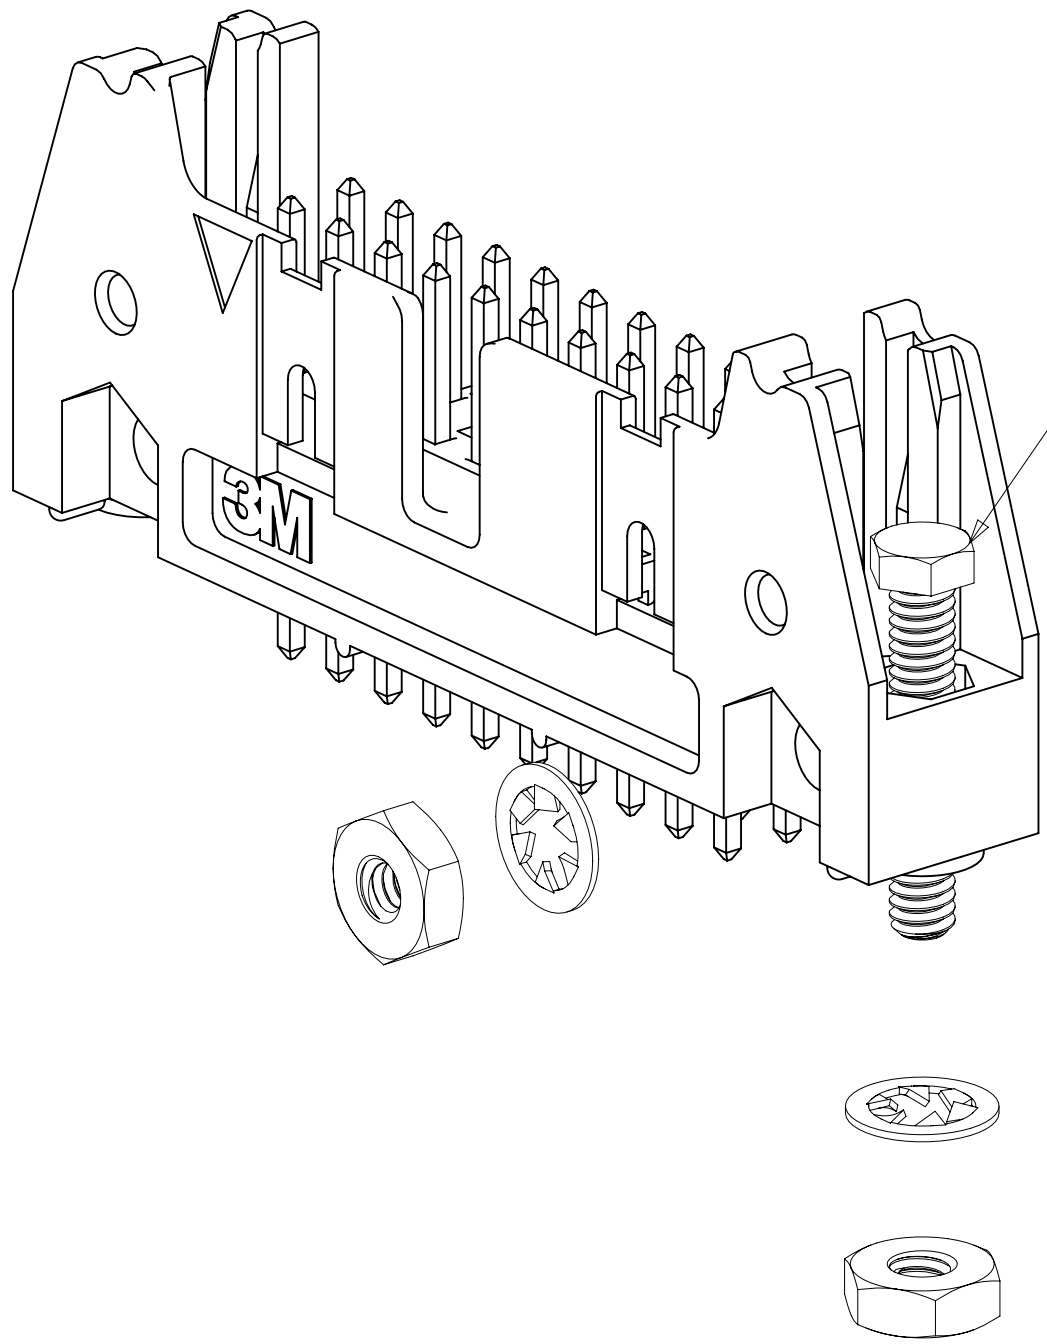


STRAIGHT VERSION INSTALL
(MUST BE INSERTED PRIOR TO
LATCH INSTALL)

RIGHT ANGLE VERSION INSTALL

3341-6
#2-56 NUT AND BOLT
TORQUE FOR EACH BOLT: 1.25 - 3.125 INCH LBS.

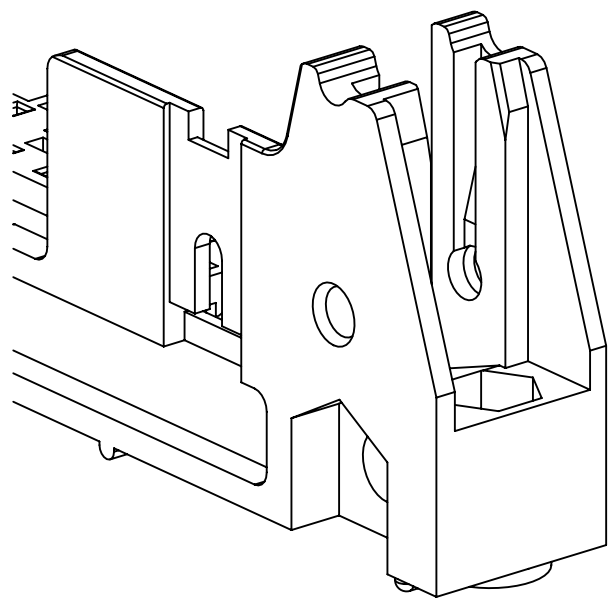

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.



3341-5

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
XREF		DIP		CASTIGLIONE	DATE	AUG 05, 2014	MFG	DATE	
DIVISION		DIVISION CODE		CHKD	DATE	R. SCHERER	DATE	SEP 05, 2014	
Interconnect Solutions		EMSD		3M		© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		TITLE HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA			
THIRD ANGLE PROJECTION		INCHES 0 ± .00 ±.01 .000 ±.005 .0000 ±		MILLIMETERS 0 ± .0 ±.3 .00 ±.13 .000 ±		CAGE NUMBER D78-5100-0771-5			
INTERPRET PER ASME Y14.5 - 2009		MAX SURFACE ROUGHNESS 12.5 SURFACES ✓ MARKED ONLY		MODEL 3000 SERIES		REV. H			
						DET LISTS YES NO SHT 4 OF 4			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.