


MA · MAD · MADD · MAT

MA

**STANDARD TO-5
HIGH-PERFORMANCE RELAY**

**QUALIFIED TO
MIL-R-39016/9**



TERMINAL VIEW


FEATURES

- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

MAD

**STANDARD TO-5
DIODE SUPPRESSED
HIGH-PERFORMANCE RELAY**

**QUALIFIED TO
MIL-R-39016/15**



TERMINAL VIEW


FEATURES

- Suppression diode
- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

MADD

**STANDARD TO-5 DIODE
SUPPRESSED/PROTECTED
HIGH-PERFORMANCE RELAY**

**QUALIFIED TO
MIL-R-39016/20**



TERMINAL VIEW


FEATURES

- Suppression & protection diodes
- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

MAT

**STANDARD TO-5 DIODE
SUPPRESSED/TRANSISTOR DRIVEN
HIGH-PERFORMANCE RELAY**

**QUALIFIED TO
MIL-R-28776/1**



TERMINAL VIEW

FEATURES

- Transistor driver & suppression diode
- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

ELECTRICAL CHARACTERISTICS

CONTACT ARRANGEMENT
2 Form C (DPDT)

CONTACT MATERIAL
Stationary:
Gold/platinum/palladium/silver alloy (gold plated)
Moveable:
Gold/platinum/palladium/silver alloy (gold plated)

CONTACT RESISTANCE
Before Life: 100 milliohms max. (measured @ 10 mA @ 6 Vdc)
After Life: 200 milliohms max. (measured @ 1 A @ 28 Vdc)

MECHANICAL LIFE EXPECTANCY
1 million operations

COIL VOLTAGE
5 to 30 Vdc

COIL POWER
675 mW max. @ 25°C


DUTY CYCLE
Continuous

PICK-UP VOLTAGE
Approximately 50% of nominal coil voltage


PICK-UP SENSITIVITY
130 mW max. @ 25°C

CONTACT RATINGS

| CONTACT LOAD | TYPE | OPERATIONS MIN. |
|----------------------------------|-------------------------------|-----------------|
| 1.0 A @ 28 Vdc | Resistive | 100,000 |
| 250 mA @ 115 Vac, 60 Hz & 400 Hz | Resistive (case not grounded) | 100,000 |
| 100 mA @ 115 Vac, 60 Hz & 400 Hz | Resistive | 100,000 |
| 0.2 A @ 28 Vdc | Inductive (0.32 Henry) | 100,000 |
| 0.1 A @ 28 Vdc | Lamp | 100,000 |
| 30 μA @ 50 mVdc | Low Level | 1,000,000 |
| 0.1 A @ 28 Vdc | Intermediate Current | 50,000 |

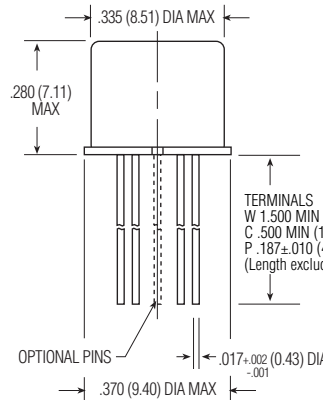

ENCLOSURE



HEADER

TO-5 HIGH-PERFORMANCE RELAYS



OPERATING CHARACTERISTICS

TIMING

Operate Time:
2.0 ms max.

Release Time:
MA: 1.5 ms max.
MAD/MADD: 4.0 ms max.
(suppression diode,
suppression/steering diodes)
MAT: 7.5 ms max.
(transistor driven)

CONTACT BOUNCE

1.5 ms max

DIELECTRIC WITHSTANDING VOLTAGE

Between Open Contacts:
500 Vrms 60 Hz

Between Adjacent Contacts:
500 Vrms 60 Hz

Between Contacts & Coil:
500 Vrms 60 Hz

INSULATION RESISTANCE

10,000 megohms min. @ 500 Vdc
1,000 megohms @ 500 Vdc
(coil to case @ +125°C)

ENVIRONMENTAL CHARACTERISTICS

TEMPERATURE RANGE

-65°C to +125°C

WEIGHT

0.09 oz. (2.55 gms)
0.10 oz. (2.80 gms) with spreader
pad attached

VIBRATION RESISTANCE

30 G's, 10 to 3,000 Hz

SHOCK RESISTANCE

75 G's, 6 ±1 ms max.

QPL APPROVAL

MIL-R-39016/9 (JMA)
MIL-R-39016/15 (JMAD)
MIL-R-39016/20 (JMADD)
MIL-R-28776/1 (JMAT)


SEMICONDUCTOR CHARACTERISTICS

DIODE

100 Vdc peak inverse voltage (PIV)
1.0 Vdc max. transient voltage

TRANSISTOR

0.3 Vdc min. base turn off voltage
6.0 Vdc min. emitter-base
breakdown voltage (BV_{EBO}) @ 25°C
80.0 Vdc min. collector-base
breakdown voltage (BV_{CBO}) @ 25°C
& I_C=100 µA

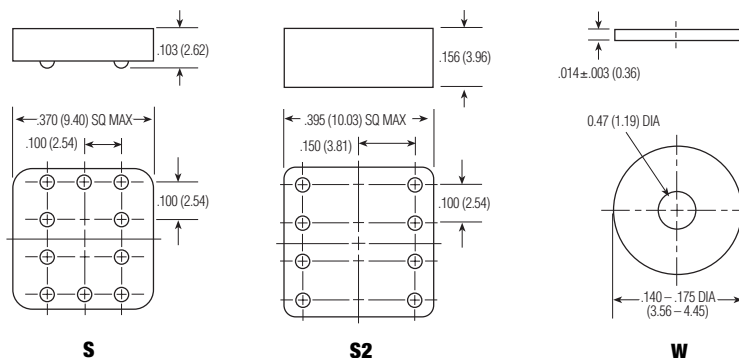

SPREADER & MOUNTING PADS

COIL DATA

| NOM. COIL VOLTAGE (Vdc) | COIL RESISTANCE IN OHMS ±10% @ 25°C (Note 1) | COIL CIRCUIT CURRENT mA (MAX.) (Note 1&2) | COIL CIRCUIT CURRENT mA (MIN.) (Note 1&2) | PICKUP VOLTAGE Vdc (MAX.) @ 25°C (Note 2) | BASE TURN ON CURRENT mA (MAX.) @ 25°C | PICKUP VOLTAGE Vdc (MAX.) @ 125°C (Note 2) | BASE TURN ON CURRENT mA (MAX.) @ 125°C | DROP-OUT VOLTAGE Vdc (MIN.) (Note 2) | DROP-OUT VOLTAGE Vdc (MIN.) @ -65°C (Note 2) | NOM. COIL POWER (mW) @ 25°C | MAX. COIL VOLTAGE | COIL DESIG. |
|-------------------------|--|---|---|---|---------------------------------------|--|--|--------------------------------------|--|-----------------------------|-------------------|-------------|
| MA/MAD | | | | | | | | | | | | |
| 5.0 | 50 | n/a | n/a | 2.7 | n/a | 3.5 | n/a | 0.22 | 0.14 | 500 | 5.8 | 5 |
| 6.0 | 98 | n/a | n/a | 3.5 | n/a | 4.5 | n/a | 0.28 | 0.18 | 367 | 8.0 | 6 |
| 9.0 | 220 | n/a | n/a | 5.3 | n/a | 6.8 | n/a | 0.54 | 0.35 | 368 | 12.0 | 9 |
| 12.0 | 390 | n/a | n/a | 7.0 | n/a | 9.0 | n/a | 0.63 | 0.41 | 369 | 16.0 | 12 |
| 18.0 | 880 | n/a | n/a | 10.5 | n/a | 13.5 | n/a | 0.91 | 0.59 | 368 | 24.0 | 18 |
| 26.5 | 1,560 | n/a | n/a | 14.2 | n/a | 18.0 | n/a | 1.37 | 0.89 | 450 | 32.0 | 26 |
| 30.0 | 2,500 | n/a | n/a | 17.7 | n/a | 22.0 | n/a | 1.50 | 1.00 | 360 | 36.0 | 30 |
| MADD | | | | | | | | | | | | |
| 5.0 | 39 | 128.2 | 93.2 | 3.2 | n/a | 4.0 | n/a | 0.6 | 0.6 | 641 | 5.8 | 5 |
| 6.0 | 78 | 78.3 | 58.3 | 4.0 | n/a | 5.0 | n/a | 0.7 | 0.7 | 462 | 8.0 | 6 |
| 9.0 | 220 | 42.9 | 33.0 | 6.3 | n/a | 7.8 | n/a | 0.9 | 0.8 | 368 | 12.0 | 9 |
| 12.0 | 390 | 32.8 | 25.6 | 8.0 | n/a | 10.0 | n/a | 1.1 | 0.9 | 369 | 16.0 | 12 |
| 18.0 | 880 | 22.1 | 17.5 | 11.5 | n/a | 14.5 | n/a | 1.4 | 1.1 | 368 | 24.0 | 18 |
| 26.5 | 1,560 | 18.5 | 14.8 | 15.2 | n/a | 19.0 | n/a | 1.8 | 1.4 | 450 | 32.0 | 26 |
| MAT | | | | | | | | | | | | |
| 5.0 | 50 | 112.1 | 82.2 | 2.7 | 0.75 | 3.5 | 3.00 | 0.22 | 0.14 | 500 | 5.8 | 5 |
| 6.0 | 98 | 69.9 | 52.9 | 3.5 | 0.55 | 4.5 | 2.04 | 0.28 | 0.18 | 367 | 8.0 | 6 |
| 9.0 | 220 | 47.4 | 35.3 | 5.3 | 0.36 | 6.8 | 1.36 | 0.54 | 0.35 | 368 | 12.0 | 9 |
| 12.0 | 390 | 35.8 | 26.6 | 7.0 | 0.27 | 9.0 | 1.03 | 0.63 | 0.41 | 369 | 16.0 | 12 |
| 18.0 | 880 | 24.0 | 17.9 | 10.5 | 0.16 | 13.5 | 0.68 | 0.91 | 0.59 | 368 | 24.0 | 18 |
| 26.5 | 1,560 | 19.8 | 14.7 | 14.2 | 0.13 | 18.0 | 0.50 | 1.37 | 0.89 | 450 | 32.0 | 26 |

Note 1: Coil resistance not directly measurable. Coil current should be within limits shown when tested at nominal voltage at 25°C for 5 seconds max.
Note 2: Set base current at 3 mA to 15 mA during measurements.

| | | | | | | |
|--|-------------|------------------|---------------|--------------------|--------------|-------------------------------|
| SPECIFYING A PART NUMBER EXAMPLE: | TYPE | TERMINALS | DIODES | GROUND PINS | COILS | SPREADER/MOUNTING PADS |
| | MA | C | D | G | -26 | S |





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.