



SG Series

Features

- 105°C, 1,000 hours assured
- High temperature Category range, with 7mm height
- RoHS Compliance




Sleeve & Marking Color: Green & Black

Specifications

Items	Performance																																																	
Category Temperature Range	-40℃ ~ +105℃																																																	
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																																	
Leakage Current (at 20℃)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																																																	
Tanδ (at 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Tanδ (max)</td><td>0.35</td><td>0.23</td><td>0.20</td><td>0.17</td><td>0.15</td><td>0.12</td><td>0.10</td><td>0.10</td></tr></table>										Rated Voltage	4	6.3	10	16	25	35	50	63	Tanδ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10																						
Rated Voltage	4	6.3	10	16	25	35	50	63																																										
Tanδ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10																																										
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td rowspan="2">Impedance Ratio</td><td>Z(-25℃)/Z(+20℃)</td><td>6</td><td>4</td><td>3</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>12</td><td>10</td><td>8</td><td>6</td><td>4</td><td>4</td><td>4</td><td>4</td></tr></table>										Rated Voltage		4	6.3	10	16	25	35	50	63	Impedance Ratio	Z(-25℃)/Z(+20℃)	6	4	3	3	2	2	2	2	Z(-40℃)/Z(+20℃)	12	10	8	6	4	4	4	4											
Rated Voltage		4	6.3	10	16	25	35	50	63																																									
Impedance Ratio	Z(-25℃)/Z(+20℃)	6	4	3	3	2	2	2	2																																									
	Z(-40℃)/Z(+20℃)	12	10	8	6	4	4	4	4																																									
Endurance	<table><tr><td>Test Time</td><td colspan="9">1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="9">Within ±20% of initial value</td></tr><tr><td>Tanδ</td><td colspan="9">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="9">Within specified value</td></tr></table> * The above Specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied with rated ripple current for 1,000 hours at 105℃.										Test Time	1,000 Hrs									Capacitance Change	Within ±20% of initial value									Tanδ	Less than 200% of specified value									Leakage Current	Within specified value								
Test Time	1,000 Hrs																																																	
Capacitance Change	Within ±20% of initial value																																																	
Tanδ	Less than 200% of specified value																																																	
Leakage Current	Within specified value																																																	
Shelf Life Test	Test time: 500 hours; other items are the same as those for the Endurance.																																																	
Ripple Current & Frequency Multipliers	<table><tr><td> Freq.(Hz) Cap.(μF) </td><td>60 (50)</td><td>120</td><td>500</td><td>1k</td><td>10k up</td></tr><tr><td>Under 47</td><td>0.75</td><td>1.00</td><td>1.20</td><td>1.30</td><td>1.45</td></tr><tr><td>100 to 330</td><td>0.88</td><td>1.00</td><td>1.10</td><td>1.15</td><td>1.20</td></tr></table>										Freq.(Hz) Cap.(μF)	60 (50)	120	500	1k	10k up	Under 47	0.75	1.00	1.20	1.30	1.45	100 to 330	0.88	1.00	1.10	1.15	1.20																						
Freq.(Hz) Cap.(μF)	60 (50)	120	500	1k	10k up																																													
Under 47	0.75	1.00	1.20	1.30	1.45																																													
100 to 330	0.88	1.00	1.10	1.15	1.20																																													

Diagram of Dimensions

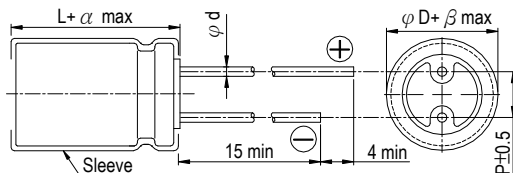

Lead Spacing and Diameter

Unit: mm

ϕD	4	5	6.3	8
P	1.5	2.0	2.5	3.5
ϕd	0.45	0.5		
α	1.0			
β	0.5			

Dimension & Permissible Ripple Current

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 105°C

V. DC		4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)	
μF	Contents	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
1	010													4×7	10	4×7	11
2.2	2R2													4×7	15	4×7	17
3.3	3R3													4×7	18	4×7	21
4.7	4R7											4×7	22	5×7*	23	5×7	26
10	100							4×7	25	4×7	26	5×7*	30	6.3×7*	34	6.3×7	40
22	220			4×7	31	4×7	32	5×7*	39	5×7*	41	6.3×7	47	6.3×7	53	8×7	70
33	330	4×7	32	4×7	32	4×7	35	5×7	43	6.3×7	53	8×7*	71	8×7	76		
47	470	4×7	38	4×7	38	5×7*	47	6.3×7*	59	6.3×7	65	8×7	83	8×7	85		
100	101	5×7	61	6.3×7*	75	6.3×7	80	6.3×7	90	8×7	125						
220	221	6.3×7	90	6.3×7	99	8×7	140	8×7	146								
330	331	8×7	156	8×7	156												

Note: Case size in mark of "*" is available to product down size.

Part Numbering System

SG series	330μF	±20%	6.3V	Bulk Package	Gas Type	8 φ ×7L	Pb-free and PET sleeve
SG-	331	M	0J	BK	-	0807	
Series	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.