

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:0365380001

Status:Active

Overview:mlx

Description:6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Compliant Polarizing Peg, 2 Circuits, Unreinforced Polyester 94V-0, White, Lead-free

Documents:

3D Model

Drawing (PDF)

Product Specification PSX-42002-0001 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Application

Overview

Product Name

PCB Headers

36538

Wire-to-Board

mlx

MLX™

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Circuits Detail

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Resin

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

No

2

2

With Compliant Polarizing Peg

Natural

50

No

No

No

No

None

Yes

Phosphor Bronze

Tin

Polyester

1

Vertical

0.170 In

4.30 mm

Yes

Yes

0.062 In

1.57 mm

Bag

0.250 In

6.35 mm

0.250 In

6.35 mm

20

0.51

Yes

Yes

Fully

No

No

-55°C to +105°C

Through Hole

Electrical




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

36538Series

Current - Maximum per Contact	12A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260















Material Info

Reference - Drawing Numbers

Product Specification	PSX-42002-0001
Sales Drawing	SD-36538-001

This document was generated on 05/24/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



.200 (5.08) LENGTH OF COMPLIANT/POLARIZING PEG (TYP)


P.C. BOARD MOUNTING DIMENSIONS

2, 3 & 4 POSITION HEADER ASSEMBLIES

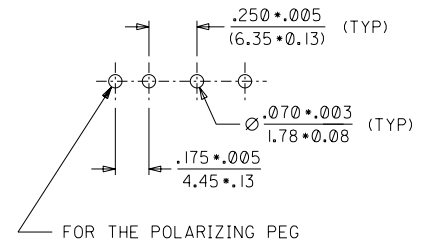

FOR THE POLARIZING PEG

6, 9, 12 & 15 POSITION HEADER ASSEMBLY

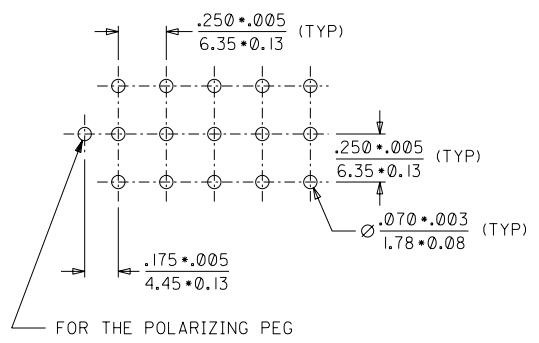

FOR THE POLARIZING PEG

NOTES:

- MATERIAL CODES:
HOUSING :
*A= UNREINFORCED POLYESTER, 94V-0.
COLOR: WHITE
*B= UNREINFORCED POLYESTER, 94V-0.
COLOR: BRICK RED
*C= NYLON (PA66), UL94V-2
COLOR: WHITE, TRANSLUCENT
TERMINAL : PHOSPHOR BRONZE
- FINISH:
TIN-LEAD 20 MICROINCH (0.51 MICRONS) MINIMUM
- TERMINAL LENGTH IS SUITABLE FOR .062/(1.57) THICK P.C BOARD
- DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.
- HEADER ASSEMBLY HOUSINGS MATE WITH :
- PLUG HOUSINGS, .084/(2.13) DIA. SERIES: (42021-**)
- CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

EC NO.I 2003-0027		DESCRIPTION	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 1.5:1	DESIGN UNITS ☐ mm ☒ INCH	 THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☒ INCH ☐ mm ONLY		SHT	REV		
DRWNS.S 20/01/03	CHK: G.L 20/01/03			APPR:G.L 20/01/03	mm	INCH	DRAWN BY & DATE S.S 01/09/28		TITLE: HEADER HOUSING ASSEMBLIES .084/(2.13) SERIES WITH COMPLIANT/POLARISING PEG					
A1	REV			4 PLACES	±0.	±.	CHECKED BY & DATE G.L 01/09/28		MOLEX INCORPORATED					
				3 PLACES	±0.	±. 0.10	APPROVED BY & DATE G.L 01/09/28							
				2 PLACES	±0.25	±. 0.14	CAD FILENAME SD-36538-001.S01							MATERIAL NO. SEE SHEET2
				1 PLACE	±0.36	±.	ANGULAR: ± 1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE C	

	I3	I2	I1	I0	9	8	7	6	5	4	3	2			
J	ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)											J	
	36538-0001	2	A												
	36538-0002		B												
	36538-0003		C												
	36538-0004	3	A												
	36538-0005		B												
	36538-0006		C												
I	36538-0007	9	A											I	
	36538-0008		B												
	36538-0009		C												
	36538-0010		A												
	36538-0011	4	B												
	36538-0012		C												
	36538-0013		A												
H	36538-0014	6	B											H	
	36538-0015		C												
	36538-0016		A												
	36538-0017	15	B												
	36538-0018		C												
	36538-0019		A												
G	36538-0020	12	B											G	
	36538-0021		C												
F														F	
E														E	
D														D	
C														C	
B														B	
A														A	
EC NO.I 2003-0027 DRWNS.S 20/01/03 CHK: G.L 20/01/03 APPR:G.L 20/01/03				QUALITY SYMBOLS MAJOR = CRITICAL C =		GENERAL TOLERANCES: (UNLESS SPECIFIED) mm INCH 4 PLACES ±0. ±. 3 PLACES ±0. ±. 010 2 PLACES ±0.25 ±. 014 1 PLACE ±0.36 ±. ANGULAR: ± 1/2°		SCALE DRAWN BY & DATE S.S 01/09/28	DESIGN UNITS ☐mm ☒INCH	☐ ☐ THIRD ANGLE PROJECTION		DIMENSIONS: ☐mm ☒INCH ☐mm ONLY		SHT	REV
						CHECKED BY & DATE G.L 01/09/28		APPROVED BY & DATE G.L 01/09/28		TITLE: HEADER HOUSING ASSEMBLIES .084/(2.13) SERIES WITH COMPLIANT/POLARIZING PEG					
						CAD FILENAME SD-36538-001.S02		MATERIAL NO. SEE CHART		DRAWING NO. SD-36538-001		SHEET NO. 2 OF 2			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				SIZE C					
LBORD.DGN REV A 96/06/12 LEVEL 5				I2	I1	I0	9	8	7	6	5	4	3	2	I



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.