

OVERVIEW

The SM6102 is a high-speed, 8-bit A/D converter fabricated in Molybdenum-gate CMOS. It uses a 2-step flash conversion method and features low current consumption.


FEATURES

- 8-bit resolution
- 8 MSPS maximum conversion rate
- 1.5 LSB non-linearity error (when $V_{RT} - V_{RB} = 2.0\text{ V}$)
- 1.0 LSB non-linearity error (when $V_{RT} - V_{RB} = 5.0\text{ V}$)
- Low current consumption
- Monotonic with guaranteed no code omission
- External sample-and-hold circuit not required
- Built-in output latch
- Output tristate control pin
- Single 5 V supply
- 22-pin plastic DIP (SM6102P) and 22-pin plastic SOP (SM6102S)
- Molybdenum-gate CMOS process

APPLICATIONS

- High-speed facsimile machines
- Data acquisition systems
- High-speed, low-current applications


PINOUT

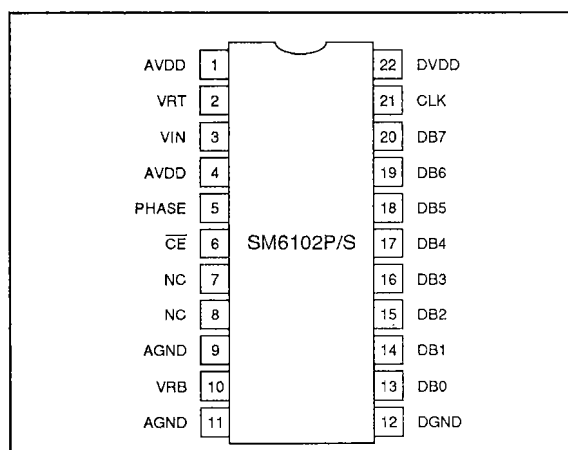


PACKAGE DIMENSIONS

Unit: mm


22-pin DIP

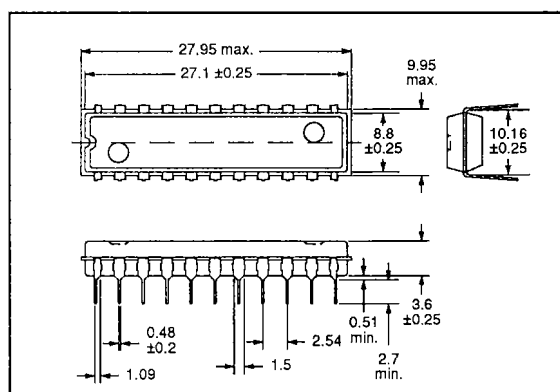

22-pin SOP

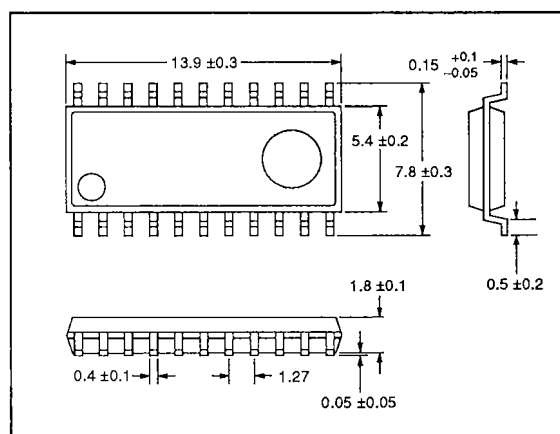

BLOCK DIAGRAM

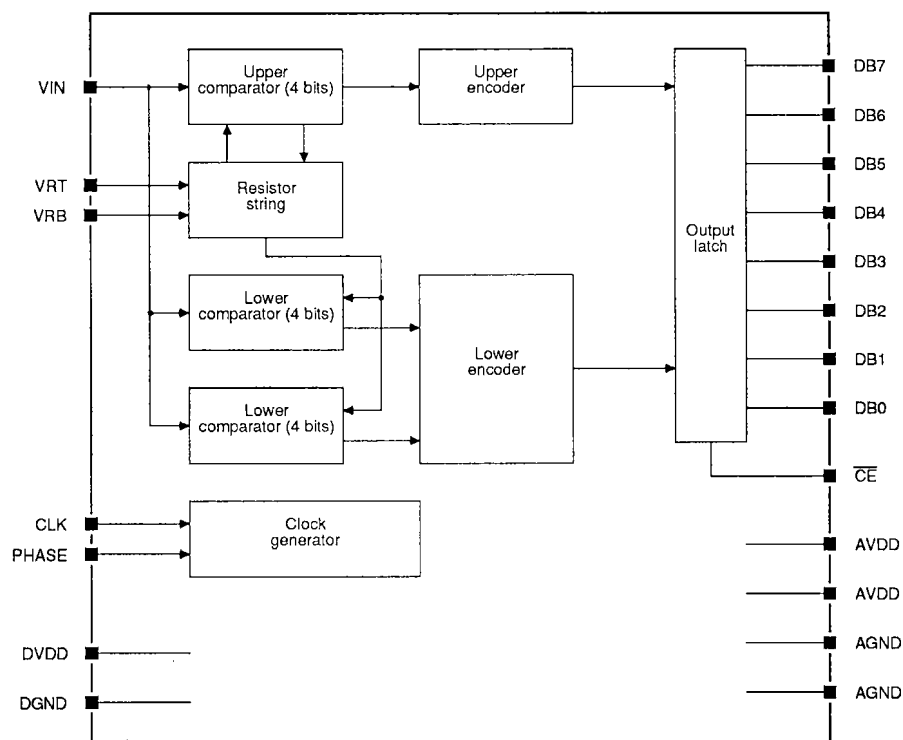

PIN DESCRIPTION

Number	Name	Description
1	AVDD	Analog supply
2	VRT	Reference voltage (top end)
3	VIN	Analog input
4	AVDD	Analog supply
5	PHASE	Clock polarity switch control
6	$\overline{CE}$	Output tristate control
7	NC	No connection
8	NC	No connection
9	AGND	Analog ground
10	VRB	Reference voltage (bottom end)
11	AGND	Analog ground
12	DGND	Digital ground
13	DB0	Converter data output bit 0 (LSB)
14	DB1	Converter data output bit 1
15	DB2	Converter data output bit 2
16	DB3	Converter data output bit 3
17	DB4	Converter data output bit 4
18	DB5	Converter data output bit 5

SM6102P/S

Number	Name	Description
19	DB6	Converter data output bit 6
20	DB7	Converter data output bit 7 (MSB)
21	CLK	Clock input
22	DVDD	Digital supply

SPECIFICATIONS

Absolute Maximum Ratings

$V_{GND} = 0 \text{ V}$

Parameter	Symbol	Rating	Unit
Supply voltage range	V_{DD}	-0.3 to 7.0	V
Input voltage range	V_{IN}	-0.3 to $V_{DD} + 0.3$	V
Output voltage range	V_{OUT}	-0.3 to $V_{DD} + 0.3$	V
Storage temperature range	T_{stg}	-40 to 125	deg. C
Power dissipation	P_D	350	mW
Soldering temperature	T_{sld}	260	deg. C
Soldering time	t_{sld}	10	s

Recommended Operating Conditions

$V_{GND} = 0 \text{ V}$

Parameter	Symbol	Rating			Unit
		min	typ	max	
Supply voltage	V_{DD}	4.75	5.0	5.25	V
Reference voltage (top end)	V_{RT}	$V_{RB} + 2.0$	—	$V_{DD} + 0.1$	V
Reference voltage (bottom end)	V_{RB}	-0.1	—	$V_{RT} - 2.0$	V
Analog full scale	$V_{RT} - V_{RB}$	2.0	—	—	V
Operating temperature	T_{opr}	-20	—	70	deg. C

DC Electrical Characteristics

$V_{DD} = 5 \text{ V} \pm 5\%$, $f_{CLK} = 8 \text{ MHz}$, $T_a = -20 \text{ to } 70 \text{ deg. C}$ unless otherwise noted

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
HIGH-level digital input voltage	V_{IH}		3.5	—	—	V
LOW-level digital input voltage	V_{IL}		—	—	1.0	V
HIGH-level digital input current	I_{IH}	$V_{IN} = V_{DD}$	—	—	2	μA
LOW-level digital input current	I_{IL}	$V_{IN} = 0 \text{ V}$	-2	—	—	μA
HIGH-level digital output voltage	V_{OH}	$I_{OH} = -0.4 \text{ mA}$	2.7	—	—	V
LOW-level digital output voltage	V_{OL}	$I_{OL} = 1.6 \text{ mA}$	—	—	0.4	V
HIGH-level tristate output leakage current	I_{OHL}	$V_O = V_{DD}$	—	—	3	μA

SM6102P/S

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
LOW-level tristate output leakage current	I_{OLL}	$V_O = 0\text{ V}$	-3	-	-	μA
Analog input resistance	R_{VIN}	$V_{IN} = \text{DC}$	1	-	-	$\text{M}\Omega$
Analog input capacitance	C_{VIN}		-	30	-	pF
Reference resistance	R_{REF}	V_{RT} to V_{RB}	260	400	600	Ω
Current consumption	I_{DD}		-	20	30	mA

AC Electrical Characteristics

$V_{DD} = 5\text{ V} \pm 5\%$, $T_a = -20$ to 70 deg. C unless otherwise noted

Parameter	Symbol	Rating			Unit
		min	typ	max	
CLK HIGH-level pulsewidth	t_{PWH}	60	-	5000	ns
CLK LOW-level pulsewidth	t_{PWL}	60	-	5000	ns
Aperture time	t_A	-	10	-	ns
Digital output delay time	t_D	-	25	40	ns
Conversion speed	FS	-	-	8	MSPS

Converter Characteristics

$V_{DD} = 5\text{ V} \pm 5\%$, $T_a = -20$ to 70 deg. C unless otherwise noted

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
Resolution	RES		-	-	8	Bits
Non-linearity error	NL	$V_{RT} - V_{RB} = 2\text{ V}$, $V_{IN} = \text{DC}$	-	-	± 1.5	LSB
		$V_{RT} - V_{RB} = 5\text{ V}$, $V_{IN} = \text{DC}$	-	-	± 1.0	
Differential non-linearity error	DNL	$V_{RT} - V_{RB} = 2\text{ V}$, $V_{IN} = \text{DC}$	-	-	± 1.0	LSB
		$V_{RT} - V_{RB} = 5\text{ V}$, $V_{IN} = \text{DC}$	-	-	± 0.75	

FUNCTIONAL DESCRIPTION

Converter Operation

The SM6102P/S uses a 2-step flash conversion method where one step sets the upper four bits and the next sets the lower four bits. The lower comparator comprises two circuits, A and B, which operate alternately at a rate set by the input clock frequency.

When PHASE = LOW


When CLK is HIGH, the upper and lower comparator (block A, for example) threshold voltages are balanced automatically. The analog input is then sampled on the first falling edge of CLK. On the second rising edge of CLK, the upper four bits are

set and the upper comparator sets the threshold voltage for the lower comparator. The lower four bits are set on the third rising edge of CLK. On the fourth rising edge of CLK, the upper and lower bits are re-combined and converted. The conversion, therefore, takes 2.5 clock cycles from the input sampling to the converter data output.

Lower comparator B operates identically to comparator A except that it is shifted by one clock cycle.


When PHASE = HIGH

The converter operates similarly as when PHASE is LOW, except that the CLK signal has opposite polarity.

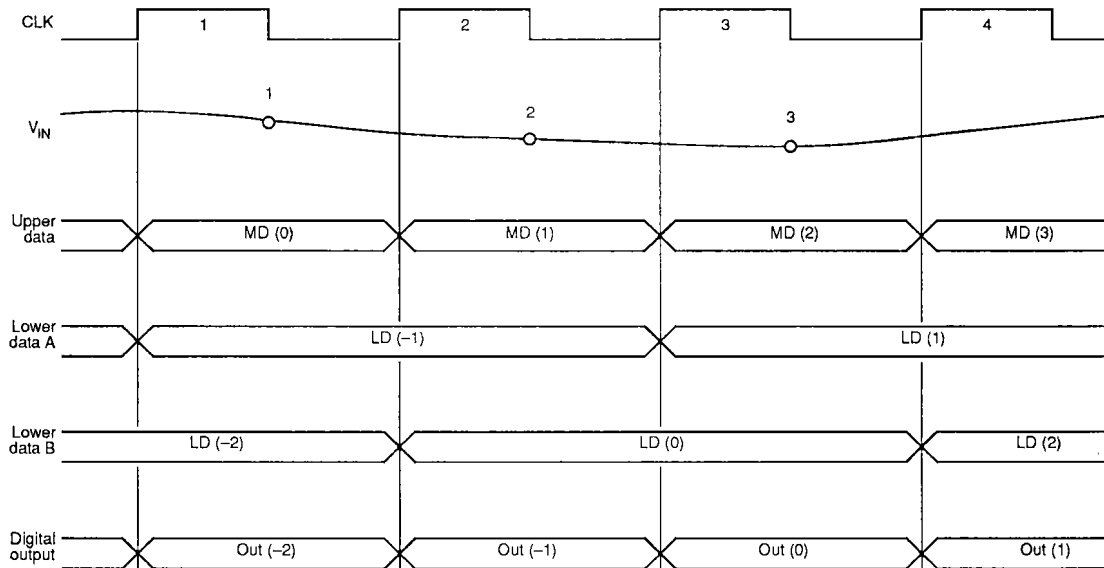


Converter Timing

PHASE = LOW

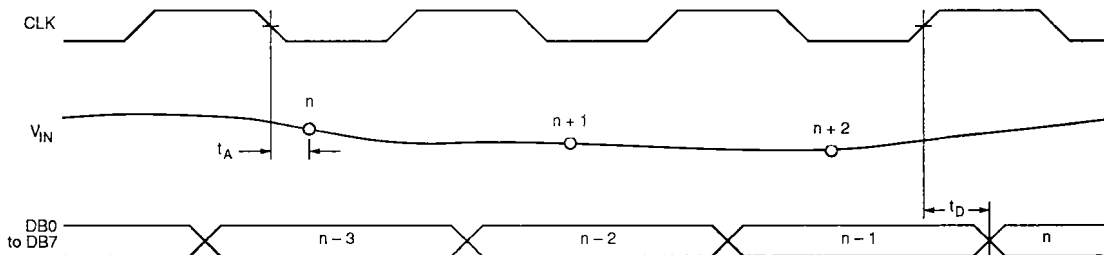

PHASE = HIGH

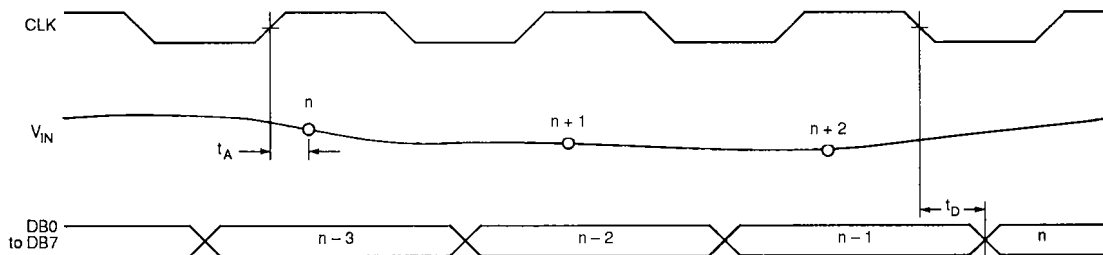

Output Tristate Control

CE	DB0 to DB7
LOW	Enable
HIGH	High impedance

Output Codes

Analog input voltage (V)	Output code								Decimal steps
	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	
0.00	0	0	0	0	0	0	0	0	0
0.01	0	0	0	0	0	0	0	1	1
0.02	0	0	0	0	0	0	1	0	2
0.03	0	0	0	0	0	0	1	1	3
0.04	0	0	0	0	0	1	0	0	4
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
2.51	1	1	1	1	1	0	1	1	251
2.52	1	1	1	1	1	1	0	0	252
2.53	1	1	1	1	1	1	0	1	253
2.54	1	1	1	1	1	1	1	0	254
2.55	1	1	1	1	1	1	1	1	255

Notes

1. The analog input voltage shown is the center voltage for each step.
2. V_{RT} and V_{RB} are adjusted such that the zero transition is 0.005 V and full-scale is 2.545 V.

DEVICE HANDLING PRECAUTIONS

1. Parallel electrolytic and ceramic filter capacitors should be connected to the supply and reference voltage pins.
2. The system ground should be connected to a single, common Earth.
3. As far as practicable, the analog input should be kept free of digital noise. For example, analog input wire on the printed circuit board should be screened by AGND.
4. The SM6102 uses CMOS chopper comparators where the analog input is alternately connected and disconnected from the input circuits. The analog inputs should, therefore, have a low impedance. Also, input buffering is recommended.

NIPPON PRECISION CIRCUITS LTD. reserves the right to make changes to the products contained in this data sheet in order to improve the design or performance and to supply the best possible products. Nippon Precision Circuits Ltd. assumes no responsibility for the use of any circuits shown in this data sheet, conveys no license under any patent or other rights, and makes no claim that the circuits are free from patent infringement. Applications for any devices shown in this data sheet are for illustration only and Nippon Precision Circuits Ltd. makes no claim or warranty that such applications will be suitable for the use specified without further testing or modification.

NPC
NIPPON PRECISION CIRCUITS LTD.

NIPPON PRECISION CIRCUITS LTD.

3-9, Taihei 4-chome
Sumida-ku, Tokyo 130, Japan
Telephone: 03-5608-5571
Facsimile: 03-3608-5566



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.