

Watchport® Sensors

USB Environment Monitoring Solutions

Create a made-to-order asset monitoring system with USB sensors and application software.



Overview

Watchport USB sensors offer an easy Plug and Play solution for measuring distance, proximity, humidity, temperature and presence of water. Creating a made-to-order monitoring system with Watchport sensors can preempt damage to equipment and facilities and also reduce costly system downtime and maintenance.

Watchport® Manager® application software provides centralized device status and historical data logging, and allows the easy integration of multiple Watchport devices without additional software development. The customizable software can send email, beeper or phone alerts when undesirable conditions are detected, making it ideal for remote monitoring in point-of-sale (kiosks, ATMs), medical and server room applications.

Applications for Watchport sensors include monitoring server room temperature/humidity; detecting water in ATMs; activating information kiosks when shoppers are nearby; or ending confidential HR kiosk sessions when users are no longer detected.

Target Applications



Retail/POS



Medical/Health Care




Data Center Management



Building Automation/Security

Application Highlight

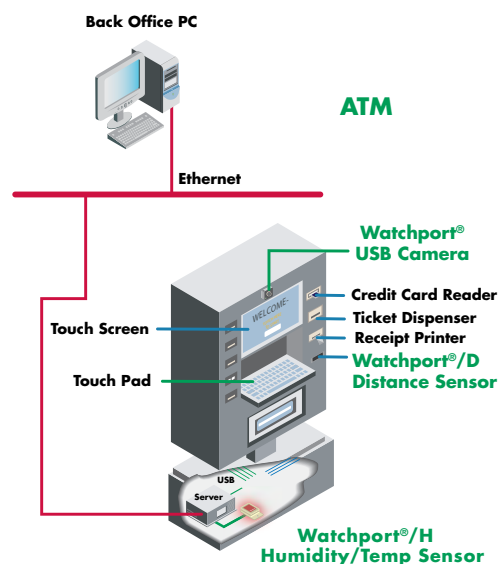

Features/Benefits

- Ideal for remote monitoring in POS (kiosks, ATMs), medical, data center and security applications
- Sensors include base unit with USB cable to host PC, sensing device with CAT5 cable to base unit, Microsoft® Windows® driver software
- Easy installation and configuration; USB-powered
- API available for application software development
- ASCII command interface available for integration with application software
- Remotely monitor and configure multiple sensors on an IP network with AnywhereUSB®



Specifications	Watchport®/D	Watchport®/H	Watchport®/T	Watchport®/W
Features				
Sensor Type	Distance/Proximity	Humidity/Temperature	Temperature	Water detector
Maximum Reading Rate	3 per second	20 per second		5 per second
Sensor-Specific Features	Photo-electric sensor with hardware controlled sensitivity Enables system event triggering with Watchport Manager (Automatic log-off; Automatic system lock; Run user-selectable files such as screen savers, batch files, scripts and executables) Detection range 1.6 to 4.9 ft (0.5 to 1.5 m) Maximum switching frequency: 100 Hz Response delay: ≤5.0 ms (typical)	Collects both relative humidity (RH) and temperature data Temperature compensated RH readings Configurable Watchport Manager alarm thresholds ASCII command interface Temperature accuracy: +/- 3.6° F (+/- 2° C) at -40° F to 14° F (-40° C to -10° C) and +/- 0.9° F (+/- 0.5° C) at 14° F to 185° F (-10° C to 85° C) RH accuracy: +/- 5% at 0-90% non-condensing; +/- 8% over 90% RH stability: +/- 1% RH (typical) at 50% RH in 5 years	Configurable Watchport Manager alarm thresholds ASCII command interface Temperature accuracy: +/- 3.6° F (+/- 2° C) at -40° F to 14° F (-40° C to -10° C) and +/- 0.9° F (+/- 0.5° C) at 14° F to 185° F (-10° C to 85° C) Temperature resolution: 0.1° C	2 gold-plated pins detect wetness on non-conductive surface Binary output with “Wet” or “Dry” readings
Watchport Manager Software* (Included)	Centralized device status; Historical data logging; User-defined thresholds; Cell phone, pager, email and onscreen alarms for remote monitoring; Easy integration of multiple sensors without additional software development; Minimizes into system tray to save screen space; *Free with Watchport sensors as courtesy for customers. Watchport Manager Software is use-as-is			
Power Consumption	70 mA (max)	15 mA (normal); 1.0 mA (suspend mode)		
Maximum CAT5 UTP Cable Length	500 ft (152.46 m)			1000 ft (304.8 m)
Operating Systems	Windows Vista®, Windows XP®, Windows® XP Embedded, Windows CE, Windows Server® 2003, Windows 2000			
Dimensions (L x W x H)	Sensing Device: 1.75 in x 0.74 in x 0.85 cm (4.45 cm x 1.88 cm x 2.16 cm) USB Base Unit: 3.15 in x 1.75 in x 0.80 in (8.00 cm x 4.45 cm x 2.03 cm)	Sensing Device: 2.12 in x 1.19 in x 0.69 in (5.39 cm x 3.02 cm x 1.75 cm) USB Base Unit: 3.15 in x 1.75 in x 0.80 in (8.00 cm x 4.45 cm x 2.03 cm)		
Weight	Sensing Device: 3.00 oz (85.05 g); USB Base Unit: 3.00 oz (85.05 g)			
Power Requirements				
Power Supply	USB-powered (no external power supply required)			
Environmental				
Operating Temperature	Sensing Device: -40° F to +185° F (-40° C to +85° C); USB Base: 32° F to 149° F (0° C to 65° C)			
Relative Humidity	0% to 95% (non-condensing)			
Regulatory Approvals				
Safety	EN60950, UL 1950, CSA 2.2 No. 950, IEC 950			
Emissions/Immunity	CE, FCC Part 15 Class B, EN55022, EN55024			

You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support

91001222
F3/913

**Digi International
Worldwide HQ**
877-912-3444
952-912-3444
www.digi.com

**Digi International
France**
+33-1-55-61-98-98
www.digi.fr

**Digi International
Japan**
+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
Singapore**
+65-6213-5380

**Digi International
China**
+86-21-50492199
www.digi.com.cn



www.digi.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.