


TRADITIONAL JOYSTICK CATEGORIES

STANDARD JOYSTICKS

Our most popular and versatile unit, the Standard Joystick is available in a variety of configurations to fit your particular application needs. Optional features include: six different centering options, mounting bezels for front or rear panel mounting, a rubber boot seal, various styles and sizes of stick handles, front panel accessible trim features as well as a wide range of output options types and values, which enable you to design the most optimal joystick for your needs.



STANDARD OUTLINE DRAWING

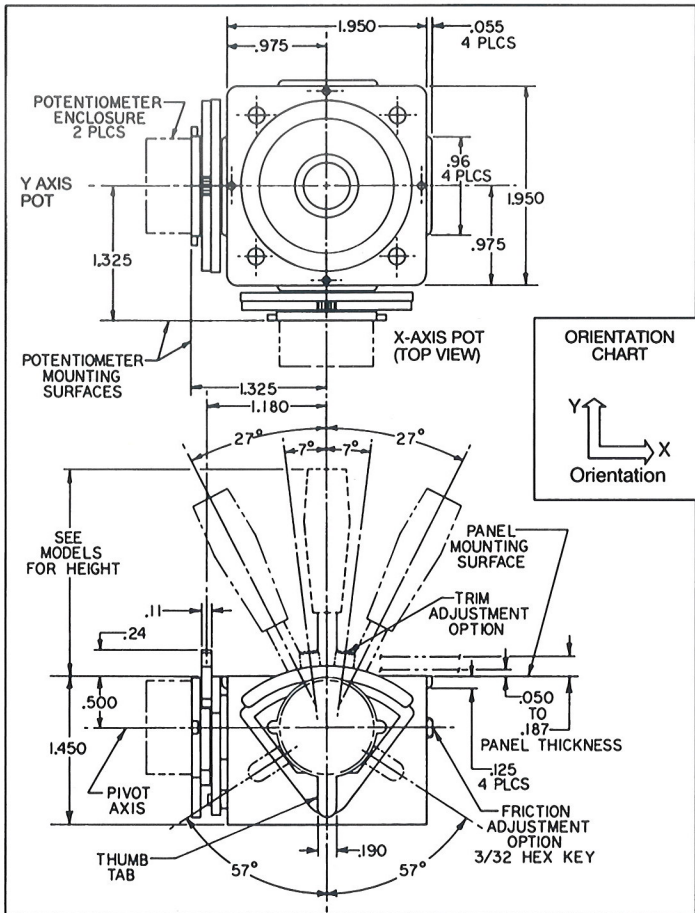

STANDARD JOYSTICK SPECIFICATIONS

- Joystick travel - 30° from design center in all directions
- Mechanical lifecycle - 5,000,000 (minimum)
- Trim movement (optional) - $\pm 7^\circ$ (total trim 14°) for each axis
- Main pivot ball - precision ground stainless steel
- Stick shaft - 3/16in. brass plated
- Return to center repeatability - $\pm 2\%$
- Mounting - front or rear panel (see bezels)
- Panel thickness (mounting) - .050in. to .1875in.
- Deflection force - .14lbs. @ 27° @ 2 7/8in. up from pivot point
- Potentiometer calibration - thumb tab provides 114° of calibration
- Potentiometers - set at center of resistance
- or -
- Non-contacting Hall Effect sensors

Model 300


MODEL 300

(Three-Axes Joystick Assemblies) -The Model 300 joystick with Option 8 handle, is a three-axis, zero button joystick with a black spring-return-to-center textured knob on the stick handle providing a third axis. The Model 300 joystick comes equipped with a two-piece mounting bezel or an optional rubber boot seal.



OPTION 8

The Option 8 handle uses a 5kΩ, 1 Watt potentiometer housed within the knob, and can be rotated a total of 90°, ±45° from design center with .4in./lbs. of torque needed to initiate the rotation of the knob. Option 8 is a double-scissor, extension-type spring-action control knob with positive stops.

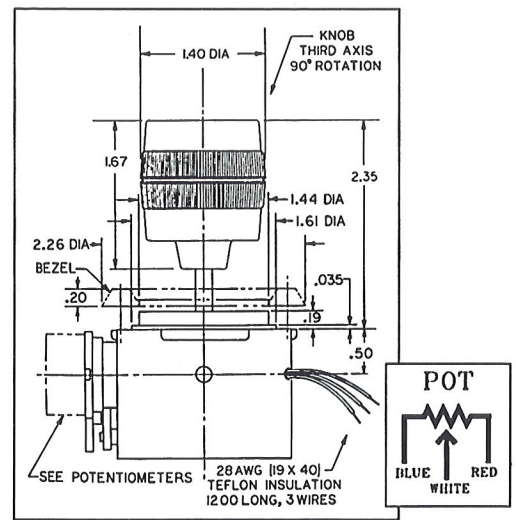

Option 8 handle

400 Model 400


MODEL 400

(Three-Axes with Pushbutton Joystick Assemblies) – The Model 400 is a three-axis joystick with a black spring-return-to-center textured knob and a pushbutton switch located at the top of the control knob. The switch on the Model 400 assembly is a normally open, single pole/single throw momentary contact switch. Options include a two-piece mounting bezel, rubber boot and IBM gray pushbutton.



OPTION 9

The Option 9 switch is a 5,000,000 life cycle switch rated at 500mA at 12VDC.

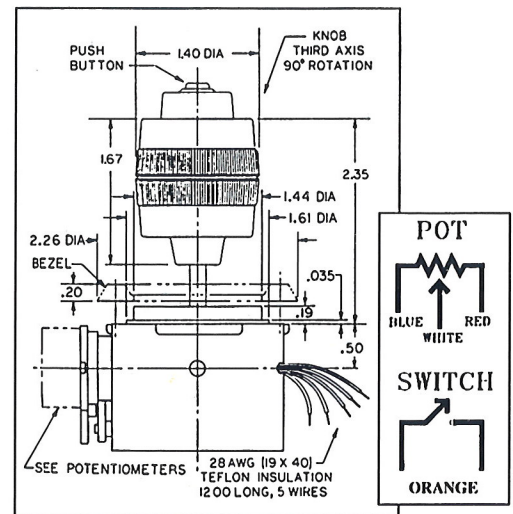

Option 9 handle

OPTIONS

OUTPUT OPTIONS POTENTIOMETER

CLAROSTAT 595 (F) AND CLAROSTAT 388 (C)

- Electrical element: Conductive plastic
- Resistance (ohms): 5K (F) & 10K (C)
- Tolerance: $\pm 20\%$
- Power rating: 0.5W
- Linearity: $\pm 5\%$
- Temperature range (°C): -55° to +120°
- CRV (Contact Resistance Variation): $\pm 1.5\%$
- Electrical travel: 265°
- Mechanical rotation: 295°
- Terminals: Solder Lug & J Hooks
- Rotational life cycle: 1,000,000 & 50,000

F 5K




C 10K




CTS HP SERIES (J, L)

- Electrical element: Conductive carbon
- Resistance (ohms): 100k & 130K
- Tolerance: $\pm 9\%$, $\pm 5\%$
- Power rating: 0.25W
- Linearity: $\pm 5\%$
- Temperature Range (C°): 0° to 85°
- CRV (Contact Resistance Variation): 1%
- Electrical travel: 50°
- Mechanical rotation: 300°
- Terminals: Solder Lug
- Rotational life cycle: 2,000,000

J 100K



L 130K



SENSORCUBE (R, U)

- Electrical element: Conductive plastic
- Resistance (ohms): Standard : 5K & 10K
- Miniature: 5K
- Tolerance: $\pm 10\%$
- Power rating: 1W
- Linearity: $\pm 1\%$
- Temperature Range (C°): -65° to +125°
- CRV (Contact Resistance Variation): 1%
- Electrical travel: Standard : 56° & 265°
Miniature: 50°
- Mechanical rotation: Standard: 310° & 360°
Miniature: 360°
- Terminals: Solder Lug
- Rotational Life cycle: 10,000,000

R 5K



U 10K



AVAILABLE RESISTANCE CALCULATION

Total available resistance depends on a combination of potentiometer type and joystick model selection. The available resistance range can be obtained using the formula below:

$$\frac{\text{Total Potentiometer Resistance (ohms)}}{\text{Potentiometer Electrical Travel (degrees)}} \times \text{Joystick Mechanical Travel (degrees)} = \text{Available Resistance Range (ohms)}$$



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.