




.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

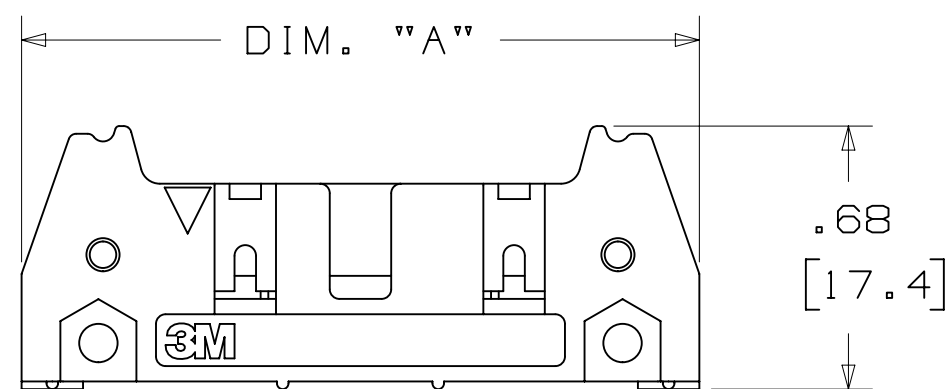

-X0XX
HEADER WITHOUT LATCH EJECTOR

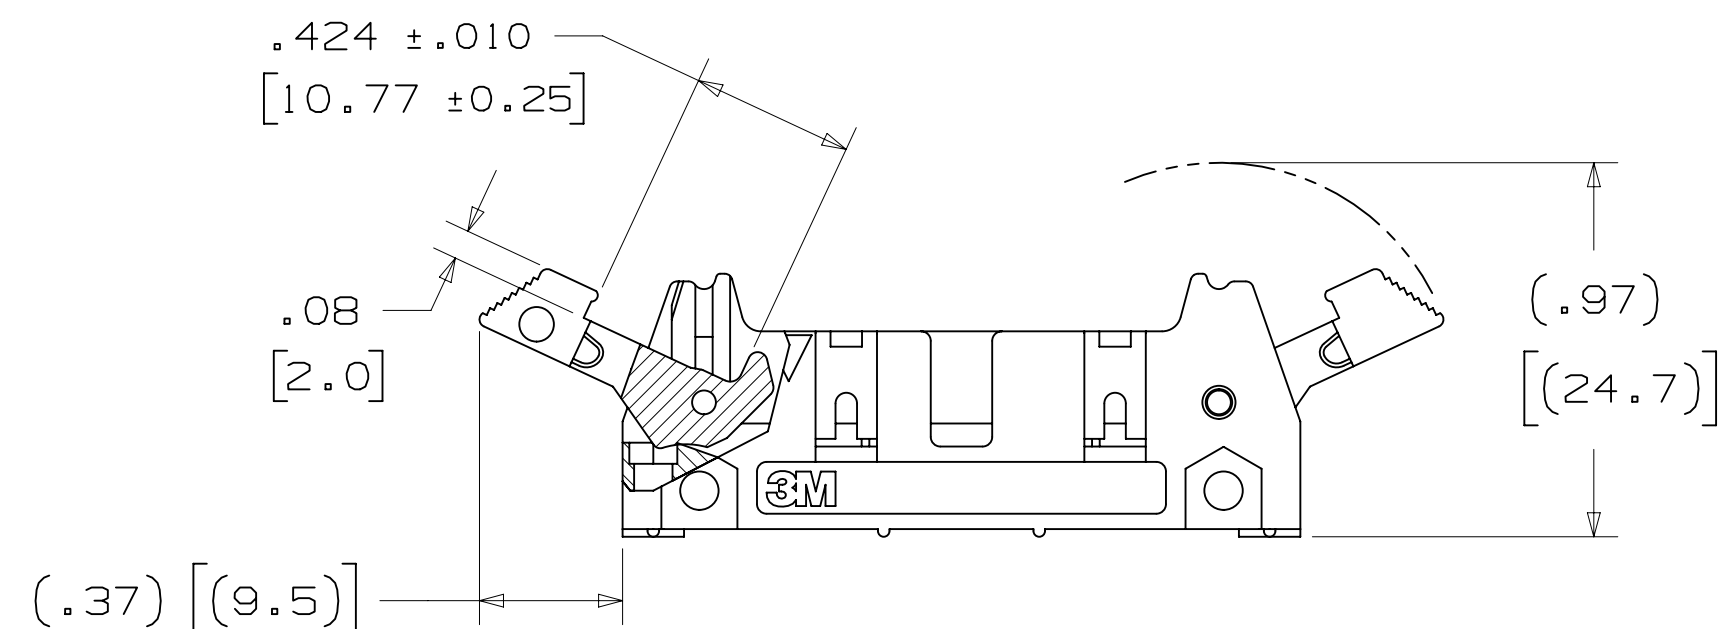

-X2XX
HEADER WITH SHORT LATCH EJECTOR
FOR 3M SOCKETS WITHOUT STRAIN RELIEF

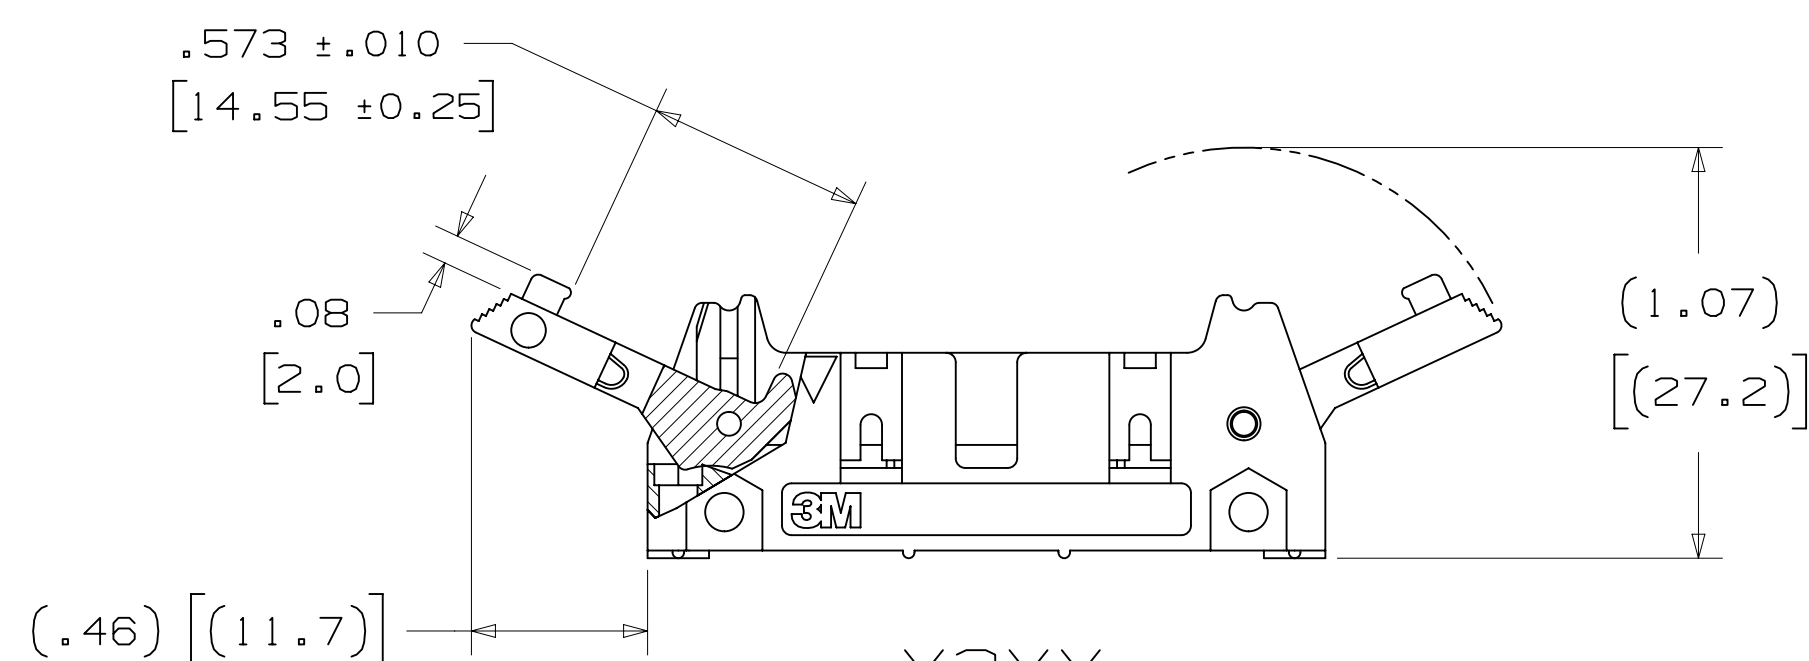

-X3XX
HEADER WITH LONG LATCH EJECTOR
FOR 3M SOCKETS WITH STRAIN RELIEF

X3XXX - XXXXXX

PIN CONFIGURATION: _____
5 = RIGHT ANGLE SOLDER TAILS
6 = STRAIGHT SOLDER TAILS

```

- TAIL :
02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18] THICK BOARD
05 = WWT FOR UP TO 3 LEVELS OF WIRE WRAP
K2 = KINKED FOR .062 [1.57] THICK BOARD

```

LATCH/EJECTOR SYSTEM:
0 = NO LATCH/EJECTOR INSTALLED
2 = SHORT ROLL PIN LATCH/EJECTORS
3 = LONG ROLL PIN LATCH/EJECTORS

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

- * MILITARY (WITH 3M'S N3518 POLARIZING KEY) AND CENTERBUMP POLARIZATION.
- * OPTIONAL EJECTOR LATCHES.
- * MOUNTING HOLES FOR SECURING HEADER TO BOARD.
- * OPTIONAL POLARIZING POSTS AVAILABLE.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.
- * SOLDER TAIL OPTION.

2 PHYSICAL :

INSULATOR: MATERIAL: GLASS FILLED POLYESTER (PCT)
FLAMMABILITY: UL94V-0
COLOR: BLACK
CONTACT: MATERIAL: COPPER ALLOY
PLATING:
UNDER PLATING: 100μ" [2.54μm] AVG. NICKEL-OVERALL
WIPING AREA: 30μ" [0.76μm] AVG. GOLD
SOLDER TAILS: TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

2 ELECTRICAL :


EIA CURRENT RATING: 5.00A, 1 CONTACT POWERED
3.00A, 6 CONTACTS POWERED
1.75A, ALL CONTACTS POWERED
RATING CONDITIONS: EIA-364-070 METHOD 2, 30°C MAXIMUM
TEMPERATURE RISE, 20% DERATED. REFERENCE APPROPRIATE
3M PRODUCT SPECIFICATION FOR DETAILED CURRENT DERATING
CURVES.

INSULATION RESISTANCE: $>1 \times 10^9 \Omega$ AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL
UL CURRENT RATING: 1.0A ALL LINES POWERED
UL VOLTAGE RATING: 125V

2 ENVIRONMENTAL :

UL TEMPERATURE RATING: 130C
EIA TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		REV		ECO		ISSUE DATE AND DESCRIPTION		DRFT		CHKD	
ACCORDS				DRFT		CASTIGLIONE		DATE		MFO		DATE	
								JUL 25, 2014					
				CHKD				DATE		APPRV.		R. SCHERER	
										SEP 05, 2014			
DIVISION				DIVISION CODE				© 3M COPYRIGHT 2016					
Interconnect Solutions				EMSD				This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.					
DO NOT SCALE DRAWING		SCALE 2 1		TOLERANCES EXCEPT AS NOTED									
						3M Center St. Paul, MN 55144							
				INCHES									
				.00 ±		.01							
				.000 ±		.005							
				.0000 ±									
				MILLIMETERS									
THIRD ANGLE PROJECTION				.00 ±		.3							
INTERPRET PER ASME Y14.5 - 2009				.00 ±		.13							
☒ MAX SURFACE ROUGHNESS ☐ ALL SURFACES ☐ MARKED ONLY				.000 ±									
				ANGLES									
								TITLE					
								HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA					
								CAGE NUMBER		SIZE		DRAWING NO.	
								D		D78-5100-0772-3		REV.	
								MODEL		3000 SERIES		DET. SHT YES X NO SHT 1 OF	

UL
UL FILE NO: E68080

Imaged: T.2 7/12/2016 8:14 AM UTC-05:00

3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE


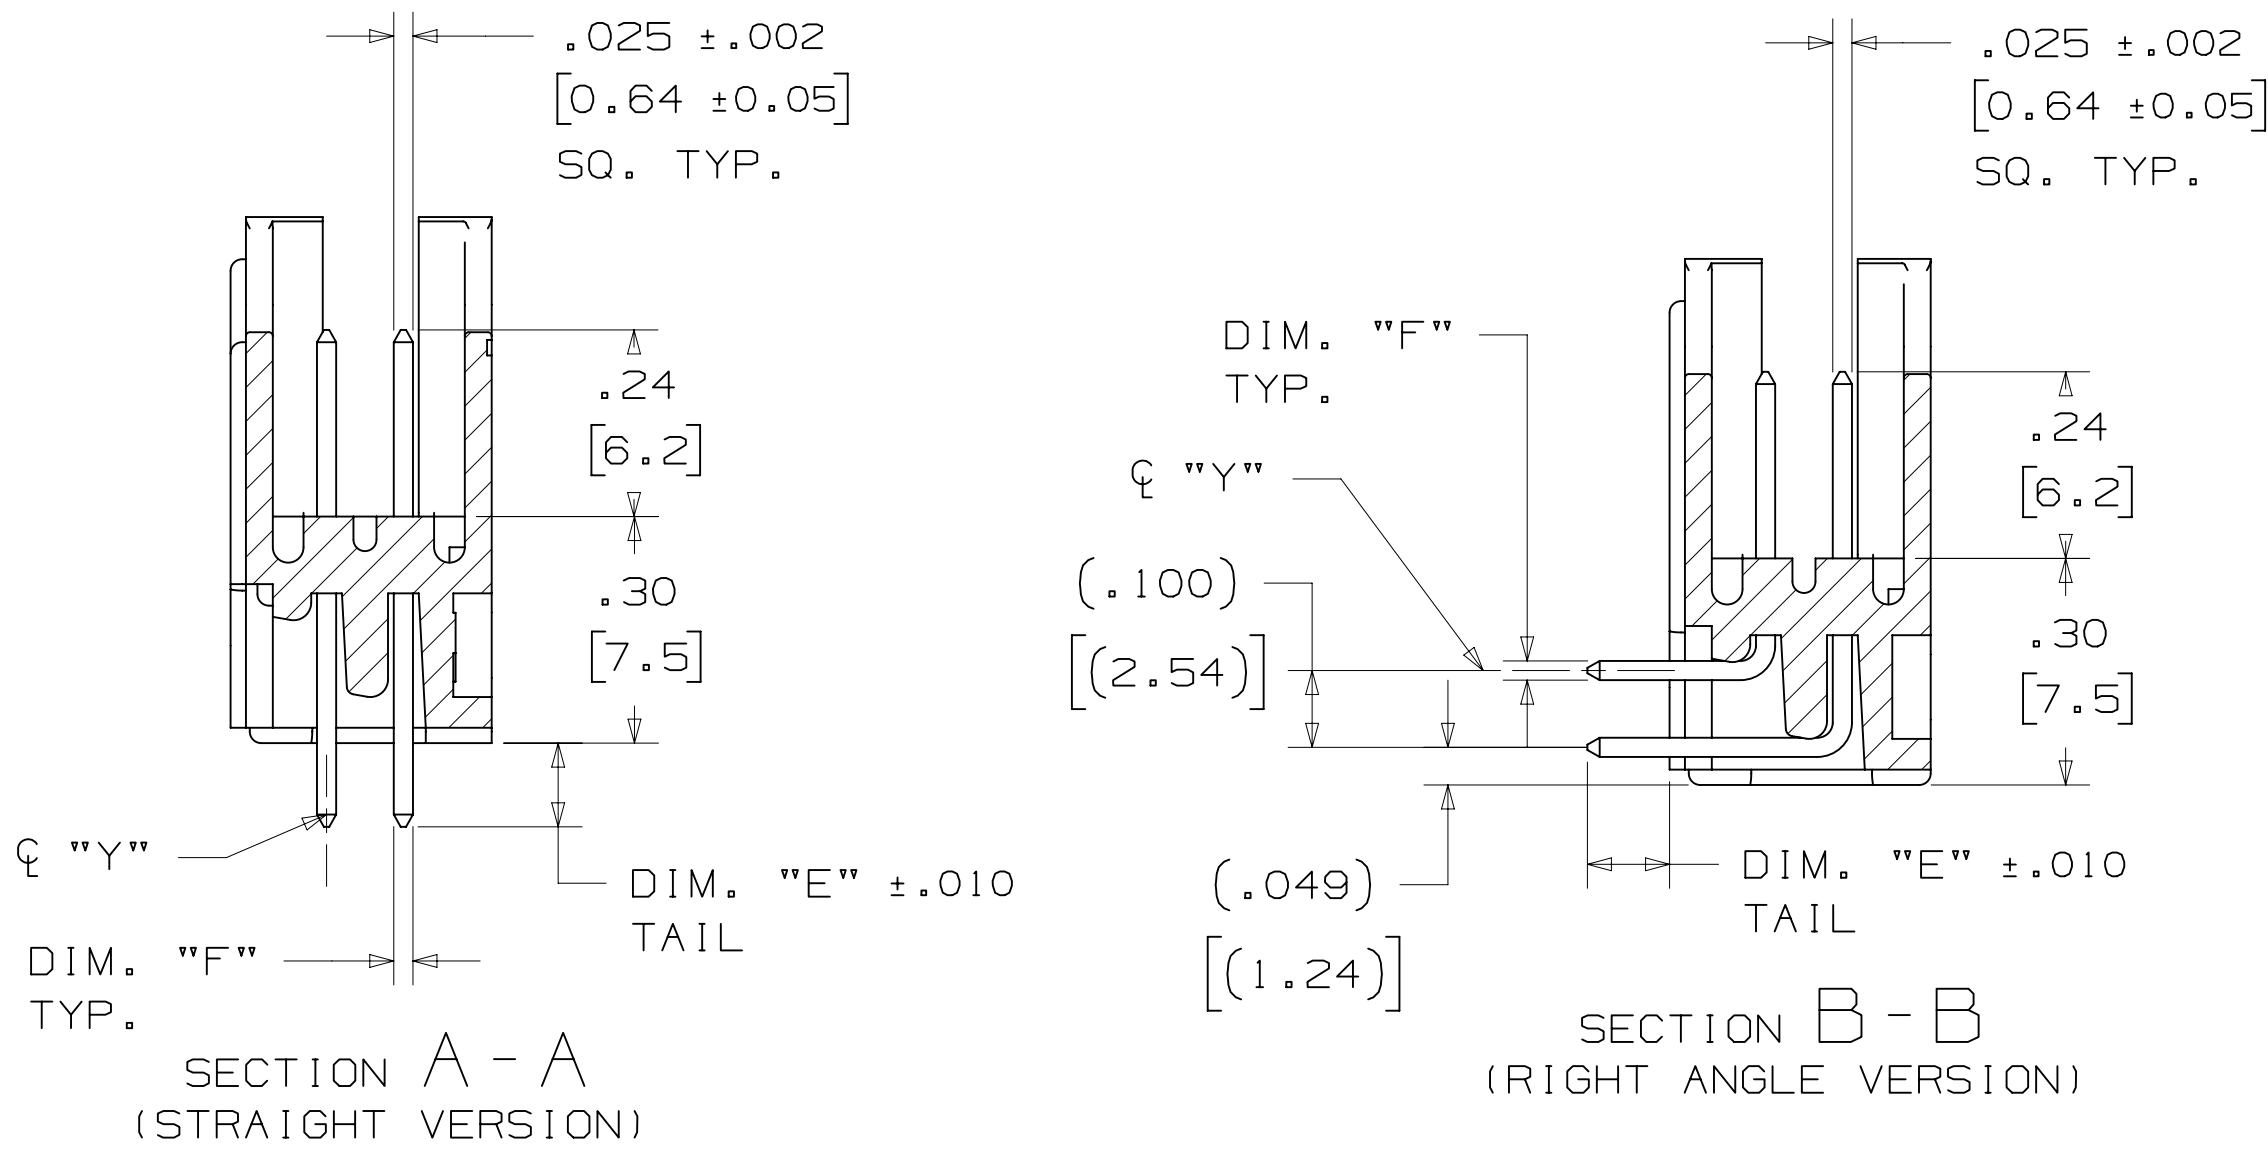


TABLE 1							
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
06	3869	1.06 [27.0]	.905 [22.99]	.665 [16.89]	.51 [12.9]	B*	06
08	3889	1.16 [29.5]	1.005 [25.53]	.765 [19.43]	.61 [15.5]	B*	08
10	3793	1.26 [32.1]	1.105 [28.04]	.865 [21.97]	.71 [18.0]	BC	10
14	3314	1.46 [37.2]	1.305 [33.12]	1.065 [27.05]	.91 [23.1]	BC	14
16	3408	1.56 [39.7]	1.405 [35.66]	1.165 [29.59]	1.01 [25.6]	ABC	16
20	3428	1.76 [44.8]	1.604 [40.74]	1.365 [34.67]	1.21 [30.7]	ABC	20
24	3627	1.96 [49.9]	1.805 [45.82]	1.565 [39.75]	1.41 [35.8]	ABC	24
26	3429	2.06 [52.4]	1.905 [48.36]	1.665 [42.29]	1.51 [38.3]	ABC	26
30	3440	2.26 [57.5]	2.105 [53.44]	1.865 [47.37]	1.71 [43.4]	ABC	30
34	3431	2.46 [62.6]	2.305 [58.52]	2.065 [52.45]	1.91 [48.5]	ABC	34
40	3432	2.76 [70.2]	2.605 [66.14]	2.365 [60.07]	2.21 [56.1]	ABC	40
50	3433	3.26 [82.9]	3.105 [78.84]	2.865 [72.77]	2.71 [68.8]	ABC	50
60	3372	3.76 [95.6]	3.605 [91.54]	3.365 [85.47]	3.21 [81.5]	ABC	60
64	3764	3.96 [100.7]	3.805 [96.62]	3.565 [90.55]	3.41 [86.6]	ABC	64

* AVAILABLE WITHOUT CENTER NOTCH B. CONTACT 3M

TABLE 2						
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"	PIN CROSS SECTION			DIM. "G"
			DIM. "F"	DIAGONALS	CORNER RADIUS	
-5XX2 -6XX2	.062 [1.57] THICK PC BOARD	.112 [2.84]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 [.191] REF.	.035+/- .003 [.89] SEE NOTE 5
-5X03 -6X03	.094 [2.39] TO .125 [3.18] THICK PC BOARD	.155 [3.94]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 [.191] REF.	.035+/- .003 [.89]
-5X05	WIRE WRAP TAIL FOR UP TO 3 LEVELS OF WIRE WRAP	.61 [15.5] REF.	.0250+/- .002 [.635]	.035+/- .003 [.89]	.003 [.08] MAX.	.045+/- .003 [1.14]

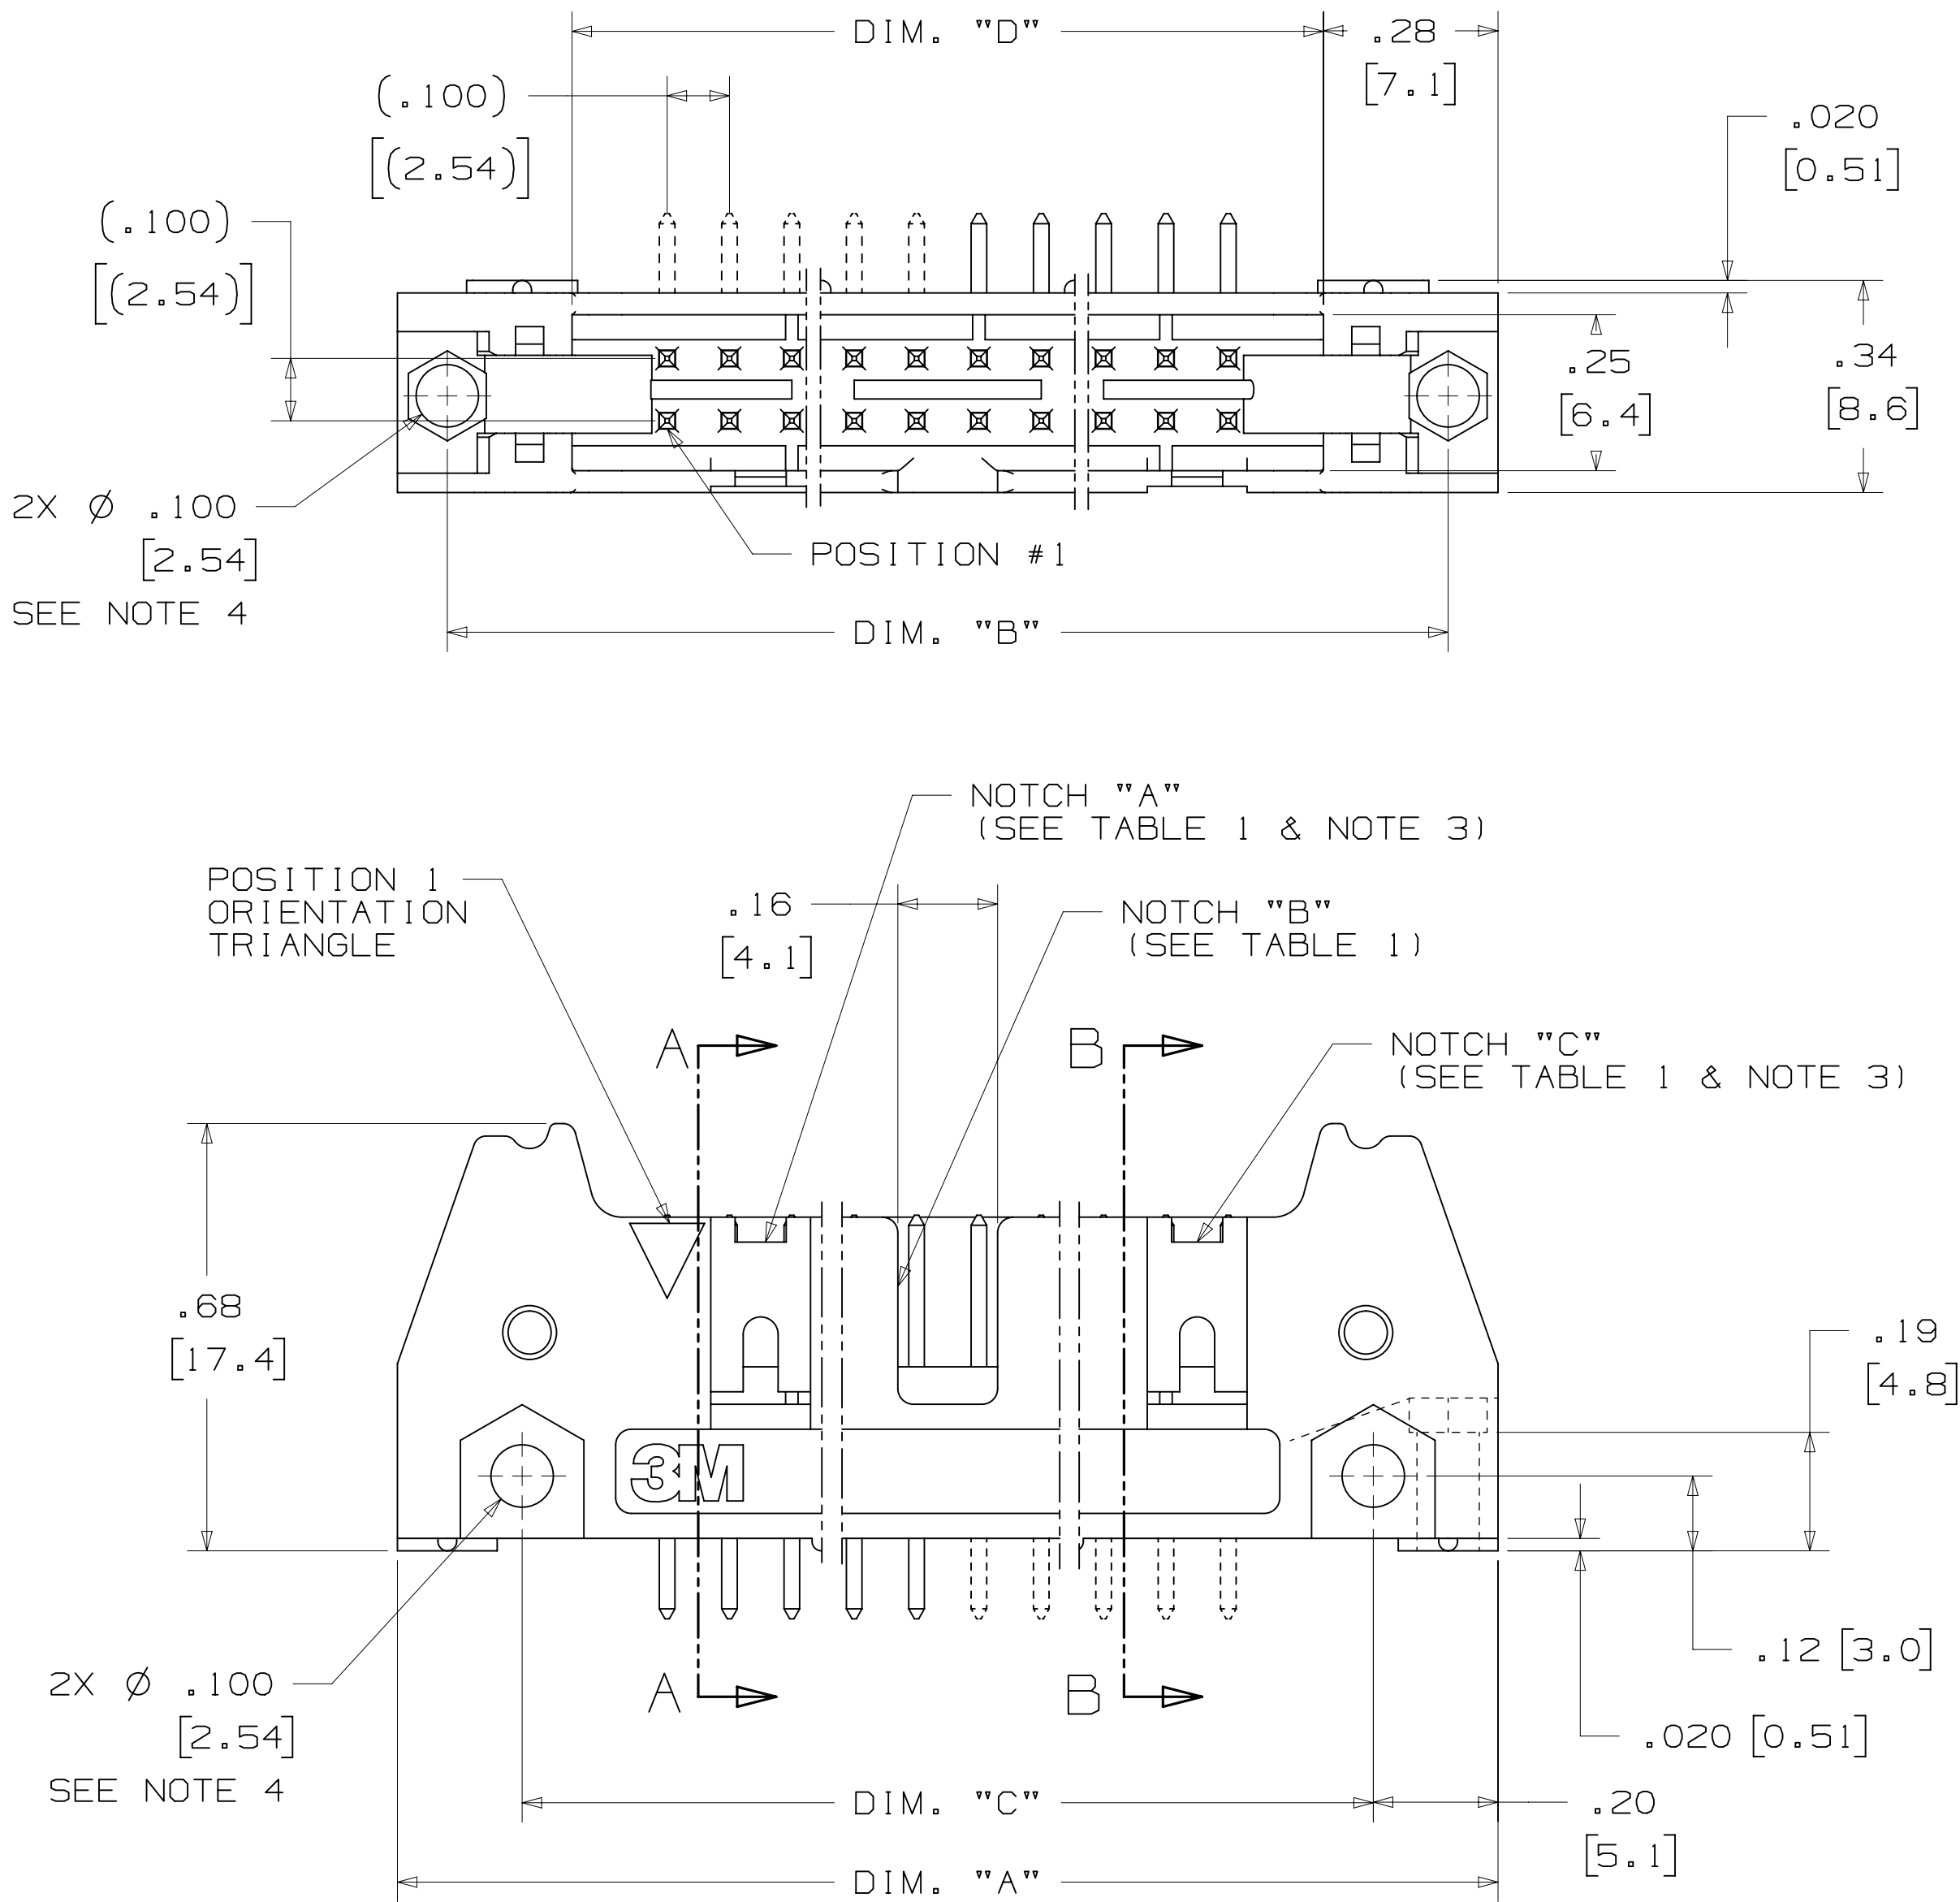

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
3M CODES		DRP	CASTIGLIONE	DATE JUL 25, 2014	MFG	DATE
		CHKD		DATE	APPR	DATE
					R. SCHERER	SEP 05, 2014
DIVISION	Interconnect Solutions	DIVISION CODE	EMSD	© 3M COPYRIGHT 2016		
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED	INCHES 0 ± .01 .000 ± .005 .0000 ±			
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	MILLIMETERS	0 ± .3 .00 ± .13 .000 ±			
MAX SURFACE ROUGHNESS	DET SURFACES	CAGE NUMBER	SIZE	DRAWING NO.	REV.	
✓ MARKED ONLY	ANGLES	D	78-5100-0772-3	T		
		MODEL	3000 SERIES	DET	LISTS	YES X NO
				SHT	2 OF 4	

3M Center St. Paul, MN 55144

Header, 4-Wall, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA

3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE



RECOMMENDED MOUNTING HOLE PATTERN
(STRAIGHT VERSION)



RECOMMENDED MOUNTING HOLE PATTERN
(RIGHT ANGLE VERSION)

PART CUSTOMIZATION


THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.

3M HAS SEVERAL CAPABILITIES THAT CAN PROVIDE A PART TAILORED TO YOUR SPECIFIC NEEDS. ASK YOUR 3M SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR MORE DETAILS.

BOTH SNAP-IN AND ROLL PIN LATCHES MAY BE ORDERED SEPARATELY. SNAP-IN AND ROLL PIN STYLE LATCHES ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT. IF ORDERING SNAP-IN OR ROLL PIN STYLE LATCHES SEPARATELY, PLEASE USE THE BELOW CHART.

MATERIAL	SHORT LATCH	LONG LATCH	LATCH STYLE	COLOR
HIGH TEMP. (PCT)	N3505-2B	N3505-3B	ROLL PIN	BLACK
HIGH TEMP (PPA)	N3505-30B	N3505-31B	SNAP-IN	BLACK


- * SELECTIVE PIN REMOVAL (ATA OR OTHER COMPATABILITY)
- * WIRE WRAP TAILS STYLE

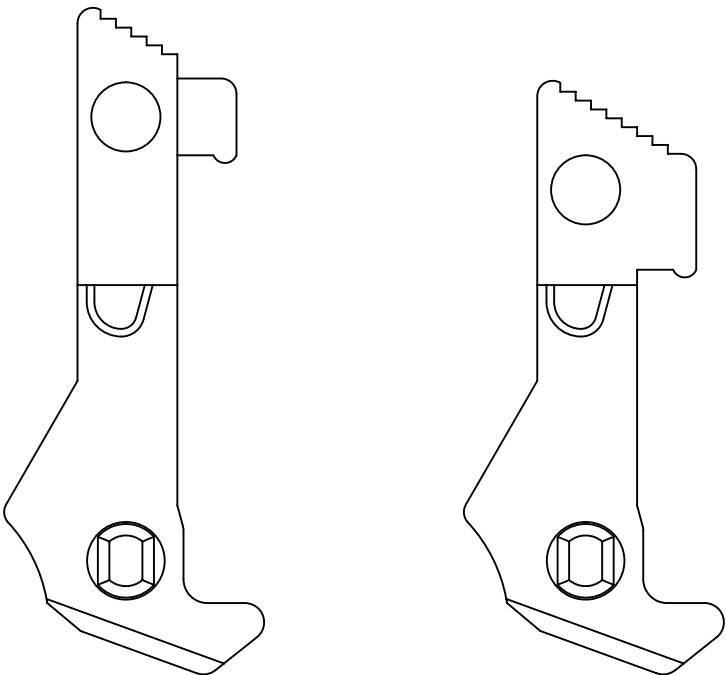


LONG SHORT

SNAP-IN LATCHES

NOTE:
SNAP-IN LATCHES CAN ONLY BE ORDERED SEPARATELY AND ARE THE CUSTOMERS RESPONSIBILITY TO INSTALL.

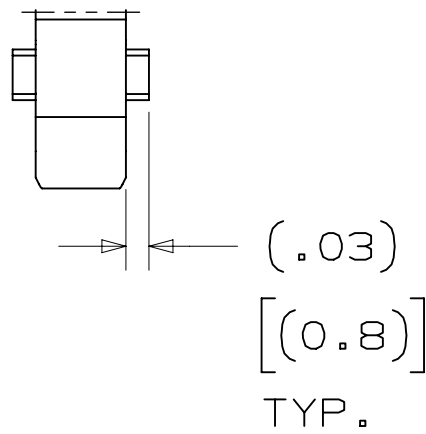

POLARIZING POST

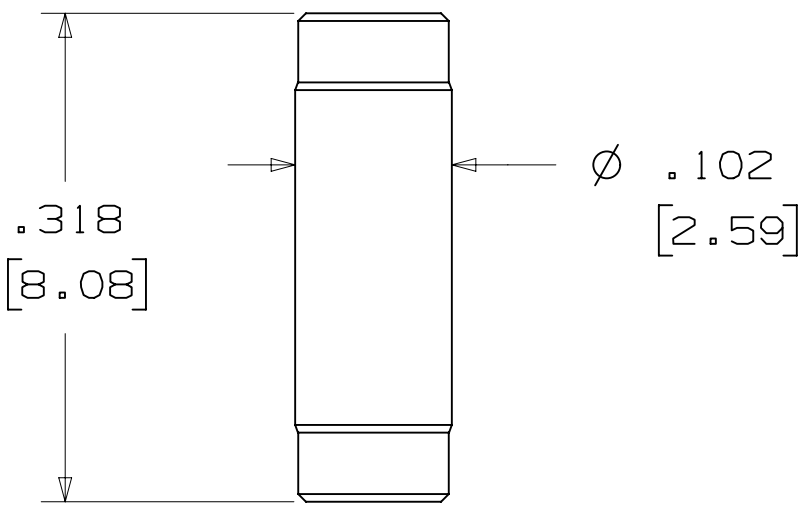

3M PART NO.	MATERIAL	COLOR
3201-4	LCP	BLACK


NOTE:
INSERT POST INTO ONE MOUNTING HARDWARE HOLE ON BOTTOM OF HEADER. SET POST TO PROTRUDE .115 [2.92]

K2 OPTION

2500 & 3000 SERIES SHROUDED HEADER						
TOTAL NO. OF PINS	NO. OF TAILS KINKED	POSITIONS KINKED				
10	4	3	4	7	8	
14	4	3	4	11	12	
16	4	3	4	13	14	
20	4	3	4	17	18	
24	4	3	4	21	22	
26	4	3	4	23	24	
30	4	5	6	25	26	
34	4	7	8	27	28	
36	4	7	8	27	28	
40	4	7	8	33	34	
50	4	7	8	43	44	
60	4	11	12	49	50	
64	4	11	12	53	54	

KINKED TAIL DETAIL:
- KINK IS LOCATED .05" BELOW BOTTOM SURFACE OF PLASTIC.
- EXTERNAL RADIUS OF KINK TOWARD PART CENTERLINE.

POLARIZING KEYS

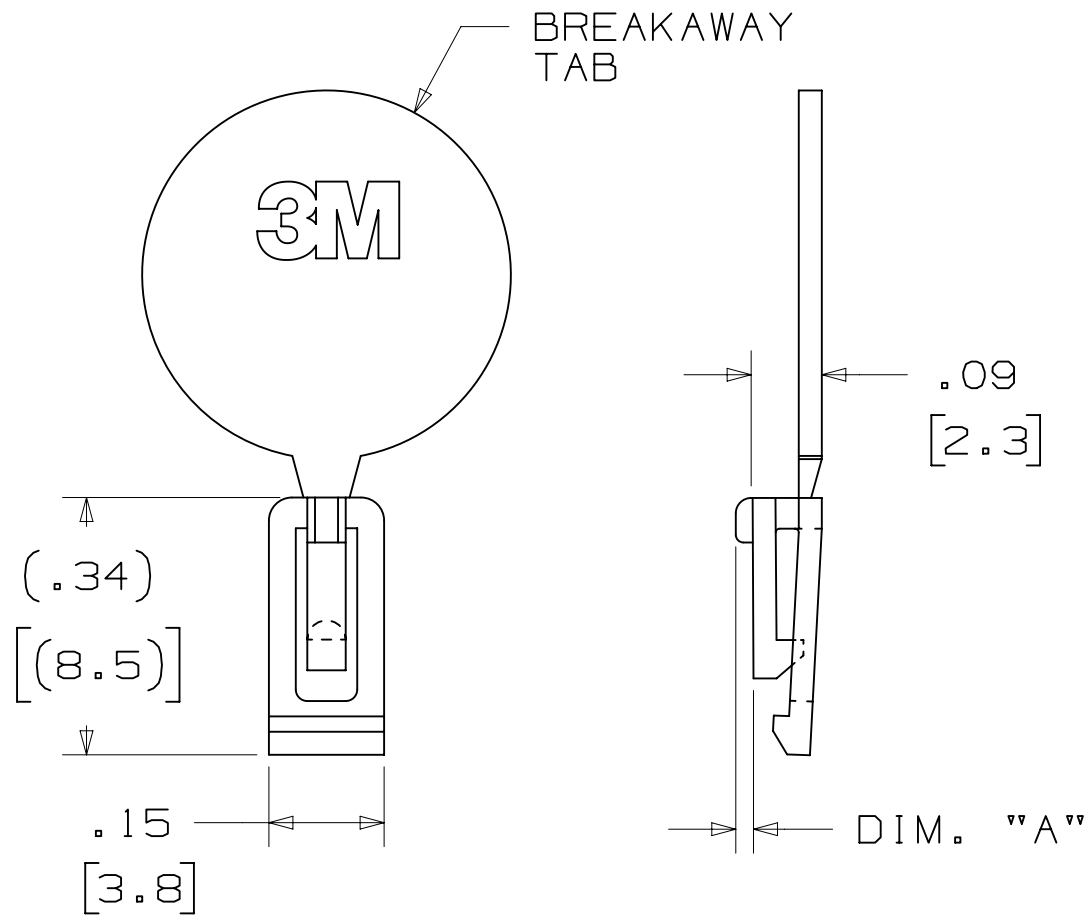


3M PART NO.	MATERIAL	COLOR	DIM. 'A'
N3518	LCP	BLACK	.02

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO ADHERE KEYS.


DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACCESS CODES				DRFT	CASTIGLIONE	DATE	JUL 25, 2014	MFG	DATE
				CHKD	DATE	APPR	R. SCHERER	DATE	SEP 05, 2014
									
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2016					
Interconnect Solutions		EMSD		 3M Center St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without the express 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
DO NOT SCALE DRAWING		SCALE 4 1							
				INCHES		TITLE HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA			
THIRD ANGLE PROJECTION				.0000 ± .0005					
INTERPRET PER ASME Y14.5 - 2009				MILLIMETERS					
MAX SURFACE ROUGHNESS ✓  0.125				.00 ± .3					
✓  0.125				.00 ± .13					
MAX SURFACE ROUGHNESS ✓  0.125				.000 ± .0005		CAGE NUMBER D 78-100-0772-3			
✓  0.125				.000 ± .0005					
✓  0.125				ANGLES		REV. T			
✓  0.125				.000 ± .0005					
✓  0.125				.000 ± .0005		MODEL 3000 SERIES			
✓  0.125				.000 ± .0005					
✓  0.125				.000 ± .0005		DET. LISTS ☐ YES ☒ NO SHT 3 OF 4			
✓  0.125				.000 ± .0005					
✓  0.125				.000 ± .0005					
✓  0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125				.000 ± .0005					
✓ 0.125									

3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE


MOUNTING HARDWARE

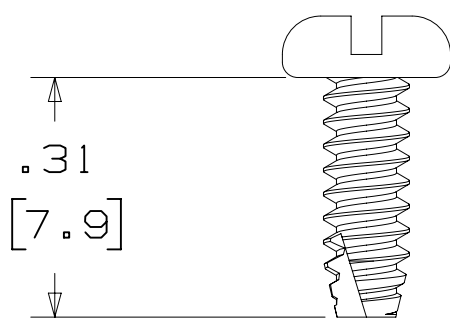

3341-5
(INSTALL FROM BOTTOM OF BOARD)
PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL

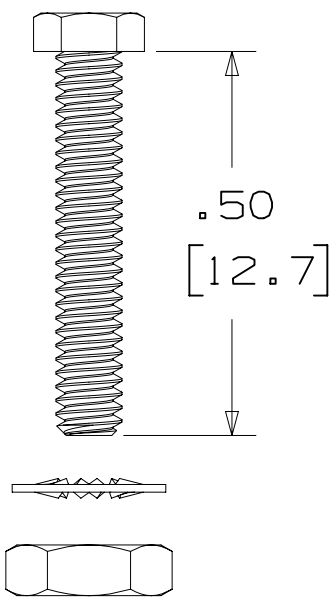


3341-6
HEX HEAD BOLT, NUT AND WASHER:
BOLT - #2-56 X 1/2"
MATERIAL: STAINLESS STEEL

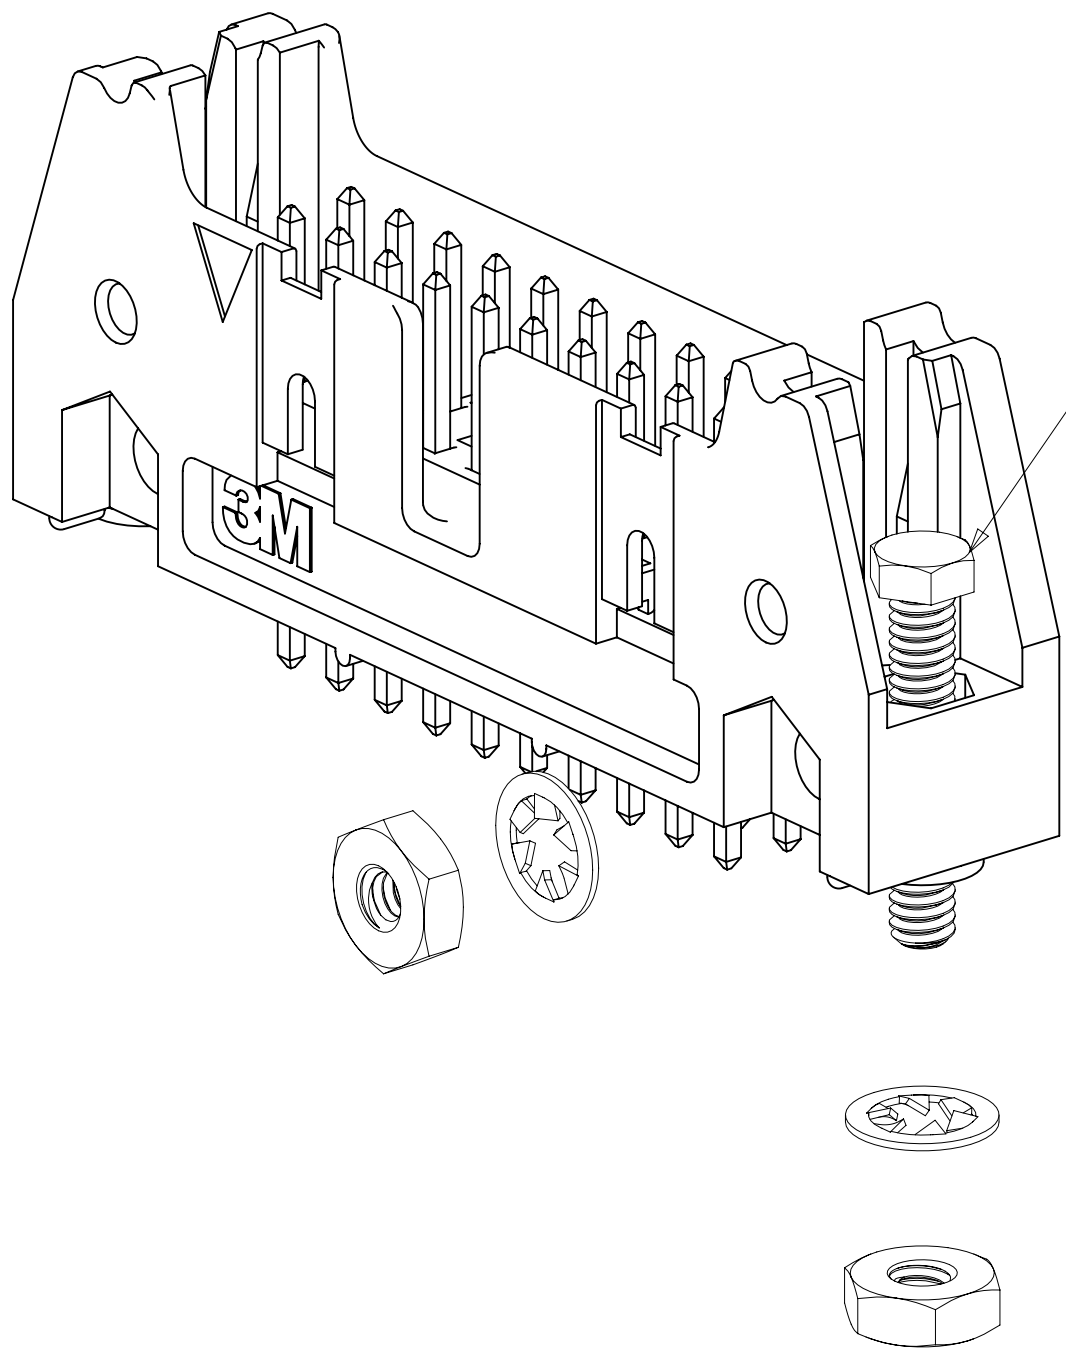

STRAIGHT VERSION INSTALL
(MUST BE INSERTED PRIOR TO
LATCH INSTALL)

RIGHT ANGLE VERSION INSTALL

3341-6
#2-56 NUT AND BOLT
TORQUE FOR EACH BOLT: 1.25 - 3.125 INCH LBS.

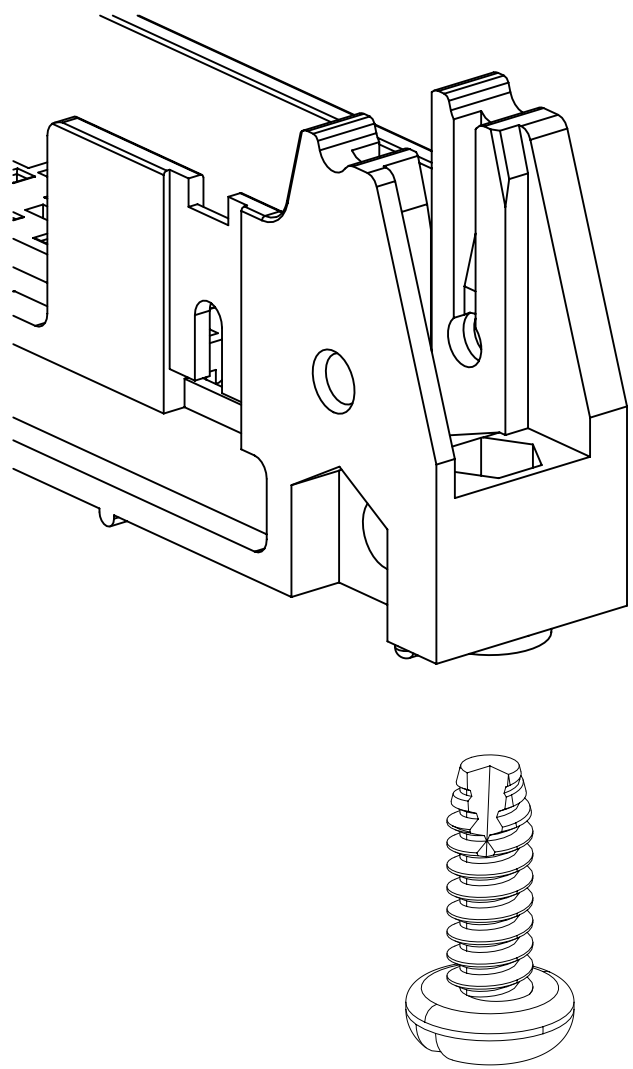

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.

3341-5

T		62689	JUL 10,2015		JNC	SN		
			ADD 5X05 OPTION AND REVISE NOTES					
S		60056	MAR 06,2015		JNC	RS		
			REVISE ORDERING NUMBER					
R		56068	JUL 25,2014		JNC	RS		
			REVISED AND REDRAWN					
DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
ACCESS CODES				DRFT	CASTIGLIONE		DATE	JUL 25,2014
				DRWD	DATE	APPRV	DATE	R. SCHERER SEP 05,2014
DIVISION		DIVISION CODE		© 3M CORPORATION 2016				
Interconnect Solutions		EMSD		3M		3M Center St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		INCHES		THIRD ANGLE PROJECTION



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.