


NAIS

20A Power Relay For Home appliances

LF-RELAYS

FEATURES

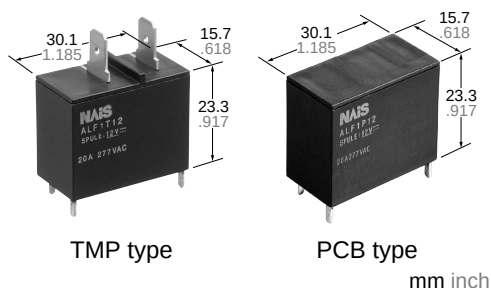

1. Ideal for compressor and inverter loads

- 1) Compressor load: 20A 250V AC
- 2) Inverter load: 20A 100V AC, 10A 200V AC

2. High insulation resistance

- Creepage distance and clearances between contact and coil;
Creepage Min. 9.5mm .374inch/Clearance Min. 8mm .315inch
- Surge withstand voltage: Min. 10,000V

3. "PCB" and "TMP" types available

4. Conforms to the various safety standards:

UL/CSA, TÜV, VDE approved

SPECIFICATIONS

Contact

Arrangement		1 Form A
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		100 mΩ
Contact material		Silver alloy
Rating (resistive load)	Nominal switching capacity	20 A 250V AC
	Max. switching power	6,250 V A
	Max. switching voltage	250V AC
	Max. switching current	25 A
Expected life (min. operations)	Mechanical (at 180 cpm)	2×10^6
	Electrical (at 20 cpm) (Resistive load)	10^5

Coil

Nominal operating power	900 mW
-------------------------	--------

Remarks

- * Specifications will vary with foreign standards certification ratings.
 *1 Measurement at same location as "Initial breakdown voltage" section.
 *2 Detection current: 10mA
 *3 Wave is standard shock voltage of $\pm 1.2 \times 50\mu s$ according to JEC-212-1981
 *4 Excluding contact bounce time.
 *5 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs
 *6 Half-wave pulse of sine wave: 6 ms
 *7 Detection time: 10 μs
 *8 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 24).

Characteristics

Max. operating speed (at rated load)		20 cpm
Initial insulation resistance*1		Min. 1,000 MΩ (at 500 V DC)
Initial breakdown voltage*2	Between open contacts	1,000 Vrms for 1 min.
	Between contacts and coil	5,000 Vrms for 1 min.
Surge voltage between contact and coil*3		Min. 10,000 V
Operate time*4 (at nominal voltage)		Approx. 15ms
Release time (without diode)*4 (at nominal voltage)		Approx. 15ms
Temperature rise (at nominal voltage)		Max. 45°C (resistance method, contact current 20 A, rated coil voltage, 60°C 140°F)
Shock resistance	Functional*5	Min. 100 m/s²{10 G}
	Destructive*6	Min. 1,000 m/s²{100 G}
Vibration resistance	Functional*7	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, trans- port and storage*8 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +60°C -40°F to +140°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 23 g .81 oz

TYPICAL APPLICATIONS

- Air conditioner
- Refrigerators
- OA equipment

ORDERING INFORMATION

Ex. A LF 1 T 12

Product Name	Contact arrangement	Terminal shape	Coil voltage, V DC
LF	1: 1 Form A	T: TMP type P: PCB type	05: 5 12: 12 06: 6 18: 18 09: 9 24: 24

Note: Standard packing; Carton: 50 pcs. Case 200 pcs.
UL/CSA, VDE, TÜV approved type is standard.

TYPES

Contact arrangement	Coil voltage, V DC	TMP type	PCB type
1 Form A	5	ALF1T05	ALF1P05
	6	ALF1T06	ALF1P06
	9	ALF1T09	ALF1P09
	12	ALF1T12	ALF1P12
	18	ALF1T18	ALF1P18
	24	ALF1T24	ALF1P24



COIL DATA

Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating current, mA ($\pm 10\%$)	Nominal operating power, W	Maximum allowable voltage, V DC
5	3.5	0.5	27.8	180	0.9	5.5
6	4.2	0.6	40	150		6.6
9	6.3	0.9	90	100		9.9
12	8.4	1.2	160	75		13.2
18	12.6	1.8	360	50		19.8
24	16.8	2.4	640	37.5		26.4


DIMENSIONS

mm inch

1. TMP type

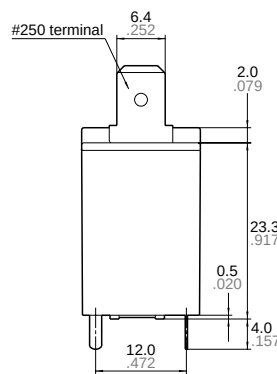
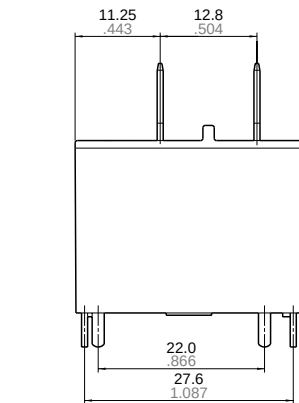


PC board pattern (Bottom view)

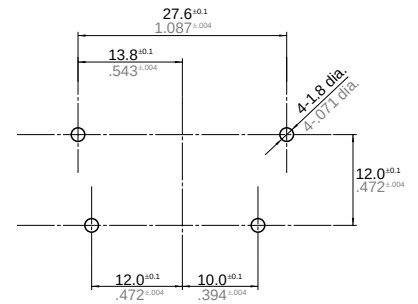

Tolerance : $\pm 0.1 \pm .004$

Schematic (Bottom view)

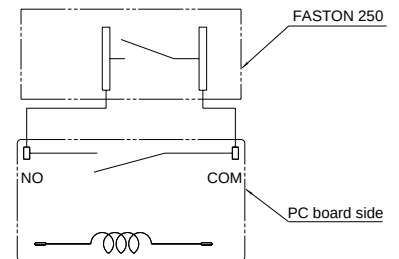



Dimension :

Max. 1mm .039 inch:
1 to 3mm .039 to .118 inch:
Min. 3mm .118 inch:


Tolerance

$\pm 0.1 \pm .004$
 $\pm 0.2 \pm .008$
 $\pm 0.3 \pm .012$

2. PCB type

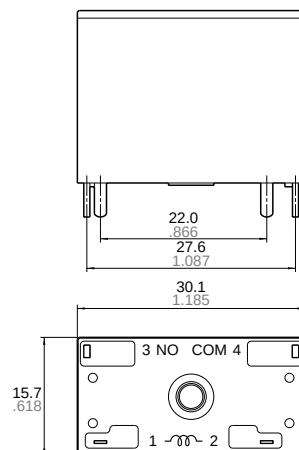


PC board pattern (Bottom view)

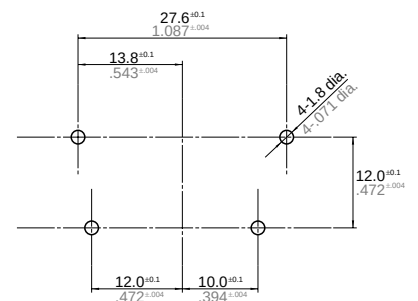

Tolerance : $\pm 0.1 \pm .004$

Schematic (Bottom view)



Dimension :

Max. 1mm .039 inch:
1 to 3mm .039 to .118 inch:
Min. 3mm .118 inch:


Tolerance

$\pm 0.1 \pm .004$
 $\pm 0.2 \pm .008$
 $\pm 0.3 \pm .012$

REFERENCE DATA



1. Coil temperature rise

Sample: ALF1T12, 6 pcs.
Point measured: coil inside
Contact current: 20A
Ambient temperature: 25°C 77°F, 60°C 140°F

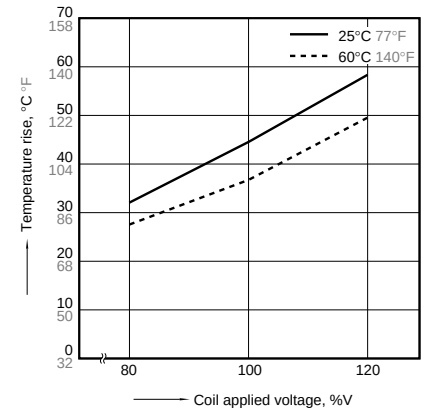



2-(1). 200V AC electrical life test

(200V AC, inverter load)
Sample: ALF1T12, 6 pcs.
Load: Inrush 102A (wave peak value),
Steady 14.4A (wave peak value)
Inverter dummy 200V AC
Switching frequency: ON 1s, OFF 5s
Circuit:

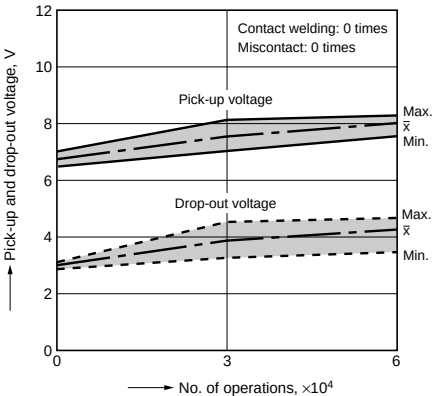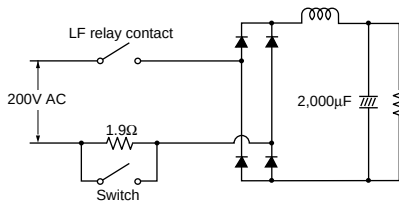



2-(2). 100V AC electrical life test

(100V AC, inverter load)
Sample: ALF1T12, 6 pcs.
Load: Inrush 224A (wave peak value),
Steady 30.5A (wave peak value)
Inverter dummy 100V AC
Switching frequency: ON 1s, OFF 5s
Circuit:

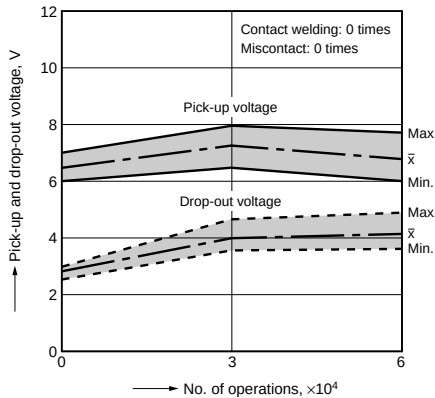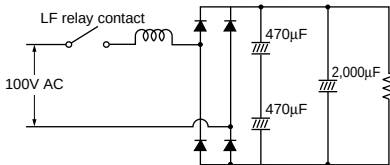


2-(3). Inrush 70.7A, Steady 20A, 250V AC electrical life test

(Compressor dummy load)
Sample: ALF1T12, 3 pcs.
Load: Inrush 70.7A, cosφ = 0.7
Steady 20A, cosφ 0.9
250V AC compressor dummy
Switching frequency: ON 1.5s, OFF 1.5s
Circuit:

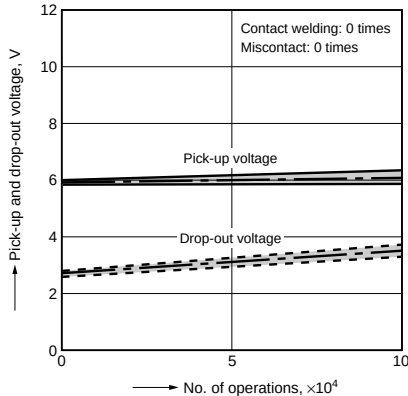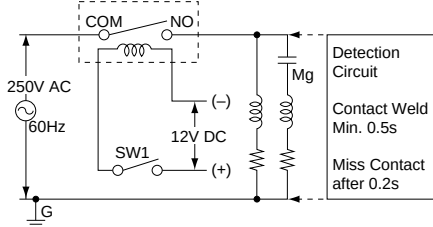

2-(4). Electrical life test

(20A 250V AC, resistive load)
Sample: ALF1T12, 6 pcs.
Switching frequency: ON 1.5s, OFF 1.5s

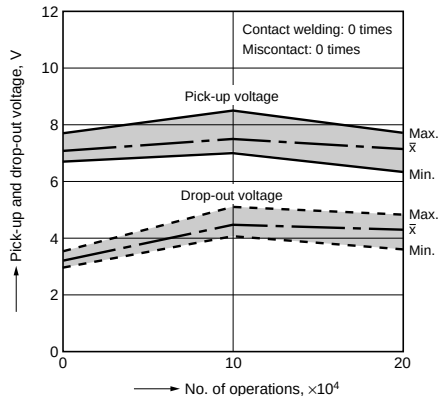

For Cautions for Use, see Relay Technical Information (Page 11 to 39).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.