



Introducing RW-175

Highly flame-resistant, high-temperature, chemical-resistant RW-175 tubing provides tough, semirigid, very-thin-wall insulation and strain relief of multipin connectors, solder joints and other delicate electrical connections and terminations. It is well-suited for applications that require dense packing of components or visual inspection of covered components. It is especially suitable for applications requiring outstanding abrasion and cut-through resistance and superior chemical and solvent resistance. Its high temperature performance meets or exceeds military and industrial standards. RW-175 meets NASA outgassing requirements making it suitable for use in space applications such as satellites.

KEY FEATURES

- 2:1 shrink ratio for all standard sizes
- Tough, semirigid, very-thin-wall insulation
- High flame-resistance, meeting the requirements of AMS-DTL-23053, Test C, with UL and CSA VW-1 flammability rating
- High temperature performance that meets or exceeds military and industrial standards
- Protection from most industrial solvents, fuels, and chemicals
- Available in several "microtubing" sizes for applications requiring recovered I.D.'s as small as .007" (0.178mm)
- Meets NASA outgassing requirements
- Offers improved clarity (clear version) and increased resistance to crazing when compared to previously offered solutions

APPLICATIONS

- Appliances
- Military and commercial aircraft
- Satellites
- Commercial electronics and communication
- Industrial equipment

ELECTRICAL

- Provides excellent electrical insulation
- Not recommended for use as a primary insulator at temperatures exceeding 135°C [275°F]

MECHANICAL

- Tough modified polyvinylidene fluoride material provides outstanding abrasion and cut-through resistance
- Excellent for strain relief when installed on delicate electrical connections and terminations

TEMPERATURE RATING

- Full recovery temperature: 175°C [347°F]
- Operating Temperature range: -55°C to 175°C [-67°F to 347°F]

STANDARDS AND SPECIFICATIONS

- RW-3029/2
- RW-175 Microtubing SCD
- SAE-AMS-DTL-23053/8
- UL 224 VW-1
- CSA C22.2 No. 198.1-98 VW-1

ORDERING INFORMATION

- Color: Clear (-X) (standard); Black (-O) (nonstandard)
- Standard packaging (-STK): 1.2m [4 ft.] lengths
Optional packaging (-SP): Spool, varying lengths (consult TE for details)
- Ordering description: Specify product name, size, and color; for example, RW-175-3/16-X.

SAMPLES NOW AVAILABLE

te.com/products/RW-175



RW-175 DIMENSIONS




| Size | Minimum Expanded I.D. (D) | | Maximum Recovered I.D. (d) | | Nominal Recovered Jacket Wall (W) | |
|-------|---------------------------|-------|----------------------------|-------|-----------------------------------|------------|
| | in. | mm. | in. | mm. | in. | mm. |
| 3/64 | .046 | 1.17 | .023 | .58 | .010 ± .002 | .25 ± .051 |
| 1/16 | .063 | 1.60 | .031 | .79 | .010 ± .002 | .25 ± .051 |
| 3/32 | .093 | 2.36 | .046 | 1.17 | .010 ± .002 | .25 ± .051 |
| 1/8 | .125 | 3.18 | .062 | 1.58 | .010 ± .002 | .25 ± .051 |
| 3/16 | .187 | 4.75 | .093 | 2.36 | .010 ± .002 | .25 ± .051 |
| 1/4 | .250 | 6.35 | .125 | 3.18 | .013 ± .002 | .33 ± .051 |
| 3/8 | .375 | 9.53 | .187 | 4.75 | .013 ± .002 | .33 ± .051 |
| 1/2 | .500 | 12.70 | .250 | 6.35 | .013 ± .002 | .33 ± .051 |
| 3/4 | .750 | 19.05 | .375 | 9.53 | .017 ± .003 | .43 ± .076 |
| 1 | 1.000 | 25.40 | .500 | 12.70 | .019 ± .003 | .48 ± .076 |
| 1-1/2 | 1.500 | 38.10 | .750 | 19.05 | .020 ± .003 | .51 ± .076 |
| 2 | 2.000 | 50.80 | 1.000 | 25.40 | .020 ± .003 | .51 ± .076 |

RW-175 ORDERING DESCRIPTION

Example 1:

RW-175-3/8-X-STK

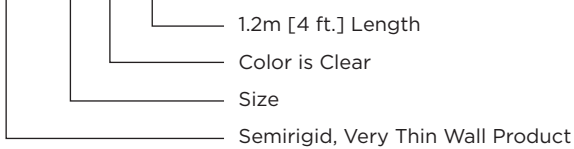

Example 2:

RW-175-3/4-0-SP



te.com/products/RW-175



PRODUCT OFFERING

| Material Description | Material Number |
|----------------------|-----------------|
| RW-175-3/64-X-STK | CV3299-000 |
| RW-175-3/64-X-SP | CV3270-000 |
| RW-175-3/64-O-STK | CV3331-000 |
| RW-175-3/64-O-SP | CV3269-000 |
| RW-175-1/16-X-STK | CV3300-000 |
| RW-175-1/16-X-SP | CV3257-000 |
| RW-175-1/16-O-STK | CV3322-000 |
| RW-175-1/16-O-SP | CV3256-000 |
| RW-175-3/32-X-STK | CV3301-000 |
| RW-175-3/32-X-SP | CV3267-000 |
| RW-175-3/32-O-STK | CV3329-000 |
| RW-175-3/32-O-SP | CV3266-000 |
| RW-175-1/8-X-STK | CV3302-000 |
| RW-175-1/8-X-SP | CV3262-000 |
| RW-175-1/8-O-STK | CV3325-000 |
| RW-175-1/8-O-SP | CV3261-000 |
| RW-175-3/16-X-STK | CV3303-000 |
| RW-175-3/16-X-SP | CV3265-000 |
| RW-175-3/16-O-STK | CV3328-000 |
| RW-175-3/16-O-SP | CV3264-000 |
| RW-175-1/4-X-STK | CV3304-000 |
| RW-175-1/4-X-SP | CV3260-000 |
| RW-175-1/4-O-STK | CV3324-000 |
| RW-175-1/4-O-SP | CV3259-000 |
| RW-175-3/8-X-STK | CV3305-000 |

| Material Description | Material Number |
|----------------------|-----------------|
| RW-175-3/8-X-SP | CV3272-000 |
| RW-175-3/8-O-STK | CV3332-000 |
| RW-175-3/8-O-SP | CV3271-000 |
| RW-175-1/2-X-STK | CV3306-000 |
| RW-175-1/2-X-SP | CV3258-000 |
| RW-175-1/2-O-STK | CV3323-000 |
| RW-175-3/4-X-STK | CV3307-000 |
| RW-175-3/4-X-SP | CV3268-000 |
| RW-175-3/4-O-STK | CV3330-000 |
| RW-175-1-X-STK | CV3308-000 |
| RW-175-1-X-SP | CV3263-000 |
| RW-175-1-O-STK | CV3326-000 |
| RW-175-1-1/2-X-STK | CV3309-000 |
| RW-175-1-1/2-O-STK | CV3327-000 |
| RW-175-2-X-STK | CV3310-000 |
| RW-175-O30-X-SP† | CV3281-000 |
| RW-175-NO.1-X-SP† | CV3293-000 |
| RW-175-NO.2-X-SP† | CV3294-000 |
| RW-175-NO.13-X-SP† | CV3291-000 |
| RW-175-NO.14-X-SP† | CV3292-000 |
| RW-175-NO.33-X-SP† | CV3296-000 |
| RW-175-NO.33-O-SP† | CV3295-000 |
| RW-175-NO.65-X-SP† | CV3298-000 |
| RW-175-NO.65-O-SP† | CV3297-000 |

† RW-175 microtubing is available in 0.014-0.045 in. (.356-1.143 mm) dia. Consult TE for complete details.

SAMPLE INVENTORY

| |
|--------------------|
| RW-175-3/64-X-STK |
| RW-175-1/16-X-STK |
| RW-175-3/32-X-STK |
| RW-175-1/8-X-STK |
| RW-175-3/16-X-STK |
| RW-175-1/4-X-STK |
| RW-175-3/8-X-STK |
| RW-175-1/2-X-STK |
| RW-175-3/4-X-STK |
| RW-175-1-X-STK |
| RW-175-1-1/2-X-STK |
| RW-175-NO.1-X-SP |
| RW-175-NO.33-X-SP |

te.com/products/RW-175



PROPERTY REQUIREMENTS

| Property | Unit | Requirement | Test Method |
|--|-----------------------------------|---|--|
| PHYSICAL | | | |
| Dimensions | Inch (mm) | Table 1 | RW-3029/2, Section 4.3.1 |
| Longitudinal Change | Percent | +0, -10 maximum | ASTM D 2671 |
| Tensile Strength | psi (MPa) | 5000 minimum (34.5) | RW-3029/2, Section 4.3.2 |
| Ultimate Elongation | Percent | 150 minimum | ASTM D 2671 |
| Secant Modulus (expanded) | psi (MPa) | 1 x 10 ⁵ minimum (690) | ASTM D 2671 |
| Specific Gravity | | 1.8 maximum | ASTM D 2671 |
| Low Temperature Flexibility 4 hours at -55°C ± 2°C (-67 ± 4°F) | | No cracking | RW-3029/2, Section 4.3.3 |
| Heat Shock 4 hours at 300 ± 5°C (572 ± 9°F) | | No dripping, flowing or cracking | RW-3029/2, Section 4.3.4 |
| Heat Resistance 168 hours at 250 ± 5°C (482 ± 9°F) Followed by test for: Ultimate elongation | Percent | 50 minimum | RW-3029/2, Section 4.3.5 ASTM D 2671 |
| Vacuum Outgassing TML (Total Mass Loss) | Percent | 1.0 maximum | ASTM E 595 |
| VCM (Volatile Condensable Material) | Percent | 0.1 maximum | |
| ELECTRICAL | | | |
| Dielectric Strength Sizes 3/64 through 12 Sizes 3/4 through 2 | V/mil (kV/mm) | 800 minimum (31,500) 600 minimum (2,600) | ASTM D 2671 |
| Volume Resistivity | Ohm-cm | 1 X 10 ¹³ minimum | ASTM D 2671 |
| CHEMICAL | | | |
| Corrosive Effect Copper Mirror 16 hours at 150°C | | Noncorrosive | RW-3029/2, Section 4.3.6.1 ASTM D 2671, Proc. A |
| Copper Contact 168 hours at 175 ± 3°C (347 ± 5°F) Followed by test for: Ultimate Elongation | Percent | No pitting or blackening of copper 100 minimum | RW-3029/2, Section 4.3.6.2 ASTM D 2671, Proc. B RW-3029/2, Section 4.3.2 |
| Flammability Average Time of Burning | Seconds | 15 maximum | ASTM D 2671, Proc. A |
| Fungus Resistance Followed by tests for: Tensile Strength Ultimate Elongation | psi (Mpa) Percent | 5000 minimum (34.5) 150 minimum | ISO 846, Method B RW-3029/2, Section 4.3.2 ASTM D 2671 |
| Dielectric Strength Sizes 3/64 through 1/2 Sizes 3/4 through 2 | Volts/mil (volts/mm) | 800 minimum (31,500) 600 minimum (23,600) | ASTM D 2671 |
| Water Absorption 24 hours at 23 ± 3°C (73 ± 5°F) | Percent | 0.5 maximum | ASTM D 2671 |
| Fluid Resistance 24 hours at 23 ± 3°C (73 ± 5°F) JP-4 Fuel (MIL-T-5624) SKYDROL 500 Hydraulic Fluid (MIL-H-5606) Aviation Gasoline 100/130 (MIL-G-5572) Salt Water (5% salt) Anti-icing Fluid (MIL-A-8243) Lubricating Oil (MIL-L-7808) Followed by tests for: Dielectric Strength Sizes 3/64 through 1/2 Sizes 3/4 through 2 Tensile Strength | Volts/mil (Volts/mm) psi (MPa) | 700 minimum (27,600) 500 minimum (19,700) 5000 minimum (34.5) | RW-3029/2, Section 4.3.7 ASTM D 2671 RW-3029/2, Section 4.3.2 ASTM D 2671 |

While TE has made every reasonable effort to ensure the accuracy of the information in this flyer, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this flyer are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

te.com/products/RW-175





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.