

HWS80A/A

SPECIFICATIONS

A264-01-01/A

ITEMS		MODEL	HWS80A -3/A	HWS80A -5/A	HWS80A -12/A	HWS80A -15/A	HWS80A -24/A	HWS80A -48/A	
1	Nominal Output Voltage	V	3.3	5	12	15	24	48	
2	Maximum Output Current	A	16	16	6.7	5.4	3.4	1.7	
3	Maximum Output Power	W	52.8	80.0	80.4	81.0	81.6	81.6	
4	Efficiency (Typ.) (*1)	100VAC	%	81	83	85	85	86	87
		200VAC	%	83	85	87	87	88	89
5	Input Voltage Range (*2)	-	85 - 265VAC (47 - 63Hz) or 120 - 370VDC						
6	Input Current (Typ.) (*1)	A	0.72/0.36	1.04/0.52					
7	Inrush Current (Typ.) (*1)(*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start						
8	PFHC	-	Designed to meet IEC61000-3-2						
9	Power Factor (Typ.) (*1)	-	0.96/0.87	0.98/0.91					
10	Output Voltage Range	V	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8	
11	Maximum Ripple & Noise (*4)	0≤Ta≤70°C	mV	120	120	150	150	150	200
		-10≤Ta<0°C	mV	160	160	180	180	180	240
12	Maximum Line Regulation (*5)	mV	20	20	48	60	96	192	
13	Maximum Load Regulation (*6)	mV	40	40	96	120	150	240	
14	Temperature Coefficient	-	Less than 0.02%/°C						
15	Over Current Protection (*7)	A	16.8 ≤	16.8 ≤	7.04 ≤	5.67 ≤	3.57 ≤	1.79 ≤	
16	Over Voltage Protection (*8)	V	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8	
17	Hold-up Time (Typ.) (*1)	-	20ms						
18	Leakage Current (*9)	-	Less than 0.5mA. 0.2mA (Typ) at 100VAC / 0.4mA (Typ) at 230VAC						
19	Remote Sensing	-	Possible						
20	Parallel Operation	-	-						
21	Series Operation	-	Possible						
22	Operating Temperature (*10)	-	-10 to +70°C (-10 to +50°C:100%, +60°C:80%, +70°C:60%)						
23	Operating Humidity	-	30 to 90%RH (No Condensing)						
24	Storage Temperature	-	-30 to +85°C						
25	Storage Humidity	-	10 to 95%RH (No Condensing)						
26	Cooling	-	Convection Cooling						
27	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min						
28	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC						
29	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.						
30	Shock	-	Less than 196.1m/s ²						
31	Safety	-	Approved by UL60950-1, CSA60950-1, EN60950-1, UL508, CSA C22.2 No.107.1-01. Designed to meet Den-an Appendix 8 at 100VAC only.						
32	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)						
33	Conducted Emission (*11)	-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B						
34	Radiated Emission (*11)	-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B						
35	Immunity (*11)	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11						
36	Weight (Typ)	-	470g						
37	Size (W x H x D)	mm	33 x 82 x 160 (Refer to Outline Drawing)						

*Read instruction manual carefully, before using the power supply unit.

=NOTES=



- *1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).
- *3. Not applicable for the inrush current to Noise Filter for less than 0.2ms.
- *4. Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.
- *5. 85 - 265VAC, constant load.
- *6. No load-Full load, constant input voltage.
- *7. Constant current limit and Hiccup with automatic recovery.
Avoid to operate at over load or short circuit condition.
- *8. OVP circuit will shut down output, manual reset (Re power on).
- *9. Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C.
- *10. Output Derating
- Derating at standard mounting. Refer to OUTPUT DERATING CURVE (A264-01-02/A-).
- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
- *11. The power supply is considered a component which will be installed into a final equipment.
The final equipment should be re-evaluated that it meets EMC directives.

HWS80A/A

OUTPUT DERATING

A264-01-02/A-A

Ta (°C)	LOAD (%)	LOAD (%)	LOAD (%)
	MOUNTING A	MOUNTING B, D	MOUNTING C
-10 - +45	100	100	100
50	100	90	86
60	80	70	60
70	60	40	20

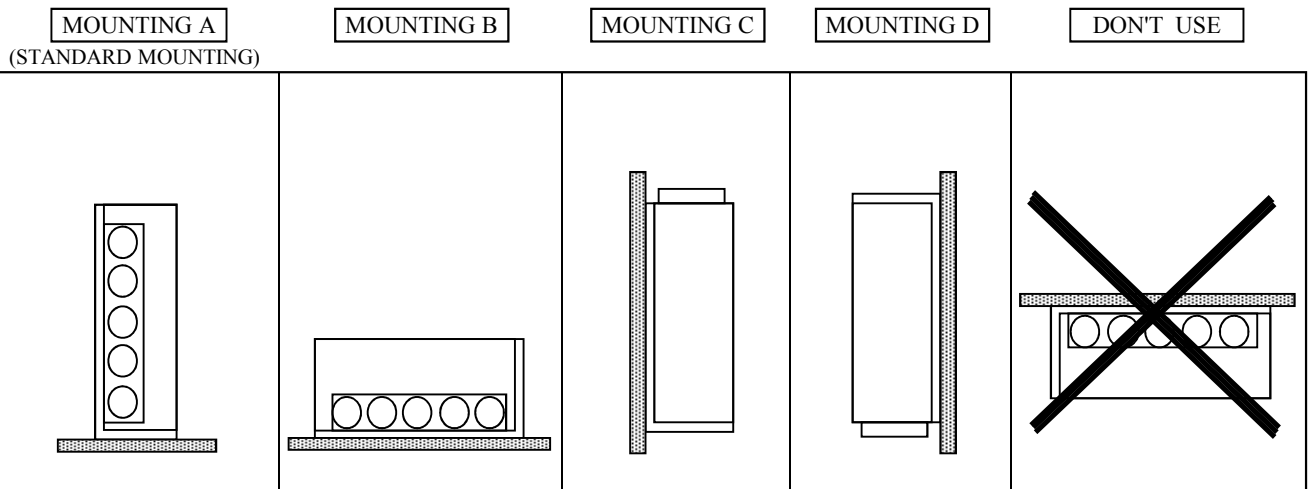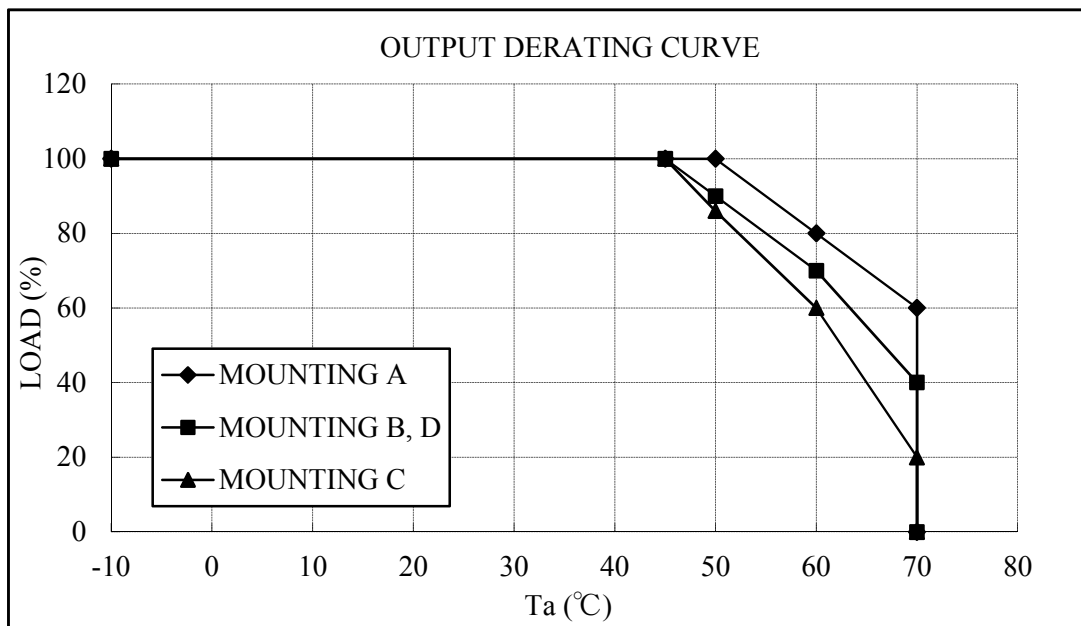

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[HWS80A-24/A](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.