

MXC-2000 Series

Intel® Atom™ Processor-based Fanless Expandable Embedded Computer with PCI/PCIe Slots



MXC-2002/2011



MXC-2012

Introduction

ADLINK's MXC-2000 series is an exceptionally fanless expandable embedded computer with configurable PCI and PCIe slots. It is designed to provide a reliable platform for a wide variety of applications by accepting standard PCI and PCIe cards. The MXC-2000 series can operate in a -20 to 70°C (-4 to 158°F) temperature range and withstands 5 Grms vibration. Its fanless and cable-less structure provides additional durability for long-term usage.

The MXC-2000 series features the Intel® Atom™ N270 1.6 GHz processor to deliver adequate performance at low power. Its PCI and PCIe slots enable the possibility of integrating off-the-shelf PCI/PCIe cards for a configurable application platform. Generic I/O interfaces, such as Gigabit Ethernet, COM, and USB are provided for connecting devices, while VGA+S-Video dual graphic outputs to allow connections to larger displays such as an LCD TV. The MXC-2000 series also integrates ADLINK in-house DIO design to deliver optional isolated DIO channels for industrial control usage.

ADLINK's MXC-2000 series is the perfect combination of configurability, reliability, durability, and compactness. With the MXC-2000 series, creating your rugged application system has never been easier.

Features




- Intel® Atom™ N270 1.6 GHz processor + 945GSE chipset
- Configurable, providing both PCI and PCIe slots options
 - 2 PCI Slots for MXC-2002
 - 1 PCI Slot + 1 PCIe x1 Slot for MXC-2011
 - 2 PCI Slot + 1 PCIe x4 Slot for MXC-2012
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation*
- Built-in wide-range DC power input
 - 9 V_{DC} to 32 V_{DC} for MXC-2002 and MXC-2011
 - 18 V_{DC} to 36 V_{DC} for MXC-2012
- Dual 1000/100/10 Mbps Ethernet ports
- Two RS-232 ports and two RS-232/422/485 ports
- Two CF sockets for HDD replacement and hot-swappable data storage
- VGA + S-Video independent dual display outputs
- Optional on-board I6-CH isolated DI and I6-CH isolated DO
- IEC-60945 maritime standards compliance (MXC-2012)

Applications

- Industrial Automation
- Factory Control
- Test Instrumentation
- Security Surveillance
- Data Acquisition System
- Building Automation
- Maritime Computer (MXC-2012)

Software Support

- OS Information
 - Windows® CE6.0/XP/XP Embedded/7
 - Linux*
- *Linux Distribution by Request

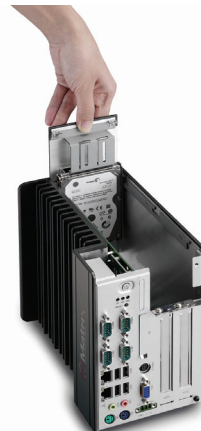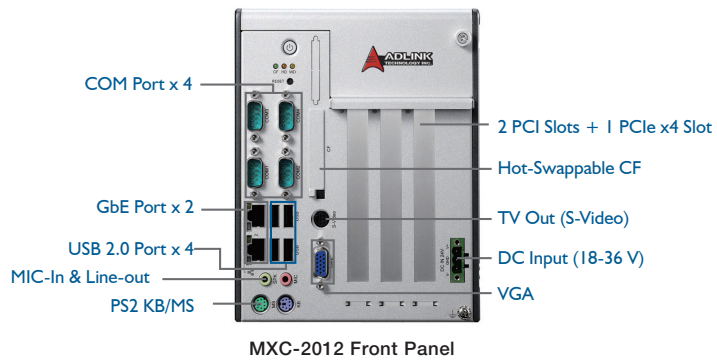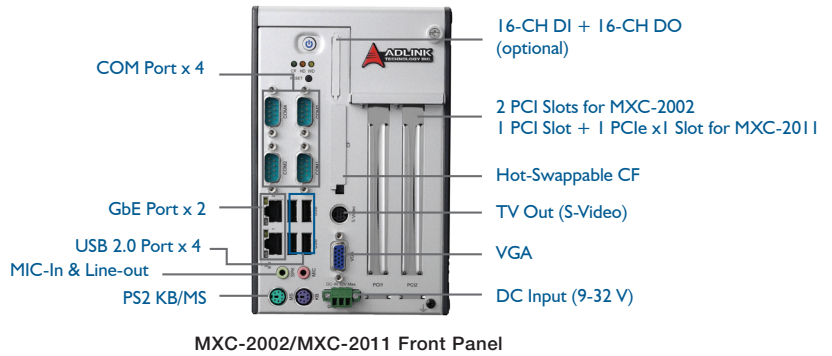

Easy Installation for HDD and PCI/PCIe Cards

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance.

Specifications

Model Name	MXC-2002	MXC-2011	MXC-2012
System Core			
■ Processor	Intel® Atom™ N270 1.6 GHz CPU		
■ Chipset	Intel® 945GSE Graphic Memory Control Hub Intel® I/O Controller Hub 7 Mobile (ICH7-M)		
■ Video	Analog CRT, supports QXGA (2048 x 1536) resolution TV-out, supports s-video		
■ Memory	1 GB DDR2 533 MHz SODIMM module		
I/O Interface			
■ Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x1 slot	2 PCI slots and 1 PCIe x4 slot
■ Ethernet	2 GbE ports (Realtek® 8111C)		
■ Serial Port	2 RS-232/422/485 (jumper selectable, COM1 & COM2) 2 RS-232 (COM3 & COM4)		
■ USB	4 USB 2.0 ports		
■ Audio	1 mic-in and 1 line-out		
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse		
■ DIO	Optional 16-CH isolated DI + 16-CH isolated DO		
■ WDT	Supports a watchdog timer		
Power Supply			
■ DC Input	Built-in 9-32 Vdc input with over-voltage protection 3P pluggable connector with latch (GND, V-, V+)	Built-in 18-36 Vdc isolation DC input	
■ AC Input	Optional 60 W external AC-DC adapter for AC input	Optional 100 W external AC-DC adapter for AC input	
Storage Device			
■ SATA HDD	Onboard SATA port for 2.5" HDD/SSD		
■ CompactFlash	2 type II CF sockets, supporting PIO and DMA modes CF1 (internal) for HDD replacement CF2 (external) supports hot-swapping		
Mechanical			
■ Dimensions	118 mm (W) x 219 mm (D) x 183 mm (H) (4.6" x 8.6" x 7.2")	150 mm (W) x 219 mm (D) x 183 mm (H) (5.9" x 8.6" x 7.2")	
■ Weight	2.8 kg (6.17 lbs)	3.1 kg (6.83 lbs)	
■ Mounting	Wall-mount kit		
Environmental			
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD)		
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excluding HDD/SSD/CF)		
■ Humidity	~95% @ 40°C (104°F) (non-condensing)		
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/CF or SSD) Operating, 0.7 Grms, 5-500 Hz, 3 axes (w/HDD)		
■ Shock	Operating, 50 G, half-sine 11 ms duration (w/CF or SSD)		
■ EMC	CE and FCC Class A	CE, FCC Class A IEC-60945 Compliance	

Ordering Information

Model Name	Description	PCI	PCIe x1	PCIe x4	GbE	COM	USB	Memory	DIO	IEC-60945
MXC-2002	Intel® Atom™ N270 fanless expandable embedded computer	2	0	-	2	4	4	1 GB DDR2	-	-
MXC-2002D	Intel® Atom™ N270 fanless expandable embedded computer	2	0	-	2	4	4	1 GB DDR2	16 DI+16 DO	-
MXC-2011	Intel® Atom™ N270 fanless expandable embedded computer	1	1	-	2	4	4	1 GB DDR2	-	-
MXC-2011D	Intel® Atom™ N270 fanless expandable embedded computer	1	1	-	2	4	4	1 GB DDR2	16 DI+16 DO	-
MXC-2012	Intel® Atom™ N270 fanless expandable embedded computer	2	0	1	2	4	4	1 GB DDR2	-	v

Optional Accessories

2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
60 W AC Adapter	60 W industrial-grade AC adapter (-20°C to 70°C, -4°F to 158°F)
100 W AC Adapter	100 W industrial-grade AC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXC-2000 series to -20°C to 70°C (-4°F to 158°F)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.