

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



**RoHS
Compliant**



Description:

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used. The MLCC is made by NP0, X7R, X6S, X5R and Y5V dielectric material and which provides product with high electrical precision, stability and reliability.

Features:

- A wide selection of sizes is available (0201 to 1812).
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).


Applications:

- For general digital circuit.
- For power supply bypass capacitors.
- For consumer electronics.
- For telecommunication.

How To Order:

MC	1206	B	104	K	500	C	T
	Size	Dielectric	Capacitance	Tolerance	Rated Voltage	Termination	Packaging style
Multicomp	Inch (mm) 0201 (0603) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	N=NP0 (C0G) B=X7R F=Y5V X=X5R S=X6S	Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg.: 0R5=0.5pF 1R0=1.0pF 104 = 10×10^4 = 100nF	A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 4R0=4V DC 6R3=6.3V DC 100=10V DC 160=16V DC 250=25V DC 500=50V DC 101=100V DC	C=Cu/Ni/Sn	T=7" reeled R=7" reeled (2mm pitch for 0603 size; paper tape) G=13" reeled

External Dimensions:



The outline of MLCC

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Soldering Method *	M _s (mm)
01R5 (0402)	0.4 ±0.02	0.2 ±0.02	0.2 ±0.02	V	R	0.1 ±0.03
0201 (0603)	0.6±0.03	0.3 ±0.03	0.3 ±0.03	L	R	0.15 ±0.05 0.15 +0.1/-0.05
	0.6±0.05 ^{#2}	0.3 ±0.05 ^{#2}	0.3 ±0.05 ^{#2}			
	0.6±0.09 ^{#3}	0.3 ±0.09 ^{#3}	0.3 ±0.09 ^{#3}			
0402 (1005)	1 ±0.05	0.5 ±0.05	0.5 ±0.05	N	R	0.25 +0.05/-0.1
			0.5 +0.02/-0.05	Q		
	1 ±0.2	0.5 ±0.2	0.5 ±0.2	E		

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Soldering Method *	M _B (mm)
0603 (1608)	1.6 ±0.1	0.8 ±0.1	0.8 ±0.07	S	R / W	0.4 ±0.15
	1.6 +0.15/-0.1	0.8 +0.15/-0.1	0.5 ±0.1	H	R / W	
			0.8 +0.15/-0.1	X	R / W	
	1.6 ±0.2* ¹	0.8 ±0.2* ¹	0.8 ±0.2* ¹			
0805 (2012)	2 ±0.15	1.25 ±0.1	0.5 ±0.1	H	R / W	0.5 ±0.2
			0.6 ±0.1	A	R / W	
			0.8 ±0.1	B	R / W	
			1.25 ±0.1	D	R	
	2 ±0.2	1.25 ±0.2	0.85 ±0.1	T	R / W	
			1.25 ±0.2	I	R	
1206 (3216)	3.2 ±0.15	1.6 ±0.15	0.8 ±0.1	B	R / W	0.6 ±0.2 (0.5±0.25) ^{***}
			0.95 ±0.1	C	R	
			1.25 ±0.1	D	R	
	3.2 ±0.2	1.6 ±0.2	1.15 ±0.15	J	R	
			1.6 ±0.2	G	R	
			0.85 ±0.1	T	R / W	
	3.2 +0.3/-0.1	1.6 +0.30/-0.1	1.6 +0.3/-0.1	P	R	
1210 (3225)	3.2 ±0.3	2.5±0.2	0.95 ±0.1	C	R	0.75 ±0.25
			0.85 ±0.1	T	R	
			1.25 ±0.1	D	R	
	3.2±0.4	2.5±0.3	1.6 ±0.2	G	R	
			2 ±0.2	K	R	
			2.5 ±0.3	M	R	
1808 (4520)	4.5 ±0.4 (4.5+0.5/-0.3) ^{**}	2.03 ±0.25	1.25 ±0.1	D	R	0.75 ±0.25 (0.5±0.25) ^{***}
			1.4 ±0.15	F	R	
			1.6 ±0.2	G	R	
			2 ±0.2	K	R	
1812 (4532)	4.5 ±0.4 4.5+0.5/-0.3) ^{**}	3.2 ±0.3	1.25 ±0.1	D	R	0.75 ±0.25 0.5±0.25) ^{***}
			1.6 ±0.2	G	R	
			2 ±0.2	K	R	
		3.2 ±0.4	2.5 ±0.3	M	R	
			2.8 ±0.3	U	R	

* R = Reflow soldering process; W = Wave soldering process.

** For 1808_200V ~3kV, 1812_200V~3kV and safety certificated products.

*** For 1206_1000V ~3kV, 1808_200V ~3kV, 1812_200V~3kV and safety certificated products.

#1: For 0603/Cap≥10μF or 0603(>10V)/Cap>1μF products.

#2: For 0201/Cap≥0.68μF products.

#3: For 0201/Cap >1μF products.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



General Electrical Data:

Dielectric	NP0	X7R	Y5V	X5R	X6S
Size	0402, 0603, 0805, 1206, 1210, 1812				
Capacitance range*	0.1pF to 0.1μF	100pF to 47μF	0.01μF to 100μF	100pF to 220μF	0.1μF to 100μF
Capacitance tolerance**	Cap≤5pF#1: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%), K (±10%), M (±20%)	M (±20%), Z (-20/+80%)	K (±10%), M (±20%)	K (±10%), M (±20%)
Rated voltage (WVDC)	10V, 16V, 25V, 50V,100V	6.3V, 10V, 16V, 25V, 50V, 100V		4V, 6.3V, 10V, 16V, 25V, 50V	
DF(Tan δ)*	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	Note 1			
Operating temperature	-55 to +125°C		-25°C to +85°C	-55°C to +85°C	-55°C to +105°C
Capacitance characteristic	±30ppm	±15%	+30/-80%	±15%	±22%
Termination	Ni/Sn (lead-free termination)				

#1: NP0, 0.1pF product only provide B tolerance

* Measured at the condition of 30~70% related humidity.

NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25°C at ambient temperature

X7R/X6S/X5R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.

Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20°C ambient temperature.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Note 1:

X7R/X5R/X6S

Rated Vol.	D.F. $\leq$	Exception of D.F. $\leq$	
$\geq 100V$	$\leq 2.5\%$	$\leq 3\%$	1206 $\geq 0.47\mu F$
		$\leq 5\%$	0805 $> 0.1\mu F$; 0603 $\geq 0.068\mu F$; 1206 $> 1\mu F$; TT series
50V	$\leq 2.5\%$	$\leq 3\%$	0201(50V); 0603 $\geq 0.047\mu F$; 0805 $\geq 0.18\mu F$; 1206 $\geq 0.47\mu F$
		$\leq 5\%$	1210 $\geq 4.7\mu F$
		$\leq 10\%$	0402 $\geq 0.1\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 1\mu F$; 1206 $\geq 2.2\mu F$; 1210 $\geq 10\mu F$; TT series
35V	$\leq 3.5\%$	$\leq 10\%$	0603 $\geq 1\mu F$; 0805 $\geq 2.2\mu F$; 1210 $\geq 10\mu F$
25V	$\leq 3.5\%$	$\leq 5\%$	0201 $\geq 0.01\mu F$; 0805 $\geq 1\mu F$; 1210 $\geq 10\mu F$
		$\leq 7\%$	0603 $\geq 0.33\mu F$; 1206 $\geq 4.7\mu F$
		$\leq 10\%$	0402 $\geq 0.10\mu F$; 0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 6.8\mu F$; 1210 $\geq 22\mu F$; TT series
		$\leq 12.5\%$	0402 $\geq 1\mu F$
16V	$\leq 3.5\%$	$\leq 5\%$	0201 $\geq 0.01\mu F$; 0402 $\geq 0.033\mu F$; 0603 $\geq 0.15\mu F$; 0805 $\geq 0.68\mu F$; 1206 $\geq 2.2\mu F$; 1210 $\geq 4.7\mu F$
		$\leq 10\%$	0201 $\geq 0.1\mu F$; 0402 $\geq 0.22\mu F$; 0603 $\geq 0.68\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 22\mu F$; TT series
10V	$\leq 5\%$	$\leq 10\%$	0201 $\geq 0.012\mu F$; 0402 $\geq 0.33\mu F$ (0402/X7R $\geq 0.22\mu F$); TT series 0603 $\geq 0.33\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 2.2\mu F$; 1210 $\geq 22\mu F$
		$\leq 15\%$	0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$
6.3V	$\leq 10\%$	$\leq 15\%$	0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 4.7\mu F$; 1206 $\geq 47\mu F$; 1210 $\geq 100\mu F$; TT series
		$\leq 20\%$	0402 $\geq 2.2\mu F$
4V	$\leq 15\%$	---	---

Y5V

Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$	
$\geq 50V$	5%	7%	0603 $\geq 0.1\mu F$; 0805 $\geq 0.47\mu F$; 1206 $\geq 4.7\mu F$
35V	7%	---	---
25V	5%	7%	0402 $\geq 0.047\mu F$; 0603 $\geq 0.1\mu F$; 0805 $\geq 0.33\mu F$; 1206 $\geq 1\mu F$; 1210 $\geq 4.7\mu F$
		9%	0402 $\geq 0.068\mu F$; 0603 $\geq 0.47\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 22\mu F$
16V (C < 1.0 μF)	7%	9%	0402 $\geq 0.068\mu F$; 0603 $\geq 0.68\mu F$
		12.5%	0402 $\geq 0.22\mu F$
16V (C $\geq 1.0\mu F$)	9%	12.5%	0603 $\geq 2.2\mu F$; 0805 $\geq 3.3\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 22\mu F$; 1812 $\geq 47\mu F$
10V	12.5%	20%	0402 $\geq 0.47\mu F$
6.3V	20%	---	---

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



Capacitance Range

NP0 Dielectric 0201, 0402, 0603, 0805 Sizes

Dielectric		NP0																	
Size		0201			0402					0603					0805				
Rated Voltage (V DC)		16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
Capacitance	0.1pF (0R1)	L	L	L	N	N	N	N											
	0.2pF (0R2)	L	L	L	N	N	N	N											
	0.3pF (0R3)	L	L	L	N	N	N	N											
	0.4pF (0R4)	L	L	L	N	N	N	N											
	0.5pF (0R5)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.6pF (0R6)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.7pF (0R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.8pF (0R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.9pF (0R9)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.0pF (1R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.2pF (1R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.5pF (1R5)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.8pF (1R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.0pF (2R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.2pF (2R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.7pF (2R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.0pF (3R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.3pF (3R3)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.9pF (3R9)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	4.0pF (4R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	4.7pF (4R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	5.0pF (5R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	5.6pF (5R6)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	6.0pF (6R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	6.8pF (6R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	7.0pF (7R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	8.0pF (8R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	8.2pF (8R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	9.0pF (9R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	10pF (100)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	12pF (120)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	15pF (150)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
18pF (180)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
22pF (220)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
27pF (270)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
33pF (330)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
39pF (390)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
47pF (470)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
56pF (560)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



Dielectric		NP0																	
Size		0201			0402					0603					0805				
Rated Voltage (V DC)		16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
Capacitance	68pF (680)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	82pF (820)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	100pF (101)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	120pF (121)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	150pF (151)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	180pF (181)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	220pF (221)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	270pF (271)				N	N	N	N		S	S	S	S	S	A	A	A	A	A
	330pF (331)				N	N	N	N		S	S	S	S	S	A	A	A	A	A
	390pF (391)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	470pF (471)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	560pF (561)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	680pF (681)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	820pF (821)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	1,000pF (102)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	1,200pF (122)									X	X	X	X	X	B	B	B	B	B
	1,500pF (152)									X	X	X	X	X	B	B	B	B	B
	1,800pF (182)									X	X	X	X		B	B	B	B	B
	2,200pF (222)									X	X	X	X		B	B	B	B	B
	2,700pF (272)									X	X	X	X		D	D	D	D	D
	3,300pF (332)									X	X	X	X		D	D	D	D	D
	3,900pF (392)									X	X	X	X		D	D	D	D	D
	4,700pF (472)									X	X	X	X		D	D	D	D	D
	5,600pF (562)									X	X	X	X		D	D	D	D	D
	6,800pF (682)									X	X	X	X		D	D	D	D	D
	8,200pF (822)									X	X	X	X		D	D	D	D	
	0.010uF (103)									X	X	X	X		D	D	D	D	
	0.012uF (123)														T	T	T	T	
	0.018uF (183)														D	D	D	D	
	0.022uF (223)														D	D	D	D	

1. The letter in cell is expressed the symbol of product thickness.

NP0 Dielectric 1206, 1210, 1812 Sizes

Dielectric		NP0											
Size		1206					1210					1812	
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50
Capacitance	1.0pF (1R0)												
	1.2pF (1R2)	B	B	B	B	B							
	1.5pF (1R5)	B	B	B	B	B							
	1.8pF (1R8)	B	B	B	B	B							
	2.2pF (2R2)	B	B	B	B	B							

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



Dielectric		NP0												
Size		1206					1210					1812		
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	2.7pF (2R7)	B	B	B	B	B								
	3.3pF (3R3)	B	B	B	B	B								
	3.9pF (3R9)	B	B	B	B	B								
	4.7pF (4R7)	B	B	B	B	B								
	5.6pF (5R6)	B	B	B	B	B								
	6.8pF (6R8)	B	B	B	B	B								
	8.2pF (8R2)	B	B	B	B	B								
	10pF (100)	B	B	B	B	B	C	C	C	C	C	D	D	D
	12pF (120)	B	B	B	B	B	C	C	C	C	C	D	D	D
	15pF (150)	B	B	B	B	B	C	C	C	C	C	D	D	D
	18pF (180)	B	B	B	B	B	C	C	C	C	C	D	D	D
	22pF (220)	B	B	B	B	B	C	C	C	C	C	D	D	D
	27pF (270)	B	B	B	B	B	C	C	C	C	C	D	D	D
	33pF (330)	B	B	B	B	B	C	C	C	C	C	D	D	D
	39pF (390)	B	B	B	B	B	C	C	C	C	C	D	D	D
	47pF (470)	B	B	B	B	B	C	C	C	C	C	D	D	D
	56pF (560)	B	B	B	B	B	C	C	C	C	C	D	D	D
	68pF (680)	B	B	B	B	B	C	C	C	C	C	D	D	D
	82pF (820)	B	B	B	B	B	C	C	C	C	C	D	D	D
	100pF (101)	B	B	B	B	B	C	C	C	C	C	D	D	D
	120pF (121)	B	B	B	B	B	C	C	C	C	C	D	D	D
	150pF (151)	B	B	B	B	B	C	C	C	C	C	D	D	D
	180pF (181)	B	B	B	B	B	C	C	C	C	C	D	D	D
	220pF (221)	B	B	B	B	B	C	C	C	C	C	D	D	D
	270pF (271)	B	B	B	B	B	C	C	C	C	C	D	D	D
	330pF (331)	B	B	B	B	B	C	C	C	C	C	D	D	D
	390pF (391)	B	B	B	B	B	C	C	C	C	C	D	D	D
	470pF (471)	B	B	B	B	B	C	C	C	C	C	D	D	D
	560pF (561)	B	B	B	B	B	C	C	C	C	C	D	D	D
	680pF (681)	B	B	B	B	B	C	C	C	C	C	D	D	D
	820pF (821)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,000pF (102)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,200pF (122)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,500pF (152)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,800pF (182)	B	B	B	B	B	C	C	C	C	C	D	D	D
	2,200pF (222)	B	B	B	B	B	C	C	C	C	C	D	D	D
	2,700pF (272)	B	B	B	B	B	C	C	C	C	C	D	D	D
	3,300pF (332)	B	B	B	B	B	C	C	C	C	C	D	D	D
	3,900pF (392)	B	B	B	B	B	C	C	C	C	C	D	D	D
	4,700pF (472)	B	B	B	B	B	C	C	C	C	C	D	D	D
	5,600pF (562)	B	B	B	B	B	C	C	C	C	C	D	D	D
	6,800pF (682)	C	C	C	C	C	C	C	C	C	C	D	D	D

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



Dielectric		NP0												
Size		1206					1210					1812		
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	8,200pF (822)	D	D	D	D	D	C	C	C	C	C	D	D	D
	0.010μF (103)	D	D	D	D	D	C	C	C	C	C	D	D	D
	0.012μF (123)	T	T	T	T	T	D	D	D	D	D	D	D	D
	0.015μF (153)	T	T	T	T	T	D	D	D	D	D	D	D	D
	0.018μF (183)	T	T	T	T	T						D	D	D
	0.022μF (223)	T	T	T	T	T						D	D	D
	0.027μF (273)	T	T	T	T							D	D	D
	0.033μF (333)	T	T	T	T							D	D	D
	0.039μF (393)	J	J	J	J									
	0.047μF (473)	J	J	J	J									
	0.056μF (563)	J	J	J	J									
	0.068μF (683)	G	G	G	G									
	0.082μF (823)	G	G	G	G									
	0.1μF (104)	G	G	G	G									

1. The letter in cell is expressed the symbol of product thickness.

X7R Dielectric 0201, 0402, 0603, 0805 Sizes

Dielectric		X7R																						
Size		0201					0402						0603						0805					
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100
Capacitance	100pF (101)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	120pF (121)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	150pF (151)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	180pF (181)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	220pF (221)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	270pF (271)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	330pF (331)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	390pF (391)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	470pF (471)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	560pF (561)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	680pF (681)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	820pF (821)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	1,000pF (102)	L	L	L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	1,200pF (122)	L	L	L	L			N	N	N	N			S	S	S	S	S		B	B	B	B	B
	1,500pF (152)	L	L	L	L			N	N	N	N			S	S	S	S	S		B	B	B	B	B
	1,800pF (182)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	2,200pF (222)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	2,700pF (272)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	3,300pF (332)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	3,900pF (392)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B

General Purpose Multilayer Ceramic Capacitors

4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		X7R																									
Size		0201					0402					0603						0805									
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100			
Capacitance	4,700pF (472)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B			
	5,600pF (562)	L	L					N	N	N	N			S	S	S	S	S		B	B	B	B	B			
	6,800pF (682)	L	L					N	N	N	N			S	S	S	S	S		B	B	B	B	B			
	8,200pF (822)	L	L					N	N	N	N			S	S	S	S	S		B	B	B	B	B			
	0.010μF (103)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B			
	0.012μF (123)							N	N	N				S	S	S	S	X		B	B	B	B	B			
	0.015μF (153)							N	N	N				S	S	S	S	X		B	B	B	B	B			
	0.018μF (183)							N	N	N				S	S	S	S	X		B	B	B	B	B			
	0.022μF (223)							N	N	N	N			S	S	S	S	X		B	B	B	B	B			
	0.027μF (273)							N	N	N				S	S	S	S	X		B	B	B	B	D			
	0.033μF (333)							N	N	N	N			S	S	S	X	X		B	B	B	B	D			
	0.039μF (393)							N	N	N				S	S	S	X	X		B	B	B	B	D			
	0.047μF (473)							N	N	N	N			S	S	S	X	X		B	B	B	B	D			
	0.056μF (563)							N	N					S	S	S	X	X		B	B	B	B	D			
	0.068μF (683)							N	N		N			S	S	S	X	X		B	B	B	B	D			
	0.082μF (823)							N	N					S	S	S	X	X		B	B	B	B	D			
	0.10μF (104)						N	N	N	N	N			S	S	S	X	X		B	B	B	B	D			
	0.12μF (124)													S	S	X				B	B	B	D				
	0.15μF (154)													S	S	X				D	D	D	D				
	0.18μF (184)													S	S	X				D	D	D	D				
	0.22μF (224)						N	N	N	N				S	S	X	X			D	D	D	D	T			
	0.27μF (274)													X	X	X	X			D	D	D	I				
	0.33μF (334)													X	X	X	X			D	D	D	I				
	0.39μF (394)													X	X	X	X			D	D	D	I				
	0.47μF (474)						N	N						X	X	X	X	X		D	D	D	I	I			
	0.56μF (564)													X	X	X				D	D	D					
	0.68μF (684)													X	X	X				D	D	D					
	0.82μF (824)													X	X	X				D	D	D					
	1.0μF (105)						N							X	X	X	X	X		D	D	D	I				
	1.5μF (155)																			I	I	I					
	2.2μF (225)													X	X					I	I	I	I				
	3.3μF (335)																										
	4.7μF (475)																			I	I	I	I				
	6.8μF (685)																										
	10μF (106)																			I	I	I*					
	22μF (226)																										

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



X7R Dielectric 1206, 1210, 1812 Sizes

Dielectric		X7R																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	100pF (101)																	
	120pF (121)																	
	150pF (151)		B	B	B	B	B											
	180pF (181)		B	B	B	B	B											
	220pF (221)		B	B	B	B	B											
	270pF (271)		B	B	B	B	B											
	330pF (331)		B	B	B	B	B											
	390pF (391)		B	B	B	B	B											
	470pF (471)		B	B	B	B	B											
	560pF (561)		B	B	B	B	B											
	680pF (681)		B	B	B	B	B											
	820pF (821)		B	B	B	B	B											
	1,000pF (102)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	1,200pF (122)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	1,500pF (152)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	1,800pF (182)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	2,200pF (222)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	2,700pF (272)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	3,300pF (332)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	3,900pF (392)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	4,700pF (472)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	5,600pF (562)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	6,800pF (682)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	8,200pF (822)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.010μF (103)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.012μF (123)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.015μF (153)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.018μF (183)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.022μF (223)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.027μF (273)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.033μF (333)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.039μF (393)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.047μF (473)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
0.056μF (563)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D	
0.068μF (683)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D	
0.082μF (823)		B	B	B	B	D		C	C	C	C	C	D	D	D	D	D	
0.10μF (104)		B	B	B	B	D		C	C	C	C	C	D	D	D	D	D	
0.12μF (124)		B	B	B	B	D		C	C	C	C	C	D	D	D	D	D	
0.15μF (154)		C	C	C	C	G		C	C	C	C	D	D	D	D	D	D	

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		X7R																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	0.18μF (184)		C	C	C	C	G		C	C	C	C	D	D	D	D	D	D
	0.22μF (224)		C	C	C	C	G		C	C	C	C	D	D	D	D	D	D
	0.27μF (274)		C	C	C	D	G		C	C	C	C	G	D	D	D	D	D
	0.33μF (334)		C	C	C	D	G		C	C	C	D	G	D	D	D	D	D
	0.39μF (394)		C	C	J	P	G		C	C	C	D	M	D	D	D	D	D
	0.47μF (474)		J	J	J	P	G		C	C	C	D	M	D	D	D	D	K
	0.56μF (564)		J	J	J	P	P		D	D	D	D	M	D	D	D	D	K
	0.68μF (684)		J	J	J	P	P		D	D	D	D	K	D	D	D	K	K
	0.82μF (824)		J	J	J	P	P		D	D	D	D	K	D	D	D	K	K
	1.0μF (105)		J	J	J	P	P		D	D	D	D	K	D	D	D	K	K
	1.5μF (155)	J	J	J	P					K	G	M	M					K
	2.2μF (225)	J	J	J	P	P	P			K	G	M	M				M	M
	3.3μF (335)		P	P	P					K	G							
	4.7μF (475)	P	P	P	P	P			K	K	K	M						
	6.8μF (685)																	
	10μF (106)	P	P	P	P				K	K	K	M						
	22μF (226)	P	P	P*					M	M	M							
	47μF (476)							M	M									
	100μF (107)																	

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with “ * ” mark is expressed product not in 10% (code “K”) tolerance.

Y5V Dielectric 0402, 0603, 0805 Sizes

Dielectric		Y5V															
Size		0402					0603					0805					
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	0.010μF (103)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.015μF (153)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.022μF (223)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.033μF (333)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.047μF (473)		N	N	N			S	S	S	S		A	A	A	A	B
	0.068μF (683)		N	N	N			S	S	S	S		A	A	A	A	B
	0.10μF (104)		N	N	N			S	S	S	S		A	A	A	A	B
	0.15μF (154)		N	N				S	S	S	S		A	A	A	A	
	0.22μF (224)	N	N	N				S	S	S	S		A	A	A	A	
	0.33μF (334)	N	N	N				S	S	S	X		B	B	B	B	
	0.47μF (474)	N	N	N				S	S	X	X		B	B	B	B	
	0.68μF (684)	N						S	X	X			B	B	D	D	
	1.0μF (105)	N	N					S	X	X			B	B	D	D	
	1.5μF (155)							S					D	D			

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		Y5V															
Size		0402					0603					0805					
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	2.2µF (225)						S	S	X				D	D	I		
	3.3µF (335)												D	D			
	4.7µF (475)						X	X					D	D	I		
	6.8µF (685)												I				
	10µF (106)											I	I	I			
	22µF (226)											I	I				

1. The letter in cell is expressed the symbol of product thickness.

Y5V Dielectric 1206, 1210, 1812 Sizes

Dielectric		Y5V																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	0.010μF (103)		B	B	B	B	B						C					D
	0.015μF (153)		B	B	B	B	B						C					D
	0.022μF (223)		B	B	B	B	B						C					D
	0.033μF (333)		B	B	B	B	B						C					D
	0.047μF (473)		B	B	B	B	B						C					D
	0.068μF (683)		B	B	B	B	B						C					D
	0.10μF (104)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.15μF (154)		B	B	B	B	C		C	C	C	C	C	D	D	D	D	D
	0.22μF (224)		B	B	B	B	C		C	C	C	C	C	D	D	D	D	D
	0.33μF (334)		B	B	B	B			C	C	C	C	C	D	D	D	D	D
	0.47μF (474)		B	B	B	B			C	C	C	C		D	D	D	D	D
	0.68μF (684)		B	B	B	B			C	C	C	C		D	D	D	D	D
	1.0μF (105)		C	C	C	C			C	C	C	C		D	D	D	D	D
	1.5μF (155)		C	C	C				C	C	C			D	D	D	D	
	2.2μF (225)		C	C	C	J			C	C	C	G		D	D	D	D	
	3.3μF (335)		J	J	J				C	C	C			D	D	D	D	
	4.7μF (475)		J	J	J	P			C	C	D	G		D	D	D	D	
	6.8μF (685)		J	J					C	C	D			D	D	D	D	
	10μF (106)		J	J	P				D	D	G			D	D	D	K	
	22μF (226)		P	P					K	K								
47μF (476)	P						K	K						M				
100μF (107)							M											

1. The letter in cell is expressed the symbol of product thickness.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



X5R Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X5R														
Size		0201					0402					0603				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	100pF (101)			L	L	L										
	120pF (121)			L	L	L										
	150pF (151)			L	L	L										
	180pF (181)			L	L	L										
	220pF (221)			L	L	L										
	270pF (271)			L	L	L										
	330pF (331)			L	L	L										
	390pF (391)			L	L	L										
	470pF (471)			L	L	L										
	560pF (561)			L	L	L										
	680pF (681)			L	L	L										
	820pF (821)			L	L	L										
	1,000pF (102)		L	L	L	L										
	1,500pF (152)		L	L												
	2,200pF (222)		L	L												
	2,700pF (272)		L	L												
	3,300pF (332)		L	L												
	4,700pF (472)		L	L												
	6,800pF (682)		L													
	0.010μF (103)	L	L	L	L											
	0.015μF (153)	L	L													
	0.022μF (223)	L	L													
	0.027μF (273)	L	L						N							
	0.033μF (333)	L	L						N							
	0.039μF (393)	L	L						N							
	0.047μF (473)	L	L						N							
	0.056μF (563)	L	L					N	N							
	0.068μF (683)	L	L					N	N							
	0.082μF (823)	L	L				N	N	N							
	0.10μF (104)	L	L	L	L		N	N	N	N	N					
	0.15μF (154)						N	N	N	N						
	0.22μF (224)	L	L				N	N	N	N	N			X	X	
	0.27μF (274)											X	X	X	X	
	0.33μF (334)						N	N				X	X	X	X	
	0.39μF (394)											X	X	X	X	
	0.47μF (474)	L					N	N	E	E	E	X	X	X	X	X
	0.68μF (684)						N	N				X	X	X	X	
	0.82μF (824)											X	X	X		
	1.0μF (105)	L	L*				N	N	N	N		X	X	X		X
	1.5μF (155)											X				
	2.2μF (225)	L*					N	N	E*	E		X	X	X	X	X
	3.3μF (335)											X	X			

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		X5R														
Size		0201					0402					0603				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	4.7µF (475)						E*	E*				X	X	X	X	
	6.8µF (685)															
	10µF (106)						E*	E*				X	X	X	X*	
	22µF (226)											X*	X*			

Dielectric		X5R																
Size		1206					1210					1812						
Rated Voltage (V DC)		4	6.3	10	16	25	50	6.3	10	16	25	50	4	6.3	10	16	25	50
Capacitance	1.0µF (105)			D	D	D	I											
	1.5µF (155)		I	I	I	I			J	J					K	K		
	2.2µF (225)		I	I	I	I	I		J	J	P	P			K	K		
	3.3µF (335)		I	I	I	I			P	P	P							
	4.7µF (475)		I	I	I	I	I	P	P	P	P	P			K	K	K	
	6.8µF (685)							P	P									
	10µF (106)		I	I	I	I	I	P	P	P	P	P		K	K	K	K	M
	22µF (226)		I*	I*	I*			P	P	P	P			M	M	M	M	
	47µF (476)		I*	I*				P	P					M	M	M		
	100µF (107)	I*						P*						M*	M*			
220µF (227)												M*						

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

X6S Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X6S																														
Size		0201		0402				0603					0805						1206					1210								
Rated Voltage (V DC)		4	6.3	6.3	10	16	25	4	6.3	10	16	25	4	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50				
Capacitance	0.10µF (104)	L	L																													
	0.15µF (154)																															
	0.22µF (224)		L																													
	0.33µF (334)																															
	0.47µF (474)			N																												
	0.68µF (684)																															
	1.0µF (105)	L*		N	E	E	E																									
	1.5µF (155)																															
	2.2µF (225)			N	E	E					X																					
	3.3µF (335)																															
	4.7µF (475)								X		X	X						I	I													
	6.8uF (685)																															
	10µF (106)								X*	X*	X*			I	I	I	I	I					G									
	22µF (226)							X*	X*						I*	I*	I*				P	P*							M			
	47µF (476)														I*						P							M	M	M		
100µF (107)																											M*					

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Packaging Dimension And Quantity:

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0201 (0603)	0.3 ±0.03	L	15,000	70,000	-	-
	0.3 ± 0.05	L	15,000	-	-	-
	0.3 ±0.09	L	15,000	-	-	-
0402 (1005)	0.5 ±0.05	N	10,000	50,000	-	-
	0.5 +0.02/-0.05	Q	10,000	50,000	-	-
	0.5 ±0.2	E	10,000	-	-	-
0603 (1608)	0.5 ±0.1	H	4,000	-	-	-
	0.8 ±0.07	S	4,000	15,000	-	-
	0.8 +0.15/-0.1	X	4,000	15,000	-	-
0805 (2012)	0.5 ±0.1	H	4,000	15,000	-	-
	0.6 ±0.1	A	4,000	15,000	-	-
	0.8 ±0.1	B	4,000	15,000	-	-
	0.85 ±0.1	T	4,000	15,000	-	-
	1.25 ±0.1	D	-	-	3,000	10,000
	1.25 ±0.2	I	-	-	3,000	10,000
1206 (3216)	0.8 ±0.1	B	4,000	15,000	-	-
	0.85 ±0.1	T	4,000	15,000	-	-
	0.95 ±0.1	C	-	-	3,000	10,000
	1.15 ±0.15	J	-	-	3,000	10,000
	1.25 ±0.1	D	-	-	3,000	10,000
	1.6 ±0.2	G	-	-	2,000	10,000
	1.6 +0.30/-0.10	P	-	-	2,000	9,000
1210 (3225)	0.85 ±0.1	T	-	-	3,000	10,000
	0.95 ±0.1	C	-	-	3,000	10,000
	1.25 ±0.1	D	-	-	3,000	10,000
	1.6 ±0.2	G	-	-	2,000	-
	2 ±0.2	K	-	-	1,000	6,000
	2.5 ±0.3	M	-	-	1,000	6,000
1808 (4520)	1.25 ±0.1	D	-	-	2,000	10,000
	1.1 ±0.15	F	-	-	2,000	10,000
	1.6 ±0.2	G	-	-	2,000	8,000
	2 ±0.2	K	-	-	1,000	6,000
1812 (4532)	1.25 ±0.1	D	-	-	1,000	5,000
	1.6 ±0.2	G	-	-	1,000	-
	2 ±0.2	K	-	-	1,000	-
	2.5 ±0.3	M	-	-	500	3,000
	2.8 ±0.3	U	-	-	500	-

Unit : pieces

Reliability Test Conditions And Requirements:

No	Item	Test Condition	Requirements
1	Visual and Mechanical	-	No remarkable defect. Dimensions to conform to individual specification sheet.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																																																										
2	Capacitance		*Shall not exceed the limits given in the detailed spec.																																																																																										
		Class I: NP0 Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10% Class II: X7R, X5R, X6S, Y5V Cap≤10μF, 1.0±0.2Vrms, 1kHz±10% ** Cap>10μF, 0.5±0.2Vrms, 120Hz±20% ** Test condition: 0.5±0.2Vrms, 1KHz±10% X7R: 0603≥225(10V), 0805=106(6.3V&10V) X5R: 01R5≥103, 0201≥224 (6.3V,10V), 0402≥475 (6.3V), 0402≥225(10V), 0603=106 (6.3V,10V), TT18X ≥475(10V) , TT15X series X6S:0201≥224 (6.3V),0402≥225 (6.3V),	NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C X7R,X5R,X6S: <table border="1"> <thead> <tr> <th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td><td rowspan="2">≤2.5%</td><td>≤3%</td><td>1206≥0.47μF</td></tr> <tr> <td>≤5%</td><td>0805>0.1μF, 0603≥0.068μF, 1206>1μF; TT series</td></tr> <tr> <td rowspan="3">≥50V</td><td rowspan="3">≤2.5%</td><td>≤3%</td><td>0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF</td></tr> <tr> <td>≤5%</td><td>1210≥4.7μF</td></tr> <tr> <td>≤10%</td><td>0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series</td></tr> <tr> <td>35V</td><td>≤3.5%</td><td>≤10%</td><td>0603≥1μF; 0805≥2.2μF; 1210≥10μF</td></tr> <tr> <td rowspan="4">25V</td><td rowspan="4">≤3.5%</td><td>≤5%</td><td>0201≥0.01μF;0805≥1μF; 1210≥10μF</td></tr> <tr> <td>≤7%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr> <tr> <td>≤10%</td><td>0402≥0.10μF;0603≥0.47μF;0805≥2.2 μF; 1206≥6.8μF ; 1210≥22μF; TT series</td></tr> <tr> <td>≤12.5%</td><td>0402≥1μF</td></tr> <tr> <td rowspan="2">16V</td><td rowspan="2">≤3.5%</td><td>≤5%</td><td>0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF</td></tr> <tr> <td>≤10%</td><td>0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF;0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series</td></tr> <tr> <td rowspan="2">10V</td><td rowspan="2">≤5%</td><td>≤10%</td><td>0201≥0.012μF;0402≥0.33μF(0402/X7R≥0.22μF); TT series 0603≥0.33μF; 0805≥2.2μF;1206≥2.2μF;1210≥22μF</td></tr> <tr> <td>≤15%</td><td>0201≥0.1μF; 0402≥1μF</td></tr> <tr> <td rowspan="2">6.3V</td><td rowspan="2">≤10%</td><td>≤15%</td><td>0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF ;1210≥100μF; TT series</td></tr> <tr> <td>≤20%</td><td>0402≥2.2μF</td></tr> <tr> <td>4V</td><td>≤15%</td><td>-</td><td>-</td></tr> </tbody> </table> Y5V: <table border="1"> <thead> <tr> <th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr> </thead> <tbody> <tr> <td>≥50V</td><td>5%</td><td>7%</td><td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td></tr> <tr> <td>35V</td><td>7%</td><td>-</td><td>-</td></tr> <tr> <td rowspan="2">25V</td><td rowspan="2">5%</td><td>7%</td><td>0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF</td></tr> <tr> <td>9%</td><td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td></tr> <tr> <td rowspan="2">16V (C<1μF)</td><td rowspan="2">7%</td><td>9%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr> <tr> <td>12.5%</td><td>0402≥0.22μF</td></tr> <tr> <td>16V (C≥1.0μF)</td><td>9%</td><td>12.5%</td><td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF</td></tr> <tr> <td>10V</td><td>12.5%</td><td>20%</td><td>0402≥0.47μF</td></tr> <tr> <td>6.3V</td><td>20%</td><td>-</td><td>-</td></tr> </tbody> </table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥100V	≤2.5%	≤3%	1206≥0.47μF	≤5%	0805>0.1μF, 0603≥0.068μF, 1206>1μF; TT series	≥50V	≤2.5%	≤3%	0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF	≤5%	1210≥4.7μF	≤10%	0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series	35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5%	0201≥0.01μF;0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF; 1206≥4.7μF	≤10%	0402≥0.10μF;0603≥0.47μF;0805≥2.2 μF; 1206≥6.8μF ; 1210≥22μF; TT series	≤12.5%	0402≥1μF	16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF	≤10%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF;0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series	10V	≤5%	≤10%	0201≥0.012μF;0402≥0.33μF(0402/X7R≥0.22μF); TT series 0603≥0.33μF; 0805≥2.2μF;1206≥2.2μF;1210≥22μF	≤15%	0201≥0.1μF; 0402≥1μF	6.3V	≤10%	≤15%	0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF ;1210≥100μF; TT series	≤20%	0402≥2.2μF	4V	≤15%	-	-	Rated vol.	D.F.≤	Exception of D.F. ≤		≥50V	5%	7%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF	35V	7%	-	-	25V	5%	7%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF	9%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	16V (C<1μF)	7%	9%	0402≥0.068μF; 0603≥0.68μF	12.5%	0402≥0.22μF	16V (C≥1.0μF)	9%	12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF	10V	12.5%	20%	0402≥0.47μF	6.3V	20%	-	-
Rated vol.	D.F.≤	Exception of D.F. ≤																																																																																											
≥100V	≤2.5%	≤3%	1206≥0.47μF																																																																																										
		≤5%	0805>0.1μF, 0603≥0.068μF, 1206>1μF; TT series																																																																																										
≥50V	≤2.5%	≤3%	0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF																																																																																										
		≤5%	1210≥4.7μF																																																																																										
		≤10%	0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series																																																																																										
35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1210≥10μF																																																																																										
25V	≤3.5%	≤5%	0201≥0.01μF;0805≥1μF; 1210≥10μF																																																																																										
		≤7%	0603≥0.33μF; 1206≥4.7μF																																																																																										
		≤10%	0402≥0.10μF;0603≥0.47μF;0805≥2.2 μF; 1206≥6.8μF ; 1210≥22μF; TT series																																																																																										
		≤12.5%	0402≥1μF																																																																																										
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF																																																																																										
		≤10%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF;0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series																																																																																										
10V	≤5%	≤10%	0201≥0.012μF;0402≥0.33μF(0402/X7R≥0.22μF); TT series 0603≥0.33μF; 0805≥2.2μF;1206≥2.2μF;1210≥22μF																																																																																										
		≤15%	0201≥0.1μF; 0402≥1μF																																																																																										
6.3V	≤10%	≤15%	0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF ;1210≥100μF; TT series																																																																																										
		≤20%	0402≥2.2μF																																																																																										
4V	≤15%	-	-																																																																																										
Rated vol.	D.F.≤	Exception of D.F. ≤																																																																																											
≥50V	5%	7%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																																																																										
35V	7%	-	-																																																																																										
25V	5%	7%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF																																																																																										
		9%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																																																																										
16V (C<1μF)	7%	9%	0402≥0.068μF; 0603≥0.68μF																																																																																										
		12.5%	0402≥0.22μF																																																																																										
16V (C≥1.0μF)	9%	12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF																																																																																										
10V	12.5%	20%	0402≥0.47μF																																																																																										
6.3V	20%	-	-																																																																																										

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																								
4	Dielectric Strength	To apply voltage (≤100V) 250%. Duration: 1 to 5 sec. Charge and discharge current less than 50mA.	No evidence of damage or flash over during test.																								
5	Insulation Resistance	To apply rated voltage for max. 120 sec.	10GΩ or RxC≥500Ω·F whichever is smaller. Class II (X7R, X5R, X6S, Y5V) <table><thead><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr></thead><tbody><tr><td>100V: X7R</td><td rowspan="7">10G or RxC≥100ΩF whichever is smaller.</td></tr><tr><td>50V:0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V:0805≥2.2μF;1210≥10μF</td></tr><tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V ; 4V</td></tr><tr><td>All X6S items</td><td rowspan="7">RxC≥50 Ω·F.</td></tr><tr><td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF;1206≥10μF</td></tr><tr><td>35V: 0603≥1μF;</td></tr><tr><td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥10μF;1206≥22μF</td></tr><tr><td>16V: 0603≥10μF</td></tr><tr><td>10V: 0201>0.1μF; 0603≥10μF; 0805≥47μF</td></tr><tr><td>6.3V: 0201≥0.1μF; 1206≥10μF</td></tr><tr><td>4V:0603≥22μF; 0805≥47μF</td></tr></tbody></table>	Rated voltage	Insulation Resistance	100V: X7R	10G or RxC≥100ΩF whichever is smaller.	50V:0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V:0805≥2.2μF;1210≥10μF	25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V ; 4V	All X6S items	RxC≥50 Ω·F.	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF;1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥10μF;1206≥22μF	16V: 0603≥10μF	10V: 0201>0.1μF; 0603≥10μF; 0805≥47μF	6.3V: 0201≥0.1μF; 1206≥10μF	4V:0603≥22μF; 0805≥47μF					
Rated voltage	Insulation Resistance																										
100V: X7R	10G or RxC≥100ΩF whichever is smaller.																										
50V:0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																											
35V:0805≥2.2μF;1210≥10μF																											
25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																											
16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF																											
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																											
6.3V ; 4V																											
All X6S items	RxC≥50 Ω·F.																										
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF;1206≥10μF																											
35V: 0603≥1μF;																											
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥10μF;1206≥22μF																											
16V: 0603≥10μF																											
10V: 0201>0.1μF; 0603≥10μF; 0805≥47μF																											
6.3V: 0201≥0.1μF; 1206≥10μF																											
4V:0603≥22μF; 0805≥47μF																											
6	Temperature Coefficient	With no electrical load. <table><thead><tr><th>T.C.</th><th>Operating Temp</th></tr></thead><tbody><tr><td>NPO</td><td>-55~125°C at 25°C</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td></tr><tr><td>X5R</td><td>-55~ 85°C at 25°C</td></tr><tr><td>X6S</td><td>-55~105°C at 25°C</td></tr><tr><td>Y5V</td><td>-25~ 85°C at 20°C</td></tr></tbody></table>	T.C.	Operating Temp	NPO	-55~125°C at 25°C	X7R	-55~125°C at 25°C	X5R	-55~ 85°C at 25°C	X6S	-55~105°C at 25°C	Y5V	-25~ 85°C at 20°C	<table><thead><tr><th>T.C.</th><th>Capacitance Change</th></tr></thead><tbody><tr><td>NPO</td><td>Within ±30ppm/°C</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr><tr><td>X5R</td><td>Within ±15%</td></tr><tr><td>X6S</td><td>Within ±22%</td></tr><tr><td>Y5V</td><td>Within +30%/-80%</td></tr></tbody></table>	T.C.	Capacitance Change	NPO	Within ±30ppm/°C	X7R	Within ±15%	X5R	Within ±15%	X6S	Within ±22%	Y5V	Within +30%/-80%
T.C.	Operating Temp																										
NPO	-55~125°C at 25°C																										
X7R	-55~125°C at 25°C																										
X5R	-55~ 85°C at 25°C																										
X6S	-55~105°C at 25°C																										
Y5V	-25~ 85°C at 20°C																										
T.C.	Capacitance Change																										
NPO	Within ±30ppm/°C																										
X7R	Within ±15%																										
X5R	Within ±15%																										
X6S	Within ±22%																										
Y5V	Within +30%/-80%																										
7	Adhesive Strength of Termination	Pressurizing force: 1N (0201) and 5N (≤0603) and 10N (>0603) * Test time: 10±1 sec.	No remarkable damage or removal of the terminations.																								
8	Vibration Resistance	Vibration frequency: 10~55 Hz/min. Total amplitude: 1.5mm Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change and Q/D.F.: To meet initial spec.																								

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements															
9	Solderability	Solder temperature: 235±5°C Dipping time: 2±0.5 sec.	95% min. coverage of all metalized area.															
10.	Bending Test	The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S: within ±12.5% Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)															
11	Resistance to Soldering Heat	Solder temperature: 260±5°C Dipping time: 10±1 sec Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S: within ±7.5% Y5V: within ±20% Q/D.F., I.R. and dielectric strength: To meet initial requirements. 25% max. leaching on each edge.															
12	Temperature Cycle	Conduct the five cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table> Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	No remarkable damage. Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S: within ±7.5% Y5V: within ±20% Q/D.F., I.R. and dielectric strength: To meet initial requirements.
Step	Temp. (°C)	Time (min.)																
1	Min. operating temp. +0/-3	30±3																
2	Room temp.	2~3																
3	Max. operating temp. +3/-0	30±3																
4	Room temp.	2~3																

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																				
13	Humidity (Damp Heat) Steady State	Test temp.: 40±2°C Humidity: 90~95% RH Test time: 500+24/-0hrs. Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; TT series & C≥ 1uF, within ±25% **10V: 0603≥4.7μF; 0402≥1μF; 0201≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C Less than 10pF Q≥200+10C X7R, X5R, X6S: <table> <tr> <th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr> <tr> <td rowspan="2">≥100V</td><td rowspan="2">≤3%</td><td>≤6%</td><td>1206≥0.47μF</td></tr> <tr> <td>≤7.5%</td><td>0805>0.1μF, 0603≥0.068μF</td></tr> <tr> <td rowspan="3">≥50V</td><td rowspan="3">≤3%</td><td>≤6%</td><td>0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr> <tr> <td>≤10%</td><td>1210≥4.7μF</td></tr> <tr> <td>≤20%</td><td>0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series</td></tr> <tr> <td>35V</td><td>≤5%</td><td>≤20%</td><td>0603≥1μF; 0805≥2.2μF; 1210≥10μF</td></tr> <tr> <td rowspan="4">25V</td><td rowspan="4">≤5%</td><td>≤10%</td><td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td></tr> <tr> <td>≤14%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr> <tr> <td>≤15%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF; TT series</td></tr> <tr> <td>≤20%</td><td>0402≥1μF</td></tr> <tr> <td rowspan="2">16V</td><td rowspan="2">≤5%</td><td>≤10%</td><td>0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td></tr> <tr> <td>≤15%</td><td>0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series</td></tr> <tr> <td rowspan="2">10V</td><td rowspan="2">≤7.5%</td><td>≤15%</td><td>0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr> <tr> <td>≤20%</td><td>0201≥0.1μF; 0402≥1μF TT series</td></tr> <tr> <td>6.3V</td><td>≤15%</td><td>≤30%</td><td>0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF; TT series</td></tr> <tr> <td>4V</td><td>≤20%</td><td>-</td><td>-</td></tr> </table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0805>0.1μF, 0603≥0.068μF	≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10%	1210≥4.7μF	≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF; 1206≥4.7μF	≤15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF; TT series	≤20%	0402≥1μF	16V	≤5%	≤10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤15%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series	10V	≤7.5%	≤15%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20%	0201≥0.1μF; 0402≥1μF TT series	6.3V	≤15%	≤30%	0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF; TT series	4V	≤20%	-	-
Rated vol.	D.F.≤	Exception of D.F. ≤																																																					
≥100V	≤3%	≤6%	1206≥0.47μF																																																				
		≤7.5%	0805>0.1μF, 0603≥0.068μF																																																				
≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																				
		≤10%	1210≥4.7μF																																																				
		≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series																																																				
35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF																																																				
25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																																				
		≤14%	0603≥0.33μF; 1206≥4.7μF																																																				
		≤15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF; TT series																																																				
		≤20%	0402≥1μF																																																				
16V	≤5%	≤10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																																				
		≤15%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series																																																				
10V	≤7.5%	≤15%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																				
		≤20%	0201≥0.1μF; 0402≥1μF TT series																																																				
6.3V	≤15%	≤30%	0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF; TT series																																																				
4V	≤20%	-	-																																																				

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																				
13			Y5V: <table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>10%</td><td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td></tr><tr><td>35V</td><td>10%</td><td>-</td><td>-</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF</td></tr><tr><td>15%</td><td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="2">16V (C<1μF)</td><td rowspan="2">10%</td><td>12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>20%</td><td>0402≥0.22μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF</td></tr><tr><td>10V</td><td>20%</td><td>30%</td><td>0402≥0.47μF</td></tr><tr><td>6.3V</td><td>30%</td><td>-</td><td>-</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF	35V	10%	-	-	25V	7.5%	10%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF	15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF	20%	0402≥0.22μF	16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF	10V	20%	30%	0402≥0.47μF	6.3V	30%	-	-
			Rated vol.	D.F.≤	Exception of D.F. ≤																																		
			≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																	
			35V	10%	-	-																																	
			25V	7.5%	10%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF																																	
					15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																	
			16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF																																	
					20%	0402≥0.22μF																																	
			16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF																																	
			10V	20%	30%	0402≥0.47μF																																	
6.3V	30%	-	-																																				
*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, Y5V)																																							
<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="8">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402≥0.1μF;0603≥1μF;0805≥1μF; 1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF; 0805≥2.2μF;1210≥10μF</td></tr><tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr><tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47 μF;0805≥2.2μF;</td></tr><tr><td>1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V ; 4V</td></tr></table>			Rated voltage	Insulation Resistance	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0402≥0.1μF;0603≥1μF;0805≥1μF; 1206≥4.7μF;1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF;1210≥10μF	25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47 μF;0805≥2.2μF;	1206≥4.7μF;1210≥47μF	6.3V ; 4V																										
Rated voltage	Insulation Resistance																																						
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																						
50V: 0402≥0.1μF;0603≥1μF;0805≥1μF; 1206≥4.7μF;1210≥4.7μF																																							
35V: 0603≥1μF; 0805≥2.2μF;1210≥10μF																																							
25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF																																							
16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF																																							
10V:0201≥47nF;0402≥0.47μF;0603≥0.47 μF;0805≥2.2μF;																																							
1206≥4.7μF;1210≥47μF																																							
6.3V ; 4V																																							
14	Humidity (Damp Heat) Load	Test temp.: 40±2°C Humidity: 90~95%RH Test time: 500+24/-0 hrs. To apply voltage : rated voltage. Before initial measurement (Class II only): To apply test voltage for 1hr at 40°C and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change: NP0: ±7.5% or 0.75pF whichever is larger. X7R, X5R, X6S: ≥10V**,within ±12.5%; ≤6.3V within ±25%; TT series & C≥ 1uF,within ±25% **10V: 0603≥4.7μF;0402≥1μF;0201≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% Q/D.F. value: NP0: C≥30pF,Q≥200;C<30pF, Q≥100+10/3C																																				

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																				
14	Humidity (Damp Heat) Load		X7R, X5R, X6S:																																																				
			<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="2">≥100V</td><td rowspan="2">≤3%</td><td>≤6%</td><td>1206≥0.47μF</td></tr><tr><td>≤7.5%</td><td>0805>0.1μF, 0603≥0.068μF</td></tr><tr><td rowspan="3">≥50V</td><td rowspan="3">≤3%</td><td>≤6%</td><td>0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF</td></tr><tr><td>≤10%</td><td>1210≥4.7μF</td></tr><tr><td>≤20%</td><td>0402≥0.1μF; 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF TT series</td></tr><tr><td>35V</td><td>≤5%</td><td>≤20%</td><td>0603≥1μF; 0805≥2.2μF; 1210≥10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤5%</td><td>≤10%</td><td>0201≥0.01μF;0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td>≤15%</td><td>0402≥0.10μF;0603≥0.47μF;0805≥2.2 μF; 1206≥6.8μF ; 1210≥22μF; TT series</td></tr><tr><td>≤20%</td><td>0402≥1μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤5%</td><td>≤10%</td><td>0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF</td></tr><tr><td>≤15%</td><td>0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤7.5%</td><td>≤15%</td><td>0201≥0.012μF 0402≥0.33μF; (0402/ X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤20%</td><td>0201≥0.1μF; 0402≥1μF; TT series</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30%</td><td>0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF :1210≥100μF; TT series</td></tr><tr><td>4V</td><td>≤20%</td><td>-</td><td>-</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0805>0.1μF, 0603≥0.068μF	≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF	≤10%	1210≥4.7μF	≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF TT series	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF;0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF; 1206≥4.7μF	≤15%	0402≥0.10μF;0603≥0.47μF;0805≥2.2 μF; 1206≥6.8μF ; 1210≥22μF; TT series	≤20%	0402≥1μF	16V	≤5%	≤10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF	≤15%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series	10V	≤7.5%	≤15%	0201≥0.012μF 0402≥0.33μF; (0402/ X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20%	0201≥0.1μF; 0402≥1μF; TT series	6.3V	≤15%	≤30%	0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF :1210≥100μF; TT series	4V	≤20%	-	-
			Rated vol.	D.F.≤	Exception of D.F. ≤																																																		
			≥100V	≤3%	≤6%	1206≥0.47μF																																																	
					≤7.5%	0805>0.1μF, 0603≥0.068μF																																																	
			≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF																																																	
					≤10%	1210≥4.7μF																																																	
					≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF TT series																																																	
			35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF																																																	
			25V	≤5%	≤10%	0201≥0.01μF;0805≥1μF; 1210≥10μF																																																	
					≤14%	0603≥0.33μF; 1206≥4.7μF																																																	
					≤15%	0402≥0.10μF;0603≥0.47μF;0805≥2.2 μF; 1206≥6.8μF ; 1210≥22μF; TT series																																																	
					≤20%	0402≥1μF																																																	
			16V	≤5%	≤10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF																																																	
					≤15%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series																																																	
			10V	≤7.5%	≤15%	0201≥0.012μF 0402≥0.33μF; (0402/ X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																	
					≤20%	0201≥0.1μF; 0402≥1μF; TT series																																																	
			6.3V	≤15%	≤30%	0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF :1210≥100μF; TT series																																																	
			4V	≤20%	-	-																																																	
			Y5V:																																																				
			<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>10%</td><td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td></tr><tr><td>35V</td><td>10%</td><td>-</td><td>-</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF</td></tr><tr><td>15%</td><td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="2">16V (C<1μF)</td><td rowspan="2">10%</td><td>12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>20%</td><td>0402≥0.22μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF</td></tr><tr><td>10V</td><td>20%</td><td>30%</td><td>0402≥0.47μF</td></tr><tr><td>6.3V</td><td>30%</td><td>-</td><td>-</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF	35V	10%	-	-	25V	7.5%	10%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF	15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF	20%	0402≥0.22μF	16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF	10V	20%	30%	0402≥0.47μF	6.3V	30%	-	-																
			Rated vol.	D.F.≤	Exception of D.F. ≤																																																		
			≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																																	
			35V	10%	-	-																																																	
			25V	7.5%	10%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF																																																	
					15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																																	
			16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF																																																	
20%	0402≥0.22μF																																																						
16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF																																																				
10V	20%	30%	0402≥0.47μF																																																				
6.3V	30%	-	-																																																				

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements	
14	Humidity (Damp Heat) Load		*I.R.: $\geq 10V$, 500M Ω or 25 Ω -F whichever is smaller. Class II (X7R, X5R, X6S, Y5V)	
			Rated voltage	Insulation Resistance
			100V: X7R	500G Ω or RxC $\geq 5 \Omega$ -F whichever is smaller.
			50V: 0402 $\geq 0.1\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 1\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 4.7\mu F$	
			35V: 0603 $\geq 1\mu F$; 0805 $\geq 2.2\mu F$; 1210 $\geq 10\mu F$	
			25V: 0402 $\geq 1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 10\mu F$	
			16V: 0402 $\geq 0.22\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 47\mu F$	
			10V: 0201 $\geq 47nF$; 0402 $\geq 0.47\mu F$; 0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 47\mu F$	
			6.3V ; 4V ; TT series ; All X6S items	
15.	High Temperature Load (Endurance)	*Test temp.: NP0, X7R/X7E: 125 $\pm 3^{\circ}C$ X6S: 105 $\pm 3^{\circ}C$ X5R, Y5V: 85 $\pm 3^{\circ}C$ *Test time: 1000+24/-0 hrs. *To apply voltage: 1) $\leq$ % of rated voltage. 2) 10V $\leq$ Ur<500V: 200% of rated voltage. 3) 500V: 150% of rated voltage. 4) Ur $\geq$ 630V: 120% of rated voltage.	No remarkable damage. Cap change: NP0: $\pm 3.0\%$ or $\pm 0.3pF$ whichever is larger X7R, X5R, X6S: $\geq 10V^{**}$, within $\pm 12.5\%$; $\leq 6.3V$ within $\pm 25\%$; TT series & C $\geq 1\mu F$, within $\pm 25\%$ **10V: 0603 $\geq 4.7\mu F$; 0402 $\geq 1\mu F$; 0201 $\geq 0.1\mu F$, within $\pm 25\%$; Y5V: $\geq 10V$, within $\pm 30\%$; $\leq 6.3V$, within $+30/-40\%$ Q/D.F. value: NP0: More than 30pF, Q ≥ 350 10pF $\leq$ C<30pF, Q $\geq 275+2.5C$ Less than 10pF, Q $\geq 200+10C$	

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																																																																	
15	High Temperature Load (Endurance)	5) 100% of rated voltage for below range.	X7R, X5R, X6S:																																																																																																	
		<table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr><tr><td>0201</td><td>X5R/X7R/X6S</td><td>6.3V,10V</td><td>C≥0.1μF</td></tr><tr><td>0402</td><td>X5R/X7R/X6S</td><td>6.3V,10V</td><td>C≥1.0μF</td></tr><tr><td rowspan="3">0603</td><td rowspan="3">X5R/X7R/X6S</td><td>4V</td><td>C≥22μF</td></tr><tr><td>6.3V,10V</td><td>C≥4.7μF</td></tr><tr><td>35V</td><td>C≥1.0μF</td></tr><tr><td rowspan="2">0805</td><td rowspan="2">X5R/X7R/X6S</td><td>4V</td><td>C≥47μF</td></tr><tr><td>6.3V</td><td>C≥22μF</td></tr><tr><td rowspan="2">1206</td><td>X5R/X7R/</td><td>6.3V</td><td>C≥47μF</td></tr><tr><td>NP0</td><td>3,000V</td><td>C≥1.5pF</td></tr><tr><td>TT18</td><td>Y5V</td><td>6.3V,10</td><td>C≥2.2μF</td></tr><tr><td>TT21</td><td>Y5V</td><td>6.3V</td><td>C≥10μF</td></tr><tr><td>TT31</td><td>Y5V</td><td>6.3V</td><td>C≥22μF</td></tr></table>	Size	Dielectric	Rated voltage	Capacitance range	0201	X5R/X7R/X6S	6.3V,10V	C≥0.1μF	0402	X5R/X7R/X6S	6.3V,10V	C≥1.0μF	0603	X5R/X7R/X6S	4V	C≥22μF	6.3V,10V	C≥4.7μF	35V	C≥1.0μF	0805	X5R/X7R/X6S	4V	C≥47μF	6.3V	C≥22μF	1206	X5R/X7R/	6.3V	C≥47μF	NP0	3,000V	C≥1.5pF	TT18	Y5V	6.3V,10	C≥2.2μF	TT21	Y5V	6.3V	C≥10μF	TT31	Y5V	6.3V	C≥22μF	<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="2">≥100V</td><td rowspan="2">≤3%</td><td>≤6%</td><td>1206≥0.47μF</td></tr><tr><td>≤7.5%</td><td>0805>0.1μF, 0603≥0.068μF</td></tr><tr><td rowspan="3">≥50V</td><td rowspan="3">≤3%</td><td>≤6%</td><td>0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF</td></tr><tr><td>≤10%</td><td>1210≥4.7μF</td></tr><tr><td>≤20%</td><td>0402≥0.1μF; 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF TT series</td></tr><tr><td>35V</td><td>≤5%</td><td>≤20%</td><td>0603≥1μF; 0805≥2.2μF; 1210≥10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤5%</td><td>≤10%</td><td>0201≥0.01μF;0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td>≤15%</td><td>0402≥0.10μF;0603≥0.47μF;0805≥2.2μF; 1206≥6.8μF ; 1210≥22μF; TT series</td></tr><tr><td>≤20%</td><td>0402≥1μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤5%</td><td>≤10%</td><td>0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF</td></tr><tr><td>≤15%</td><td>0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF;0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤7.5%</td><td>≤15%</td><td>0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;</td></tr><tr><td>≤20%</td><td>0201≥0.1μF; 0402≥1μF</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30%</td><td>0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF :1210≥100μF; TT series</td></tr><tr><td>4V</td><td>≤20%</td><td>-</td><td>-</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0805>0.1μF, 0603≥0.068μF	≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF	≤10%	1210≥4.7μF	≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF TT series	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF;0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF; 1206≥4.7μF	≤15%	0402≥0.10μF;0603≥0.47μF;0805≥2.2μF; 1206≥6.8μF ; 1210≥22μF; TT series	≤20%	0402≥1μF	16V	≤5%	≤10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF	≤15%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF;0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series	10V	≤7.5%	≤15%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;	≤20%	0201≥0.1μF; 0402≥1μF	6.3V	≤15%	≤30%	0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF :1210≥100μF; TT series	4V	≤20%	-	-
		Size	Dielectric	Rated voltage	Capacitance range																																																																																															
		0201	X5R/X7R/X6S	6.3V,10V	C≥0.1μF																																																																																															
		0402	X5R/X7R/X6S	6.3V,10V	C≥1.0μF																																																																																															
		0603	X5R/X7R/X6S	4V	C≥22μF																																																																																															
				6.3V,10V	C≥4.7μF																																																																																															
				35V	C≥1.0μF																																																																																															
		0805	X5R/X7R/X6S	4V	C≥47μF																																																																																															
				6.3V	C≥22μF																																																																																															
		1206	X5R/X7R/	6.3V	C≥47μF																																																																																															
			NP0	3,000V	C≥1.5pF																																																																																															
		TT18	Y5V	6.3V,10	C≥2.2μF																																																																																															
		TT21	Y5V	6.3V	C≥10μF																																																																																															
		TT31	Y5V	6.3V	C≥22μF																																																																																															
		Rated vol.	D.F.≤	Exception of D.F. ≤																																																																																																
		≥100V	≤3%	≤6%	1206≥0.47μF																																																																																															
				≤7.5%	0805>0.1μF, 0603≥0.068μF																																																																																															
		≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF;1206≥0.47μF																																																																																															
				≤10%	1210≥4.7μF																																																																																															
				≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF TT series																																																																																															
		35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF																																																																																															
		25V	≤5%	≤10%	0201≥0.01μF;0805≥1μF; 1210≥10μF																																																																																															
				≤14%	0603≥0.33μF; 1206≥4.7μF																																																																																															
				≤15%	0402≥0.10μF;0603≥0.47μF;0805≥2.2μF; 1206≥6.8μF ; 1210≥22μF; TT series																																																																																															
				≤20%	0402≥1μF																																																																																															
		16V	≤5%	≤10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF;1206≥2.2μF;1210≥4.7μF																																																																																															
≤15%	0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF;0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series																																																																																																			
10V	≤7.5%	≤15%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;																																																																																																	
		≤20%	0201≥0.1μF; 0402≥1μF																																																																																																	
6.3V	≤15%	≤30%	0201≥0.1μF;0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF :1210≥100μF; TT series																																																																																																	
4V	≤20%	-	-																																																																																																	
(6) 150% of rated voltage for below range.																																																																																																				
<table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr><tr><td>0201</td><td>X5R/X7R/X6S</td><td>16V</td><td>C≥0.1μF</td></tr><tr><td rowspan="2">0402</td><td rowspan="2">X5R/X7R/X6S</td><td>50V</td><td>C≥0.1μF</td></tr><tr><td>10V~25V</td><td>C≥0.22μF</td></tr><tr><td></td><td>Y5V</td><td>16V</td><td>C≥0.47μF</td></tr><tr><td rowspan="2">0603</td><td rowspan="2">X5R/X7R/X6S</td><td>10V,50V</td><td>C≥1.0μF</td></tr><tr><td>Y5V</td><td>16V</td><td>C≥2.2μF</td></tr><tr><td rowspan="4">0805</td><td rowspan="2">X5R/X7R/X6S</td><td>10~50V</td><td>C≥4.7μF</td></tr><tr><td rowspan="2">X7R</td><td>50V</td><td>C≥2.2μF</td></tr><tr><td>100V</td><td>C≥0.47μF</td></tr><tr><td>Y5V</td><td>16V</td><td>C≥4.7μF</td></tr><tr><td>2220</td><td>X7R</td><td>100V</td><td>C≥6.8μF</td></tr></table>	Size	Dielectric	Rated voltage	Capacitance range	0201	X5R/X7R/X6S	16V	C≥0.1μF	0402	X5R/X7R/X6S	50V	C≥0.1μF	10V~25V	C≥0.22μF		Y5V	16V	C≥0.47μF	0603	X5R/X7R/X6S	10V,50V	C≥1.0μF	Y5V	16V	C≥2.2μF	0805	X5R/X7R/X6S	10~50V	C≥4.7μF	X7R	50V	C≥2.2μF	100V	C≥0.47μF	Y5V	16V	C≥4.7μF	2220	X7R	100V	C≥6.8μF																																																											
Size	Dielectric	Rated voltage	Capacitance range																																																																																																	
0201	X5R/X7R/X6S	16V	C≥0.1μF																																																																																																	
0402	X5R/X7R/X6S	50V	C≥0.1μF																																																																																																	
		10V~25V	C≥0.22μF																																																																																																	
	Y5V	16V	C≥0.47μF																																																																																																	
0603	X5R/X7R/X6S	10V,50V	C≥1.0μF																																																																																																	
		Y5V	16V	C≥2.2μF																																																																																																
0805	X5R/X7R/X6S	10~50V	C≥4.7μF																																																																																																	
		X7R	50V	C≥2.2μF																																																																																																
	100V		C≥0.47μF																																																																																																	
	Y5V	16V	C≥4.7μF																																																																																																	
2220	X7R	100V	C≥6.8μF																																																																																																	
Y5V:																																																																																																				
<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>10%</td><td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td></tr><tr><td>35V</td><td>10%</td><td>-</td><td>-</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF</td></tr><tr><td>15%</td><td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td>16V (C<1μF)</td><td rowspan="2">10%</td><td>12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>20%</td><td>0402≥0.22μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF</td></tr><tr><td>10V</td><td>20%</td><td>30%</td><td>0402≥0.47μF</td></tr><tr><td>6.3V</td><td>30%</td><td>-</td><td>-</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF	35V	10%	-	-	25V	7.5%	10%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF	15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF	20%	0402≥0.22μF	16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF	10V	20%	30%	0402≥0.47μF	6.3V	30%	-	-																																																																
Rated vol.	D.F.≤	Exception of D.F. ≤																																																																																																		
≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																																																																																	
35V	10%	-	-																																																																																																	
25V	7.5%	10%	0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF																																																																																																	
		15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																																																																																	
16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF																																																																																																	
20%		0402≥0.22μF																																																																																																		
16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF																																																																																																	
10V	20%	30%	0402≥0.47μF																																																																																																	
6.3V	30%	-	-																																																																																																	


General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)




No	Item	Test Condition	Requirements																																			
15	High Temperature Load (Endurance	*Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp. *Measurement to be made after keeping at room temp. for 24±2 hrs <table border="1"><caption>Graph Data: Ratio Operating Voltage/Rated Voltage (%) vs Temperature at Product (°C)</caption><thead><tr><th>Temperature (°C)</th><th>Product for 125°C (%)</th><th>Product for 105°C (%)</th><th>Product for 85°C (%)</th></tr></thead><tbody><tr><td>25</td><td>100</td><td>100</td><td>100</td></tr><tr><td>50</td><td>100</td><td>100</td><td>100</td></tr><tr><td>75</td><td>100</td><td>100</td><td>70</td></tr><tr><td>100</td><td>100</td><td>70</td><td>70</td></tr><tr><td>125</td><td>70</td><td>70</td><td>70</td></tr></tbody></table>	Temperature (°C)	Product for 125°C (%)	Product for 105°C (%)	Product for 85°C (%)	25	100	100	100	50	100	100	100	75	100	100	70	100	100	70	70	125	70	70	70	*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, Y5V) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="6">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF; 0805≥2.2μF;1210≥10μF</td></tr><tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;</td></tr><tr><td colspan="2">6.3V ; 4V ; TT series ; All X6S items</td></tr></table>	Rated voltage	Insulation Resistance	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF;1210≥10μF	25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;	6.3V ; 4V ; TT series ; All X6S items	
		Temperature (°C)	Product for 125°C (%)	Product for 105°C (%)	Product for 85°C (%)																																	
25	100	100	100																																			
50	100	100	100																																			
75	100	100	70																																			
100	100	70	70																																			
125	70	70	70																																			
Rated voltage	Insulation Resistance																																					
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																					
50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																						
35V: 0603≥1μF; 0805≥2.2μF;1210≥10μF																																						
25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																																						
16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF																																						
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;																																						
6.3V ; 4V ; TT series ; All X6S items																																						

Appendixes

Tape & Reel Dimensions

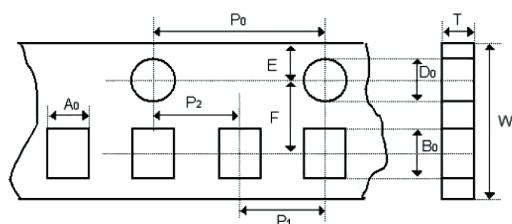


The dimension of paper tape

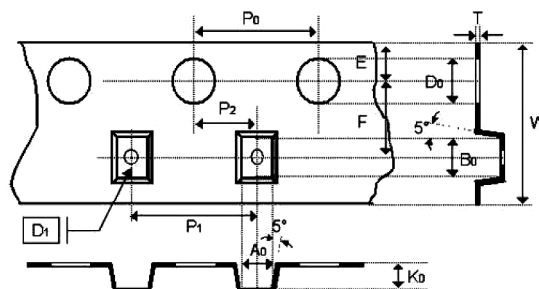

The dimension of plastic tape

Size	0201	0402		0603	0805			1206			1210			1812		
Thick- ness	L	N	E	S, X	A	B	C, D, I	B	C, J, D	G,P	C, D	G, K	M	D, K	M	U
A0	0.38±0.05	0.62±0.05	0.7±0.1	1.02±0.05	1.5±0.1	1.5±0.1	<1.57	2±0.1	<1.85	<1.95	<2.97	<2.97	<2.97	<3.81	<3.81	<3.9
B0	0.68±0.05	1.12±0.05	1.2±0.1	1.8±0.05	2.3±0.1	2.3±0.1	<2.40	3.5±0.1	<3.46	<3.67	<3.73	<3.73	<3.73	<5.3	<5.3	<5.3
T	0.42±0.05	0.6±0.05	0.7±0.1	0.95±0.05	0.75±0.05	0.95±0.05	0.23±0.05	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05	0.25±0.05
K0	-	-	-	-	-	-	<2.5	-	<2.5	<2.5	<2.5	<2.5	<3	<2.5	<3	<3.5
W	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	12±0.2	12±0.2	12±0.2
P0	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1
10xP0	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.2
P1	2±0.05	2±0.05	2±0.05	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.10	4±0.1	8±0.1	8±0.1	8±0.1
P2	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05
D0	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.1
D1	-	-	-	-	-	-	1±0.1	-	1±0.1	1±0.1	1±0.1	1±0.1	1±0.1	1.5±0.1	1.5±0.1	1.5±0.1
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1
F	3.50±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	5.5±0.05	5.5±0.05	5.5±0.05


General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



The dimension of reel

Size	0201, 0402, 0603, 0805, 1206, 1210			1812
Reel size	7"	10"	13"	7"
C	13 +0.5/-0.2	13 +0.5/-0.2	13 +0.5/-0.2	13 +0.5/-0.2
W1	8.4 +1.5/-0	8.4 +1.5/-0	8.4 +1.5/-0	12.4 +2.0/-0
A	178 ±0.1	250 ±1	330 ±1	178 ±0.1
N	60 +1/-0	100 ±1	100 ±1	60 +1/-0

Constructions:

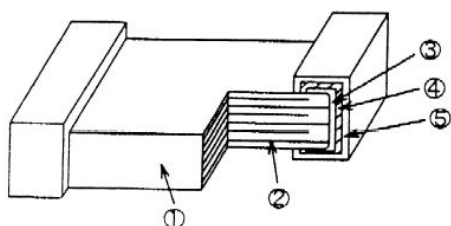

No.	Name		NPO, X7R, X5R, X6S, Y5V
1	Ceramic material		BaTiO ₃ based
2	Inner electrode		Ni
3	Termination	Inner layer	Cu
4		Middle layer	Ni
5		Outer layer	Sn

Storage and handling conditions

- (1) To store products at 5°C to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:


- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)




Recommended Soldering Conditions:

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N₂ within oven are recommended.

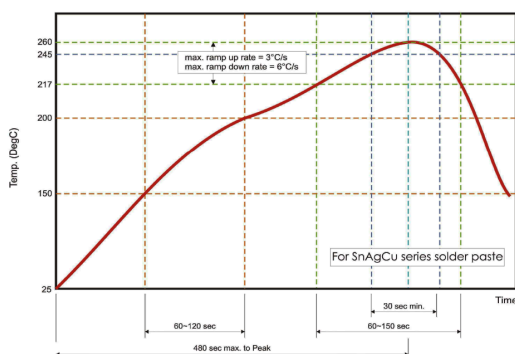

Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

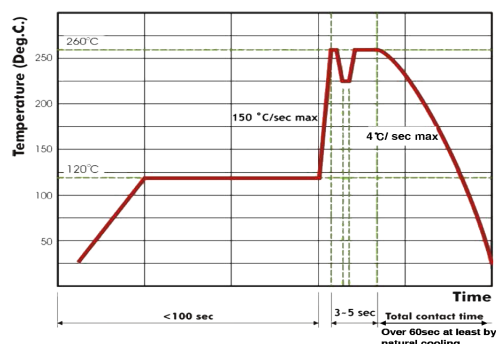

Recommended wave soldering profile for SMT process with SnAgCu series solder.

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.