



## Features/Benefits

- Compact design
- Low actuation force
- Detect mechanical movement
- Left and right options
- Right angle options

## Typical Applications




- Computer peripherals
- Office equipment
- Consumer electronics
- Appliances
- Audio and visual equipment



| PART NUMBER     | PACKAGING    | SCHEMATIC |
|-----------------|--------------|-----------|
| <b>DS-02005</b> | 1,000 pieces | 1P-1T     |

## Specifications

CONTACT ARRANGEMENT: SPST, NO  
 CONTACT RATING: 100mA @ 30 VDC  
 OPERATING LIFE: 50,000 cycles  
 OPERATING FORCE: 50 gf max.  
 PRE-TRAVEL: 0.7 mm  
 TOTAL TRAVEL: 2.6 mm  
 INITIAL CONTACT RESISTANCE: 1 Ω max.  
 INSULATION RESISTANCE: 100 M Ω min. @ 100 VDC 60 sec.  
 DIELECTRIC STRENGTH: 100 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -40°C to +85°C.

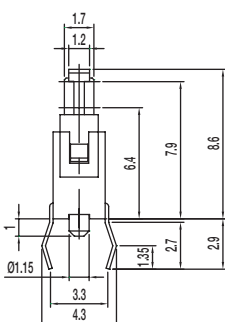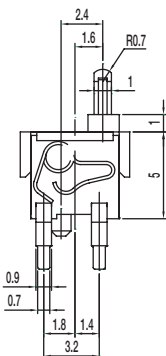

## Materials



KNOB: PA  
 COVER: PA  
 SPRING: Gold plated, copper alloy  
 HOUSING: PA  
 TERMINAL: Silver plated, copper alloy



| PART NUMBER          | PACKAGING    | SCHEMATIC |
|----------------------|--------------|-----------|
| <b>DS-02005 (30)</b> | 1,000 pieces | 1P-1T     |

## Specifications

CONTACT ARRANGEMENT: SPST, NO  
 CONTACT RATING: 100mA @ 30 VDC  
 OPERATING LIFE: 50,000 cycles  
 OPERATING FORCE: 30 gf max.  
 PRE-TRAVEL: 0.7 mm  
 TOTAL TRAVEL: 2.2 mm  
 INITIAL CONTACT RESISTANCE: 1 Ω max.  
 INSULATION RESISTANCE: 100 M Ω min. @ 100 VDC 60 sec.  
 DIELECTRIC STRENGTH: 100 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -40°C to +85°C.

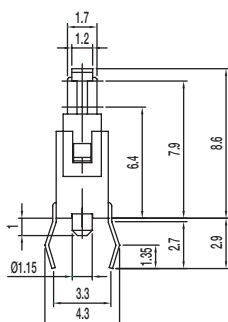

## Materials

KNOB: PA  
 COVER: PA  
 SPRING: Gold plated, copper alloy  
 HOUSING: PA  
 TERMINAL: Silver plated, copper alloy

# DS Series Detect Switch




| PART NUMBER       | PACKAGING    | SCHEMATIC         |
|-------------------|--------------|-------------------|
| <b>DS-02005-A</b> | 1,000 pieces | 1P-1T<br><br>N.O. |

## Specifications

CONTACT ARRANGEMENT: SPST, NO  
 CONTACT RATING: 100mA @ 30 VDC  
 OPERATING LIFE: 50,000 cycles  
 OPERATING FORCE: 50 gf max.  
 PRE-TRAVEL: 0.7 mm  
 TOTAL TRAVEL: 2.6 mm  
 INITIAL CONTACT RESISTANCE: 1 Ω max.  
 INSULATION RESISTANCE: 100 M Ω min. @ 100 VDC 60 sec.  
 DIELECTRIC STRENGTH: 100 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -40°C to +85°C.

## Materials

KNOB: PA  
 COVER: PA  
 SPRING: Gold plated, copper alloy  
 HOUSING: PA  
 TERMINAL: Silver plated, copper alloy






| PART NUMBER     | PACKAGING    | SCHEMATIC |
|-----------------|--------------|-----------|
| <b>DS-21805</b> | 2,500 pieces | <br>N.O.  |

## Specifications

CONTACT ARRANGEMENT: SPDT  
 CONTACT RATING: 5mA @ 5 VDC  
 OPERATING LIFE: 100,000 cycles  
 OPERATING FORCE: 36 gf  
 TOTAL TRAVEL: 2.20 mm  
 INITIAL CONTACT RESISTANCE: 1 Ω max.  
 INSULATION RESISTANCE: 100 M Ω min. @ 100 VDC 60 sec.  
 DIELECTRIC STRENGTH: 100 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -20°C to +70°C.

## Materials

KNOB: POM  
 COVER: PA46  
 SPRING: Silver plated  
 HOUSING: PPS  
 TERMINAL: Silver plated

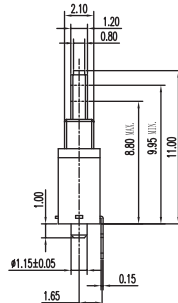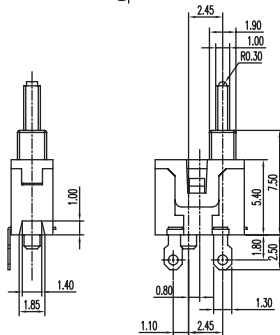





D

Detect

# DS Series Detect Switch



| PART NUMBER     | PACKAGING    | SCHEMATIC   |
|-----------------|--------------|---|
| <b>DS-203-A</b> | 2,500 pieces | <br>N.O. |



### Specifications



- CONTACT ARRANGEMENT: SPST
- CONTACT RATING: 100mA @ 30 VDC
- OPERATING LIFE: 50,000 cycles
- OPERATING FORCE: 36 gf
- PRE TRAVEL: 0.70 +0.20/-0.40 mm
- INITIAL CONTACT RESISTANCE: 1  $\Omega$  max.
- INSULATION RESISTANCE: 50 M  $\Omega$  min. @ 250 VDC 60 sec.
- DIELECTRIC STRENGTH: 250 V AC (50-60Hz) 60 sec.
- OPERATING TEMPERATURE: -20°C to +70°C.

### Materials

- KNOB: POM
- COVER: PA
- SPRING: Gold plated
- HOUSING: PA
- TERMINAL: Silver plated



| PART NUMBER      | PACKAGING    | SCHEMATIC   |
|------------------|--------------|---|
| <b>DS-040-02</b> | 1,000 pieces | <br>N.O. |

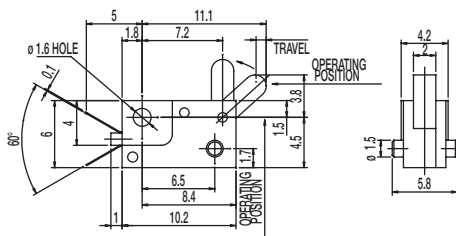

### Specifications

- CONTACT ARRANGEMENT: SPST, NO
- CONTACT RATING: 0.1A @ 16 VDC
- OPERATING LIFE: 20,000 cycles
- OPERATING FORCE: 30  $\pm$  15 gf
- TRAVEL: 0.90  $\pm$  0.20 mm
- INITIAL CONTACT RESISTANCE: 40 m  $\Omega$  max.
- INSULATION RESISTANCE: 100 M  $\Omega$  min. @ 250 VDC 60 sec.
- DIELECTRIC STRENGTH: 250 V AC (50-60Hz) 60 sec.
- OPERATING TEMPERATURE: -20°C to +70°C.



### Materials

- LEVER: POM
- CASE: PBT
- COVER: PC

# DS Series Detect Switch



| PART NUMBER   | PACKAGING    | SCHEMATIC |
|---------------|--------------|-----------|
| <b>DS-080</b> | 1,000 pieces |           |

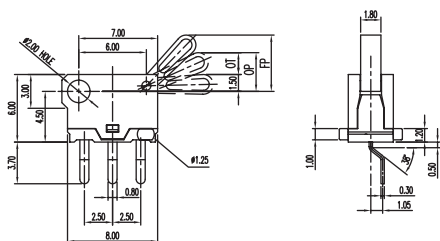

PIERCING PLAN

## Specifications



CONTACT ARRANGEMENT: SPDT  
 CONTACT RATING: 100mA @ 30 VDC  
 OPERATING LIFE: 20,000 cycles  
 OPERATING FORCE: 30 ± 20 gf  
 OVER TRAVEL: 2.0 ± 0.40 mm  
 INITIAL CONTACT RESISTANCE: 200 m Ω max.  
 INSULATION RESISTANCE: 10 M Ω min. @ 250 VDC 60 sec.  
 DIELECTRIC STRENGTH: 250 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -20°C to +70°C.

## Materials

KNOB: POM  
 COVER: PA46  
 SLIDER: PBT  
 HOUSING: PA46  
 TERMINAL: Silver plated



| PART NUMBER        | PACKAGING    | SCHEMATIC |
|--------------------|--------------|-----------|
| <b>DS-080-C PA</b> | 1,000 pieces |           |

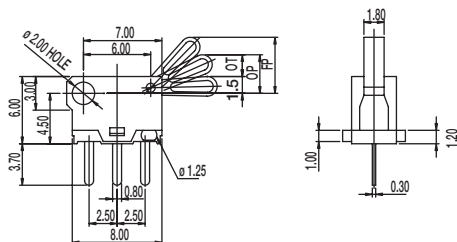

PIERCING PLAN

## Specifications

CONTACT ARRANGEMENT: SPDT  
 CONTACT RATING: 100mA @ 30 VDC  
 OPERATING LIFE: 20,000 cycles  
 OPERATING FORCE: 30 ± 20 gf  
 OVER TRAVEL: 2.0 ± 0.40 mm  
 INITIAL CONTACT RESISTANCE: 200 m Ω max.  
 INSULATION RESISTANCE: 10 M Ω min. @ 250 VDC 60 sec.  
 DIELECTRIC STRENGTH: 250 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -20°C to +70°C.

## Materials

KNOB: POM  
 COVER: PA46  
 SLIDER: PBT  
 HOUSING: PA46  
 TERMINAL: Silver plated



D

Detect



| PART NUMBER           | PACKAGING  | SCHEMATIC   |
|-----------------------|------------|---|
| <b>DS-09005-02 BK</b> | 500 pieces | <br>N.O. |



## Specifications


CONTACT ARRANGEMENT: SPST  
 CONTACT RATING: 1mA @ 5 VDC  
 OPERATING LIFE: 100,000 cycles  
 OPERATING FORCE: 50 gf max.  
 TOTAL TRAVEL: 4.5±0.2 mm  
 INITIAL CONTACT RESISTANCE: 500 m Ω max.  
 INSULATION RESISTANCE: 100 M Ω min. @ 500 VDC 60 sec.  
 DIELECTRIC STRENGTH: 500 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -20°C to +70°C.

## Materials

LEVER: POM  
 COVER: PA  
 HOUSING: PA  
 TERMINAL: Silver plated



| PART NUMBER           | PACKAGING  | SCHEMATIC   |
|-----------------------|------------|---|
| <b>DS-09005-02 RP</b> | 500 pieces | <br>N.O. |



## Specifications

CONTACT ARRANGEMENT: SPST  
 CONTACT RATING: 1mA @ 5 VDC  
 OPERATING LIFE: 100,000 cycles  
 OPERATING FORCE: 50 gf max.  
 TOTAL TRAVEL: 4.5±0.2 mm  
 INITIAL CONTACT RESISTANCE: 500 m Ω max.  
 INSULATION RESISTANCE: 100 M Ω min. @ 500 VDC 60 sec.  
 DIELECTRIC STRENGTH: 500 V AC (50-60Hz) 60 sec.  
 OPERATING TEMPERATURE: -20°C to +70°C.

## Materials

LEVER: POM  
 COVER: PA  
 HOUSING: PA  
 TERMINAL: Silver plated



Detect



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.