



# CCD Signal Processors with *Precision Timing*™ Generator

## AD9891/AD9895

### FEATURES

**AD9891: 10-Bit 20 MHz Version**

**AD9895: 12-Bit 30 MHz Version**

**Correlated Double Sampler (CDS)**

**4  $\pm$ 6 dB Pixel Gain Amplifier (PxGA®)**

**2 dB to 36 dB 10-Bit Variable Gain Amplifier (VGA)**

**10-Bit 20 MHz A/D Converter (AD9891)**

**12-Bit 30 MHz A/D Converter (AD9895)**

**Black Level Clamp with Variable Level Control**

**Complete On-Chip Timing Generator**

***Precision Timing* Core with 1 ns Resolution**

**On-Chip 5 V Horizontal and RG Drivers**

**2-Phase and 4-Phase H-Clock Modes**

**4-Phase Vertical Transfer Clocks**

**Electronic and Mechanical Shutter Modes**

**On-Chip Driver for External Crystal**

**On-Chip Sync Generator with External Sync Option**

**64-Lead CSPBGA Package**

### APPLICATIONS

**Digital Still Cameras**

**Digital Video Camcorders**

**Industrial Imaging**


### PRODUCT DESCRIPTION

The AD9891 and AD9895 are highly integrated CCD signal processors for digital still camera applications. Both include a complete analog front end with A/D conversion combined with a full-function programmable timing generator. A *Precision Timing* core allows adjustment of high speed clocks with 1 ns resolution at 20 MHz operation and 700 ps resolution at 30 MHz operation.

The AD9891 is specified at pixel rates of up to 20 MHz, and the AD9895 is specified at 30 MHz. The analog front end includes black level clamping, CDS, PxGA, VGA, and a 10-Bit or 12-Bit A/D converter. The timing generator provides all the necessary CCD clocks: RG, H-clocks, V-clocks, sensor gate pulses, substrate clock, and substrate bias control. Operation is programmed using a 3-wire serial interface.

Packaged in a space-saving 64-lead CSPBGA, the AD9891 and AD9895 are specified over an operating temperature range of  $-20^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

### FUNCTIONAL BLOCK DIAGRAM

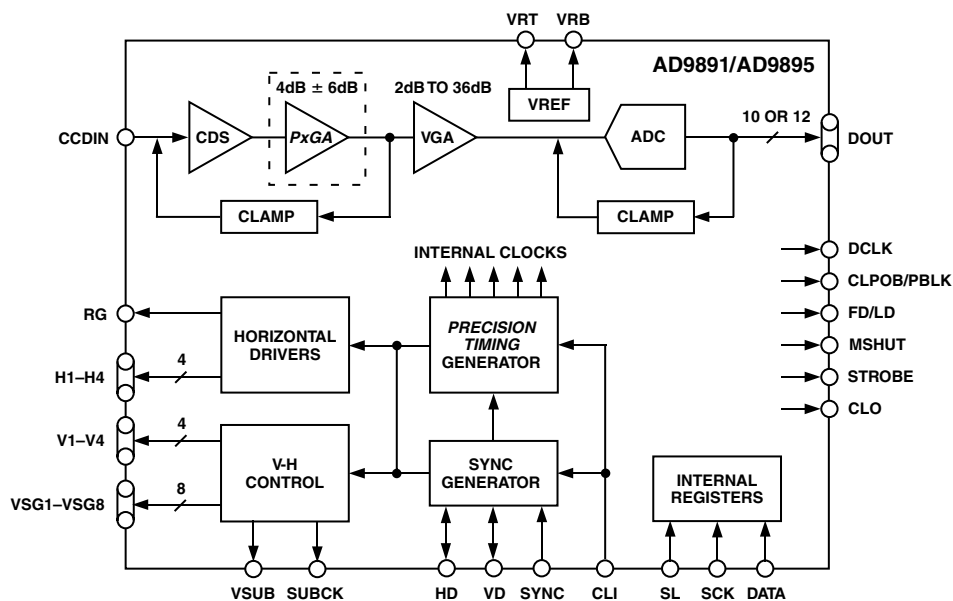

PxGA is a registered trademark and *Precision Timing* is a trademark of Analog Devices, Inc.

### REV. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781/329-4700  
Fax: 781/326-8703  
[www.analog.com](http://www.analog.com)  
© Analog Devices, Inc., 2002

# AD9891/AD9895

## TABLE OF CONTENTS

|   |    |   |    |
|---|----|---|----|
| SPECIFICATIONS .....                              | 3  | Frame Transfer CCD Mode .....                             | 24 |
| DIGITAL SPECIFICATIONS .....                      | 3  | Vertical Sensor Gate (Shift Gate) Timing .....            | 25 |
| AD9891 ANALOG SPECIFICATIONS .....                | 4  | SHUTTER TIMING CONTROL .....                              | 26 |
| AD9895 ANALOG SPECIFICATIONS .....                | 5  | Normal Shutter Mode .....                                 | 26 |
| TIMING SPECIFICATIONS .....                       | 6  | High Precision Shutter Mode .....                         | 26 |
| PACKAGE THERMAL CHARACTERISTICS .....             | 6  | Low Speed Shutter Mode .....                              | 26 |
| ABSOLUTE MAXIMUM RATINGS .....                    | 6  | SUBCK Suppression .....                                   | 26 |
| ORDERING GUIDE .....                              | 6  | Readout After Exposure .....                              | 27 |
| PIN CONFIGURATION-AD9891 .....                    | 7  | VSub Control .....  | 27 |
| PIN FUNCTION DESCRIPTIONS-AD9891 .....            | 7  | MSHUT and STROBE Control .....                            | 27 |
| PIN CONFIGURATION-AD9895 .....                    | 8  | Example of Exposure and Readout of Interlaced Frame ..... | 29 |
| PIN FUNCTION DESCRIPTIONS-AD9895 .....            | 8  | ANALOG FRONT END DESCRIPTION AND                          |    |
| SPECIFICATION DEFINITIONS .....                   | 9  | OPERATION .....   | 30 |
| EQUIVALENT CIRCUITS .....                         | 9  | DC Restore .....  | 30 |
| TYPICAL PERFORMANCE CHARACTERISTICS ....          | 10 | Correlated Double Sampler .....                           | 30 |
| SYSTEM OVERVIEW .....                             | 11 | Input Clamp .....   | 30 |
| Typical System Block Diagram .....                | 11 | PxGA .....  | 30 |
| PRECISION TIMING HIGH SPEED TIMING                |    | PxGA Color Steering Mode Timing .....                     | 31 |
| GENERATION .....                                  | 12 | Variable Gain Amplifier .....                             | 33 |
| Timing Resolution .....                           | 12 | PxGA and VGA Gain Curves .....                            | 33 |
| High Speed Clock Programmability .....            | 12 | Optical Black Clamp .....                                 | 33 |
| H-Driver and RG Outputs .....                     | 13 | A/D Converter .....                                       | 33 |
| Digital Data Outputs .....                        | 13 | POWER-UP AND SYNCHRONIZATION .....                        | 34 |
| HORIZONTAL CLAMPING AND BLANKING .....            | 15 | Recommended Power-Up Sequence for Master Mode .....       | 34 |
| Individual CLPOB, CLPDM, and PBLK Sequences ..... | 15 | SYNC During Master Mode Operation .....                   | 35 |
| Individual HBLK Sequences .....                   | 15 | Synchronization in Slave Mode .....                       | 35 |
| Horizontal Sequence Control .....                 | 15 | POWER-DOWN MODE OPERATION .....                           | 35 |
| VERTICAL TIMING GENERATION .....                  | 17 | HORIZONTAL TIMING SEQUENCE EXAMPLE ....                   | 37 |
| Individual Vertical Sequences .....               | 18 | VERTICAL TIMING EXAMPLE .....                             | 39 |
| Individual Vertical Regions .....                 | 19 | CIRCUIT LAYOUT INFORMATION .....                          | 40 |
| Complete Field: Combining the Regions .....       | 20 | SERIAL INTERFACE TIMING .....                             | 41 |
| Vertical Sequence Alteration .....                | 21 | Notes About Accessing a Double-Wide Register .....        | 41 |
| Second Vertical Sequence During VSG Lines .....   | 22 | NOTES ON REGISTER LISTING .....                           | 42 |
| Vertical Sweep Mode Operation .....               | 22 | COMPLETE REGISTER LISTING .....                           | 43 |
| Vertical Multiplier Mode .....                    | 24 | OUTLINE DIMENSIONS .....                                  | 57 |
|   |    | REVISION HISTORY .....                                    | 57 |

# AD9891/AD9895—SPECIFICATIONS

| Parameter   | Min | Typ | Max  | Unit |
|---|-----|-----|------|------|
| TEMPERATURE RANGE                                     |     |     |      |      |
| Operating   | −20 |     | +85  | °C   |
| Storage   | −65 |     | +150 | °C   |
| POWER SUPPLY VOLTAGE                                  |     |     |      |      |
| AVDD1, AVDD2 (AFE Analog Supply)                      | 2.7 | 3.0 | 3.6  | V    |
| TCVDD (Timing Core Analog Supply)                     | 2.7 | 3.0 | 3.6  | V    |
| RGVDD (RG Driver)                                     | 3.0 | 5.0 | 5.25 | V    |
| HVDD (H1–H4 Drivers)                                  | 3.0 | 5.0 | 5.25 | V    |
| DRVDD (Data Output Drivers)                           | 2.7 | 3.0 | 3.6  | V    |
| DVDD (Digital)  | 2.7 | 3.0 | 3.6  | V    |
| POWER DISSIPATION—AD9891 (See TPC 1 for Power Curves) |     |     |      |      |
| 20 MHz, Typ Supply Levels, 100 pF H1–H4 Loading       |     | 380 |      | mW   |
| Power from HVDD Only*                                 |     | 220 |      | mW   |
| Power-Down 1 Mode                                     |     | 42  |      | mW   |
| Power-Down 2 Mode                                     |     | 8   |      | mW   |
| Power-Down 3 Mode                                     |     | 2.5 |      | mW   |
| POWER DISSIPATION—AD9895 (See TPC 4 for Power Curves) |     |     |      |      |
| 30 MHz, Typ Supply Levels, 100 pF H1–H4 Loading       |     | 600 |      | mW   |
| Power from HVDD Only*                                 |     | 320 |      | mW   |
| Power-Down 1 Mode                                     |     | 138 |      | mW   |
| Power-Down 2 Mode                                     |     | 22  |      | mW   |
| Power-Down 3 Mode                                     |     | 2.5 |      | mW   |
| MAXIMUM CLOCK RATE (CLI)                              |     |     |      |      |
| AD9891  | 20  |     |      | MHz  |
| AD9895  | 30  |     |      | MHz  |

\*The total power dissipated by the HVDD supply may be approximated using the equation:

$$\text{Total HVDD Power} = [C_{\text{LOAD}} \times \text{HVDD} \times \text{Pixel Frequency}] \times \text{HVDD} \times \text{Number of H-Outputs Used}$$

Reducing the H-loading, using only two of the outputs, and/or using a lower HVDD supply will reduce the power dissipation.

Actual HVDD power may be slightly higher than the calculated value because of stray capacitance inherent in the PCB layout/routing.

Specifications subject to change without notice.

## DIGITAL SPECIFICATIONS (RGVDD = HVDD = 4.75 V to 5.25 V, DVDD = DRVDD = 2.7 V to 3.5 V, C<sub>L</sub> = 20 pF, T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

| Parameter  | Symbol          | Min       | Typ | Max | Unit |
|--|-----------------|-----------|-----|-----|------|
| LOGIC INPUTS                                       |                 |           |     |     |      |
| High Level Input Voltage                           | V <sub>IH</sub> | 2.1       |     |     | V    |
| Low Level Input Voltage                            | V <sub>IL</sub> |           |     | 0.6 | V    |
| High Level Input Current                           | I <sub>IH</sub> |           | 10  |     | μA   |
| Low Level Input Current                            | I <sub>IL</sub> |           | 10  |     | μA   |
| Input Capacitance                                  | C <sub>IN</sub> |           | 10  |     | pF   |
| LOGIC OUTPUTS (Except H and RG)                    |                 |           |     |     |      |
| High Level Output Voltage @ I <sub>OH</sub> = 2 mA | V <sub>OH</sub> | 2.2       |     |     | V    |
| Low Level Output Voltage @ I <sub>OL</sub> = 2 mA  | V <sub>OL</sub> |           |     | 0.5 | V    |
| RG and H-DRIVER OUTPUTS (H1–H4)                    |                 |           |     |     |      |
| High Level Output Voltage @ Max Current            | V <sub>OH</sub> | VDD − 0.5 |     |     | V    |
| Low Level Output Voltage @ Max Current             | V <sub>OL</sub> |           |     | 0.5 | V    |
| Maximum Output Current (Programmable)              |                 | 24        |     |     | mA   |
| Maximum Load Capacitance (for Each Output)         |                 | 100       |     |     | pF   |


Specifications subject to change without notice.

# AD9891/AD9895

## AD9891—ANALOG SPECIFICATIONS (AVDD1, AVDD2 = 3.0 V, $f_{\text{CLI}} = 20 \text{ MHz}$ , $T_{\text{MIN}}$ to $T_{\text{MAX}}$ , unless otherwise noted.)

| Parameter                              | Min  | Typ        | Max       | Unit    | Notes  |
|--|------|------------|-----------|---------|--|
| CDS                                    |      |            |           |         |  |
| Gain                                   |      | 0          |           | dB      | Input signal characteristics*  |
| Allowable CCD Reset Transient          |      | 500        |           | mV      |  |
| Max Input Range before Saturation      | 1.0  |            |           | V p-p   |  |
| Max CCD Black Pixel Amplitude          |      | $\pm 200$  |           | mV      |  |
| PIXEL GAIN AMPLIFIER ( $PxGA$ )        |      |            |           |         |  |
| Max Input Range                        | 1.0  |            |           | V p-p   | Default setting  |
| Max Output Range                       | 1.6  |            |           | V p-p   |  |
| Gain Control Resolution                |      | 64         |           | Steps   |  |
| Gain Monotonicity                      |      | Guaranteed |           |         |  |
| Gain Range                             |      |            |           |         |  |
| Min Gain ( $PxGA$ Code 32)             |      | -2.5       |           | dB      |  |
| Med Gain ( $PxGA$ Code 0)              |      | +3.5       |           | dB      |  |
| Max Gain ( $PxGA$ Code 31)             |      | +9.5       |           | dB      |  |
| VARIABLE GAIN AMPLIFIER (VGA)          |      |            |           |         |  |
| Max Input Range                        | 1.6  |            |           | V p-p   |  |
| Max Output Range                       | 2.0  |            |           | V p-p   |  |
| Gain Control Resolution                |      | 1024       |           | Steps   |  |
| Gain Monotonicity                      |      | Guaranteed |           |         |  |
| Gain Range                             |      |            |           |         |  |
| Low Gain (VGA Code 70)                 |      | 2          |           | dB      |  |
| Max Gain (VGA Code 1023)               |      | 36         |           | dB      |  |
| BLACK LEVEL CLAMP                      |      |            |           |         |  |
| Clamp Level Resolution                 |      | 256        |           | Steps   | Measured at ADC output   |
| Clamp Level                            |      |            |           |         |  |
| Min Clamp Level                        |      | 0          |           | LSB     |  |
| Max Clamp Level                        |      | 63.75      |           | LSB     |  |
| A/D CONVERTER                          |      |            |           |         |  |
| Resolution                             | 10   |            |           | Bits    |  |
| Differential Nonlinearity (DNL)        |      | $\pm 0.4$  | $\pm 1.0$ | LSB     |  |
| No Missing Codes                       |      | Guaranteed |           |         |  |
| Full-Scale Input Voltage               |      | 2.0        |           | V       |  |
| VOLTAGE REFERENCE                      |      |            |           |         |  |
| Reference Top Voltage (VRT)            |      | 2.0        |           | V       |  |
| Reference Bottom Voltage (VRB)         |      | 1.0        |           | V       |  |
| SYSTEM PERFORMANCE                     |      |            |           |         |  |
| Gain Accuracy                          |      |            |           |         | Includes entire signal chain<br>Includes 4 dB default $PxGA$ gain<br>Gain = $(0.035 \times \text{Code}) + 3.55 \text{ dB}$ |
| Low Gain (VGA Code 70)                 | 5    | 6          | 7         | dB      |  |
| Max Gain (VGA Code 1023)               | 38.5 | 39.5       | 40.5      | dB      | 12 dB gain applied<br>AC grounded input, 6 dB gain applied<br>Measured with step change on supply                          |
| Peak Nonlinearity, 500 mV Input Signal |      | 0.2        |           | %       |  |
| Total Output Noise                     |      | 0.6        |           | LSB rms |  |
| Power Supply Rejection (PSR)           |      | 40         |           | dB      |  |

\*Input signal characteristics defined as follows:

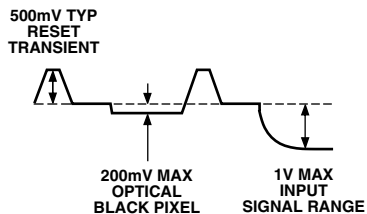


Specifications subject to change without notice.

## AD9895—ANALOG SPECIFICATIONS (AVDD1, AVDD2 = 3.0 V, $f_{\text{CLI}} = 30 \text{ MHz}$ , $T_{\text{MIN}}$ to $T_{\text{MAX}}$ , unless otherwise noted.)

| Parameter                                       | Min  | Typ        | Max       | Unit    | Notes  |
|---|------|------------|-----------|---------|--|
| <b>CDS</b>                                      |      |            |           |         |  |
| Gain  |      | 0          |           | dB      | Input signal characteristics*  |
| Allowable CCD Reset Transient                   |      | 500        |           | mV      |  |
| Max Input Range before Saturation               | 1.0  |            |           | V p-p   |  |
| Max CCD Black Pixel Amplitude                   |      | $\pm 200$  |           | mV      |  |
| <b>PIXEL GAIN AMPLIFIER (<math>PxGA</math>)</b> |      |            |           |         |  |
| Max Input Range                                 | 1.0  |            |           | V p-p   | Default setting  |
| Max Output Range                                | 1.6  |            |           | V p-p   |  |
| Gain Control Resolution                         |      | 64         |           | Steps   |  |
| Gain Monotonicity                               |      | Guaranteed |           |         |  |
| Gain Range                                      |      |            |           |         |  |
| Min Gain ( $PxGA$ Code 32)                      |      | -2.5       |           | dB      |  |
| Med Gain ( $PxGA$ Code 0)                       |      | +3.5       |           | dB      |  |
| Max Gain ( $PxGA$ Code 31)                      |      | +9.5       |           | dB      |  |
| <b>VARIABLE GAIN AMPLIFIER (VGA)</b>            |      |            |           |         |  |
| Max Input Range                                 | 1.6  |            |           | V p-p   |  |
| Max Output Range                                | 2.0  |            |           | V p-p   |  |
| Gain Control Resolution                         |      | 1024       |           | Steps   |  |
| Gain Monotonicity                               |      | Guaranteed |           |         |  |
| Gain Range                                      |      |            |           |         |  |
| Low Gain (VGA Code 70)                          |      | 2          |           | dB      |  |
| Max Gain (VGA Code 1023)                        |      | 36         |           | dB      |  |
| <b>BLACK LEVEL CLAMP</b>                        |      |            |           |         |  |
| Clamp Level Resolution                          |      | 256        |           | Steps   | Measured at ADC output   |
| Clamp Level                                     |      |            |           |         |  |
| Min Clamp Level                                 |      | 0          |           | LSB     |  |
| Max Clamp Level                                 |      | 255        |           | LSB     |  |
| <b>A/D CONVERTER</b>                            |      |            |           |         |  |
| Resolution                                      | 12   |            |           | Bits    |  |
| Differential Nonlinearity (DNL)                 |      | $\pm 0.5$  | $\pm 1.0$ | LSB     |  |
| No Missing Codes                                |      | Guaranteed |           |         |  |
| Full-Scale Input Voltage                        |      | 2.0        |           | V       |  |
| <b>VOLTAGE REFERENCE</b>                        |      |            |           |         |  |
| Reference Top Voltage (VRT)                     |      | 2.0        |           | V       |  |
| Reference Bottom Voltage (VRB)                  |      | 1.0        |           | V       |  |
| <b>SYSTEM PERFORMANCE</b>                       |      |            |           |         |  |
| Gain Accuracy                                   |      |            |           |         | Includes entire signal chain<br>Includes 4 dB default $PxGA$ gain<br>Gain = $(0.035 \times \text{Code}) + 3.55 \text{ dB}$ |
| Low Gain (VGA Code 70)                          | 5    | 6          | 7         | dB      |  |
| Max Gain (VGA Code 1023)                        | 38.5 | 39.5       | 40.5      | dB      |  |
| Peak Nonlinearity, 500 mV Input Signal          |      | 0.2        |           | %       |  |
| Total Output Noise                              |      | 0.8        |           | LSB rms |  |
| Power Supply Rejection (PSR)                    |      | 40         |           | dB      |  |

\*Input signal characteristics defined as follows:

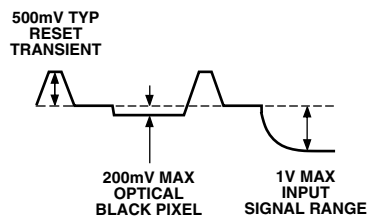

Specifications subject to change without notice.

# AD9891/AD9895

## TIMING SPECIFICATIONS ( $C_L = 20$ pF, $AVDD = DVDD = DRVDD = 3.0$ V, $f_{CLI} = 20$ MHz [AD9891] or 30 MHz [AD9895], unless otherwise noted.)

| Parameter   | Symbol       | Min  | Typ  | Max | Unit   |
|---|--------------|------|------|-----|--------|
| MASTER CLOCK, CLI (Figure 7)                            |              |      |      |     |        |
| CLI Clock Period, AD9891                                | $t_{CONV}$   | 50   |      |     | ns     |
| CLI High/Low Pulsewidth, AD9891                         |              | 20   | 25   |     | ns     |
| CLI Clock Period, AD9895                                | $t_{CONV}$   | 33.3 |      |     | ns     |
| CLI High/Low Pulsewidth, AD9895                         |              | 13   | 16.7 |     | ns     |
| Delay from CLI Rising Edge to Internal Pixel Position 0 | $t_{CLIDLy}$ |      | 6    |     | ns     |
| AFE CLAMP PULSES <sup>1</sup> (Figure 13)               |              |      |      |     |        |
| CLPDM Pulsewidth  |              | 4    | 10   |     | Pixels |
| CLPOB Pulsewidth <sup>2</sup>                           |              | 2    | 20   |     | Pixels |
| AFE SAMPLE LOCATION <sup>1</sup> (Figure 10)            |              |      |      |     |        |
| SHP Sample Edge to SHD Sample Edge, AD9891              | $t_{S1}$     | 20   | 25   |     | ns     |
| SHP Sample Edge to SHD Sample Edge, AD9895              | $t_{S1}$     | 13   | 16.7 |     | ns     |
| DATA OUTPUTS (Figure 12)                                |              |      |      |     |        |
| Output Delay from DCLK Rising Edge <sup>1</sup>         | $t_{OD}$     |      | 8    |     | ns     |
| Pipeline Delay from SHP/SHD Sampling                    |              |      | 9    |     | Cycles |
| SERIAL INTERFACE (Figures 52 and 53)                    |              |      |      |     |        |
| Maximum SCK Frequency                                   | $f_{SCLK}$   | 10   |      |     | MHz    |
| SL to SCK Setup Time                                    | $t_{LS}$     | 10   |      |     | ns     |
| SCK to SL Hold Time                                     | $t_{LH}$     | 10   |      |     | ns     |
| SDATA Valid to SCK Rising Edge Setup                    | $t_{DS}$     | 10   |      |     | ns     |
| SCK Falling Edge to SDATA Valid Hold                    | $t_{DH}$     | 10   |      |     | ns     |
| SCK Falling Edge to SDATA Valid Read                    | $t_{DV}$     | 10   |      |     | ns     |

### NOTES

<sup>1</sup>Parameter is programmable.

<sup>2</sup>Minimum CLPOB pulsewidth is for functional operation only. Wider typical pulses are recommended to achieve good clamp performance.

## ABSOLUTE MAXIMUM RATINGS

| Parameter                | With Respect To | Min  | Max         | Unit |
|--------------------------|-----------------|------|-------------|------|
| AVDD1, AVDD2             | AVSS            | -0.3 | +3.9        | V    |
| TCVDD                    | TCVSS           | -0.3 | +3.9        | V    |
| HVDD                     | HVSS            | -0.3 | +5.5        | V    |
| RGVDD                    | RGVSS           | -0.3 | +5.5        | V    |
| DVDD                     | DVSS            | -0.3 | +3.9        | V    |
| DRVDD                    | DRVSS           | -0.3 | +3.9        | V    |
| RG Output                | RGVSS           | -0.3 | RGVDD + 0.3 | V    |
| H1-H4 Output             | HVSS            | -0.3 | HVDD + 0.3  | V    |
| Digital Outputs          | DVSS            | -0.3 | DVDD + 0.3  | V    |
| Digital Inputs           | DVSS            | -0.3 | DVDD + 0.3  | V    |
| SCK, SL, SDATA           | DVSS            | -0.3 | DVDD + 0.3  | V    |
| VRT, VRB                 | AVSS            | -0.3 | AVDD + 0.3  | V    |
| BYP1-BYP3, CCDIN         | AVSS            | -0.3 | AVDD + 0.3  | V    |
| Junction Temperature     |                 |      | 150         | °C   |
| Lead Temperature, 10 sec |                 |      | 350         | °C   |

## PACKAGE THERMAL CHARACTERISTICS

### Thermal Resistance

$$\theta_{JA} = 61^{\circ}\text{C/W}$$

$$\theta_{JC} = 29.7^{\circ}\text{C/W}$$

## ORDERING GUIDE


| Model     | Temperature Range | Package Description | Package Option |
|-----------|-------------------|---------------------|----------------|
| AD9891KBC | -20°C to +85°C    | CSPBGA              | BC-64          |
| AD9895KBC | -20°C to +85°C    | CSPBGA              | BC-64          |

## CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the AD9891 and AD9895 feature proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



## AD9891 PIN CONFIGURATION


PIN FUNCTION DESCRIPTIONS<sup>1</sup>

| Pin | Mnemonic       | Type <sup>2</sup> | Description  | Pin | Mnemonic | Type <sup>2</sup> | Description  |
|-----|----------------|-------------------|--|-----|----------|-------------------|--|
| A1  | VD             | DO                | Vertical Sync Pulse<br>(Input for Slave Mode,<br>Output for Master Mode)   | K9  | VSG5     | DO                | CCD Sensor Gate Pulse 5  |
| B1  | HD             | DO                | Horizontal Sync Pulse<br>(Input for Slave Mode,<br>Output for Master Mode) | J9  | VSG6     | DO                | CCD Sensor Gate Pulse 6  |
| C1  | SYNC           | DI                | External System Sync Input   | K10 | VSG7     | DO                | CCD Sensor Gate Pulse 7  |
| C2  | LD/FD          | DO                | Line or Field Designator<br>Output   | J10 | VSG8     | DO                | CCD Sensor Gate Pulse 8  |
| D1  | DCLK           | DO                | Data Clock Output  | H10 | H1       | DO                | CCD Horizontal Clock 1   |
| D2  | CLPOB/<br>PBLK | DO                | CLPOB or PBLK Output   | H9  | H2       | DO                | CCD Horizontal Clock 2   |
| E1  | NC             |                   | Not Internally Connected   | G10 | HVDD     | P                 | H1–H4 Driver Supply  |
| E2  | NC             |                   | Not Internally Connected   | G9  | HVSS     | P                 | H1–H4 Driver Ground  |
| F2  | DO/SDO         | DO                | Data Output (LSB)<br>(also Serial Data Output <sup>3</sup> )               | F10 | H3       | DO                | CCD Horizontal Clock 3   |
| F1  | D1             | DO                | Data Output  | F9  | H4       | DO                | CCD Horizontal Clock 4   |
| G2  | D2             | DO                | Data Output  | E10 | RGVDD    | P                 | RG Driver Supply   |
| G1  | D3             | DO                | Data Output  | E9  | RGVSS    | P                 | RG Driver Ground   |
| H2  | D4             | DO                | Data Output  | D9  | RG       | DO                | CCD Reset Gate Clock   |
| H1  | D5             | DO                | Data Output  | D10 | CLO      | DO                | Reference Clock Output for<br>Crystal  |
| J2  | D6             | DO                | Data Output  | C10 | CLI      | DI                | Reference Clock Input  |
| J1  | D7             | DO                | Data Output  | B10 | TCVDD    | P                 | Analog Supply for Timing Core  |
| K2  | D8             | DO                | Data Output  | C9  | TCVSS    | P                 | Analog Ground for Timing<br>Core   |
| K1  | D9             | DO                | Data Output (MSB)  | A10 | AVDD1    | P                 | Analog Supply for AFE  |
| K3  | DRVDD          | P                 | Data Output Driver Supply  | B9  | AVSS1    | P                 | Analog Ground for AFE  |
| K4  | DRVSS          | P                 | Data Output Driver Ground  | A9  | BYP1     | AO                | Analog Circuit Bypass  |
| J3  | VSUB           | DO                | CCD Substrate Bias   | B8  | BYP2     | AO                | Analog Circuit Bypass  |
| J4  | SUBCK          | DO                | CCD Substrate Clock<br>(E-Shutter)   | A8  | CCDIN    | AI                | CCD Signal Input   |
| K5  | V1             | DO                | CCD Vertical Transfer Clock 1  | A7  | BYP3     | AO                | Analog Circuit Bypass  |
| J5  | V2             | DO                | CCD Vertical Transfer Clock 2  | B7  | AVDD2    | P                 | Analog Supply for AFE  |
| K6  | V3             | DO                | CCD Vertical Transfer Clock 3  | B6  | AVSS2    | P                 | Analog Ground for AFE  |
| J6  | V4             | DO                | CCD Vertical Transfer Clock 4  | A6  | REFB     | AO                | Voltage Reference Bottom<br>Bypass   |
| K7  | VSG1/V5        | DO                | CCD Sensor Gate Pulse 1<br>(also V5 <sup>4</sup> )                         | A5  | REFT     | AO                | Voltage Reference Top Bypass   |
| J7  | VSG2/V6        | DO                | CCD Sensor Gate Pulse 2<br>(also V6 <sup>4</sup> )                         | B5  | SL       | DI                | 3-Wire Serial Load Pulse   |
| K8  | VSG3/V7        | DO                | CCD Sensor Gate Pulse 3<br>(also V7 <sup>4</sup> )                         | A4  | SDI      | DI                | 3-Wire Serial Data Input   |
| J8  | VSG4/V8        | DO                | CCD Sensor Gate Pulse 4<br>(also V8 <sup>4</sup> )                         | B4  | SCK      | DI                | 3-Wire Serial Clock  |
|     |                |                   |  | A3  | MSHUT    | DO                | Mechanical Shutter Pulse   |
|     |                |                   |  | B3  | STROBE   | DO                | Strobe Pulse   |
|     |                |                   |  | B2  | DVSS     | P                 | Digital Ground   |
|     |                |                   |  | A2  | DVDD     | P                 | Digital Supply for VSG,<br>V1–V4, HD, VD, MSHUT,<br>STROBE, and Serial Interface |

## NOTES

<sup>1</sup>See Figure 50 for circuit configuration.<sup>2</sup>AI = Analog Input, AO = Analog Output, DI = Digital Input,  
DO = Digital Output, DIO = Digital Input/Output, P = Power.<sup>3</sup>In Register Readback Mode<sup>4</sup>In Frame Transfer CCD Mode

## AD9895 PIN CONFIGURATION

PIN FUNCTION DESCRIPTIONS<sup>1</sup>

| Pin | Mnemonic       | Type <sup>2</sup> | Description  | Pin | Mnemonic | Type <sup>2</sup> | Description  |
|-----|----------------|-------------------|--|-----|----------|-------------------|--|
| A1  | VD             | DO                | Vertical Sync Pulse<br>(Input for Slave Mode,<br>Output for Master Mode)   | K9  | VSG5     | DO                | CCD Sensor Gate Pulse 5  |
| B1  | HD             | DO                | Horizontal Sync Pulse<br>(Input for Slave Mode,<br>Output for Master Mode) | J9  | VSG6     | DO                | CCD Sensor Gate Pulse 6  |
| C1  | SYNC           | DI                | External System Sync Input   | K10 | VSG7     | DO                | CCD Sensor Gate Pulse 7  |
| C2  | LD/FD          | DO                | Line or Field Designator<br>Output   | J10 | VSG8     | DO                | CCD Sensor Gate Pulse 8  |
| D1  | DCLK           | DO                | Data Clock Output  | H10 | H1       | DO                | CCD Horizontal Clock 1   |
| D2  | CLPOB/<br>PBLK | DO                | CLPOB or PBLK Output   | H9  | H2       | DO                | CCD Horizontal Clock 2   |
| E2  | DO             | DO                | Data Output (LSB)  | G10 | HVDD     | P                 | H1–H4 Driver Supply  |
| E1  | D1             | DO                | Data Output  | G9  | HVSS     | P                 | H1–H4 Driver Ground  |
| F2  | D2/SDO         | DO                | Data Output<br>(also Serial Data Output <sup>3</sup> )                     | F10 | H3       | DO                | CCD Horizontal Clock 3   |
| F1  | D3             | DO                | Data Output  | F9  | H4       | DO                | CCD Horizontal Clock 4   |
| G2  | D4             | DO                | Data Output  | E10 | RGVDD    | P                 | RG Driver Supply   |
| G1  | D5             | DO                | Data Output  | E9  | RGVSS    | P                 | RG Driver Ground   |
| H2  | D6             | DO                | Data Output  | D9  | RG       | DO                | CCD Reset Gate Clock   |
| H1  | D7             | DO                | Data Output  | D10 | CLO      | DO                | Reference Clock Output for<br>Crystal  |
| J2  | D8             | DO                | Data Output  | C10 | CLI      | DI                | Reference Clock Input  |
| J1  | D9             | DO                | Data Output  | B10 | TCVDD    | P                 | Analog Supply for Timing Core  |
| K2  | D10            | DO                | Data Output  | C9  | TCVSS    | P                 | Analog Ground for Timing<br>Core   |
| K1  | D11            | DO                | Data Output (MSB)  | A10 | AVDD1    | P                 | Analog Supply for AFE  |
| K3  | DRVDD          | P                 | Data Output Driver Supply  | B9  | AVSS1    | P                 | Analog Ground for AFE  |
| K4  | DRVSS          | P                 | Data Output Driver Ground  | A9  | BYP1     | AO                | Analog Circuit Bypass  |
| J3  | VSUB           | DO                | CCD Substrate Bias   | B8  | BYP2     | AO                | Analog Circuit Bypass  |
| J4  | SUBCK          | DO                | CCD Substrate Clock<br>(E-Shutter)   | A8  | CCDIN    | AI                | CCD Signal Input   |
| K5  | V1             | DO                | CCD Vertical Transfer Clock 1  | A7  | BYP3     | AO                | Analog Circuit Bypass  |
| J5  | V2             | DO                | CCD Vertical Transfer Clock 2  | B7  | AVDD2    | P                 | Analog Supply for AFE  |
| K6  | V3             | DO                | CCD Vertical Transfer Clock 3  | B6  | AVSS2    | P                 | Analog Ground for AFE  |
| J6  | V4             | DO                | CCD Vertical Transfer Clock 4  | A6  | REFB     | AO                | Voltage Reference Bottom<br>Bypass   |
| K7  | VSG1/V5        | DO                | CCD Sensor Gate Pulse 1<br>(also V5 <sup>4</sup> )                         | A5  | REFT     | AO                | Voltage Reference Top Bypass   |
| J7  | VSG2/V6        | DO                | CCD Sensor Gate Pulse 2<br>(also V6 <sup>4</sup> )                         | B5  | SL       | DI                | 3-Wire Serial Load Pulse   |
| K8  | VSG3/V7        | DO                | CCD Sensor Gate Pulse 3<br>(also V7 <sup>4</sup> )                         | A4  | SDI      | DI                | 3-Wire Serial Data Input   |
| J8  | VSG4/V8        | DO                | CCD Sensor Gate Pulse 4<br>(also V8 <sup>4</sup> )                         | B4  | SCK      | DI                | 3-Wire Serial Clock  |
|     |                |                   |  | A3  | MSHUT    | DO                | Mechanical Shutter Pulse   |
|     |                |                   |  | B3  | STROBE   | DO                | Strobe Pulse   |
|     |                |                   |  | B2  | DVSS     | P                 | Digital Ground   |
|     |                |                   |  | A2  | DVDD     | P                 | Digital Supply for VSG,<br>V1–V4, HD, VD, MSHUT,<br>STROBE, and Serial Interface |

## NOTES

<sup>1</sup>See Figure 50 for circuit configuration.<sup>2</sup>AI = Analog Input, AO = Analog Output, DI = Digital Input,  
DO = Digital Output, DIO = Digital Input/Output, P = Power.<sup>3</sup>In Register Readback Mode<sup>4</sup>In Frame Transfer CCD Mode



## SPECIFICATION DEFINITIONS

### Differential Nonlinearity (DNL)

An ideal ADC exhibits code transitions that are exactly 1 LSB apart. DNL is the deviation from this ideal value. Thus, every code must have a finite width. No missing codes guaranteed to 12-bit resolution indicates that all 4096 codes, respectively, must be present over all operating conditions.

### Peak Nonlinearity

Peak nonlinearity, a full signal chain specification, refers to the peak deviation of the output of the AD9891/AD9895 from a true straight line. The point used as “zero scale” occurs 0.5 LSB before the first code transition. “Positive full scale” is defined as a level 1 and 0.5 LSB beyond the last code transition. The deviation is measured from the middle of each particular output code to the true straight line. The error is then expressed as a

percentage of the 2 V ADC full-scale signal. The input signal is always appropriately gained up to fill the ADC’s full-scale range.

### Total Output Noise

The rms output noise is measured using histogram techniques. The standard deviation of the ADC output codes is calculated in LSB and represents the rms noise level of the total signal chain at the specified gain setting. The output noise can be converted to an equivalent voltage, using the relationship  $1 \text{ LSB} = (\text{ADC Full Scale} / 2^n \text{ codes})$  when  $n$  is the bit resolution of the ADC. For the AD9891, 1 LSB is 2 mV, while for the AD9895, 1 LSB is 0.5 mV.

### Power Supply Rejection (PSR)

The PSR is measured with a step change applied to the supply pins. The PSR specification is calculated from the change in the data outputs for a given step change in the supply voltage.

## EQUIVALENT CIRCUITS




Figure 1. CCDIN

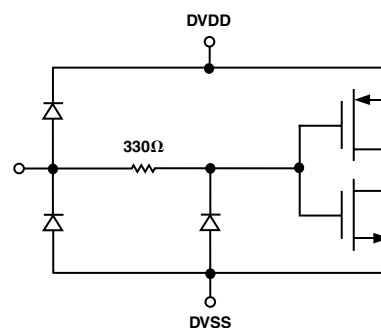


Figure 3. Digital Inputs

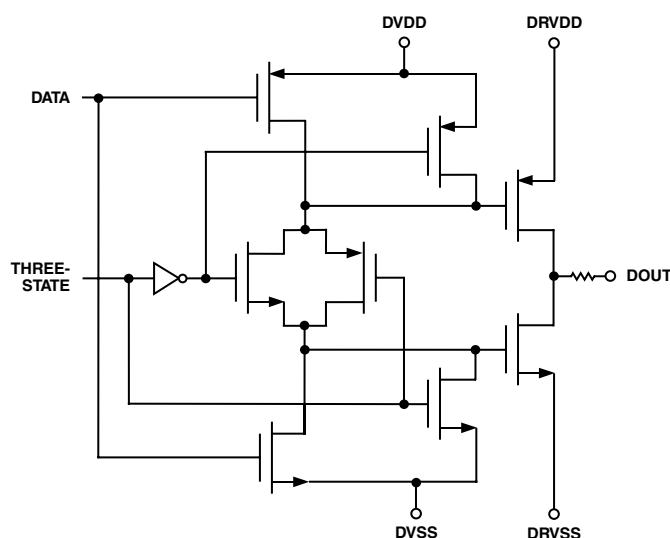


Figure 2. Digital Data Outputs



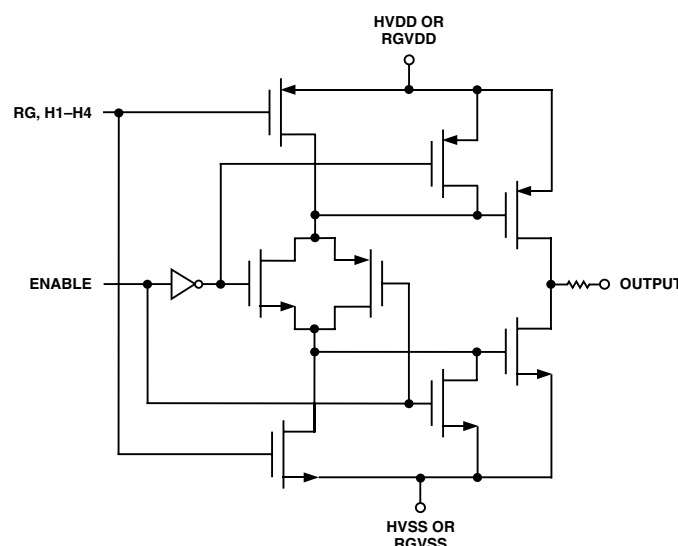


Figure 4. H1-H4, RG Drivers


# AD9891/AD9895—Typical Performance Characteristics

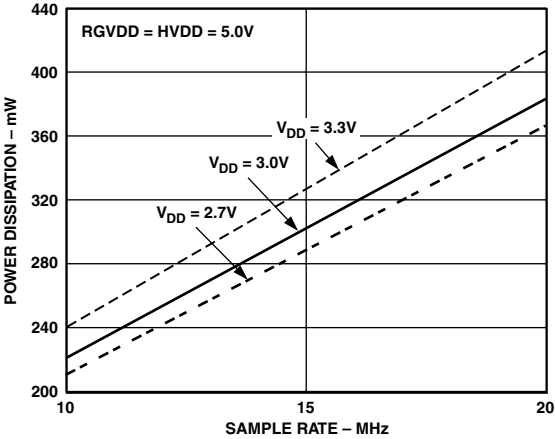


TPC 1. AD9891 Power vs. Sample Rate

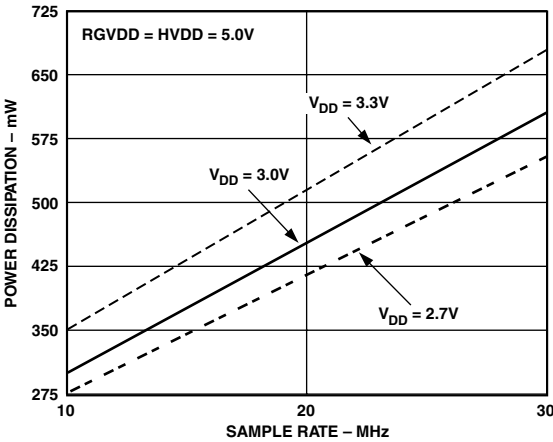


TPC 4. AD9895 Power vs. Sample Rate

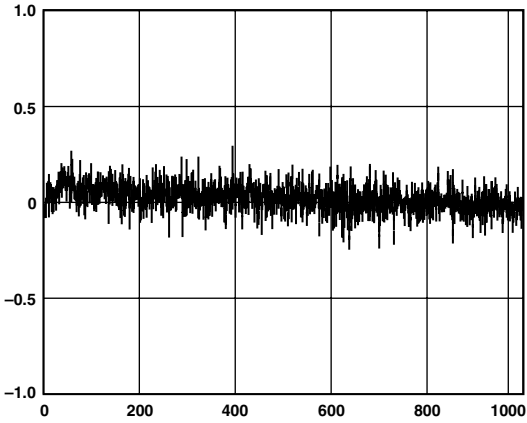


TPC 2. AD9891 Typical DNL Performance

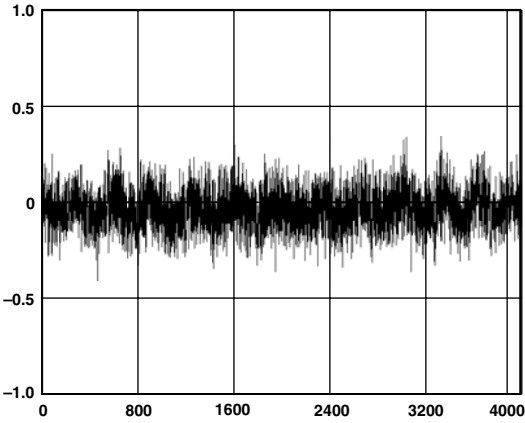

TPC 5. AD9895 Typical DNL Performance

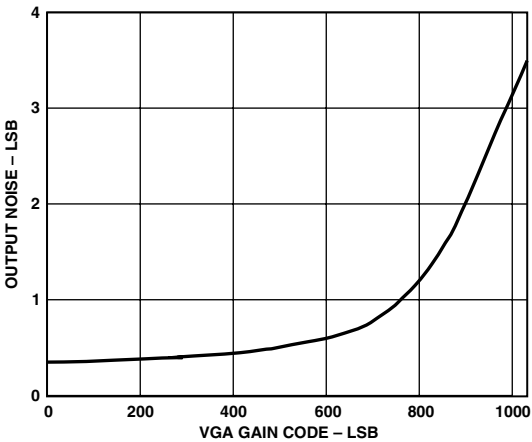

TPC 3. AD9891 Output Noise vs. VGA Gain

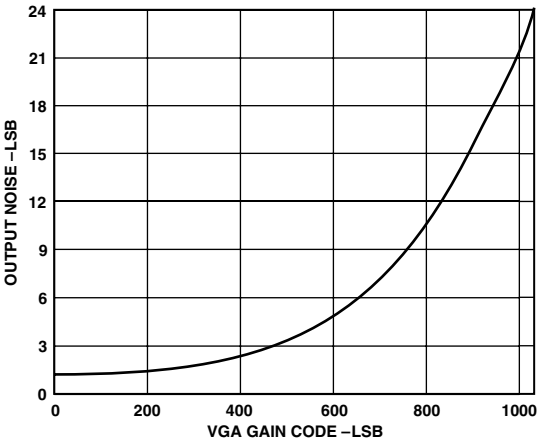

TPC 6. AD9895 Output Noise vs. VGA Gain

## SYSTEM OVERVIEW

Figure 5 shows the typical system block diagram for the AD9891/AD9895 used in Master Mode. The CCD output is processed by the AD9891/AD9895's AFE circuitry, which consists of a CDS,  $P_xGA$ , VGA, black level clamp, and an A/D converter. The digitized pixel information is sent to the digital image processor chip, which performs the post-processing and compression. To operate the CCD, all CCD timing parameters are programmed into the AD9891/AD9895 from the system microprocessor, through the 3-wire serial interface. From the system master clock, CLI, provided by the image processor or external crystal, the AD9891/AD9895 generates all of the CCD's horizontal and vertical clocks and all internal AFE clocks. External synchronization is provided by a SYNC pulse from the microprocessor, which will reset internal counters and resync the VD and HD outputs.

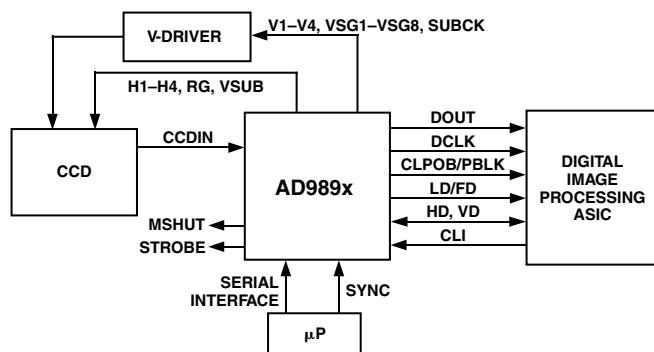


Figure 5. Typical System Block Diagram, Master Mode

Alternatively, the AD9891/AD9895 may be operated in Slave Mode, in which the VD and HD are provided externally from the image processor. In this mode, all AD9891/AD9895 timing will be synchronized with VD and HD.

The H-drivers for H1-H4 and RG are included in the AD9891/AD9895, allowing these clocks to be directly connected to the CCD.

H-drive voltage of up to 5 V is supported. An external V-driver is required for the vertical transfer clocks, the sensor gate pulses, and the substrate clock.

The AD9891/AD9895 also includes programmable MSHUT and STROBE outputs, which may be used to trigger mechanical shutter and strobe (flash) circuitry.

Figure 6 shows the horizontal and vertical counter dimensions for the AD9891/AD9895. All internal horizontal and vertical clocking is programmed using these dimensions to specify line and pixel locations.

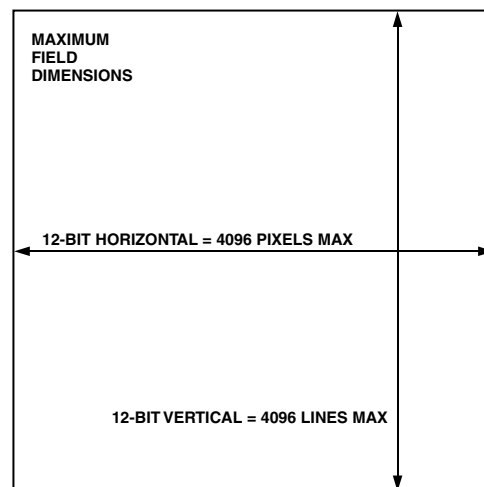


Figure 6. Vertical and Horizontal Counters

# AD9891/AD9895

## PRECISION TIMING HIGH SPEED TIMING GENERATION

The AD9891/AD9895 generates flexible, high speed timing signals using the *Precision Timing* core. This core is the foundation for generating the timing used for both the CCD and the AFE: the reset gate RG, horizontal drivers H1–H4, and the SHP/SHD sample clocks. A unique architecture makes it routine for the system designer to optimize image quality by providing precise control over the horizontal CCD readout and the AFE correlated double sampling.

The high speed timing of the AD9891/AD9895 operates the same in either Master or Slave Mode configuration.

### Timing Resolution


The *Precision Timing* core uses a  $1\times$  master clock input (CLI) as a reference. This clock should be the same as the CCD pixel clock frequency. Figure 7 illustrates how the internal timing core divides the master clock period into 48 steps or edge positions. Using a 20 MHz CLI frequency, the edge resolution of the *Precision Timing* core is 1 ns. If a  $1\times$  system clock is not available, it is also possible to use a  $2\times$  reference clock by programming the CLIDIVIDE Register (Addr x01F). The AD9891/AD9895 will then internally divide the CLI frequency by two.

The AD9891/AD9895 also includes a master clock output, CLO, which is the inverse of CLI. This output is intended to be used as a crystal driver. A crystal can be placed between the CLI and CLO Pins to generate the master clock for the AD9891/AD9895. For more information on using a crystal, see Figure 51.

### High Speed Clock Programmability


Figure 8 shows how the high speed clocks RG, H1–H4, SHP, and SHD are generated. The RG pulse has programmable rising and falling edges, and may be inverted using the polarity control. The horizontal clocks H1 and H3 have programmable rising and falling edges and polarity control. The H2 and H4 clocks are always inverses of H1 and H3, respectively. Table I summarizes the high speed timing registers and their parameters. Figure 9 shows the typical 2-phase H-clock arrangement in which H3 and H4 are programmed for the same edge location as H1 and H2.

The edge location registers are six bits wide, but there are only 48 valid edge locations available. Therefore, the register values are mapped into four quadrants, with each quadrant containing 12 edge locations. Table II shows the correct register values for

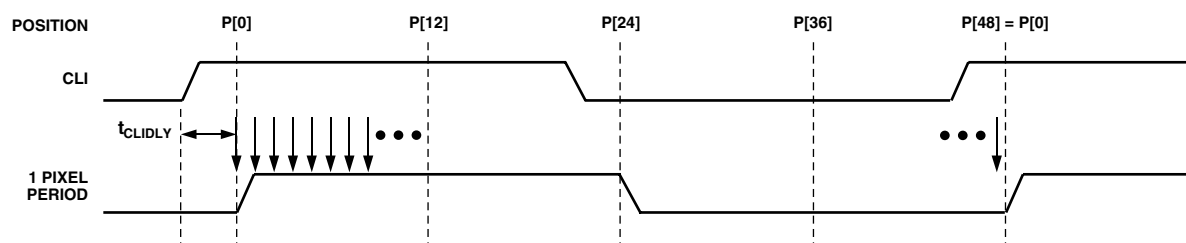

NOTES  
PIXEL CLOCK PERIOD IS DIVIDED INTO 48 POSITIONS, PROVIDING FINE EDGE RESOLUTION FOR HIGH SPEED CLOCKS.  
THERE IS A FIXED DELAY FROM THE CLI INPUT TO THE INTERNAL PIXEL PERIOD POSITIONS ( $t_{CLIDLY} = 6\text{ns TYP}$ ).

Figure 7. High Speed Clock Resolution from CLI Master Clock Input

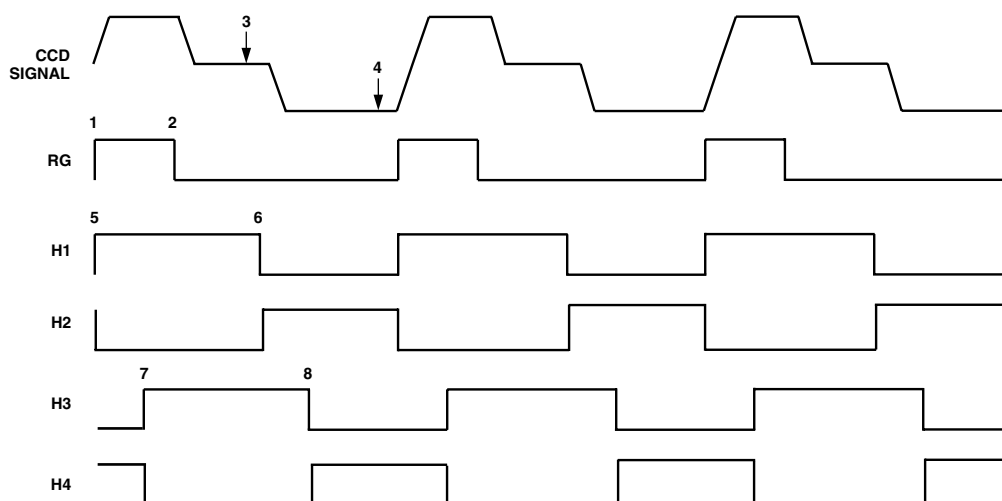

PROGRAMMABLE CLOCK POSITIONS:  
1: RG RISING EDGE  
2: RG FALLING EDGE  
3: SHP SAMPLE LOCATION  
4: SHD SAMPLE LOCATION  
5: H1 RISING EDGE POSITION AND 6: H1 FALLING EDGE POSITION (H2 IS INVERSE OF H1)  
7: H3 RISING EDGE POSITION AND 8: H3 FALLING EDGE POSITION (H4 IS INVERSE OF H3)

Figure 8. High Speed Clock Programmable Locations

the corresponding edge locations. Figure 10 shows the range and default locations of the high speed clock signals.

#### H-Driver and RG Outputs

In addition to the programmable timing positions, the AD9891/AD9895 features on-chip output drivers for the RG and H1–H4 outputs. These drivers are powerful enough to directly drive the CCD inputs. The H-driver current can be adjusted for optimum rise/fall time into a particular load by using the DRV Registers (Addr x0E1 to x0E4). The RG drive current is adjustable using the RGDRV Register (Addr x0E8). Each 3-bit DRV Register is adjustable in 3.5 mA increments, with the minimum setting of 0 equal to OFF or three-state, and the maximum setting of 7 equal to 24.5 mA.

As shown in Figure 11, the H2 and H4 outputs are inverses of H1 and H3, respectively. The internal propagation delay resulting from the signal inversion is less than 1 ns, which is significantly less than the typical rise time driving the CCD load. This results

in an H1/H2 crossover voltage at approximately 50% of the output swing. The crossover voltage is not programmable.


#### Digital Data Outputs

The AD9891/AD9895 data output and DCLK phase are programmable using the DOUTPHASE Register (Addr x01D). Any edge from 0 to 47 may be programmed, as shown in Figure 12. Normally, the DOUT and DCLK signals will track in phase, based on the DOUTPHASE Register contents. The DCLK output phase can also be held fixed with respect to the data outputs, by changing the DCLKMODE Register (Addr x01E) HIGH. In this mode, the DCLK output will remain at a fixed phase equal to CLO (the inverse of CLI) while the data output phase is still programmable.

There is a fixed output delay from the DCLK rising edge to the DOUT transition, called  $t_{OD}$ . This delay can be programmed to four values between 0 ns and 12 ns, using the DOUT\_DELAY Register (Addr x032). The default value is 8 ns.

**Table I. H1–H4, RG, SHP, and SHD Timing Parameters**

| Register | Length | Range              | Description   |
|----------|--------|--------------------|---|
| POL      | 1b     | High/Low           | Polarity Control for H1, H3, and RG (0 = No Inversion, 1 = Inversion)     |
| POSLOC   | 6b     | 0–47 Edge Location | Positive Edge Location for H1, H3, and RG<br>Sample Location for SHP, SHD |
| NEGLOC   | 6b     | 0–47 Edge Location | Negative Edge Location for H1, H3, and RG                                 |
| DRV      | 3b     | 0–7 Current Steps  | Drive Current for H1–H4 and RG Outputs (3.5 mA per Step)                  |

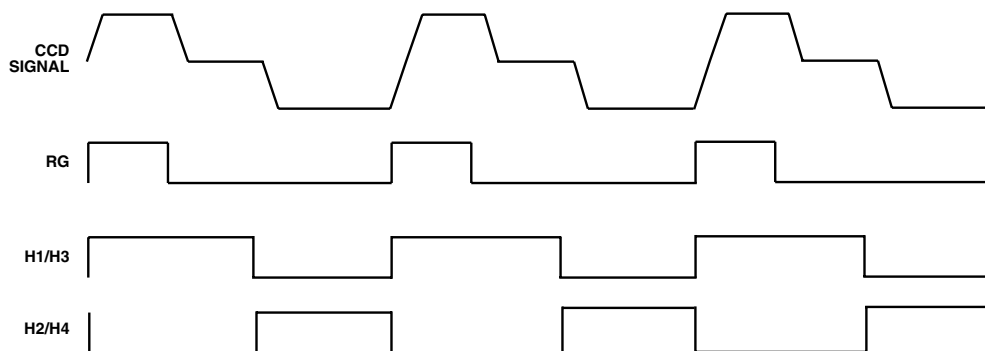


USING THE SAME TOGGLE POSITIONS FOR H1 AND H3 GENERATES STANDARD 2-PHASE H-CLOCKING.

*Figure 9. 2-Phase H-Clock Operation*

**Table II. Precision Timing Edge Locations**

| Quadrant | Edge Location (Dec) | Register Value (Dec) | Register Value (Bin) |
|----------|---------------------|----------------------|----------------------|
| I        | 0 to 11             | 0 to 11              | 000000 to 001011     |
| II       | 12 to 23            | 16 to 27             | 010000 to 011011     |
| III      | 24 to 35            | 32 to 43             | 100000 to 101011     |
| IV       | 36 to 47            | 48 to 59             | 110000 to 111011     |

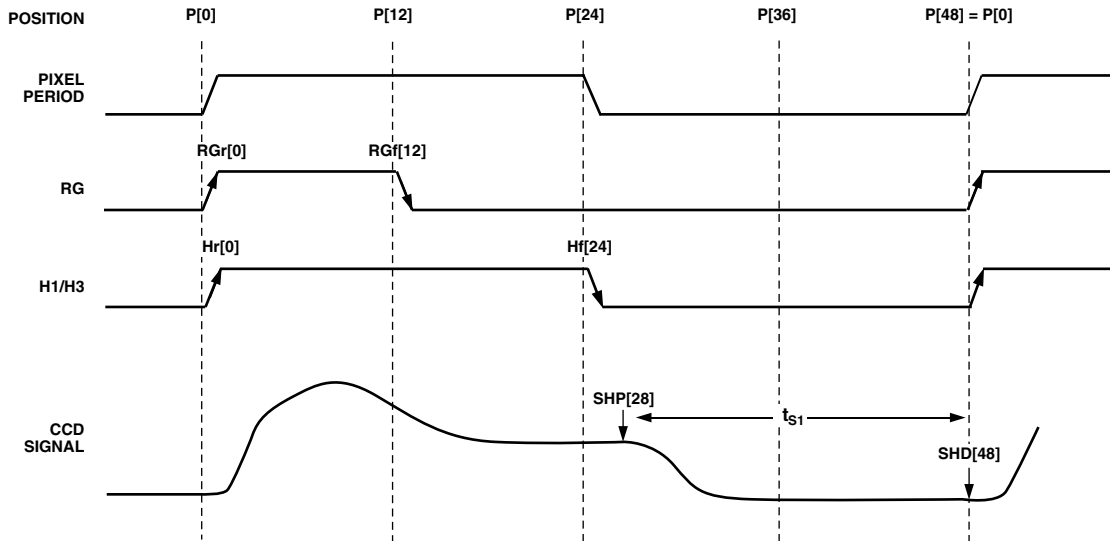

NOTES  
ALL SIGNAL EDGES ARE FULLY PROGRAMMABLE TO ANY OF THE 48 POSITIONS WITHIN ONE PIXEL PERIOD.  
DEFAULT POSITIONS FOR EACH SIGNAL ARE SHOWN.

Figure 10. High Speed Clock Default and Programmable Locations


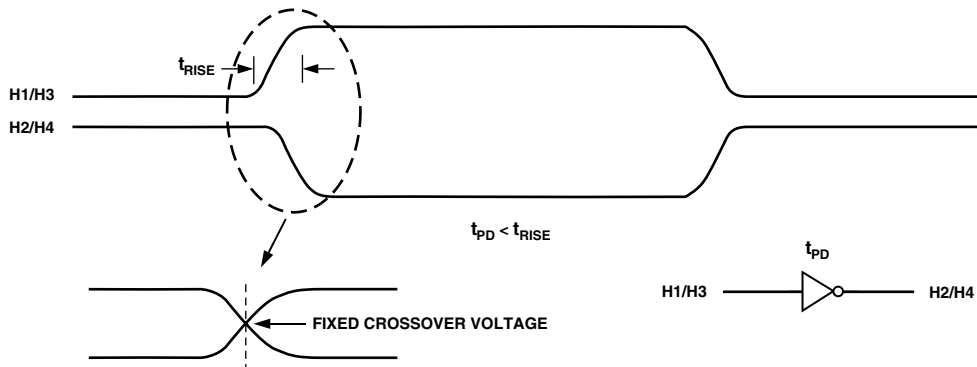


Figure 11. H-Clock Inverse Phase Relationship

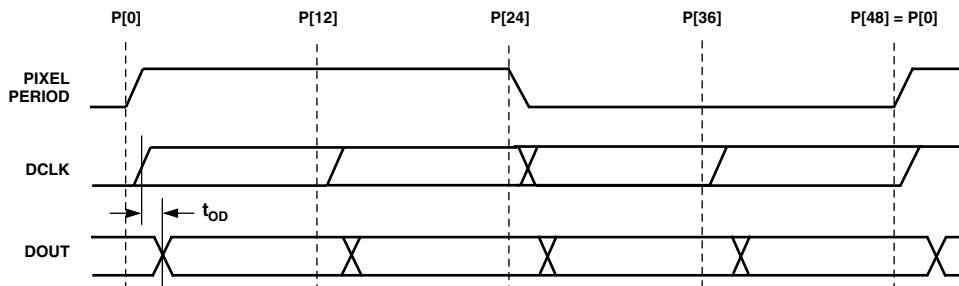

NOTES  
DATA OUTPUT (DOUT) AND DCLK PHASE ARE ADJUSTABLE WITH RESPECT TO THE PIXEL PERIOD.  
WITHIN 1 CLOCK PERIOD, THE DATA TRANSITION CAN BE PROGRAMMED TO 48 DIFFERENT LOCATIONS.  
OUTPUT DELAY ( $t_{OD}$ ) FROM DCLK RISING EDGE TO DOUT RISING EDGE IS PROGRAMMABLE.

Figure 12. Digital Output Phase Adjustment

## HORIZONTAL CLAMPING AND BLANKING

The AD9891/AD9895's horizontal clamping and blanking pulses are fully programmable to suit a variety of applications. As with the vertical timing generation, individual sequences are defined for each signal, which are then organized into multiple regions during image readout. This allows the dark pixel clamping and blanking patterns to be changed at each stage of the readout in order to accommodate different image transfer timing and high speed line shifts.

### Individual CLPOB, CLPDM, and PBLK Sequences

The AFE horizontal timing consists of CLPOB, CLPDM, and PBLK, as shown in Figure 13. These three signals are independently programmed using the registers in Table III. SPOL is the start polarity for the signal, and TOG1 and TOG2 are the first and second toggle positions of the pulse. All three signals are active low and should be programmed accordingly. Up to four individual sequences can be created for each signal.

To simplify the programming requirements, the CLPDM signal will track the CLPOB signal by default. If separate control of the CLPDM signal is desired, the SINGLE\_CLAMP Register (Addr x031) should be set LOW.

### Individual HBLK Sequences

The HBLK programmable timing shown in Figure 14 is similar to CLPOB, CLPDM, and PBLK. However, there is no start polarity control. Only the toggle positions are used to designate the start and the stop positions of the blanking period. Additionally, there is a polarity control, HBLKMASK, that designates the polarity of the horizontal clock signals H1–H4 during the blanking period. Setting HBLKMASK high will set H1 = H3 = Low and H2 = H4 = High during the blanking, as shown in Figure 15. Up to four individual sequences are available for HBLK.

### Horizontal Sequence Control

The AD9891/AD9895 use sequence change positions (SCP) and sequence pointers (SPTR) to organize the individual hori-

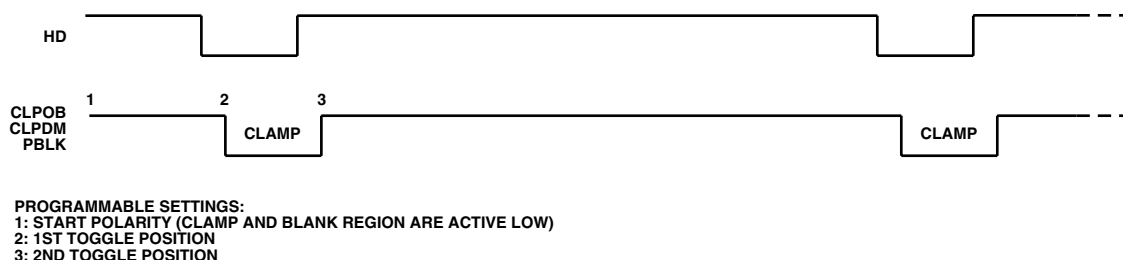


Figure 13. Clamp and Preblank Pulse Placement

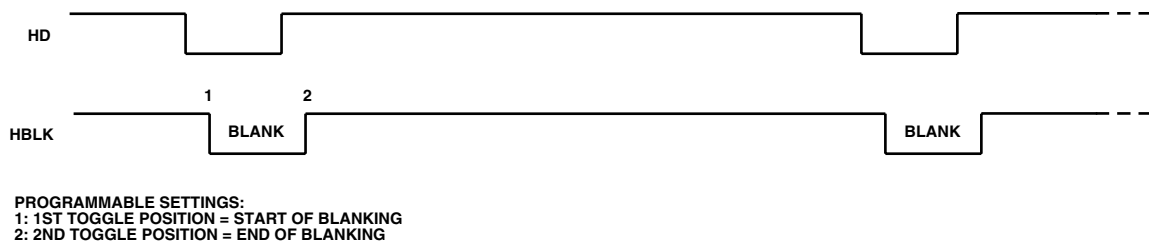


Figure 14. Horizontal Blanking (HBLK) Pulse Placement

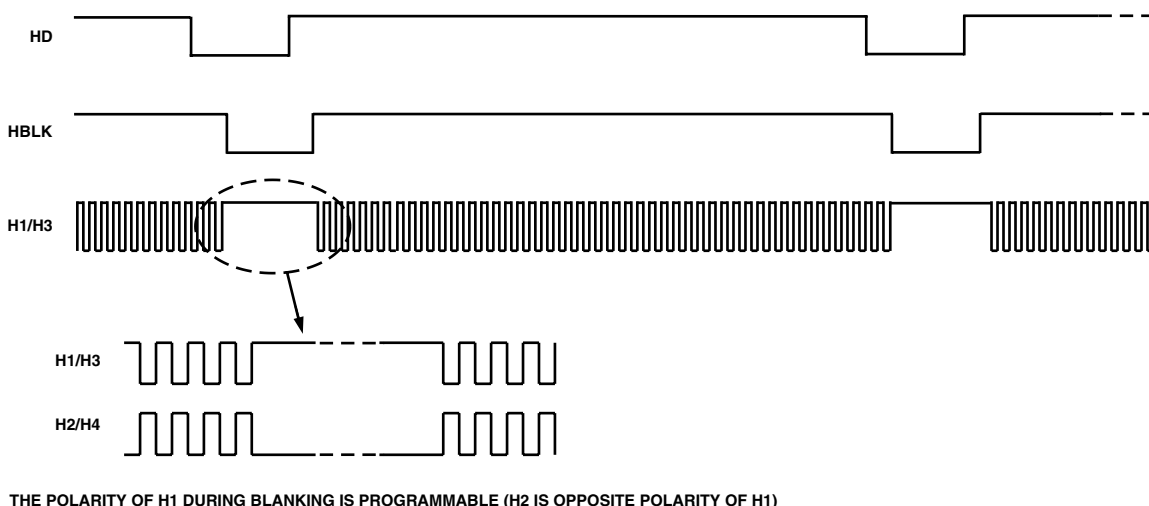


Figure 15. HBLK Masking Control

# AD9891/AD9895

zontal sequences. Up to four SCPs are available to divide the readout into four separate regions, as shown in Figure 16. The SCP0 is always hard-coded to line 0, and SCP1–SCP3 are register programmable. During each region bound by the SCP, the SPTR Registers designate which sequence is used by each signal. CLPOB and CLPDM share the same SCP, PBLK has a separate set of SCP, and HBLK shares the vertical RCP (see Vertical Timing Generation section). For example,

CLPSCP1 will define Region 0 for CLPOB and CLPDM, and in that region any of the four individual CLPOB and CLPDM sequences may be selected with the SPTR Registers. The next SCP defines a new region, and in that region each signal can be assigned to a different individual sequence. Because HBLK shares the vertical RCP, there are up to eight regions where HBLK sequences may be changed using the eight HBLKSPTR Registers.

**Table III. CLPOB, CLPDM, and PBLK Individual Sequence Parameters**

| Register | Length | Range                 | Description  |
|----------|--------|-----------------------|--|
| SPOL     | 1b     | High/Low              | Starting Polarity of Vertical Transfer Pulse for Sequences 0–3 |
| TOG1     | 12b    | 0–4095 Pixel Location | First Toggle Position within Line for Sequences 0–3            |
| TOG2     | 12b    | 0–4095 Pixel Location | Second Toggle Position within Line for Sequences 0–3           |

**Table IV. HBLK Individual Sequence Parameters**


| Register | Length | Range                 | Description   |
|----------|--------|-----------------------|---|
| HBLKMASK | 1b     | High/Low              | Masking Polarity for H1 for Sequences 0–3 (0 = H1 Low, 1 = H1 High) |
| HBLKTOG1 | 12b    | 0–4095 Pixel Location | First Toggle Position within Line for Sequences 0–3                 |
| HBLKTOG2 | 12b    | 0–4095 Pixel Location | Second Toggle Position within Line for Sequences 0–3                |

**Table V. Horizontal Sequence Control Parameters for CLPOB, CLPDM, and PBLK**

| Register    | Length | Range               | Description                                     |
|-------------|--------|---------------------|---|
| SCP1–SCP3   | 12b    | 0–4095 Line Number  | CLPOB/PBLK SCP to Define Horizontal Regions 0–3 |
| SPTR0–SPTR3 | 2b     | 0–3 Sequence Number | Sequence Pointer for Horizontal Regions 0–3     |

**Table VI. Horizontal Sequence Control Parameters for HBLK**

| Register            | Length | Range               | Description                                      |
|---------------------|--------|---------------------|--|
| VTPRCP1–VTPRCP7     | 12b    | 0–4095 Line Number  | Vertical Region Change Positions (See Table IX.) |
| HBLKSPTR0–HBLKSPTR7 | 2b     | 0–3 Sequence Number | Sequence Pointer for HBLK Regions 0–7            |

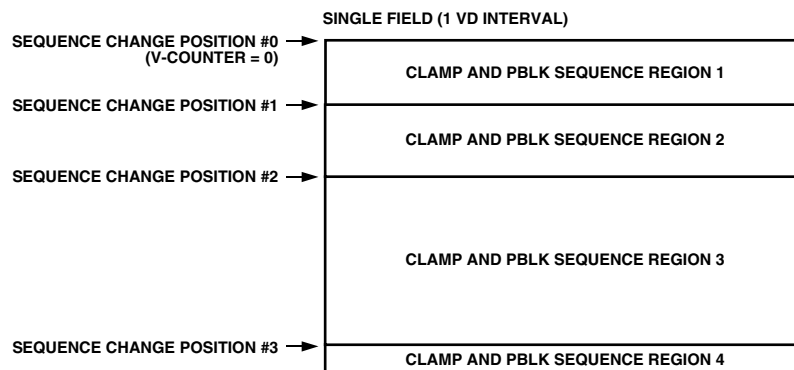

UP TO FOUR INDIVIDUAL HORIZONTAL CLAMP AND BLANKING REGIONS MAY BE PROGRAMMED WITHIN A SINGLE FIELD, USING THE SEQUENCE CHANGE POSITIONS.

*Figure 16. Clamp and Blanking Sequence Flexibility*



## VERTICAL TIMING GENERATION

The AD9891/AD9895 provide a very flexible solution for generating vertical CCD timing and can support multiple CCDs and different system architectures. The 4-phase vertical transfer clocks V1–V4 are used to shift each line of pixels into the horizontal output register of the CCD. The AD9891/AD9895 allow these outputs to be individually programmed into different pulse patterns. Vertical sequence control registers then organize the individual vertical pulses into the desired CCD vertical timing arrangement.

Figure 17 shows an overview of how the vertical timing is generated in three basic steps. First, the individual pulse patterns or

sequences are created by using the Vertical Transfer Pulse (VTP) Registers. These sequences are a essentially a “pool” of pulse patterns that may be assigned to any of the V1–V4 outputs. Second, individual regions are built by assigning a sequence to each of the V1–V4 outputs. Up to five unique regions may be specified. Finally, the readout of the entire field is constructed by combining one or more of the individual regions sequentially. With up to eight region areas available, different steps of the readout such as high speed line shifts and vertical image transfer can be supported.

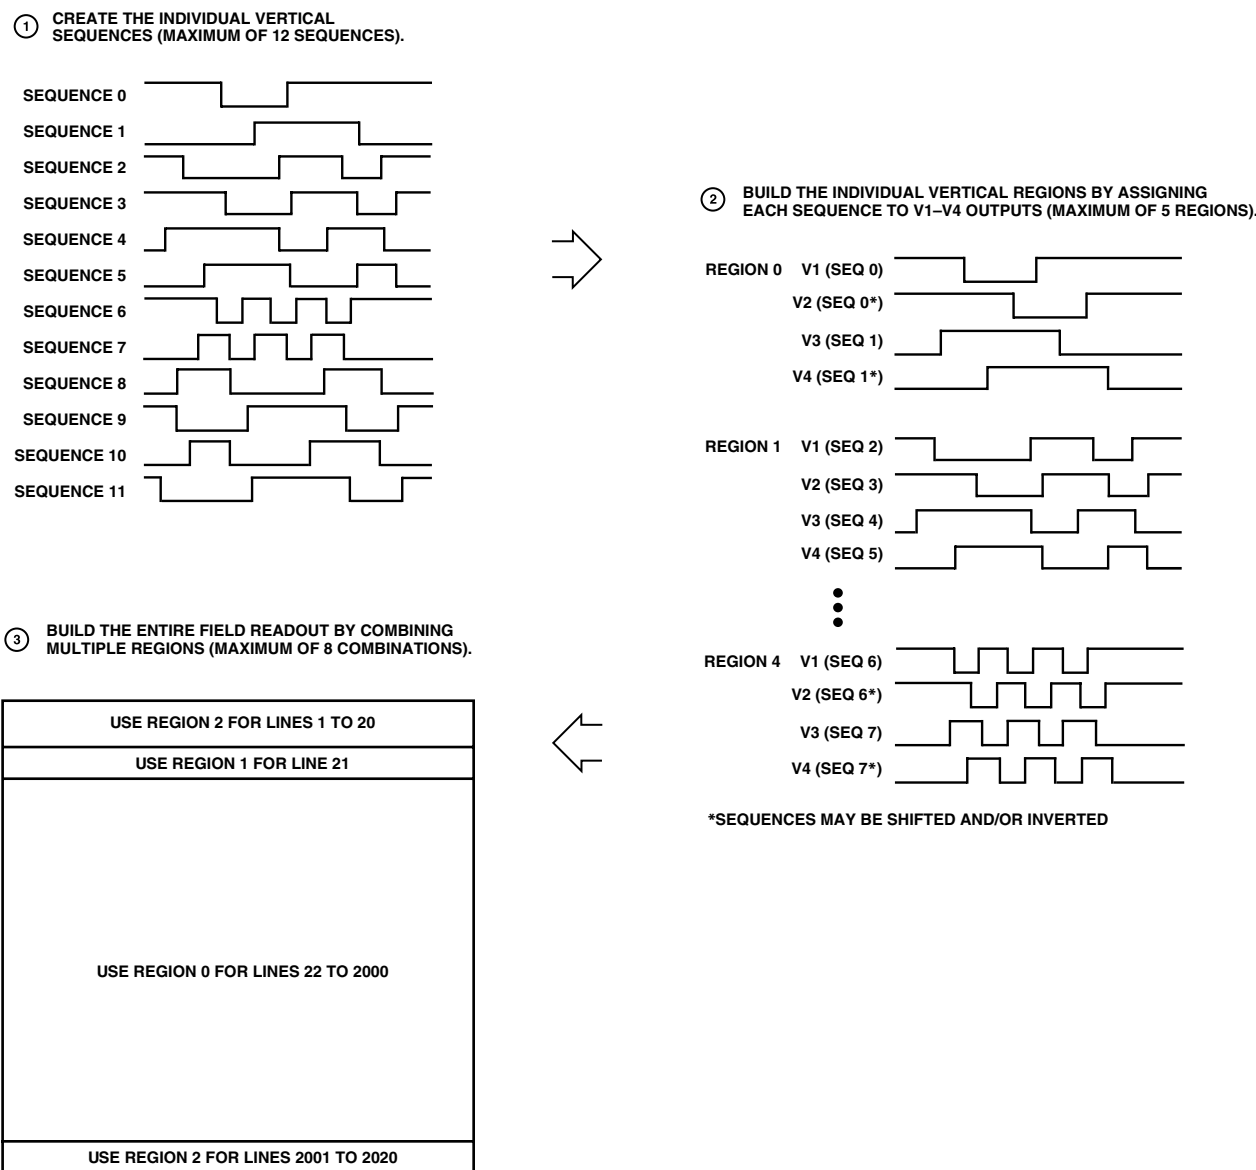


Figure 17. Summary of Vertical Timing Generation

# AD9891/AD9895

## Individual Vertical Sequences

To generate the individual vertical sequences or patterns shown in Figure 18, five registers are required for each sequence. Table VII summarizes these registers and their respective bit lengths. The start polarity (VTPPOL) determines the starting polarity of the vertical sequence and can be programmed high or low. The first toggle position (VTPTOG1) and second toggle position (VTPTOG2) are the pixel locations within the line where the pulse transitions. A third toggle position (VTPTOG3) is also available for sequences 0 through 7. All toggle positions are 10-bit values, which limits the placement of a pulse to within 1024 pixels of a line. A separate register, VSTART, sets the start position of the sequence within the line (see Individual Vertical Regions section). The Length (VTPLEN) Register determines the number of pixels between each of the pulse repetitions, if any repetitions have been programmed. The number of repetitions (VTPREP) simply determines the number of pulse repetitions desired within a


single line. Programming “1” for VTPREP gives a single pulse, while setting to “0” will provide a fixed dc output based on the start polarity value. There is a total of 12 individual sequences that may be programmed.

When specifying the individual regions, each sequence may be assigned to any of the V1–V4 outputs. For example, Figure 19 shows a typical 4-phase V-clock arrangement. Two different sequences are needed to generate the different pulsewidths. The use of individual start positions for V1–V4 allows the four outputs to be generated from two sequences. Figure 20 shows a slightly different V-clock arrangement in which V2, V3, and V4 are simply shifted and/or inverted versions of V1. Only one individual sequence is needed because all signals have the same pulsewidth. The invert sequence registers (VINV) are used for V3 and V4 (see Table VII).


Note that for added flexibility, the VTPPOL Registers (Start Polarity) may be used as an extra toggle position.

**Table VII. Individual VTP Sequence Parameters**

| Register | Length | Range                 | Description   |
|----------|--------|-----------------------|---|
| VTPPOL   | 1b     | High/Low              | Starting Polarity of Vertical Transfer Pulse for Each Sequence 0–11 |
| VTPTOG1  | 10b    | 0–1023 Pixel Location | First Toggle Position within Line for Each Sequence 0–11            |
| VTPTOG2  | 10b    | 0–1023 Pixel Location | Second Toggle Position within Line for Each Sequence 0–11           |
| VTPTOG3  | 10b    | 0–1023 Pixel Location | Third Toggle Position within Line for Each Sequence 0–7             |
| VTPLEN   | 10b    | 0–1023 Pixels         | Length between Pulse Repetitions for Each Sequence 0–11             |
| VTPREP   | 12b    | 0–4095 Pulses         | Number of Pulse Repetitions for Each Sequence 0–11 (0 = DC Output)  |

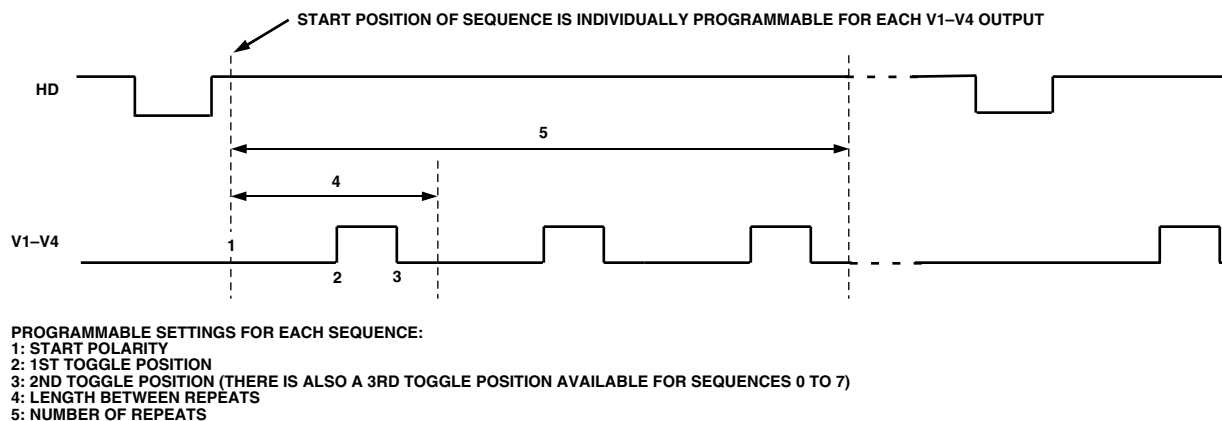

*Figure 18. Individual Vertical Sequence Programmability*

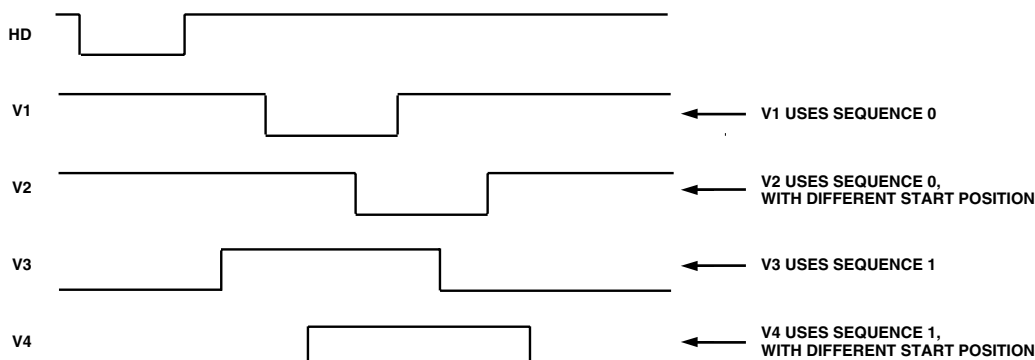

*Figure 19. Example of Separate V1–V4 Signals Using Two Individual Sequences*

### Individual Vertical Regions

The AD9891/AD9895 arranges the individual sequences into regions through the use of Sequence Pointers (SPTR). Within each region, different sequences may be assigned to each V-clock output. Figure 21 shows the programmability of each region and Table VIII summarizes the registers needed for generating each region.

For each individual region, the line length (in pixels) is programmable using the HDLEN Registers. Each region can have a different line length to accommodate various image readout techniques. The maximum number of pixels per line is 4096. Also unique to each region are the sequence start positions for each V-output, which are programmed using the VSTART Registers. Each VSTART is a 12-bit value, allowing the start position to be placed anywhere in the line. There are five HDLEN Registers, one for each region. There is a total of 20 VSTART Registers: one for each V1–V4 output, for five different regions.

Note that the last line of the field is separately programmable using the HDLASTLEN Register.

The Sequence Pointer registers VxSPTRFIRST and VxSPTRSECOND assign the individual vertical sequences to each of the V-clock outputs (V1–V4) within a given region. Typically, only the SPTRFIRST Registers are used, with the SPTRSECOND Registers reserved for generating line-by-line alternation (see Vertical Sequence Alternation). Any of the 12 individual sequences may also be inverted using the VxINVFIRST and VxINVSECOND Registers, effectively doubling the number of sequences available. There is one SPTRFIRST Register for each V-output, for a total of four registers per region. If all five regions are used, there is a total of 20 SPTRFIRST Registers. There is also the same number of SPTRSECOND Registers, if alternation is required. Note that the SPTR Registers are four bits wide; if a value greater than 11 is programmed, the Vx output will be dc at the level of the VxINV Register.


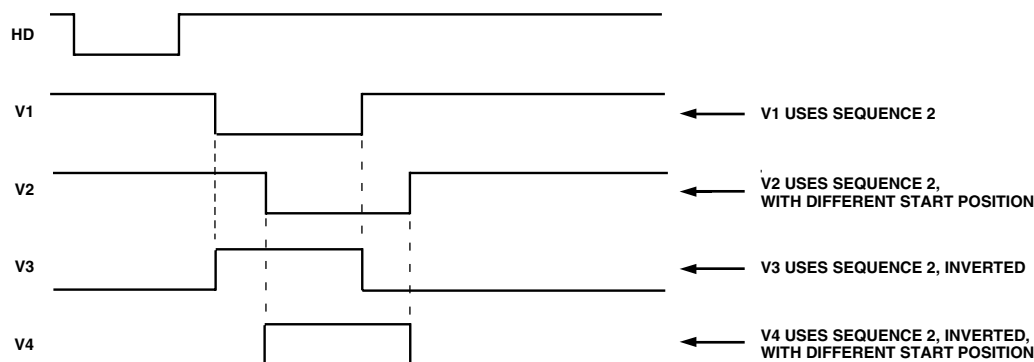


Figure 20. Example of Inverted V1–V4 Signals Using One Individual Sequence with Inversion

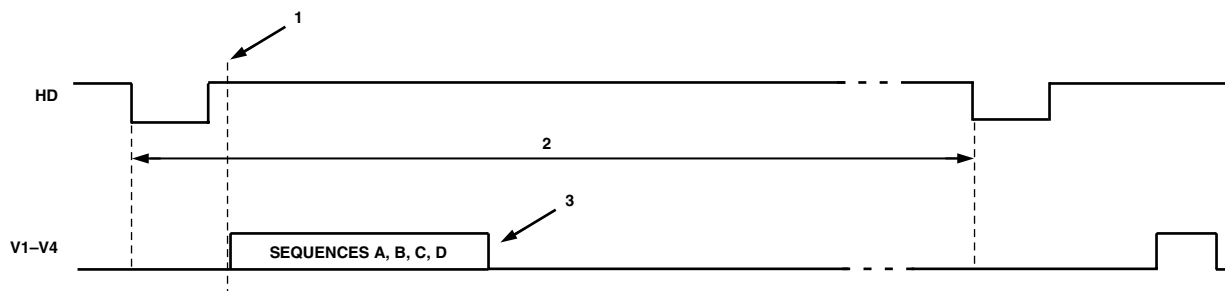

PROGRAMMABLE SETTINGS FOR EACH REGION:  
 1: START POSITION OF SELECTED SEQUENCE IS SEPARATELY PROGRAMMABLE FOR EACH OUTPUT  
 2: HD LINE LENGTH  
 3: SEQUENCE POINTERS (SPTR) TO SELECT AN INDIVIDUAL SEQUENCE FOR EACH OUTPUT  
 4: ANY SEQUENCES MAY ALSO BE ALTERNATED FOR ADDITIONAL FLEXIBILITY

Figure 21. Individual Vertical Region Programmability

Table VIII. Individual Vertical Region Parameters

| Register    | Length | Range                 | Description  |
|-------------|--------|-----------------------|--|
| HDLEN       | 12b    | 0–4095 Pixels         | HD Line Length for Lines in Each Region 0–4  |
| VxSTART     | 12b    | 0–4095 Pixel Location | Sequence Start Position for Each Vx Output in Each Region 0–4  |
| VxSPTRFIRST | 4b     | Sequence 0–11         | Sequence Pointer for Vx Output during Each Region 0–4<br>(Can Be Used with SPTRSECOND for Alternation, See Text) |
| VxINVFIRST  | 1b     | High/Low              | When High, the Polarity of Sequence VxSPTRFIRST Is Inverted  |

x is the V-output from 1–4.

### Complete Field: Combining the Regions

The individual regions are combined into a complete field readout by using region change positions (RCP) and region pointers (REGPTR). Figure 22 shows how each field is divided into multiple regions. This allows the user to change the vertical timing during various stages of the image readout. The boundaries of each region are defined by the sequence change positions (RCP). Each RCP is a 12-bit value representing the line number bounding the region. A total of seven RCPs allow up to eight

different region areas in the field to be defined. The first RCP is always hard-coded to zero, and the remaining seven are register programmable. Note that there are only five possible individual regions that can be defined, but the eight region areas allow the same region to be used in more than one place during the field. Within each region area, the region pointers specify which of the five individual regions will be used. There are eight region pointers, one for each region area. Table IX summarizes the registers for the region change positions and region pointers.

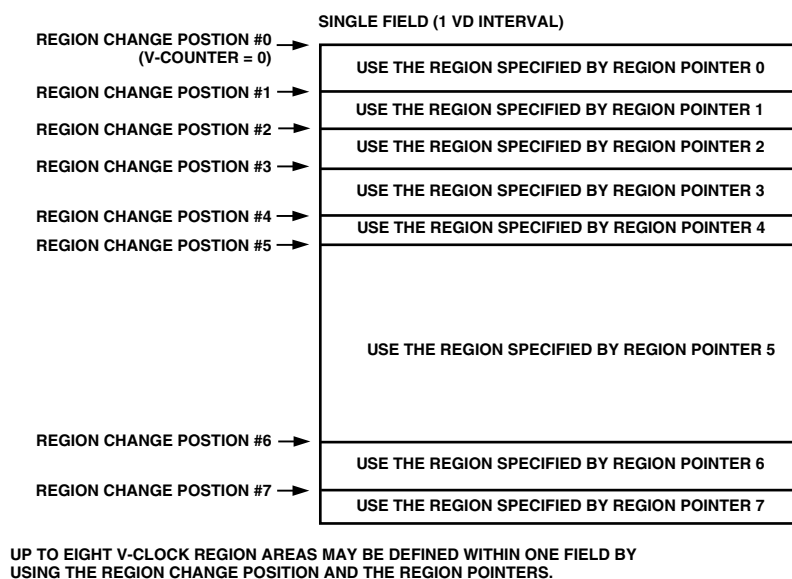


Figure 22. Complete Field Using Multiple Region Areas

Table IX. Complete Vertical Field Registers

| Register  | Length | Range                | Description  |
|-----------|--------|----------------------|--|
| VTPRCP    | 12b    | 0–4095 Line Location | Region Change Position for each Region Area in Field |
| VTPREGPTR | 3b     | Region 0–4           | Region Pointer for each Region Area of Field         |

### Vertical Sequence Alternation

The AD9891/AD9895 also supports line-by-line alternation of vertical sequences within any region, as shown in Figure 23. Table X summarizes the additional registers used to support different alternation patterns. To create an alternating vertical pattern,

the VxSPTRFIRST and VxSPTRSECOND Registers are programmed with the desired sequences to be alternated. The VTPALT Register must be set HIGH for that region to use alternation. If VTPALT is LOW, then the VxSPTRSECOND Registers will be ignored. Figure 24 shows an example of line-by-line alternation.


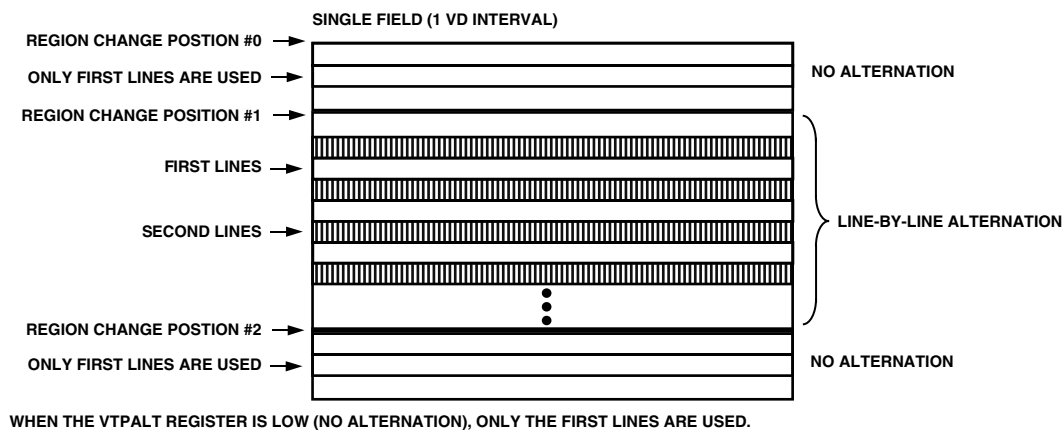


Figure 23. Use of Line Alternation in Vertical Sequencing

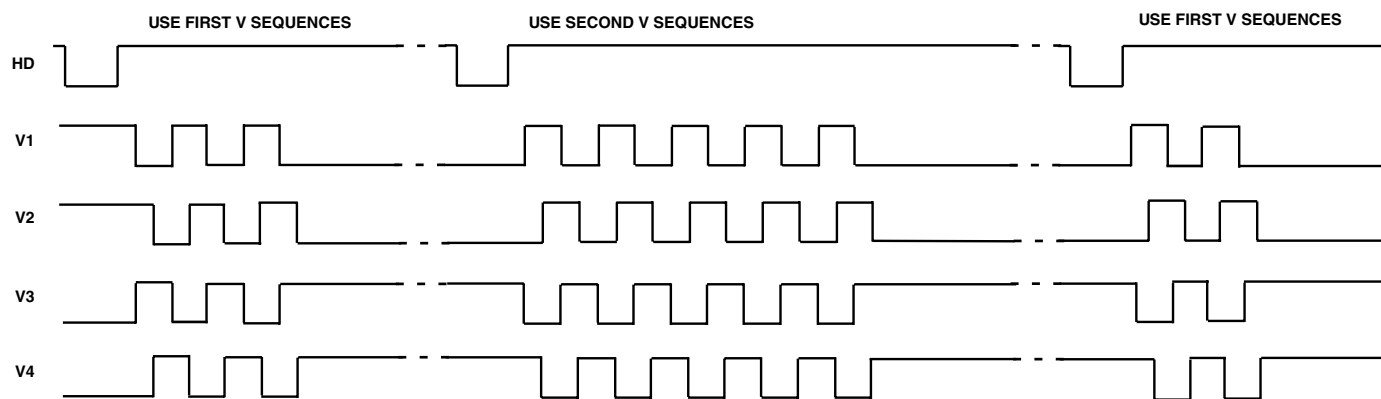

SEQUENCES MAY BE ALTERNATED WITHIN A REGION BY USING THE SPTRFIRST AND SPTRSECOND REGISTERS.

Figure 24. Example of Line Alternation within a Region

Table X. Vertical Sequence Alternation Parameters

| Register     | Length | Range            | Description  |
|--------------|--------|------------------|--|
| VTPALT       | 1b     | Enabled/Disabled | Enables the Line-by-Line Alternation (1 = Enabled)         |
| VxSPTRFIRST  | 4b     | Sequence 0–11    | SPTR for Vx Output during Each Region 0–4 for FIRST Lines  |
| VxINVFIRST   | 1b     | High/Low         | When High, the Polarity of VxSPTRFIRST Is Inverted         |
| VxSPTRSECOND | 4b     | Sequence 0–11    | SPTR for Vx Output during Each Region 0–4 for SECOND Lines |
| VxINVSECOND  | 1b     | High/Low         | When High, the Polarity of VxSPTRSECOND Is Inverted        |

x is the V-output from 1–4.

# AD9891/AD9895

## Second Vertical Sequence During VSG Lines

Most CCDs require additional vertical timing during the sensor gate line. The AD9891/AD9895 supports the option to output a second set of sequences for V1–V4 during the line when the sensor gates VSG1–VSG4 are active. Figure 25 shows a typical VSG line, which includes two separate sets of vertical sequences on V1–V4. The sequences at the start of the line are the same as those generated in the previous line. But the second sequence only occurs in the line where the VSG signals are active. To select the sequences used for the second sequence, the registers in Table XI are used. To enable the second set of sequences during the VSG line, the VTP\_SGLINEMODE is set HIGH. As with the standard vertical regions, each V1–V4 output has an individual start position, programmed in the VxSTART\_SGLINE Registers. Each V1–V4 output can select from the pool of 12 unique sequences using individual sequence pointer registers, VxSPTR\_SGLINE. Also, any sequence may be inverted for a particular V1–V4 output by using the VxINV\_SGLINE Registers.

## Vertical Sweep Mode Operation

The AD9891/AD9895 contains a special mode of vertical timing operation called Sweep Mode. This mode is used to generate a large number of repetitive pulses that span across multiple HD lines. One example of where this mode may be needed is at the start of the CCD readout operation. At the end of the image exposure, but before the image is transferred by the sensor gate

pulses, the vertical interline CCD Registers should be “clean” of all charge. This can be accomplished by quickly shifting out any charge with a long series of pulses on the V1–V4 outputs. Depending on the vertical resolution of the CCD, up to two or three thousand clock cycles will be needed to shift the charge out of each vertical CCD line. This operation will span across multiple HD line lengths. Normally, the AD9891/AD9895 sequences are contained within one HD line length. But when Sweep Mode is enabled, the HD boundaries will be ignored until the region is finished. To enable Sweep Mode within any region, program the appropriate SWEEP (0–4) Registers to HIGH.

Figure 26 shows an example of the Sweep Mode operation. The number of vertical pulses needed will depend on the vertical resolution of the CCD. The V1–V4 output signals are generated using the Individual Vertical Sequence Registers (shown in Table VII). A single pulse is created using the first, second, and third toggle positions, and then the number of repeats is set to the number of vertical shifts required by the CCD. The maximum number of repeats is 4096 in this mode, using the VTPREP Register. This produces a pulse train of the appropriate length. Normally, the pulse train would be truncated at the end of the HD line length. But with Sweep Mode enabled for this region, the HD boundaries will be ignored. In Figure 26, the sweep region occupies 23 HD lines. After the Sweep Mode region is completed, normal sequence operation will resume in the next region.

**Table XI. Second Vertical Sequence Registers During SG Lines**

| Register Name  | Length | Range                 | Description   |
|----------------|--------|-----------------------|---|
| VTP_SGLINEMODE | 1b     | HIGH/LOW              | To Turn on Second Sequences during SG Line, Set = HIGH          |
| VxSTART_SGLINE | 12b    | 0–4095 Pixel Location | Sequence Start Position for Each Vx Output for SG Line Sequence |
| VxSPTR_SGLINE  | 4b     | 0–11 Sequence #       | Sequence Pointer for Vx Output during second SG Line Sequence   |
| VxINV_SGLINE   | 1b     | HIGH/LOW              | When HIGH, the Polarity of Sequence VxSPTRFIRST Is Inverted     |

x is the V-output from 1–4.

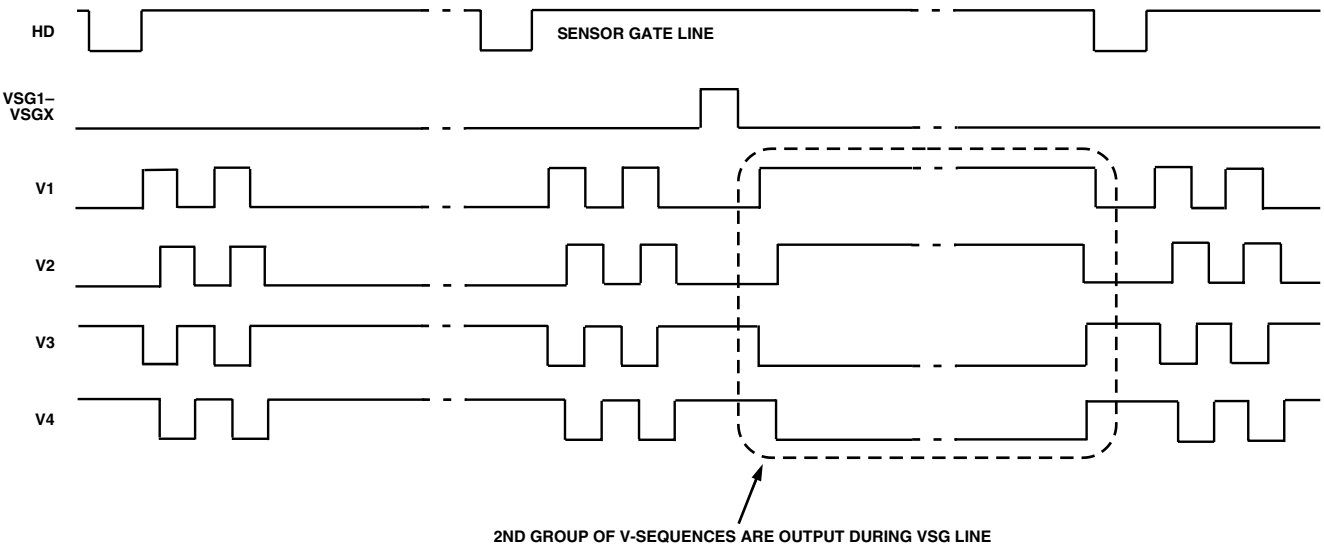


Figure 25. Example of Second Sequences During Sensor Gate Line

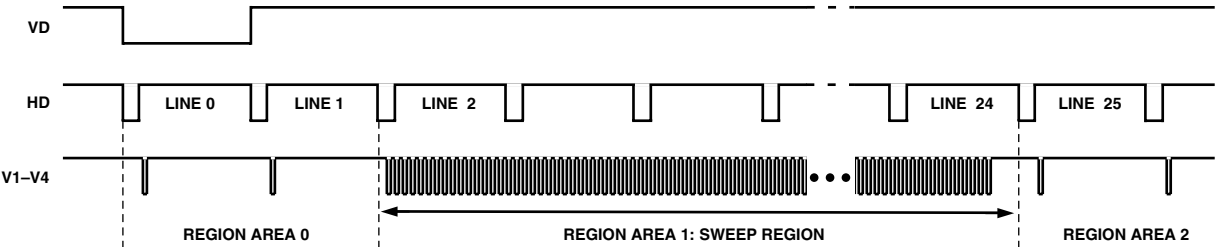


Figure 26. Example of Sweep Region for High Speed Vertical Shift

# AD9891/AD9895

## Vertical Multiplier Mode

To generate very wide vertical timing pulses, a vertical region may be configured into Multiplier Mode. This mode uses the vertical sequence registers in a slightly different manner. Multiplier Mode can be used to support unusual CCD timing requirements, such as vertical pulses that are wider than a single HD line length.

The start polarity and toggle positions are still used in the same manner as the standard sequence generation, but the length is used differently. Instead of using the pixel counter (HD counter) to specify the toggle position locations (VTPTOG1, 2, 3) of the sequence, VTP length (VTPLEN) is multiplied by the VTPTOG position to allow very long sequences to be generated. To calculate the exact toggle position, counted in pixels after the start position:

$$\text{Multiplier Toggle Position} = \text{VTPTOG} \times \text{VTPLEN}$$

Because the VTPTOG Register is multiplied by VTPLEN, the resolution of the toggle position placement is reduced. If VTPLEN = 4, the toggle position accuracy is now reduced to 4-pixel steps instead of single pixel steps. Table XII summarizes how the Individual Vertical Sequence Registers are programmed for Multiplier Mode operation. Note that the bit ranges for the VTPTOG and VTPREP Registers differ from the normal operation shown in Table VII. In Multiplier Mode, the VTPREP Register should always be programmed to the same value as the highest toggle position register.

The example shown in Figure 27 illustrates this operation. The first toggle position is 2 and the second toggle position is 9. In Nonmultiplier Mode, this would cause the V-sequence to toggle at pixel 2 and then pixel 9 within a single HD line. However, now toggle positions are multiplied by the VTPLEN = 4, so the first toggle occurs at pixel count = 8, and the second toggle occurs at pixel count = 36. Sweep Mode should be enabled to allow the toggle positions to cross the HD line boundaries.

## Frame Transfer CCD Mode

The AD9891/AD9895 may also be configured for use with frame transfer CCDs. In Frame Transfer CCD (FTCCD) Mode, an additional four vertical outputs are available for a total of eight outputs (V1–V8). In this case, V1–V4 are used for clocking the active image area, and V5–V8 are used for clocking the storage area. In FTCCD Mode, the sequences assigned to the V1–V4 outputs are duplicated at the V5–V8 outputs to allow the storage area to be clocked along with the image area. Individual masking of the V1–V4 and V5–V8 outputs allows for vertical decimation techniques during transfer from the image to the storage area. The additional outputs V5–V8 are available on four of the sensor gate output pins, VSG1–VSG4. Figure 28 shows an example of the eight V-clocks configured for use with a frame transfer CCD.

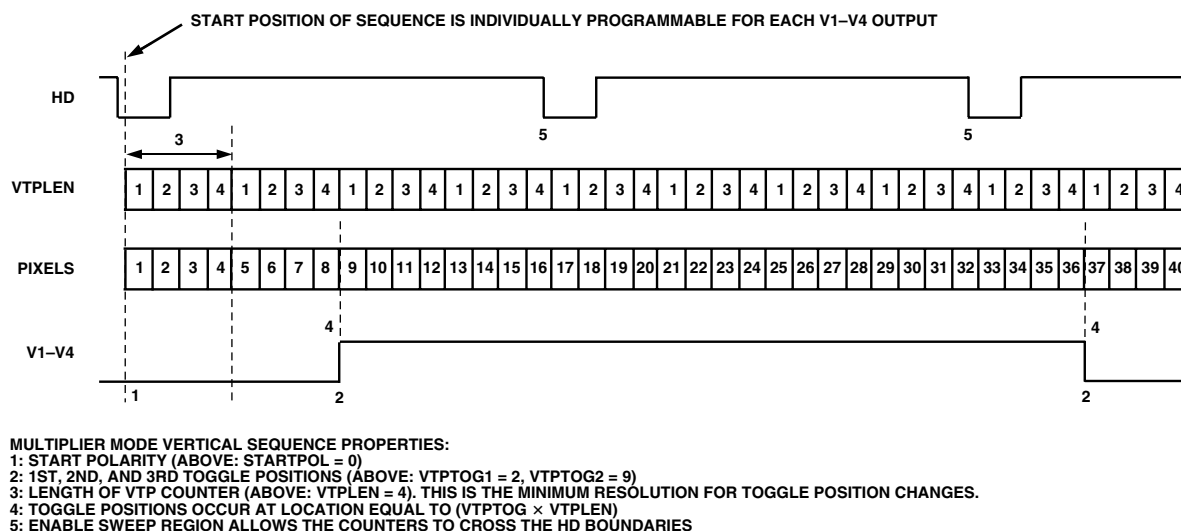


Figure 27. Example of Multiplier Region for Wide Vertical Pulse Timing

Table XII. Multiplier Mode and Sequence Register Parameters

| Register | Length | Range                 | Description   |
|----------|--------|-----------------------|---|
| MULTI    | 1b     | HIGH/LOW              | High Enables Multiplier Mode for Each Region 0–4                      |
| VTTPOL   | 1b     | HIGH/LOW              | Starting Polarity of Vertical Transfer Pulse for Each Sequence 0–11   |
| VTPTOG1  | 12b    | 0–4095 Pixel Location | First Toggle Position for Each Sequence 0–11                          |
| VTPTOG2  | 12b    | 0–4095 Pixel Location | Second Toggle Position for Each Sequence 0–11                         |
| VTPTOG3  | 12b    | 0–4095 Pixel Location | Third Toggle Position for Each Sequence 0–7                           |
| VTPLEN   | 10b    | 0–1023 Pixels         | “Multiplier” Factor for Repetition Counter                            |
| VTPREP   | 12b    | 0–4096                | Should Be Programmed to the Same Value as the Highest Toggle Position |



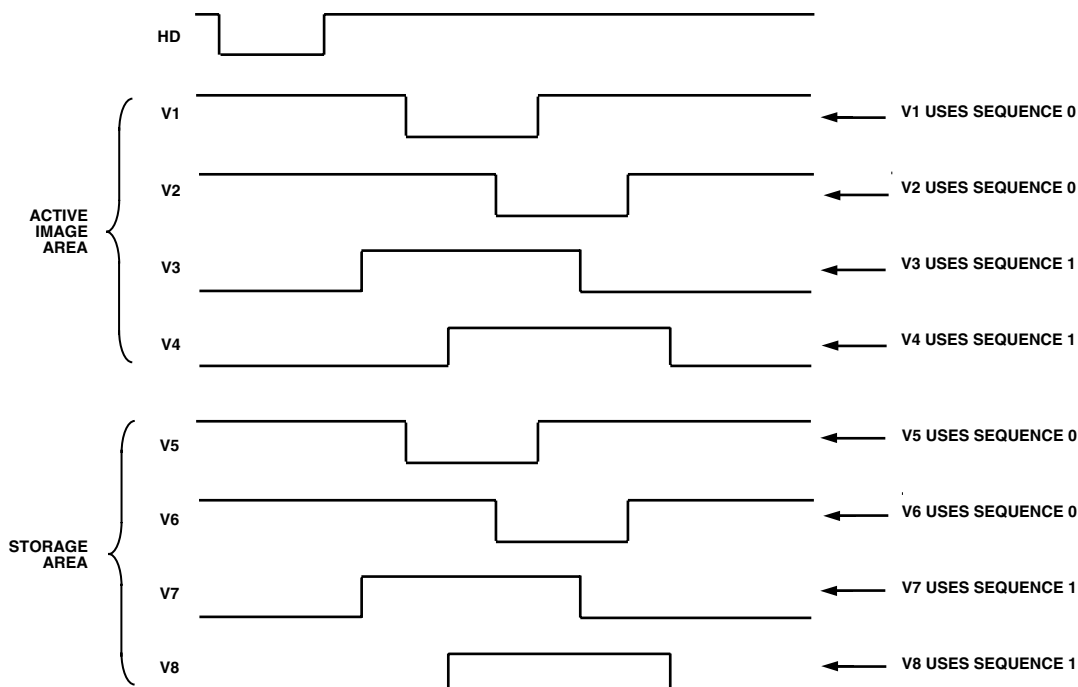


Figure 28. Example of Frame Transfer CCD Mode using V1-V8

The frame transfer CCD also requires additional timing control when decimating the image for Preview Mode. The AD9891/AD9895 contain registers to independently stop the operation of the V5-V8 outputs while the V1-V4 outputs continue to run or to stop the V1-V4 outputs, while the V5-V8 outputs remain operational. The FREEZE and RESUME Registers specify the pixel locations within each line of a region where the V1-V4 or V5-V8 clock outputs will start to hold their state, and where they will resume normal operation. FREEZE and RESUME can be used in any region during the frame readout.

#### Vertical Sensor Gate (Shift Gate) Timing

With an interline CCD, the vertical sensor gates (VSG) are used to transfer the pixel charges from the light-sensitive image area into the light-shielded vertical registers. When a mechanical shutter is not being used, this transfer will effectively end the exposure period during the image acquisition. From the light-shield vertical registers, the image is then read out line-by-line by using the vertical transfer pulses V1-V4 in conjunction with the high speed horizontal clocks.

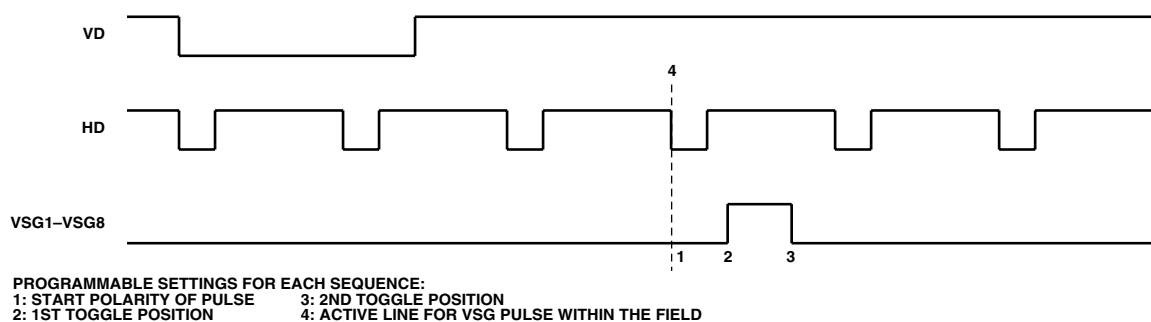


Figure 29. Vertical Sensor Gate Pulse Placement

Table XIII. Sensor Gate Register Parameters

| Register  | Length | Range                 | Description   |
|-----------|--------|-----------------------|---|
| SGPOL     | 1b     | High/Low              | Sensor Gate Starting Polarity for Sequence 0-3          |
| SGTOG1    | 12b    | 0-4095 Pixel Location | First Toggle Position for Sequence 0-11                 |
| SGTOG2    | 12b    | 0-4095 Pixel Location | Second Toggle Position for Sequence 0-11                |
| SGACTLINE | 12b    | 0-4095 Pixel Location | Line in Field where VSG1-VSG8 Are Active                |
| SGSEL     | 2b     | Sequence 0-3          | Selects Sequence 0-3 for VSG1-VSG8                      |
| SGMASK    | 8b     | 8 Individual Bits     | Masking for any of VSG1-VSG8 Signals (0 = On, 1 = Mask) |

# AD9891/AD9895

Table XIII contains the summary of the VSG Registers. The AD9891/AD9895 has eight SG outputs, VSG1–VSG8. Each of the outputs can be assigned to one of four programmed sequences by using the SGSEL1–SGSEL8 Registers. Each sequence is generated in the same manner as the individual vertical sequences, with a programmable start polarity (SGPOL), first toggle position (SGTOG1), and second toggle position (SGTOG2). The active line where the VSG1–VSG8 pulses occur is programmable using the two SGACTION Registers. Additionally, any of the VSG1–VSG8 pulses may be individually disabled by using the SGMASK Register. The masking allows all of the different SG sequences to be preprogrammed and the appropriate pulses for odd or even fields can be masked.

## SHUTTER TIMING CONTROL

CCD image exposure time is controlled through use of the substrate clock signal (SUBCK), which pulses the CCD substrate to clear out accumulated charge. The AD9891/AD9895 supports three types of electronic shuttering: Normal Shutter Mode, High Precision Shutter Mode, and Low Speed Shutter Mode. Along with the SUBCK pulse placement, the AD9891/AD9895 can accommodate different progressive and interlaced readout modes. Additionally, the AD9891/AD9895 provides output signals to control an external mechanical shutter, strobe (flash), and the CCD bias for still mode readout (VSUB).

### Normal Shutter Mode

Figure 30 shows the VD and SUBCK output for Normal Shutter Mode. The SUBCK will pulse once per line, and the total number of repetitions within the field is programmable. The pulse polarity, width, and line location is programmable using the SUBCKPOL, SUBCK1TOG1, and SUBCK1TOG2 Registers

(see Table XIV). The number of SUBCK pulses per field is programmed in the SUBCKNUM Register.


As shown in Figure 30, the SUBCK pulses will always begin on the line after the sensor gates occur, specified by the SGACTLINE Register (Addr x265 and Addr x266). The SUBCKPOL, SUBCK1TOG, SUBCK2TOG, and SUBCKNUM Registers are updated at the start of the line after the sensor gate line. All other shutter mode registers are updated with the majority of the AD9891/AD9895's registers at the VD/HD falling edge.

### High Precision Shutter Mode

High precision shuttering is controlled in the same way as normal shuttering but requires a second set of toggle registers. In this mode, the SUBCK still pulses once per line, but the last SUBCK in the field will have an additional SUBCK pulse whose location is determined by the SUBCK2TOG1 and SUBCK2TOG2 Registers (see Figure 31). Finer resolution of the exposure time is possible using this mode. Leaving both SUBCK2TOG Registers set to 4095 (x3F) will disable the High Precision Mode (default setting).


### Low Speed Shutter Mode

For normal exposure times less than one field interval, the EXPOSURE Register will be set to 0. Exposure times greater than one field interval can be achieved by writing a value greater than zero to the EXPOSURE Register. As shown in Figure 32, this shutter mode will suppress the SUBCK and VSG outputs for up to 4095 fields (VD periods). The VD and HD outputs may be suppressed during the exposure period by programming the VDHDOFF Register to 1.

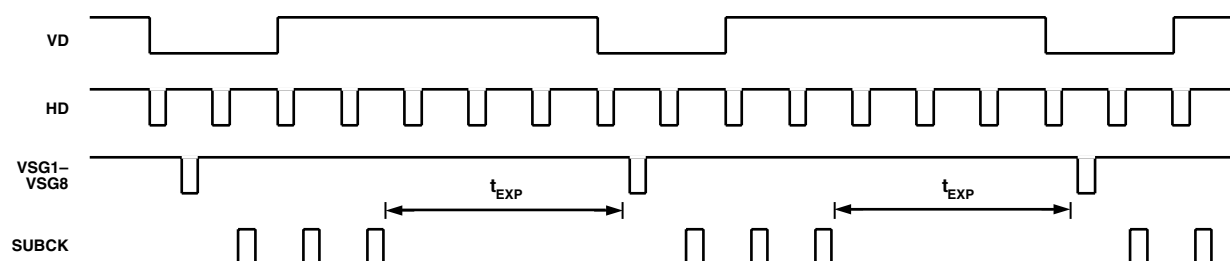

SUBCK PROGRAMMABLE SETTINGS:  
 1: PULSE POLARITY USING THE SUBCKPOL REGISTER  
 2: NUMBER OF PULSES WITHIN THE FIELD USING THE SUBCKNUM REGISTER  
 3: PIXEL LOCATION OF PULSE WITHIN THE LINE AND PULSE WIDTH PROGRAMMED USING SUBCK1 TOGGLE POSITION REGISTERS

Figure 30. Normal Shutter Mode

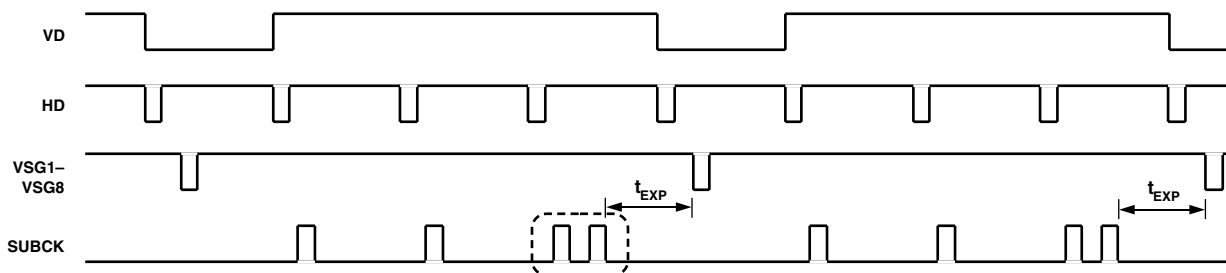

NOTES  
 1. 2ND SUBCK PULSE IS ADDED IN THE LAST SUBCK LINE.  
 2. LOCATION OF 2ND PULSE IS FULLY PROGRAMMABLE USING THE SUBCK2 TOGGLE POSITION REGISTERS.

Figure 31. High Precision Shutter Mode

### SUBCK Suppression

Normally, the SUBCKs will begin to pulse on the line following the sensor gate line (VSG). With some CCDs, the SUBCKs need to be suppressed for one or more lines following the VSG line. The SUBCKSUPPRESS Register allows for the suppression the SUBCK pulses for up to 63 lines following the VSG line.

### Readout After Exposure

A write to the EXPOSURE Register will designate the number fields in the exposure time ( $t_{EXP}$ ) from 0 to 4095. After the exposure, the readout of the CCD data occurs. During readout, the SUBCK output may need to be further suppressed until the readout is completed. The READOUT Register specifies the number of additional fields after the exposure to continue the suppression of SUBCK. READOUT can be programmed for zero to seven additional fields and should be preprogrammed at start-up, not at the same time as the exposure write. A typical interlaced CCD frame readout mode will generally require two additional fields of SUBCK suppression (READOUT = 2).

Note that a write to the EXPOSURE Register acts as a trigger for readout after the exposure is completed. If no write to the EXPOSURE Register occurs, then the READOUT Register will have no effect. See Figure 35 for an example of triggering the exposure and subsequent readout.

### VSUB Control

The CCD readout bias (VSUB) can be programmed to accommodate different CCDs. Figure 35 shows two different modes that are available. In Mode 0, VSUB goes active during the field of the last SUBCK when the exposure begins. The on-position (rising edge in Figure 35) is programmable to any line within the field. VSUB will remain active until the end of the image readout. In Mode 1, the VSUB is not activated until the start of the readout.

### MSHUT and STROBE Control

MSHUT and STROBE operation is shown in Figures 33, 34, and 35. Table XV shows the registers parameters for controlling the MSHUT and STROBE outputs. The MSHUT output is switched on with the MSHUTON Registers, and it will remain on until the location specified in the MSHUTOFF Registers. The location of MSHUTOFF is fully programmable to anywhere within the exposure period, using the FD (field), LN (line), and PX (pixel) Registers. The STROBE pulse is defined by the ON and OFF positions. STROBON\_FD is the field in which the STROBE is turned on, measured from the field containing the last SUBCK before exposure begins. The STROBON\_LN and STROBON\_PX Registers give the line and pixel positions with respect to STROBON\_FD. The STROBE off position is programmable to any field, line, and pixel location with respect to the field of the last SUBCK.

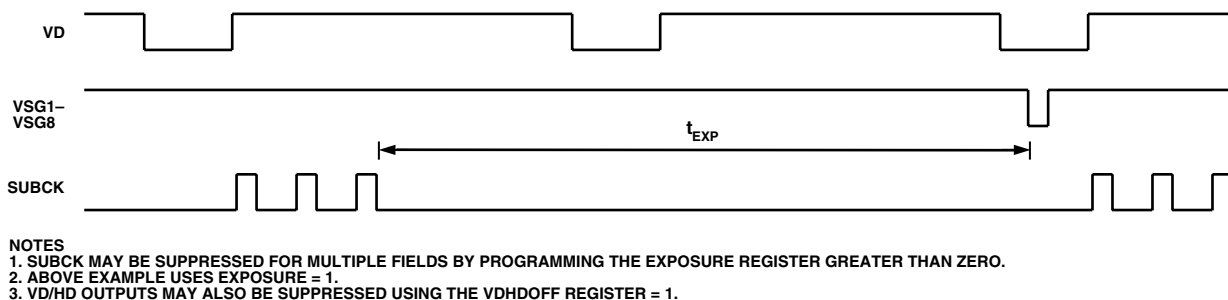



Figure 32. Low Speed Shutter Mode Using EXPOSURE Register

Table XIV. Electronic Shutter Mode Register Parameters

| Register       | Length | Range                 | Description  |
|----------------|--------|-----------------------|--|
| SUBCKPOL*      | 1b     | HIGH/LOW              | SUBCK Start Polarity for SUBCK1 and SUBCK2   |
| SUBCK1TOG1*    | 12b    | 0–4095 Pixel Location | SUBCK First Toggle Position  |
| SUBCK1TOG2*    | 12b    | 0–4095 Pixel Location | SUBCK Second Toggle Position   |
| SUBCK2TOG1*    | 12b    | 0–4095 Pixel Location | Second SUBCK First Toggle Position (for High Precision Mode)                             |
| SUBCK2TOG2*    | 12b    | 0–4095 Pixel Location | Second SUBCK Second Toggle Position (for High Precision Mode)                            |
| SUBCKNUM*      | 12b    | 0–4095 # of Pulses    | Total Number of SUBCKs per Field (at 1 Pulse per Line)                                   |
| SUBCKSUPPRESS* | 6b     | 0–63 # of Pulses      | Number of SUBCK's to Suppress after VSG Line   |
| EXPOSURE       | 12b    | 0–4095 # of Fields    | Number of Fields to Suppress to SUBCK and VSG; Triggers Readout to Occur after $t_{EXP}$ |
| VDHDOFF        | 1b     | ON/OFF                | Disable VD/HD Output during Exposure (1 = On, 0 = Off)                                   |
| READOUT        | 3b     | 0–7 # of Fields       | Number of Fields to Suppress SUBCK after Exposure (for Readout)                          |


\*Register is not VD/HD updated but is updated at the start of line after sensor gate line.

# AD9891/AD9895

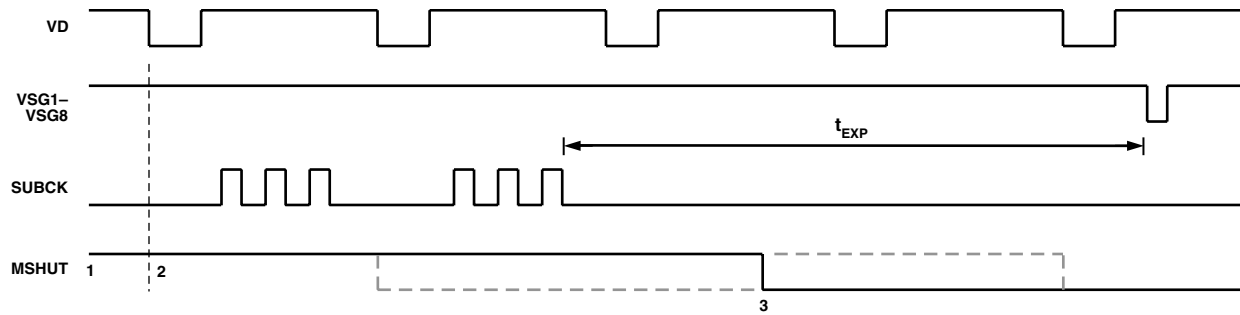

MSHUT PROGRAMMABLE SETTINGS:  
 1: ACTIVE POLARITY  
 2: ON-POSITION IS VD UPDATED AND MAY BE SWITCHED ON AT ANY TIME  
 3: OFF-POSITION CAN BE PROGRAMMED ANYWHERE FROM THE FIELD OF LAST SUBCK UNTIL THE FIELD BEFORE READOUT

Figure 33. MSHUT Output Programmability

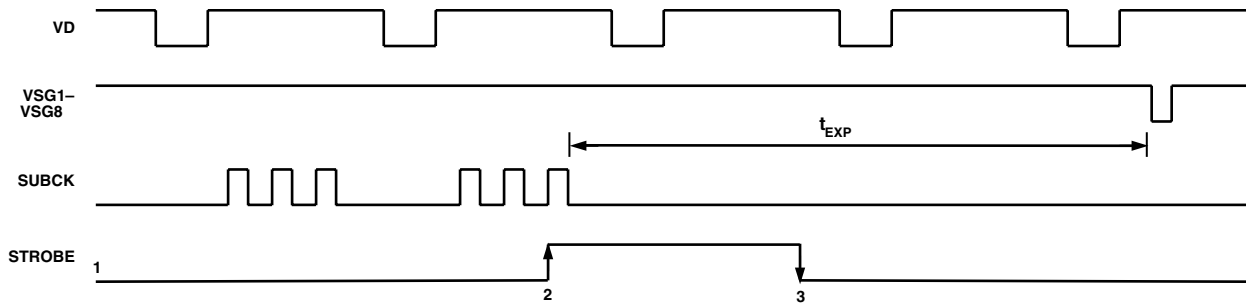

STROBE PROGRAMMABLE SETTINGS:  
 1: ACTIVE POLARITY  
 2: ON-POSITION WITH RESPECT TO TO FIELD OF LAST SUBCK  
 3: OFF-POSITION CAN BE PROGRAMMED ANYWHERE DURING THE EXPOSURE TIME

Figure 34. STROBE Output Programmability

Table XV. VSUB, MSHUT, and STROBE Register Parameters

| Register      | Length | Range                    | Description   |
|---------------|--------|--------------------------|---|
| TRIGGER       | 3b     | On/Off for Three Signals | 1-Bit Triggers for VSUB[0], MSHUT[1], and STROBE[2]         |
| VSUBMODE      | 1b     | HIGH/LOW                 | VSUB Mode (0 = Mode 0, 1 = Mode 1) (See Figure 27)          |
| VSUBKEEPON    | 1b     | HIGH/LOW                 | Sets VSUB to Stay Active after Readout When High            |
| VSUBPOL       | 1b     | HIGH/LOW                 | VSUB Active Polarity  |
| VSUBON        | 12b    | 0–4095 Line Location     | VSUB On Position. Active starting in any line of field.     |
| MSHUTON       | 1b     | ON/OFF                   | MSHUT Signal Enable (1 = Active or “Open”)                  |
| MSHUTONPOS_LN | 12b    | 0–4095 Line Location     | MSHUT Line Location   |
| MSHUTONPOS_PX | 12b    | 0–4095 Pixel Location    | MSHUTON Pixel Location                                      |
| MSHUTPOL      | 1b     | HIGH/LOW                 | MSHUT Active Polarity                                       |
| MSHUTOFF_FD   | 12b    | 0–4095 Field Location    | Field Location to Switch OFF MSHUT. (Inactive or “Closed”)  |
| MSHUTOFF_LN   | 12b    | 0–4095 Line Location     | Line Location to Switch OFF MSHUT. (Inactive or “Closed”)   |
| MSHUTOFF_PX   | 12b    | 0–4095 Pixel Location    | Pixel Location to Switch OFF MSHUT. (Inactive or “Closed”)  |
| STROBPOL      | 1b     | HIGH/LOW                 | STROBE Active Polarity                                      |
| STROBON_FD    | 12b    | 0–4095 Field Location    | STROBE ON Field Location, with Respect to Last SUBCK Field  |
| STROBON_LN    | 12b    | 0–4095 Line Location     | STROBE ON Line Location                                     |
| STROBON_PX    | 12b    | 0–4095 Pixel Location    | STROBE ON Pixel Location                                    |
| STROBOFF_FD   | 12b    | 0–4095 Field Location    | STROBE OFF Field Location, with Respect to Last SUBCK Field |
| STROBOFF_LN   | 12b    | 0–4095 Line Location     | STROBE OFF Location   |
| STROBOFF_PX   | 12b    | 0–4095 Pixel Location    | STROBE OFF Location   |

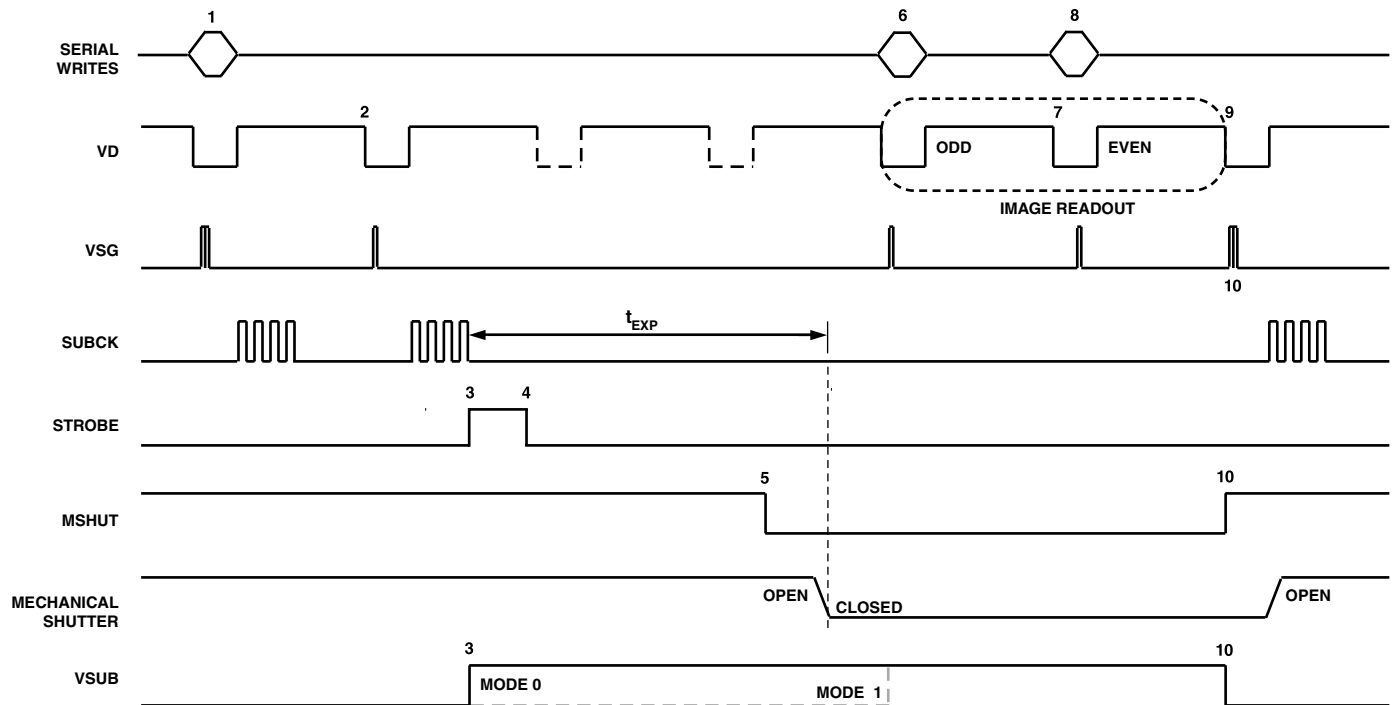


Figure 35. Exposure and Readout of Interlaced Frame

#### Example of Exposure and Readout of Interlaced Frame

Figure 35 shows the sequence of events for a typical exposure and readout operation using a mechanical shutter and strobe. The register values for the VSUB, MSHUT, and STROBE toggle positions may be previously loaded at any time, prior to triggering these functions. Additional register writes are required to configure the vertical clock outputs, V1–V4, which are not described here.

- 0: Write to the READOUT Register (Addr x281) to specify the number of fields to further suppress SUBCK while the CCD data is readout. In this example, READOUT = 2.
- 1: Write to the EXPOSURE Register (Addr x27D) to start the exposure and specify the number of fields to suppress SUBCK and VSG outputs during exposure. In this example, EXPOSURE = 2.

Write to the TRIGGER Register (Addr x280) to enable the STROBE, MSHUT, and VSUB signals. To trigger all three signals (as in Figure 36) the register TRIGGER = 7.

Write to the SGACTION Register (Addr x265 and Addr x266) and SGMASK Register (Addr x26F and Addr x270) to configure the sensor gates for ODD field readout (interlaced CCD).

- 2: VD/HD falling edge will update the serial writes from 1.
- 3: If VSUB Mode = 0, VSUB output turns ON at the line specified in the VSUBON Register (Addr x272 and Addr x273).

STROBE output turns ON at the location specified in the STROBON Registers (Addr x294 to Addr x299).

- 4: STROBE output turns OFF at the location specified in the STROBOFF Registers (Addr x29A to Addr x29F).
- 5: MSHUT Output turns OFF at the location specified in the MSHUTOFF Registers (Addr x28D to Addr x292).
- 6: Write to the SGACTION Register (Addr x253 and Addr x254) and SGMASK Register to configure the sensor gates for EVEN field readout.
- 7: VD/HD falling edge will update the serial writes from 6.
- 8: Write to the SGACTION Register and SGMASK Register to reconfigure the sensor gates for Draft/Preview Mode output. Write to the MSHUTON Register (Addr x287) to reopen the mechanical shutter for Draft/Preview Mode.
- 9: VD/HD falling edge will update the serial writes from 8.
- 10: VSG outputs returns to Draft/Preview Mode timing. SUBCK output resumes operation. MSHUT output returns to the ON position (Active or “Open”). VSUB output returns to the OFF position (Inactive).

# AD9891/AD9895

## ANALOG FRONT END DESCRIPTION AND OPERATION

The AD9891/AD9895 AFE signal processing chain is shown in Figure 36. Each processing step is essential in achieving a high quality image from the raw CCD pixel data. AFE Register details are shown in Table XXXI.

### DC Restore

To reduce the large dc offset of the CCD output signal, a dc-restore circuit is used with an external  $0.1\ \mu\text{F}$  series coupling capacitor. This restores the dc level of the CCD signal to approximately  $1.5\ \text{V}$ , to be compatible with the  $3\ \text{V}$  analog supply of the AD9891/AD9895.

### Correlated Double Sampler

The CDS circuit samples each CCD pixel twice to extract the video information and reject low frequency noise. The timing shown in Figure 10 illustrates how the two internally generated CDS clocks, SHP and SHD, are used to sample the reference level and the data level, respectively, of the CCD signal. The placement of the SHP and SHD sampling edges is determined by the setting of the SHPOSLOC and SHDPOSLOC Registers located at Addr  $0\text{x}E9$  and Addr  $0\text{x}EA$ , respectively. Placement of these two clock signals is critical in achieving the best performance from the CCD.

### Input Clamp

A line-rate input clamping circuit is used to remove the CCD's optical black offset. This offset exists in the CCD's shielded black reference pixels. The AD9891/AD9895 remove this offset in the input stage to minimize the effect of a gain change on the

system black level. Another advantage of removing this offset at the input stage is to maximize system headroom. Some area CCDs have large black level offset voltages, which, if not corrected at the input stage, can significantly reduce the available headroom in the internal circuitry when higher VGA gain settings are used.

The input clamp is controlled by the CLPDM signal, which is fully programmable (see Horizontal Clamping and Blanking section). System timing examples are shown in the Horizontal Timing Sequence Example section. It is recommended that the CLPDM pulse be used during valid CCD dark pixels. CLPDM may be used during the optical black pixels, either together with CLPOB or separately. The CLPDM pulse should be a minimum of 4 pixels wide.

### PxGA

The PxGA provides separate gain adjustment for the individual color pixels. A programmable gain amplifier with four separate values, the PxGA has the capability to "multiplex" its gain value on a pixel-to-pixel basis (see Figure 37). This allows lower output color pixels to be gained up to match higher output color pixels. Also, the PxGA may be used to adjust the colors for white balance, reducing the amount of digital processing that is needed. The four different gain values are switched according to the "color steering" circuitry. Seven different color steering modes for different types of CCD color filter arrays are programmed in the AD9891/AD9895 AFE CTLMODE Register, at Addr  $0\text{x}06$  (see Figures 39a–39g for internal color steering timing). For


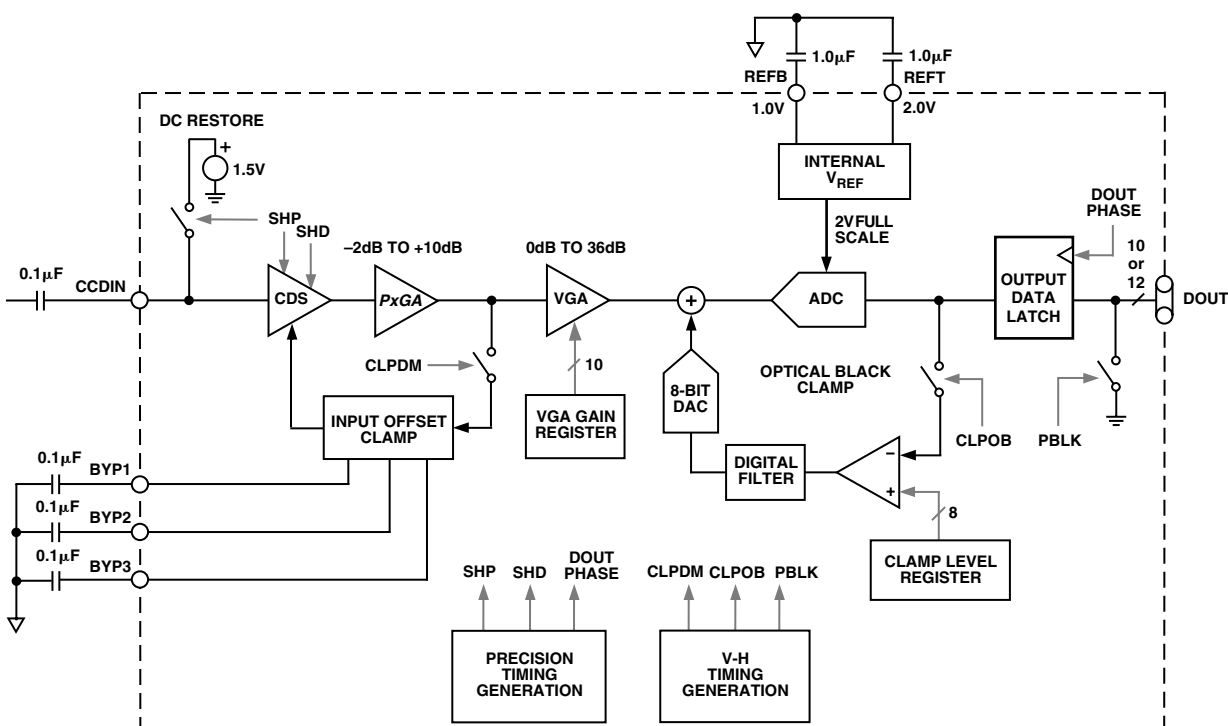


Figure 36. AFE Block Diagram




# AD9891/AD9895

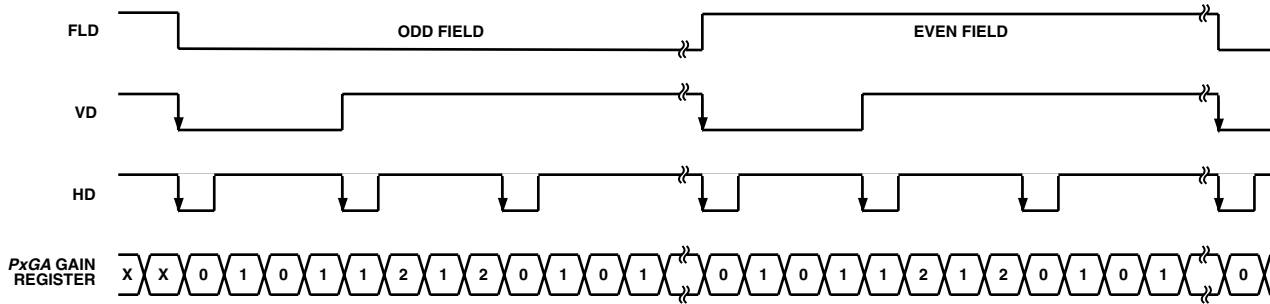

## NOTES

1. VD FALLING EDGE WILL RESET THE PxGA GAIN STEERING TO "0101" LINE.
2. HD FALLING EDGES WILL ALTERNATE THE PxGA GAIN STEERING BETWEEN "0101" AND "1212" LINES.
3. ALL FIELDS WILL HAVE THE SAME PxGA GAIN STEERING PATTERN (FLD STATUS IS IGNORED).


Figure 39c. Mosaic Repeat Color Steering Mode

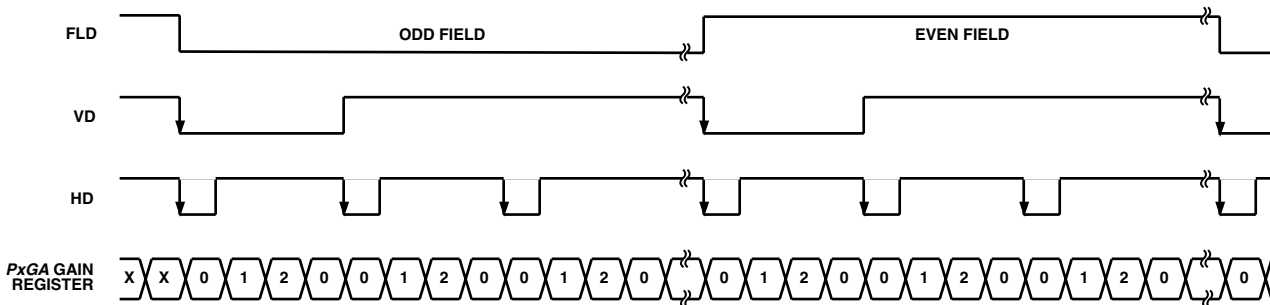

## NOTES

1. EACH LINE FOLLOWS "012012" STEERING PATTERN.
2. VD AND HD FALLING EDGES WILL RESET THE PxGA GAIN REGISTER STEERING TO GAIN REGISTER "0."
3. FLD STATUS IS IGNORED.


Figure 39d. 3-Color 1-Color Steering Mode

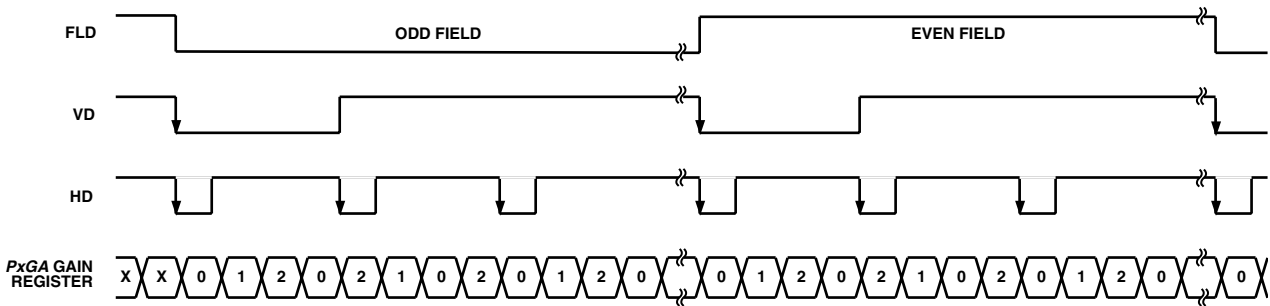

## NOTES

1. VD FALLING EDGE WILL RESET THE PxGA GAIN REGISTER STEERING TO "012012" LINE.
2. HD FALLING EDGES WILL ALTERNATE THE PxGA GAIN REGISTER STEERING BETWEEN "012012" AND "210210" LINES.
3. FLD STATUS IS IGNORED.

Figure 39e. 3-Color 2-Color Steering Mode

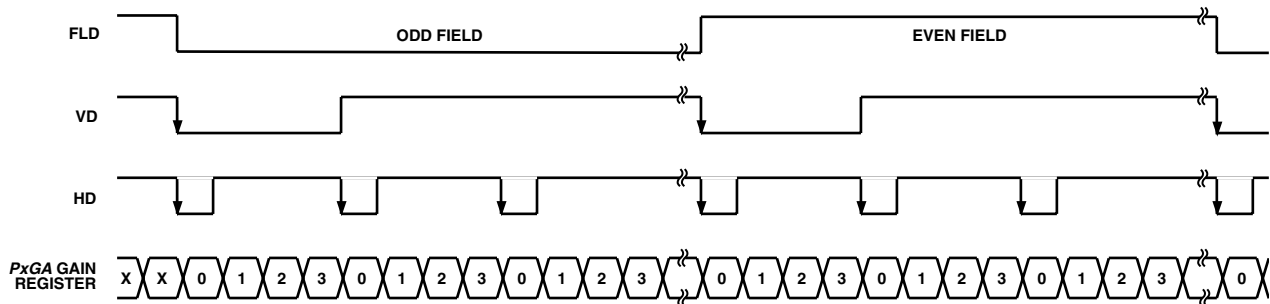


## NOTES

1. EACH LINE FOLLOWS "01230123" STEERING PATTERN.
2. VD AND HD FALLING EDGES WILL RESET THE PxGA GAIN REGISTER STEERING TO GAIN REGISTER "0."
3. FLD STATUS IS IGNORED.

Figure 39f. 4-Color 1-Color Steering Mode



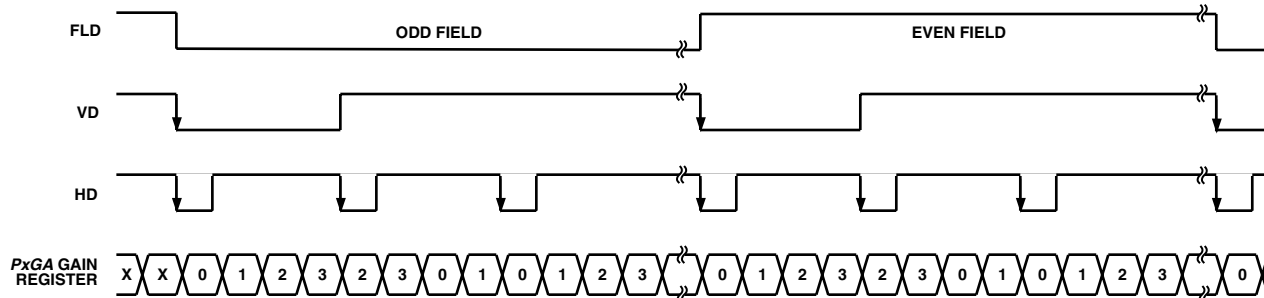

## NOTES

1. VD FALLING EDGE WILL RESET THE PxGA GAIN REGISTER STEERING TO "01230123" LINE.
2. HD FALLING EDGES WILL ALTERNATE THE PxGA GAIN REGISTER STEERING BETWEEN "01230123" AND "23012301" LINES.
3. FLD STATUS IS IGNORED.

Figure 39g. 4-Color 2-Color Steering Mode

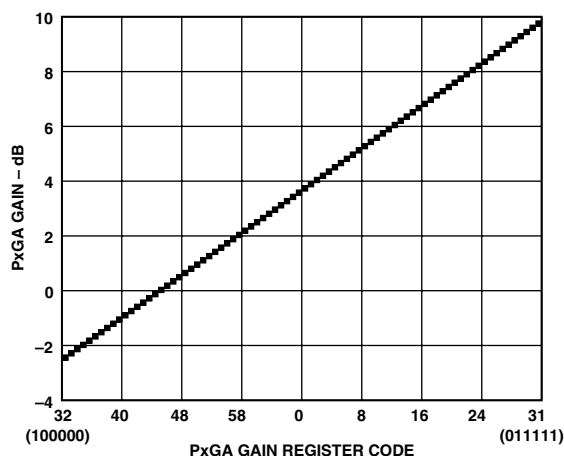


Figure 40. PxGA Gain Curve

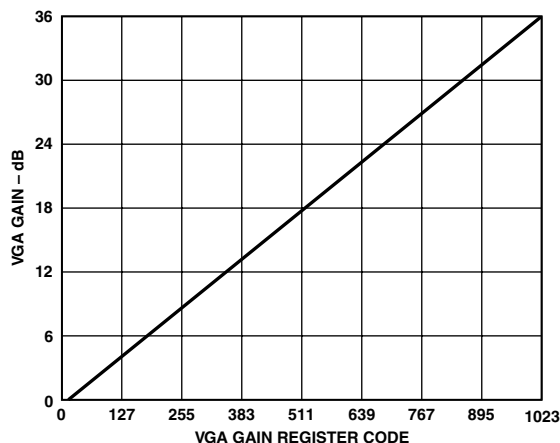


Figure 41. VGA Gain Curve (PxGA not included)

**Variable Gain Amplifier**

The VGA stage provides a gain range of 2 dB to 36 dB, programmable with 10-bit resolution through the serial digital interface. Combined with approximately 4 dB from the PxGA stage, the total gain range for the AD9891/AD9895 is 6 dB to 40 dB. The minimum gain of 6 dB is needed to match a 1 V input signal with the ADC full-scale range of 2 V. When compared to 1 V full-scale systems (such as ADI's AD9803), the equivalent gain range is 0 dB to 34 dB.

The VGA gain curve follows a "linear-in-dB" characteristic. The exact VGA gain can be calculated for any gain register value by using the equation:

$$\text{Gain} = (0.035 \times \text{Code}) + 3.55$$

where the code range is 0 to 1023. PxGA default gain is included.

The gain accuracy specifications include the PxGA gain of approximately 4 dB, for a total gain range of 6 dB to 40 dB.

**Optical Black Clamp**

The optical black clamp loop is used to remove residual offsets in the signal chain and to track low frequency variations in the CCD's black level. During the optical black (shielded) pixel interval on each line, the ADC output is compared with a fixed black level reference selected by the user in the Clamp Level Register. The clamp level is programmable in 256 steps, with a range between 0 LSB and 63.75 LSB in the AD9891 and between 0 LSB and 255 LSB in the AD9895. The resulting error signal is filtered to reduce noise, and the correction value is applied to the ADC input through a D/A converter. Normally, the optical black clamp loop is turned on once per horizontal line, but this loop can be updated more slowly to suit a particular application. If external digital clamping is used during the post-processing, the AD9891/AD9895 optical black clamping may be disabled using Bit D5 in the Operation Register (see Serial Interface Timing and Register Listing sections). When the loop is disabled, the Clamp Level Register may still be used to provide programmable offset adjustment.

The optical black clamp is controlled by the CLPOB signal, which is fully programmable (see Horizontal Clamping and Blanking section). System timing examples are shown in the Horizontal Timing Sequence Example section. The CLPOB pulse should be placed during the CCD's optical black pixels. It is recommended that the CLPOB pulse duration be at least 20 pixels wide. Shorter pulsewidths may be used, but the ability to track low frequency variations in the black level will be reduced.

**A/D Converter**

The AD9891 uses a high performance 10-bit ADC architecture, optimized for high speed and low power, while the AD9895 uses a 12-bit ADC architecture. Differential nonlinearity (DNL) performance is typically better than 0.5 LSB for both products. The ADC uses a 2 V input range. Better noise performance results from using a larger ADC full-scale range.

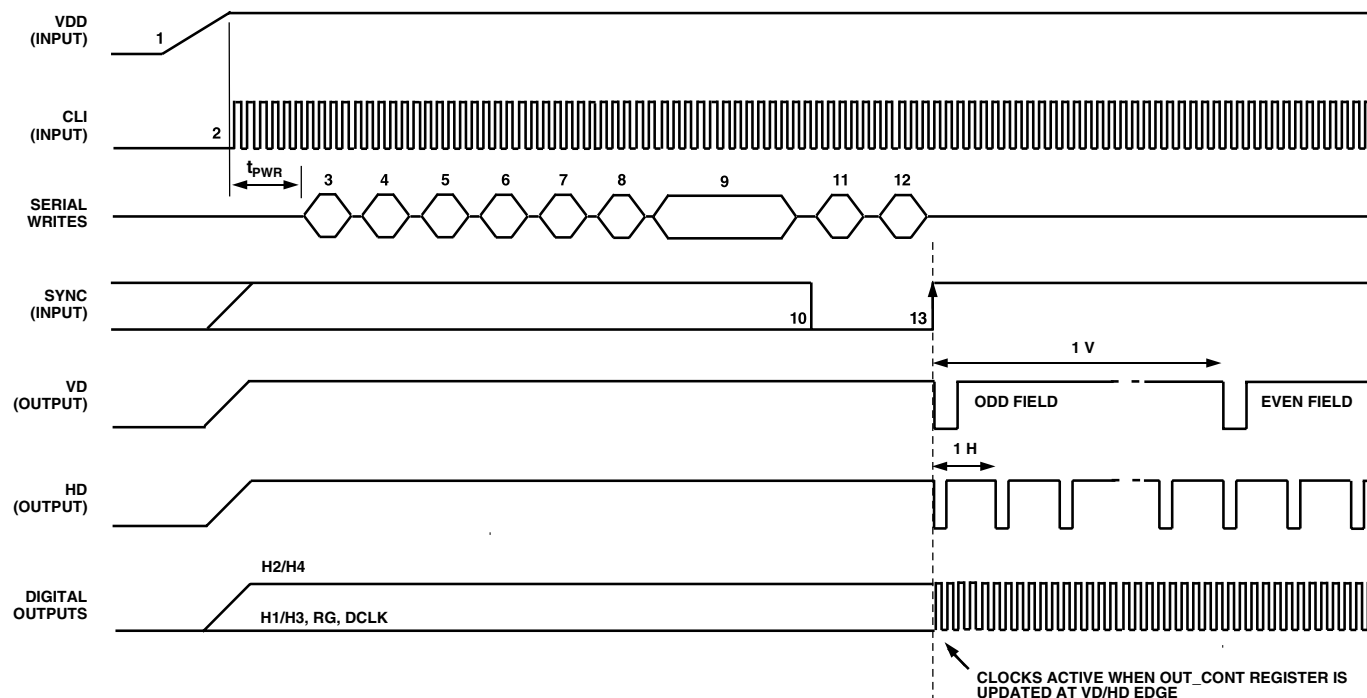


Figure 42. Recommended Power-Up Sequence and Synchronization, Master Mode

## POWER-UP AND SYNCHRONIZATION

### Recommended Power-Up Sequence for Master Mode

When the AD9891/AD9895 are powered up, the following sequence is recommended (refer to Figure 42 for each step).

1. Turn on power supplies for the AD9891/AD9895.
2. Apply the master clock input CLI.
3. Reset and initialize the internal AD9891/AD9895 Registers. First, write a “1” to the SW\_RESET Register (Addr x017) followed by a “0” to the same register. Next, write “110101” (53 decimal) to the INITIAL1 Register (Addr x02B) followed by “000100” (4 decimal) to the INITIAL2 Register (Addr x010). This sequence of writes must always be done in the proper order:
 

|           |             |
|-----------|-------------|
| Addr x017 | Data 000001 |
| Addr x017 | Data 000000 |
| Addr x02B | Data 110101 |
| Addr x010 | Data 000100 |
4. Configure the AD9891/AD9895 for Master Mode timing by writing a “1” to the MASTER Register (Addr x0EB).
5. By default, the internal timing core is held in a reset state with TGCORE\_RSTB Register = “0.” Write a “1” to the TGCORE\_RSTB Register (Addr x029) to start the internal timing core operation.
6. Write a “1” to the PREVENTUPDATE Register (Addr x01B). This will prevent any updating of the serial register data.
7. Write a “1” to the SYNCENABLE Register (Addr x024). This will allow the external SYNC to be used.
8. Write a “1” to the SYNCSPEND Register (Addr x026). This will cause the outputs to be suspended during the SYNC operation (see Figure 43).


9. Write to desired registers to configure high speed timing, horizontal timing, vertical timing, and shutter timing.
10. If SYNC is HIGH at power-up, then bring SYNC input LOW. Also, SYNC may be held low from power-up.
11. Write a “1” to the OUT\_CONT Register (Addr x018). This will allow the outputs to become active after SYNC rising edge.
12. Write a “0” to the PREVENTUPDATE Register (Addr x01B). This will allow the serial information to be updated at the next VD/HD falling edge.
13. Bring SYNC back HIGH. This will cause the internal counters to reset to “0” and start VD/HD operation. VD/HD edge allows register updates to occur, including OUT\_CONT, which enables all clock outputs.

### SYNC During Master Mode Operation

The SYNC input may be used any time during operation to resync the AD9891/AD9895 counters with external timing, as shown in Figure 43. The operation of the digital outputs may be suspended during the SYNC operation by setting the SYNCSPEND Register (Addr x026) to a “1.”

### Synchronization in Slave Mode


When the AD9891/AD9895 is used in Slave Mode, the VD and HD inputs are used to synchronize the internal counters. Following a falling edge of VD, there will be a latency of eight master clock cycles (CLI) after the falling edge of HD until the internal H-counter will be reset. The reset operation is shown in Figure 44.

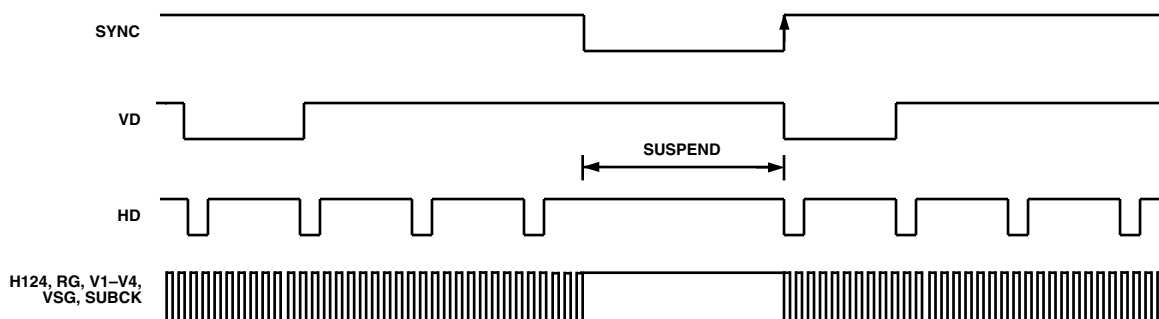

## NOTES

1. SYNC RISING EDGE RESETS VD/HD AND COUNTERS TO ZERO.
2. SYNC POLARITY IS PROGRAMMABLE USING SYNCPOL REGISTER (ADDR x025).
3. DURING SYNC LOW, ALL INTERNAL COUNTERS ARE RESET AND VD/HD CAN BE SUSPENDED USING THE SYNCSPEND REGISTER (ADDR x026).
4. IF SYNCSPEND = 1, VERTICAL CLOCKS AND H1-H2, RG ARE HELD AT THEIR DEFAULT POLARITIES.
5. IF SYNCSPEND = 0, THEN ALL CLOCK OUTPUTS CONTINUE TO OPERATE NORMALLY UNTIL SYNC RESET EDGE.

Figure 43. SYNC Timing to Synchronize AD989x with External Timing

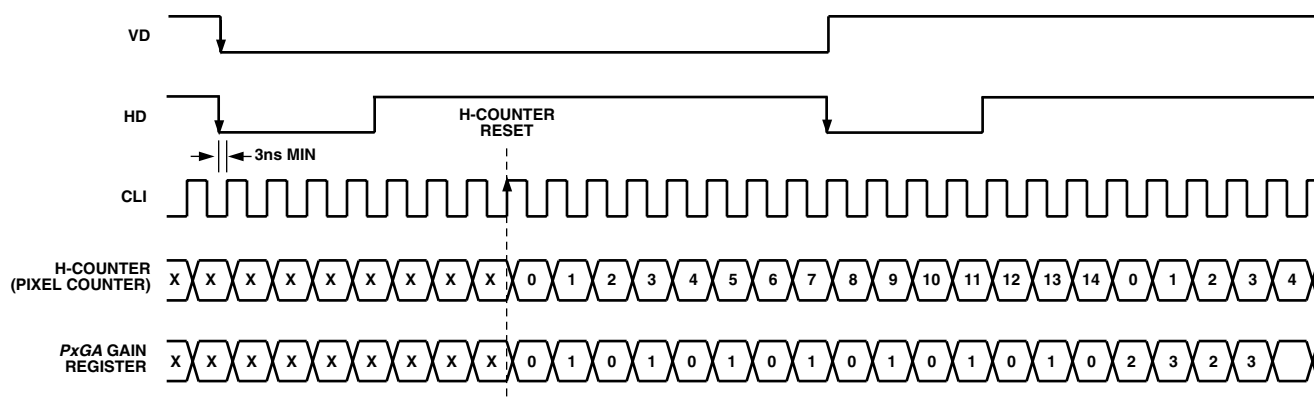

## NOTES

1. INTERNAL H-COUNTER IS RESET 8 CLOCK CYCLES AFTER THE HD FALLING EDGE.
2. PxGA STEERING IS SYNCHRONIZED WITH THE RESET OF THE INTERNAL H-COUNTER (MOSAIC SEPARATE MODE IS SHOWN).

Figure 44. External VD/HD and Internal H-Counter Synchronization, SLAVE Mode

**POWER-DOWN MODE OPERATION**

The AD9891/AD9895 contain three different power-down modes to optimize the overall power dissipation in a particular application. Bits [1:0] of the OPRMODE Register control the power-down state of the device:

OPR\_MODE [1:0] = 00 = Normal Operation (full power)

OPR\_MODE [1:0] = 01 = Power-Down 1 Mode

OPR\_MODE [1:0] = 10 = Power-Down 2 Mode

OPR\_MODE [1:0] = 11 = Power-Down 3 Mode (lowest overall power)

Table XVI summarizes the operation of each power-down mode. Note that in any mode, the OUT\_CONT Register takes priority over the power-down modes where the digital output states are concerned. Power-Down 3 Mode has the lowest power consumption, and it even powers down the crystal oscillator circuit between CLI and CLO. Thus, if CLI and CLO are being used with a crystal to generate the master clock, this circuit will be powered down and there will be no clock signal. When returning from Power-Down 3 Mode to normal operation, the timing core must be reset at least 500 ms after the OPR\_MODE Register is written to. This will allow sufficient time for the crystal circuit to settle.

# AD9891/AD9895

**Table XVI. Power-Down Mode Operation**

| I/O Block      | OUT_CONT== LOW <sup>1</sup> | Power-Down 1 <sup>1</sup> | Power-Down 2 <sup>1, 2</sup> | Power-Down 3 <sup>1, 3, 4</sup> |
|----------------|-----------------------------|---------------------------|------------------------------|---------------------------------|
| AFE            | ON                          | OFF                       | OFF                          | OFF                             |
| Timing Core    | ON                          | ON                        | OFF                          | OFF                             |
| CLO Oscillator | ON                          | ON                        | ON                           | OFF                             |
| V1             | LOW                         | LOW                       | LOW                          | LOW                             |
| V2             | LOW                         | LOW                       | LOW                          | LOW                             |
| V3             | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| V4             | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG1           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG2           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG3           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG4           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG5           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG6           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG7           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSG8           | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| SUBCK          | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VSUB           | LOW                         | LOW                       | LOW                          | LOW                             |
| MSHUT          | LOW                         | LOW                       | LOW                          | LOW                             |
| STROBE         | LOW                         | LOW                       | LOW                          | LOW                             |
| H1             | LOW                         | LOW                       | LOW (3.5 mA)                 | Hi-Z                            |
| H2             | HIGH                        | HIGH                      | HIGH (3.5 mA)                | Hi-Z                            |
| H3             | LOW                         | LOW                       | LOW (3.5 mA)                 | Hi-Z                            |
| H4             | HIGH                        | HIGH                      | HIGH (3.5 mA)                | Hi-Z                            |
| RG             | LOW                         | LOW                       | LOW (3.5 mA)                 | Hi-Z                            |
| LD/FD          | LOW                         | LOW                       | LOW                          | LOW                             |
| CLPOB/<br>PBLK | HIGH                        | HIGH                      | HIGH                         | LOW                             |
| VD             | vdhdpol                     | running                   | vdhdpol                      | LOW                             |
| HD             | vdhdpol                     | running                   | vdhdpol                      | LOW                             |
| DCLK           | LOW                         | running                   | LOW                          | LOW                             |
| CLO            | running                     | running                   | running                      | HIGH                            |
| DOUT           | LOW                         | LOW                       | LOW                          | LOW                             |

## NOTES

<sup>1</sup>First column represents the defaults when OUT\_CONT==LO (OUT\_CONT takes precedence). Power-Down 1, 2, and 3 are direct decodes of the OPRMODE Register Bits [1:0]. These polarities assume OUT\_CONT==HI.

<sup>2</sup>Power-Down 2 will set H[1,2,3,4]DRV and RGDRV to 3'h1 (3.5 mA). Power-Down 3 will three-state the H and RG clocks (set H[1,2,3,4]DRV and RGDRV to 3'h0).

<sup>3</sup>Both the Timing Core and the CLO Oscillator will be powered down in Power-Down 3.

<sup>4</sup>To exit Power-Down 3, first write a 2'b00 to OPRMODE[1:0] (will wake up the oscillator and the timing core), then reset the timing core after ~500µs to guarantee lock.

**HORIZONTAL TIMING SEQUENCE EXAMPLE**

Figure 45 shows an example CCD layout. The horizontal register contains 28 dummy pixels that will occur on each line clocked from the CCD. In the vertical direction, there are 10 optical black (OB) lines at the front of the readout and two at the back of the readout. The horizontal direction has four OB pixels in the front and 48 in the back.

To configure the AD9891/AD9895 horizontal signals for this CCD, three sequences can be used. Figure 46 shows the first sequence to be used during vertical blanking. During this time, there are no valid OB pixels from the sensor, so the CLPOB and

CLPDM signals are not used. In some cases, if the horizontal clocks are used during this time, the CLPDM signal may be used to keep the AD9891/AD9895's input clamp partially settled. PBLK may be enabled during this time because no valid data is available.

Figure 47 shows the recommended sequence for the vertical OB interval. The clamp signals are used across the whole lines in order to stabilize the clamp loops of the AD9891/AD9895.

Figure 48 shows the recommended sequence for the effective pixel readout. The 48 OB pixels at the end of each line are used for the CLPOB and CLPDM signals.


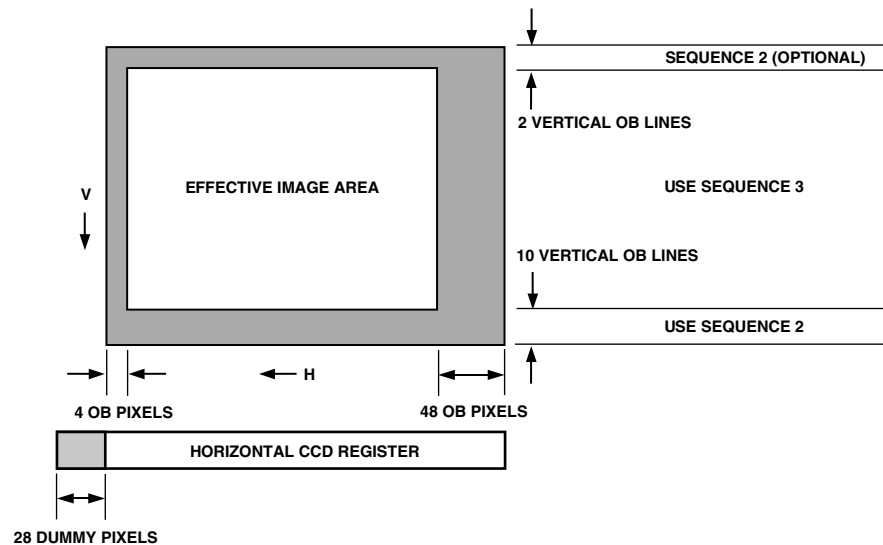


Figure 45. Example CCD Configuration

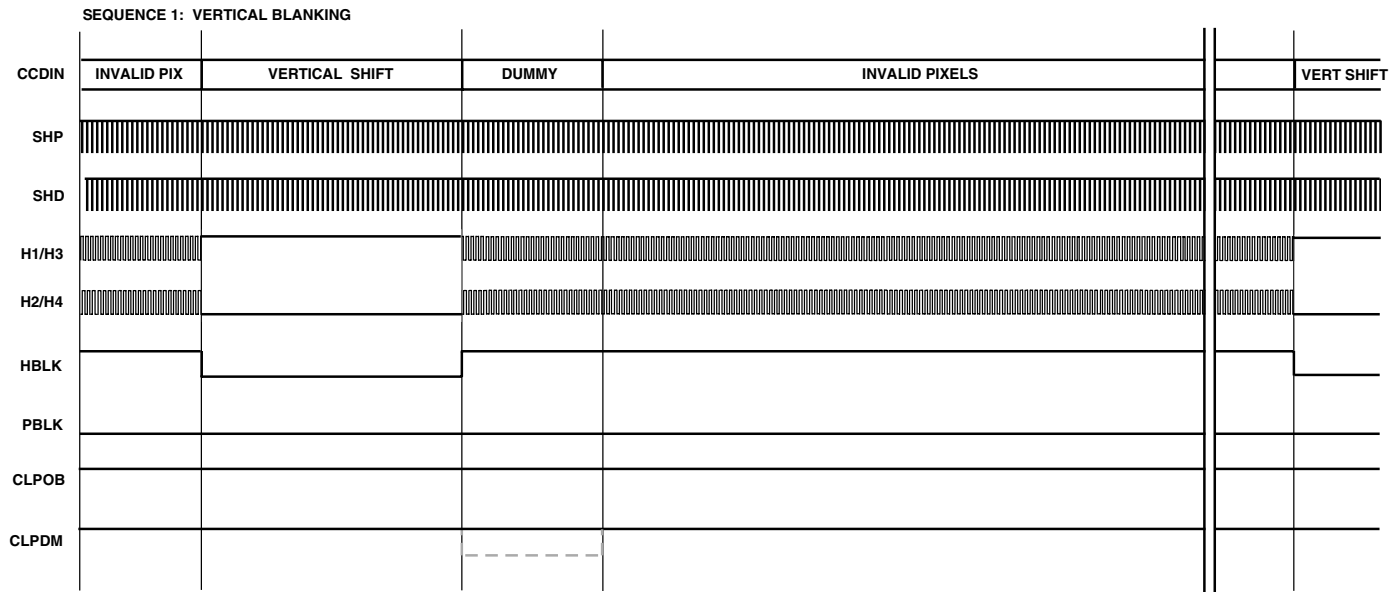

CLPDM PULSE MAY BE USED DURING HORIZONTAL DUMMY PIXELS IF THE H-CLOCKS ARE USED DURING VERTICAL BLANKING.

Figure 46. Horizontal Sequences During Vertical Blanking

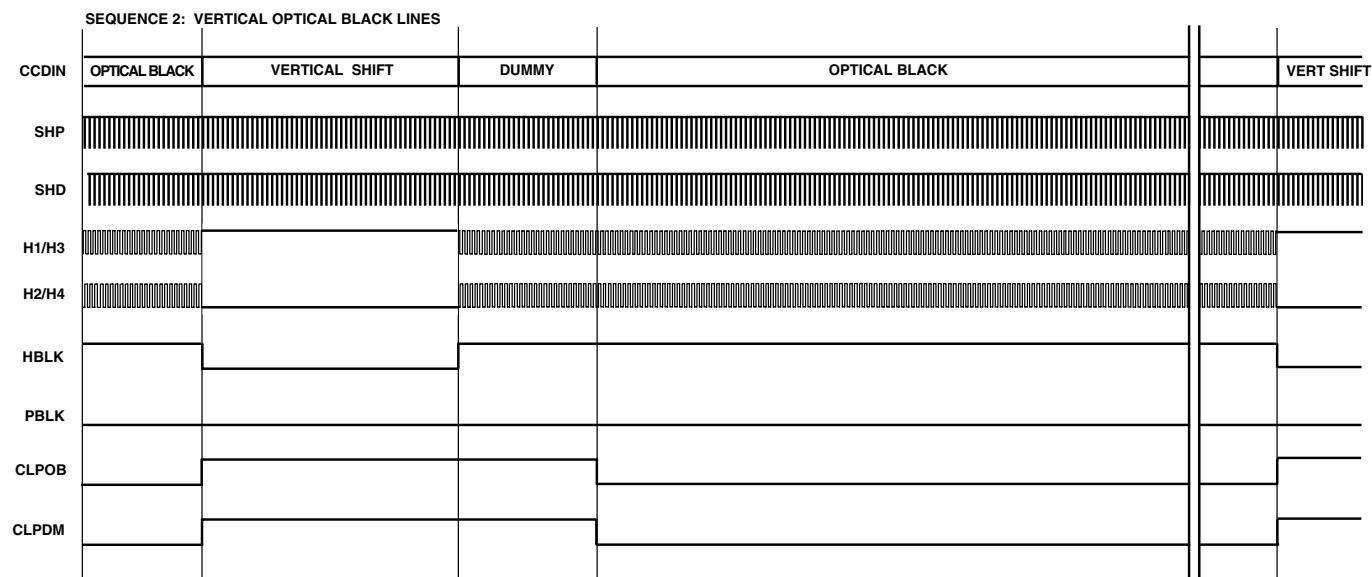


Figure 47. Horizontal Sequences During Vertical Optical Black Pixels

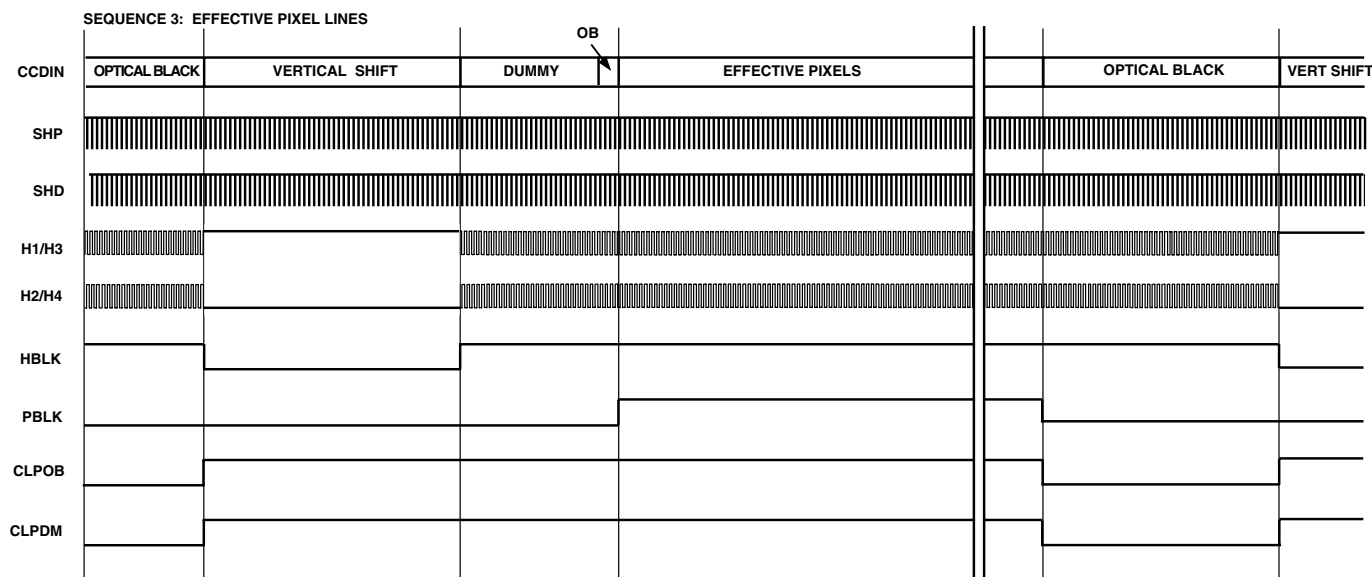


Figure 48. Horizontal Sequences During Effective Pixels

### VERTICAL TIMING EXAMPLE

Figure 49 shows an example CCD timing chart for an interlaced readout. Each field can be broken down into four separate region areas. The vertical region change positions (RCPs) will set the line boundaries for each region area, and the region pointers will assign a unique region to each region area.

Region Area 0 is a high speed vertical shift region. Sweep Mode can be used to generate this timing operation, with the desired number of high speed vertical pulses needed to “clean” the charge from the CCD’s vertical registers.

Region Area 1 consists of only two lines and uses standard single line vertical shift timing. The timing of this region area will be the same as the timing in Region Area 3.

Region Area 2 is the sensor gate line, where the VSG pulses transfer the image into the vertical CCD registers. This region will require the use of the second vertical sequence for SG lines.

Region Area 3 also uses the standard single line vertical shift timing, the same timing as Region Area 1.

In summary, three unique regions are required to support the four region areas, since Region Areas 1 and 3 use the same timing.

Some of the timing parameters will need to be adjusted to read out the second field, such as the sensor gate pulse and line location.

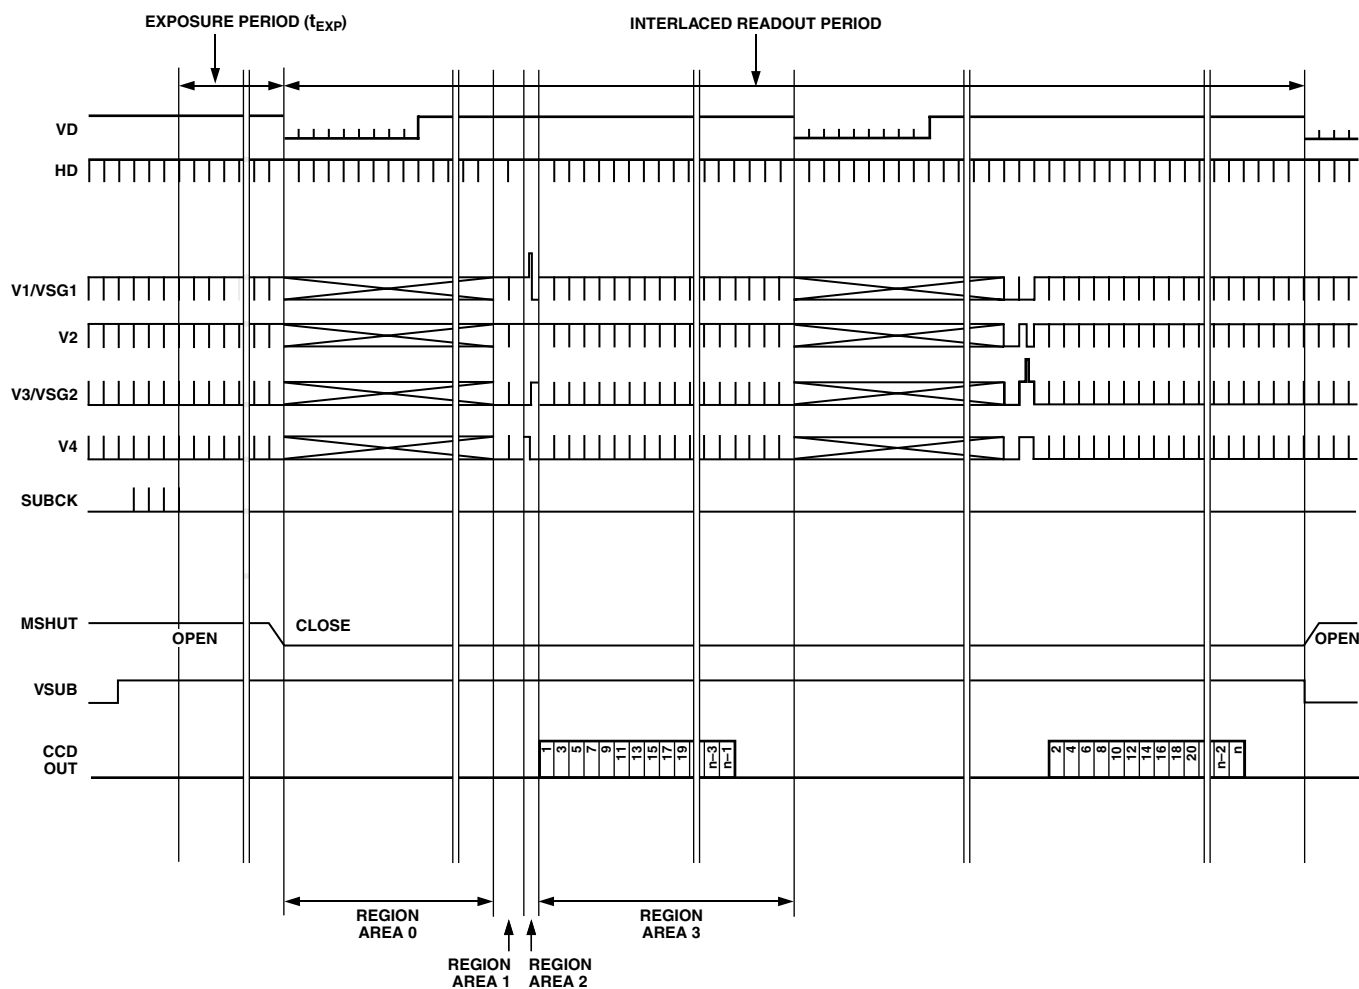


Figure 49. Vertical Timing Example—Separate Regions

# AD9891/AD9895


## CIRCUIT LAYOUT INFORMATION

The AD9891/AD9895 Typical Circuit Connection is shown in Figure 50. Note that Pins E1 and E2 will be No Connects when using the AD9891. The PCB layout is critical in achieving good image quality from the AD989x products. All of the supply pins, particularly the AVDD1, TCVDD, RGVDD, and HVDD supplies, must be decoupled to ground with good quality high frequency chip capacitors. The decoupling capacitors should be located as close as possible to the supply pins and should have a very low impedance path to a continuous ground plane. There should also be a 4.7  $\mu$ F or larger value bypass capacitor for each main supply—AVDD, RGVDD, HVDD, and DRVDD—although this is not necessary for each individual pin. In most applications, it is easier to share the supply for RGVDD and HVDD, which may be done as long as the individual supply pins are separately bypassed. A separate 3 V supply may also be used for DRVDD, but this supply pin should still be decoupled to the same ground plane as the rest of the chip. A separate ground for DRVSS is not recommended.

The analog bypass pins (BYP1–3, VRB, VRT) should also be carefully decoupled to ground as close as possible to their respective pins. The analog input (CCDIN) capacitor should also be located close to the pin.

The H1–H4 and RG traces should be designed to have low inductance to avoid excessive distortion of the signals. Heavier traces are recommended because of the large transient current demand on H1–H4 by the CCD. If possible, physically locating the AD9891/AD9895 closer to the CCD will reduce the inductance on these lines. As always, the routing path should be as direct as possible from the AD9891/AD9895 to the CCD.

The AD9891/AD9895 also contains an on-chip oscillator for driving an external crystal. Figure 51 shows an example application using a typical 18 MHz crystal. For the exact values of the external resistors and capacitors, it is best to consult with the crystal manufacturer's data sheet.

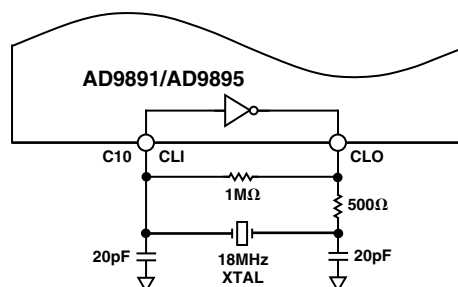

*Figure 51. Crystal Driver Application*

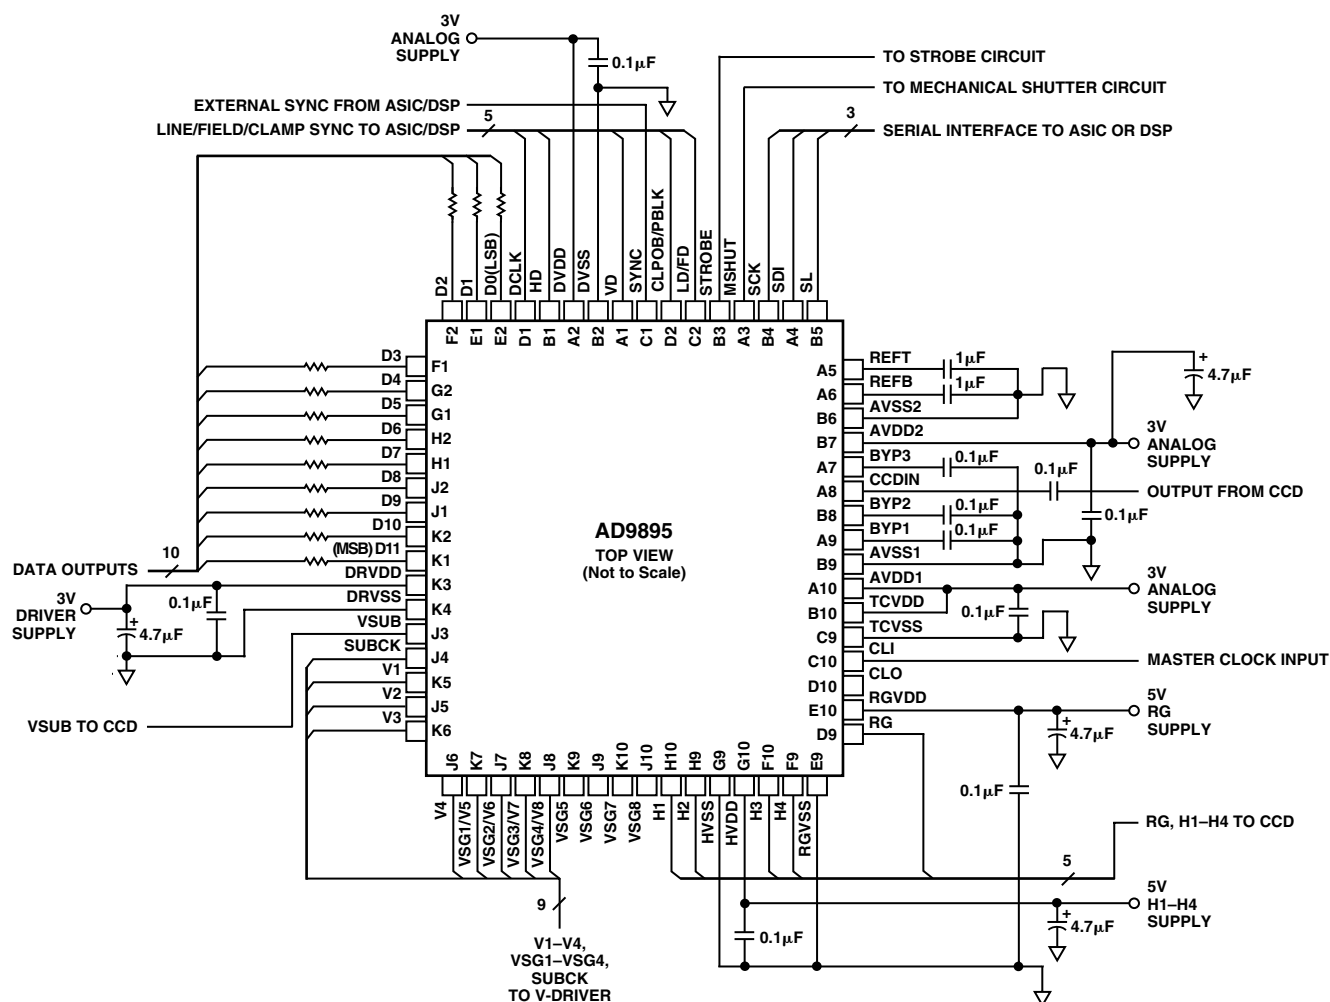


Figure 50. AD9891/AD9895 Typical Circuit Configuration



### SERIAL INTERFACE TIMING

All of the internal registers of the AD9891/AD9895 are accessed through a 3-wire serial interface. Each register consists of a 10-bit address and a 6-bit data-word. Both the 10-bit address and 6-bit data-word are written starting with the LSB. To write to each register, a 16-bit operation is required, as shown in Figure 52. Although many registers are less than six bits wide, all six bits must be written to for each register. If the register is only two bits wide, then the upper four bits are Don't Cares and can be filled with 0s during the serial write operation. If less than six bits are written, the register will not be updated with new data.

Because of the large number of registers in the AD9891/AD9895, Figure 53 shows a more efficient way to write to the registers, using the AD9891/AD9895's address auto-increment capability. Using this method, the lowest desired address is written first, followed by multiple 6-bit data-words. Each new 6-bit data-word will automatically be written to the next highest register address. By eliminating the need for each 10-bit address to be written, faster register loading is accomplished. Address auto-increment may be used starting with any register location and may be used to write to as few as two registers or as many as the entire register space.

#### Notes About Accessing a Double-Wide Register

There are many double-wide registers in the AD9891/AD9895. These registers are configured into two consecutive 6-bit registers with the least significant six bits located in the lower of the two addresses and the remaining most significant

bits located in the higher of the two addresses. For example, the six LSBs of the OPRMODE Register, OPRMODE[5:0], are located at Addr 0x00. The most significant six bits of the OPRMODE Register, OPRMODE[11:6], are located at Addr 0x1. The following rules must be followed when accessing double-wide registers:

1. When accessing a double-wide register, BOTH addresses must be written to.
2. The lower of the two consecutive addresses for the double-wide register must be written to first. In the example of the OPRMODE Register, the contents of Addr 0x00 must be written first followed by the contents of Addr 0x01. The register will be internally updated after the completion of the write to Register 0x01, either at the next SL rising edge or the next VD/HD falling edge depending on the register.
3. A single write to the lower of the two consecutive addresses of a double-wide register that is not followed by a write to the higher address of the registers is not supported. This will not update the register.
4. A single write to the higher of the two consecutive addresses of a double-wide register that is not preceded by a write to the lower of the two addresses is not supported. Although the write to the higher address will update the full double-wide register, the lower six bits of the register will be written with an indeterminate value if the lower address was not written to first.

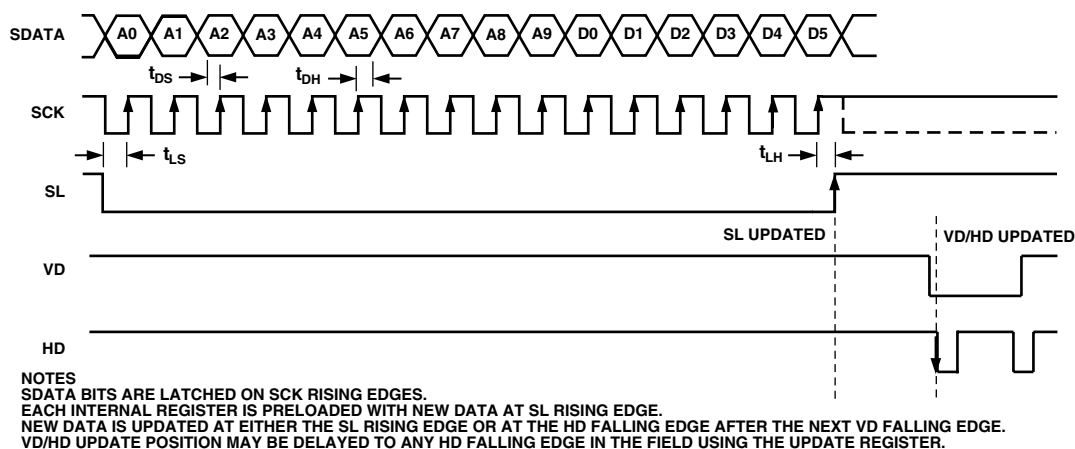


Figure 52. Serial Write Operation

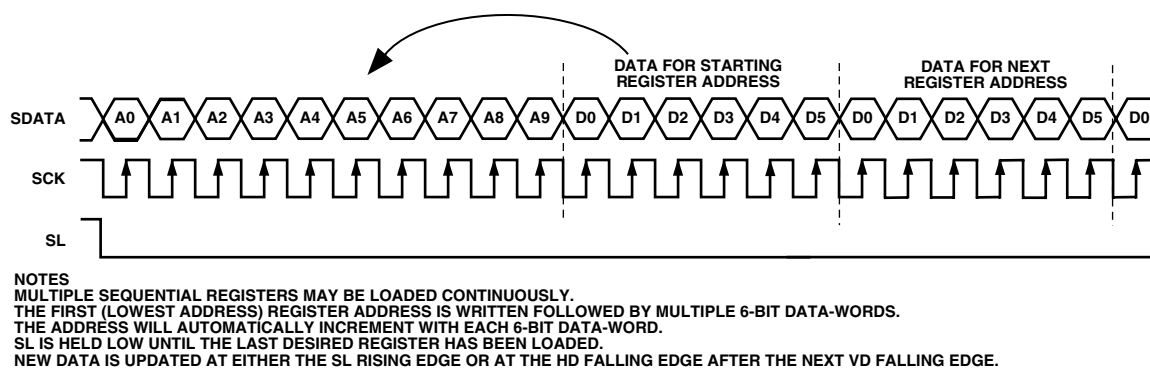


Figure 53. Continuous Serial Write Operation

# AD9891/AD9895

## NOTES ON REGISTER LISTING

1. Registers larger than six bits occupy two adjacent addresses. When writing to these registers, the lower address containing the least significant data bits should be written to first. The data for both addresses should be written to avoid corruption of register data.
2. All addresses and default values are expressed in hexadecimal.
3. All registers are VD/HD updated as shown in Figure 52, except for the registers indicated in Table XVII, which are SL updated.
4. The registers indicated in Table XVIII are not updated by SL or VD/HD, but are updated at the HD line following the VSG line.

**Table XVII. SL-Updated Register**

| Register     | Description                           |
|--------------|---------------------------------------|
| OPRMODE      | AFE Operation Modes                   |
| CTLMODE      | AFE Control Modes                     |
| SW_RESET     | Software Reset Bit                    |
| READBACK     | Enables Serial Register Readback Mode |
| FIELDVAL     | Resets Internal Field Pulse.          |
| H1HBLKRETIME | Retimes the H1 HBLK to Internal Clock |
| H3HBLKRETIME | Retimes the H3 HBLK to Internal Clock |
| SYNCEENABLE  | External Synchronization Enable       |
| SYNCPOL      | External SYNC Active Polarity         |
| SYNCSUSPEND  | SYNC Suspend while Active             |
| TG_CORE_RSTB | Reset Bar Signal for Internal TG Core |
| FFTRANCCD    | Frame Transfer CCD Mode               |
| H12POL       | H1/H2 Polarity Control                |
| H1POSLOC     | H1 Positive Edge Location             |
| H1NEGLOC     | H1 Negative Edge Location             |
| H34POL       | H3/H4 Polarity Control                |
| H3POSLOC     | H3 Positive Edge Location             |
| H3NEGLOC     | H3 Negative Edge Location             |
| H1DRV        | H1 Drive Current                      |
| H2DRV        | H2 Drive Current                      |
| H3DRV        | H3 Drive Current                      |
| H4DRV        | H4 Drive Current                      |
| RGPOL        | RG Polarity                           |
| RGPOSLOC     | RG Positive Edge Location             |
| RGNEGLOC     | RG Negative Edge Location             |
| SHPLC        | SHPL Sample Location                  |
| SHDLOC       | SHD Sample Location                   |
| MASTER       | VD/HD Master/Slave Timing Mode        |
| VDHDPOL      | VD/HD Active Polarity                 |
| SINGLE_CLAMP | Sets CLPDM = CLPOB                    |
| DOUT_DELAY   | Sets the Output Delay of DOUT         |
| OSC_PWRDOWN  | Powers Down the CLO Oscillator        |
| VDHDPOL      | VD/HD Active Polarity                 |

**Table XVIII. SG-Line Updated Registers**

| Register      | Description                                 |
|---------------|---|
| SUBCKPOL      | SUBCK Start Polarity                        |
| SUBCK1TOG1    | SUBCK First Toggle Position                 |
| SUBCK1TOG2    | SUBCK Second Toggle Position                |
| SUBCK2TOG1    | Second SUBCK First Toggle Position          |
| SUBCK2TOG2    | Second SUBCK Second Toggle Position         |
| SUBCKNUM      | Total Number of SUBCKs per Field            |
| SUBCKSUPPRESS | Number of SUBCKs to Suppress after VSG Line |

Table XIX. AFE Register Map

| Address | Content | Bit Width | Default Value | Register Name | Register Description                 |
|---------|---------|-----------|---------------|---------------|--------------------------------------|
| 00      | [5:0]   | 6         | 10            | OPRMODE[5:0]  | AFE Operation Mode (See Table XXXI.) |
| 01      | [1:0]   | 2         | 00            | OPRMODE[7:6]  |                                      |
| 02      | [5:0]   | 6         | 05            | CCDGAIN[5:0]  | VGA Gain (Defaults to 2 dB)          |
| 03      | [3:0]   | 4         | 01            | CCDGAIN[9:6]  |                                      |
| 04      | [5:0]   | 6         | 00            | REFBLACK[5:0] | Black Clamp Level                    |
| 05      | [1:0]   | 2         | 02            | REFBLACK[7:6] |                                      |
| 06      | [5:0]   | 6         | 00            | CTLMODE       | Control Mode (See Table XXXI.)       |
| 07      | [5:0]   | 6         | 00            | PXGA GAIN0    |                                      |
| 08      | [5:0]   | 6         | 00            | PXGA GAIN1    |                                      |
| 09      | [5:0]   | 6         | 00            | PXGA GAIN2    |                                      |
| 0A      | [5:0]   | 6         | 00            | PXGA GAIN3    |                                      |
|         |         |           |               |               |                                      |

Table XX. MISCELLANEOUS/EXTRA Register Map

| Address | Content | Bit Width | Default Value | Register Name  | Register Description   |
|---------|---------|-----------|---------------|----------------|--|
| 010     | [5:0]   | 6         | 00            | INTIAL2        | See Power-Up Sequence. Should be set to “4.”   |
| 017     | [0]     | 1         | 00            | SW_RESET       | Software Reset (1 = Reset All Registers to Default)  |
| 018     | [0]     | 1         | 00            | OUT_CONT       | Output Control (0 = Make All Outputs DC Inactive)  |
| 019     | [5:0]   | 6         | 00            | UPDATE[5:0]    | Serial Data Update Control. Sets the line (HD) within the field for the serial data update to occur. |
| 01A     | [5:0]   | 6         | 00            | UPDATE[11:6]   |  |
| 01B     | [0]     | 1         | 00            | PREVENTUPDATE  | Prevents the Update of the VD Updated Registers  |
| 01C     | [0]     | 1         | 00            | READBACK       | Serial Interface Readback Enable   |
| 01D     | [5:0]   | 6         | 00            | DOUTPHASE      | DOUT Phase Control   |
| 01E     | [0]     | 1         | 00            | DCLKMODE       | DCLK Mode (0 = DCLK Tracks DOUT Phase, 1 = DCLK Is CLO, i.e., CLI Inverse)                           |
| 01F     | [0]     | 1         | 00            | CLIDIVIDE      | Divide CLI Input Clock by 2  |
| 020     | [0]     | 1         | 00            | DISABLERESTORE | Disable CCDIN DC Restore Circuit during PBLK (1 = Disable)   |
| 021     | [0]     | 1         | 01            | FIELDVAL       | Reset Internal Field Pulse Value (0 = Next Field Odd, 1 = Next Field Even)                           |
| 022     | [0]     | 1         | 00            | H1HBLKRETIME   | Re-time H1/H2 HBLK to Internal H1 Clock  |
| 023     | [0]     | 1         | 00            | H3HBLKRETIME   | Re-time H3/H4 HBLK to Internal H3 Clock  |
| 024     | [0]     | 1         | 00            | SYNCENABLE     | External Synchronization Enable (1 = Enable)   |
| 025     | [0]     | 1         | 00            | SYNCPOL        | SYNC Active Polarity (0 = Active LOW)  |
| 026     | [0]     | 1         | 00            | SYNCSUSPEND    | Suspend Clocks during SYNC Active (1 = Suspend)  |
| 027     | [0]     | 1         | 00            | OUTPUTLD       | Assign LD/FD Output (0 = FD, 1 = LD)   |
| 028     | [0]     | 1         | 00            | OUTPUTPBLK     | Assign CLPOB/PBLK Output (0 = CLPOB, 1 = PBLK)   |
| 029     | [0]     | 1         | 00            | TGCORE_RSTB    | TG Core Reset_bar (0 = Hold TG Core in Reset, 1 = Resume Operation)                                  |
| 02A     | [0]     | 1         | 00            | FTRANCCD       | Frame Transfer CCD Mode (1 = VSG1–VSG4 Become V5–V8 Out)   |
| 02B     | [5:0]   | 6         | 00            | INTIAL1        | See Power-Up Sequence. Should be set to “53.”  |
| 031     | [0]     | 1         | 01            | SINGLE_CLAMP   | CLPDM = CLPOB when Set to 1 (Only CLPOB Registers Used).   |
| 032     | [1:0]   | 2         | 02            | DOUT_DELAY     | Delay from DCLK to DOUT (0 = No Delay, 1 = 4 ns, 2 = 8 ns, 3 = 12 ns)                                |
| 033     | [0]     | 1         | 01            | OSC_PWRDOWN    | CLO Oscillator Power-Down (0 = Oscillator Is Powered Down)   |

Table XXI. CLPDM/CLPOB Shared Register Map

| Address | Content | Bit Width | Default Value | Register Name  | Register Description                                   |
|---------|---------|-----------|---------------|----------------|--|
| 064     |         | 0         | 00            | CLPSCP0        | CLPOB/DM Sequence-Change Position #0 (Hard-Coded to 0) |
| 065     | [5:0]   | 6         | 3F            | CLPSCP1[5:0]   | CLPOB/CLPDM Sequence-Change Position #1                |
| 066     | [5:0]   | 6         | 3F            | CLPSCP1[11:6]  |  |
| 067     | [5:0]   | 6         | 3F            | CLPSCP2[5:0]   | CLPOB/CLPDM Sequence-Change Position #2                |
| 068     | [5:0]   | 6         | 3F            | CLPSCP2[11:6]  |  |
| 069     | [5:0]   | 6         | 3F            | CLPSCP3[5:0]   | CLPOB/CLPDM Sequence-Change Position #3                |
| 06A     | [5:0]   | 6         | 3F            | CLPSCP3[11:6]  |  |
| 06B     | [5:0]   | 6         | 3F            | CLPMASK0[5:0]  | CLPOB/CLPDM Masking Line #0                            |
| 06C     | [5:0]   | 6         | 3F            | CLPMASK0[11:6] |  |
| 06D     | [5:0]   | 6         | 3F            | CLPMASK1[5:0]  | CLPOB/CLPDM Masking Line #1                            |
| 06E     | [5:0]   | 6         | 3F            | CLPMASK1[11:6] |  |
| 06F     | [5:0]   | 6         | 3F            | CLPMASK2[5:0]  | CLPOB/CLPDM Masking Line #2                            |
| 070     | [5:0]   | 6         | 3F            | CLPMASK2[11:6] |  |
| 071     | [5:0]   | 6         | 3F            | CLPMASK3[5:0]  | CLPOB/CLPDM Masking Line #3                            |
| 072     | [5:0]   | 6         | 3F            | CLPMASK3[11:6] |  |
| 073     | [5:0]   | 6         | 3F            | CLPMASK4[5:0]  | CLPOB/CLPDM Masking Line #4                            |
| 074     | [5:0]   | 6         | 3F            | CLPMASK4[11:6] |  |

Table XXII. CLPDM Register Map

| Address | Content | Bit Width | Default Value | Register Name     | Register Description                     |
|---------|---------|-----------|---------------|-------------------|--|
| 075     | [0]     | 1         | 01            | CLPDMSPOL0        | Sequence #0: Start Polarity for CLPDM    |
| 076     | [5:0]   | 6         | 2E            | CLPDMTOG1_0[5:0]  | Sequence #0: Toggle Position 1 for CLPDM |
| 077     | [5:0]   | 6         | 00            | CLPDMTOG1_0[11:6] |  |
| 078     | [5:0]   | 6         | 06            | CLPDMTOG2_0[5:0]  | Sequence #0: Toggle Position 2 for CLPDM |
| 079     | [5:0]   | 6         | 03            | CLPDMTOG2_0[11:6] |  |
| 07A     | [0]     | 1         | 00            | CLPDMSPOL1        | Sequence #1: Start Polarity for CLPDM    |
| 07B     | [5:0]   | 6         | 3F            | CLPDMTOG1_1[5:0]  | Sequence #1: Toggle Position 1 for CLPDM |
| 07C     | [5:0]   | 6         | 3F            | CLPDMTOG1_1[11:6] |  |
| 07D     | [5:0]   | 6         | 3F            | CLPDMTOG2_1[5:0]  | Sequence #1: Toggle Position 2 for CLPDM |
| 07E     | [5:0]   | 6         | 3F            | CLPDMTOG2_1[11:6] |  |
| 07F     | [0]     | 1         | 00            | CLPDMSPOL2        | Sequence #2: Start Polarity for CLPDM    |
| 080     | [5:0]   | 6         | 3F            | CLPDMTOG1_2[5:0]  | Sequence #2: Toggle Position 1 for CLPDM |
| 081     | [5:0]   | 6         | 3F            | CLPDMTOG1_2[11:6] |  |
| 082     | [5:0]   | 6         | 3F            | CLPDMTOG2_2[5:0]  | Sequence #2: Toggle Position 2 for CLPDM |
| 083     | [5:0]   | 6         | 3F            | CLPDMTOG2_2[11:6] |  |
| 084     | [0]     | 1         | 00            | CLPDMSPOL3        | Sequence #3: Start Polarity for CLPDM    |
| 085     | [5:0]   | 6         | 3F            | CLPDMTOG1_3[5:0]  | Sequence #3: Toggle Position 1 for CLPDM |
| 086     | [5:0]   | 6         | 3F            | CLPDMTOG1_3[11:6] |  |
| 087     | [5:0]   | 6         | 3F            | CLPDMTOG2_3[5:0]  | Sequence #3: Toggle Position 2 for CLPDM |
| 088     | [5:0]   | 6         | 3F            | CLPDMTOG2_3[11:6] |  |
| 089     | [1:0]   | 2         | 00            | CLPDMSPTR0        | CLPDM Sequence Pointer for Region #0     |
| 08A     | [1:0]   | 2         | 00            | CLPDMSPTR1        | CLPDM Sequence Pointer for Region #1     |
| 08B     | [1:0]   | 2         | 00            | CLPDMSPTR2        | CLPDM Sequence Pointer for Region #2     |
| 08C     | [1:0]   | 2         | 00            | CLPDMSPTR3        | CLPDM Sequence Pointer for Region #3     |

Table XXIII. CLPOB Register Map

| Address | Content | Bit Width | Default Value | Register Name     | Register Description                     |
|---------|---------|-----------|---------------|-------------------|--|
| 08D     | [0]     | 1         | 01            | CLPOBPOL0         | Sequence #0: Start Polarity for CLPOB    |
| 08E     | [5:0]   | 6         | 0A            | CLPOBTOG1_0[5:0]  | Sequence #0: Toggle Position 1 for CLPOB |
| 08F     | [5:0]   | 6         | 00            | CLPOBTOG1_0[11:6] |  |
| 090     | [5:0]   | 6         | 2F            | CLPOBTOG2_0[5:0]  | Sequence #0: Toggle Position 2 for CLPOB |
| 091     | [5:0]   | 6         | 00            | CLPOBTOG2_0[11:6] |  |
| 092     | [0]     | 1         | 00            | CLPOBPOL1         | Sequence #1: Start Polarity for CLPOB    |
| 093     | [5:0]   | 6         | 3F            | CLPOBTOG1_1[5:0]  | Sequence #1: Toggle Position 1 for CLPOB |
| 094     | [5:0]   | 6         | 3F            | CLPOBTOG1_1[11:6] |  |
| 095     | [5:0]   | 6         | 3F            | CLPOBTOG2_1[5:0]  | Sequence #1: Toggle Position 2 for CLPOB |
| 096     | [5:0]   | 6         | 3F            | CLPOBTOG2_1[11:6] |  |
| 097     | [0]     | 1         | 00            | CLPOBPOL2         | Sequence #2: Start Polarity for CLPOB    |
| 098     | [5:0]   | 6         | 3F            | CLPOBTOG1_2[5:0]  | Sequence #2: Toggle Position 1 for CLPOB |
| 099     | [5:0]   | 6         | 3F            | CLPOBTOG1_2[11:6] |  |
| 09A     | [5:0]   | 6         | 3F            | CLPOBTOG2_2[5:0]  | Sequence #2: Toggle Position 2 for CLPOB |
| 09B     | [5:0]   | 6         | 3F            | CLPOBTOG2_2[11:6] |  |
| 09C     | [0]     | 1         | 00            | CLPOBSPOL3        | Sequence #3: Start Polarity for CLPOB    |
| 09D     | [5:0]   | 6         | 3F            | CLPOBTOG1_3[5:0]  | Sequence #3: Toggle Position 1 for CLPOB |
| 09E     | [5:0]   | 6         | 3F            | CLPOBTOG1_3[11:6] |  |
| 09F     | [5:0]   | 6         | 3F            | CLPOBTOG2_3[5:0]  | Sequence #3: Toggle Position 2 for CLPOB |
| 0A0     | [5:0]   | 6         | 3F            | CLPOBTOG2_3[11:6] |  |
| 0A1     | [1:0]   | 2         | 00            | CLPOBSPTR0        | CLPOB Sequence Pointer for Region #0     |
| 0A2     | [1:0]   | 2         | 00            | CLPOBSPTR1        | CLPOB Sequence Pointer for Region #1     |
| 0A3     | [1:0]   | 2         | 00            | CLPOBSPTR2        | CLPOB Sequence Pointer for Region #2     |
| 0A4     | [1:0]   | 2         | 00            | CLPOBSPTR3        | CLPOB Sequence Pointer for Region #3     |

Table XXIV. HBLK Register Map\*

| Address | Content | Bit Width | Default Value | Register Name    | Register Description                      |
|---------|---------|-----------|---------------|------------------|---|
| 0A5     | [0]     | 1         | 01            | HBLKMASK_H1_0    | Sequence #0: H1 Masking Polarity for HBLK |
| 0A6     | [0]     | 1         | 01            | HBLKMASK_H3_0    | Sequence #0: H3 Masking Polarity for HBLK |
| 0A7     | [5:0]   | 6         | 34            | HBLKTOG1_0[5:0]  | Sequence #0: Toggle Position 1 for HBLK   |
| 0A8     | [5:0]   | 6         | 00            | HBLKTOG1_0[11:6] |   |
| 0A9     | [5:0]   | 6         | 2C            | HBLKTOG2_0[5:0]  | Sequence #0: Toggle Position 2 for HBLK   |
| 0AA     | [5:0]   | 6         | 02            | HBLKTOG2_0[11:6] |   |
| 0AB     | [0]     | 1         | 00            | HBLKMASK_H1_1    | Sequence #1: H1 Masking Polarity for HBLK |
| 0AC     | [0]     | 1         | 00            | HBLKMASK_H3_1    | Sequence #1: H3 Masking Polarity for HBLK |
| 0AD     | [5:0]   | 6         | 3F            | HBLKTOG1_1[5:0]  | Sequence #1: Toggle Position 1 for HBLK   |
| 0AE     | [5:0]   | 6         | 3F            | HBLKTOG1_1[11:6] |   |
| 0AF     | [5:0]   | 6         | 3F            | HBLKTOG2_1[5:0]  | Sequence #1: Toggle Position 2 for HBLK   |
| 0B0     | [5:0]   | 6         | 3F            | HBLKTOG2_1[11:6] |   |
| 0B1     | [0]     | 1         | 00            | HBLKMASK_H1_2    | Sequence #2: H1 Masking Polarity for HBLK |
| 0B2     | [0]     | 1         | 00            | HBLKMASK_H3_2    | Sequence #2: H3 Masking Polarity for HBLK |
| 0B3     | [5:0]   | 6         | 3F            | HBLKTOG1_2[5:0]  | Sequence #2: Toggle Position 1 for HBLK   |
| 0B4     | [5:0]   | 6         | 3F            | HBLKTOG1_2[11:6] |   |
| 0B5     | [5:0]   | 6         | 3F            | HBLKTOG2_2[5:0]  | Sequence #2: Toggle Position 2 for HBLK   |
| 0B6     | [5:0]   | 6         | 3F            | HBLKTOG2_2[11:6] |   |
| 0B7     | [0]     | 1         | 00            | HBLKMASK_H1_3    | Sequence #3: H1 Masking Polarity for HBLK |
| 0B8     | [0]     | 1         | 00            | HBLKMASK_H3_3    | Sequence #3: H3 Masking Polarity for HBLK |
| 0B9     | [5:0]   | 6         | 3F            | HBLKTOG1_3[5:0]  | Sequence #3: Toggle Position 1 for HBLK   |
| 0BA     | [5:0]   | 6         | 3F            | HBLKTOG1_3[11:6] |   |
| 0BB     | [5:0]   | 6         | 3F            | HBLKTOG2_3[5:0]  | Sequence #3: Toggle Position 2 for HBLK   |
| 0BC     | [5:0]   | 6         | 3F            | HBLKTOG2_3[11:6] |   |

\*HBLK Sequence-Change Positions shared with the vertical transfer pulses.

Table XXV. PBLK Register Map

| Address | Content | Bit Width | Default Value | Register Name     | Register Description                                  |
|---------|---------|-----------|---------------|-------------------|---|
| 0BD     | [0]     | 1         | 00            | PBLKSPOL0         | Sequence #0: Start Polarity for PBLK                  |
| 0BE     | [5:0]   | 6         | 10            | PBLKTOG1_0[5:0]   | Sequence #0: Toggle Position 1 for PBLK               |
| 0BF     | [5:0]   | 6         | 03            | PBLKTOG1_0[11:6]  |   |
| 0C0     | [5:0]   | 6         | 3F            | PBLKBTOG2_0[5:0]  | Sequence #0: Toggle Position 2 for PBLK               |
| 0C1     | [5:0]   | 6         | 3F            | PBLKBTOG2_0[11:6] |   |
| 0C2     | [0]     | 1         | 00            | PBLKSPOL1         | Sequence #1: Start Polarity for PBLK                  |
| 0C3     | [5:0]   | 6         | 3F            | PBLKTOG1_1[5:0]   | Sequence #1: Toggle Position 1 for PBLK               |
| 0C4     | [5:0]   | 6         | 3F            | PBLKTOG1_1[11:6]  |   |
| 0C5     | [5:0]   | 6         | 3F            | PBLKTOG2_1[5:0]   | Sequence #1: Toggle Position 2 for PBLK               |
| 0C6     | [5:0]   | 6         | 3F            | PBLKTOG2_1[11:6]  |   |
| 0C7     | [0]     | 1         | 00            | PBLKSPOL2         | Sequence #2: Start Polarity for PBLK                  |
| 0C8     | [5:0]   | 6         | 3F            | PBLKTOG1_2[5:0]   | Sequence #2: Toggle Position 1 for PBLK               |
| 0C9     | [5:0]   | 6         | 3F            | PBLKTOG1_2[11:6]  |   |
| 0CA     | [5:0]   | 6         | 3F            | PBLKTOG2_2[5:0]   | Sequence #2: Toggle Position 2 for PBLK               |
| 0CB     | [5:0]   | 6         | 3F            | PBLKTOG2_2[11:6]  |   |
| 0CC     | [0]     | 1         | 00            | PBLKSPOL3         | Sequence #3: Start Polarity for PBLK                  |
| 0CD     | [5:0]   | 6         | 3F            | PBLKTOG1_3[5:0]   | Sequence #3: Toggle Position 1 for PBLK               |
| 0CE     | [5:0]   | 6         | 3F            | PBLKTOG1_3[11:6]  |   |
| 0CF     | [5:0]   | 6         | 3F            | PBLKTOG2_3[5:0]   | Sequence #3: Toggle Position 2 for PBLK               |
| 0D0     | [5:0]   | 6         | 3F            | PBLKTOG2_3[11:6]  |   |
|         |         | 0         | 00            | PBLKSCP0          | PBLK Sequence-Change Position #0<br>(Hard-Coded to 0) |
| 0D1     | [1:0]   | 2         | 00            | PBLKSPTR0         | PBLK Sequence Pointer for Region #0                   |
| 0D2     | [5:0]   | 6         | 3F            | PBLKSCP1[5:0]     | PBLK Sequence-Change Position #1                      |
| 0D3     | [5:0]   | 6         | 3F            | PBLKSCP1[11:6]    |   |
| 0D4     | [1:0]   | 2         | 00            | PBLKSPTR1         | PBLK Sequence Pointer for Region #1                   |
| 0D5     | [5:0]   | 6         | 3F            | PBLKSCP2[5:0]     | PBLK Sequence-Change Position #2                      |
| 0D6     | [5:0]   | 6         | 3F            | PBLKSCP2[11:6]    |   |
| 0D7     | [1:0]   | 2         | 00            | PBLKSPTR2         | PBLK Sequence Pointer for Region #2                   |
| 0D8     | [5:0]   | 6         | 3F            | PBLKSCP3[5:0]     | PBLK Sequence-Change Position #3                      |
| 0D9     | [5:0]   | 6         | 3F            | PBLKSCP3[11:6]    |   |
| 0DA     | [1:0]   | 2         | 00            | PBLKSPTR3         | PBLK Sequence Pointer for Region #3                   |

Table XXVI. H1-H4, RG, SHP, SHD Register Map

| Address | Content | Bit Width | Default Value | Register Name | Register Description   |
|---------|---------|-----------|---------------|---------------|--|
| 0DB     | [0]     | 1         | 01            | H12POL        | H1/H2 Polarity Control (0 = Inversion, 1 = No Inversion)   |
| 0DC     | [5:0]   | 6         | 00            | H1POSLOC      | H1 Positive Edge Location  |
| 0DD     | [5:0]   | 6         | 20            | H1NEGLOC      | H1 Negative Edge Location  |
| 0DE     | [0]     | 1         | 01            | H34POL        | H3/H4 Polarity Control (0 = Inversion, 1 = No Inversion)   |
| 0DF     | [5:0]   | 6         | 00            | H3POSLOC      | H3 Positive Edge Location  |
| 0E0     | [5:0]   | 6         | 20            | H3NEGLOC      | H3 Negative Edge Location  |
| 0E1     | [2:0]   | 3         | 03            | H1DRV         | H1 Drive Strength (0 = Off, 1 = 3.5 mA, 2 = 7 mA, 3 = 10.5 mA, 4 = 14 mA, 5 = 17.5 mA, 6 = 21 mA, 7 = 24.5 mA) |
| 0E2     | [2:0]   | 3         | 03            | H2DRV         | H2 Drive Strength  |
| 0E3     | [2:0]   | 3         | 03            | H3DRV         | H3 Drive Strength  |
| 0E4     | [2:0]   | 3         | 03            | H4DRV         | H4 Drive Strength  |
| 0E5     | [0]     | 1         | 01            | RGPOL         | RG Polarity Control (0 = Inversion, 1 = No Inversion)  |
| 0E6     | [5:0]   | 6         | 00            | RGPOSLOC      | RG Positive Edge Location  |
| 0E7     | [5:0]   | 6         | 10            | RGNEGLOC      | RG Negative Edge Location  |
| 0E8     | [2:0]   | 3         | 02            | RGDRV         | RG Drive Strength (0 = Off, 1 = 3.5 mA, 2 = 7 mA, 3 = 10.5 mA, 4 = 14 mA, 5 = 17.5 mA, 6 = 21 mA, 7 = 24.5 mA) |
| 0E9     | [5:0]   | 6         | 24            | SHPPOSLOC     | SHP (Positive) Edge Sampling Location  |
| 0EA     | [5:0]   | 6         | 00            | SHDPOSLOC     | SHD (Positive) Edge Sampling Location  |

Table XXVII. HD/VD Register Map

| Address | Content | Bit Width | Default Value | Register Name   | Register Description   |
|---------|---------|-----------|---------------|-----------------|--|
| 0EB     | [0]     | 1         | 00            | MASTER          | VD/HD Master or Slave Timing (0 = Slave, 1 = Master)         |
| 0EC     | [0]     | 1         | 00            | VDHDPOL         | VD/HD Active Polarity (0 = Low Active, 1 = High Active)      |
| 0ED     | [5:0]   | 6         | 09            | VDRISE          | VD Rising Edge Location (HD Location in Field)               |
| 0EE     | [5:0]   | 6         | 07            | VDLEN[5:0]      | VD Field Length (Number of Lines per Field)                  |
| 0EF     | [4:0]   | 6         | 04            | VDLEN[11:6]     |  |
| 0F0     | [5:0]   | 6         | 33            | HDRISE[5:0]     | HD Rising Edge Location (Pixel Location in Line)             |
| 0F1     | [5:0]   | 6         | 01            | HDRISE[11:6]    |  |
| 0F2     | [5:0]   | 6         | 38            | HDLASTLEN[5:0]  | HD Last Line Length (Number of Pixels in Last Line of Field) |
| 0F3     | [5:0]   | 6         | 11            | HDLASTLEN[11:6] |  |

Table XXVIII. V1-V8 Register Map

| Address | Content | Bit Width | Default Value | Register Name   | Register Description           |
|---------|---------|-----------|---------------|-----------------|--------------------------------|
| 0F4     | [0]     | 1         | 00            | VTTPOL0         | Sequence #0: Start Polarity    |
| 0F5     | [5:0]   | 6         | 05            | VTPTOG1_0[5:0]  | Sequence #0: Toggle Position 1 |
| 0F6     | [5:0]   | 6         | 00            | VTPTOG1_0[11:6] |                                |
| 0F7     | [5:0]   | 6         | 12            | VTPTOG2_0[5:0]  | Sequence #0: Toggle Position 2 |
| 0F8     | [5:0]   | 6         | 00            | VTPTOG2_0[11:6] |                                |
| 0F9     | [5:0]   | 6         | 3F            | VTPTOG3_0[5:0]  | Sequence #0: Toggle Position 3 |
| 0FA     | [5:0]   | 6         | 3F            | VTPTOG3_0[11:6] |                                |
| 0FB     | [5:0]   | 6         | 24            | VTPLEN0[5:0]    | Sequence #0: Total Length      |
| 0FC     | [3:0]   | 4         | 00            | VTPLEN0[9:6]    |                                |
| 0FD     | [5:0]   | 6         | 03            | VTPREP0[5:0]    | Sequence #0: Repetitions       |
| 0FE     | [11:6]  | 6         | 00            | VTPREP0[11:6]   |                                |
| 0FF     | [0]     | 1         | 00            | VTTPOL1         | Sequence #1: Start Polarity    |
| 100     | [5:0]   | 6         | 17            | VTPTOG1_1[5:0]  | Sequence #1: Toggle Position 1 |
| 101     | [5:0]   | 6         | 00            | VTPTOG1_1[11:6] |                                |
| 102     | [5:0]   | 6         | 3F            | VTPTOG2_1[5:0]  | Sequence #1: Toggle Position 2 |
| 103     | [5:0]   | 6         | 3F            | VTPTOG2_1[11:6] |                                |
| 104     | [5:0]   | 6         | 3F            | VTPTOG3_1[5:0]  | Sequence #1: Toggle Position 3 |
| 105     | [5:0]   | 6         | 3F            | VTPTOG3_1[11:6] |                                |
| 106     | [5:0]   | 6         | 24            | VTPLEN1[5:0]    | Sequence #1: Total Length      |
| 107     | [3:0]   | 4         | 00            | VTPLEN1[9:6]    |                                |
| 108     | [5:0]   | 6         | 03            | VTPREP1[5:0]    | Sequence #1: Repetitions       |
| 109     | [11:6]  | 6         | 00            | VTPREP1[11:6]   |                                |
| 10A     | [0]     | 1         | 01            | VTTPOL2         | Sequence #2: Start Polarity    |
| 10B     | [5:0]   | 6         | 16            | VTPTOG1_2[5:0]  | Sequence #2: Toggle Position 1 |
| 10C     | [5:0]   | 6         | 02            | VTPTOG1_2[11:6] |                                |
| 10D     | [5:0]   | 6         | 2C            | VTPTOG2_2[5:0]  | Sequence #2: Toggle Position 2 |
| 10E     | [5:0]   | 6         | 04            | VTPTOG2_2[11:6] |                                |
| 10F     | [5:0]   | 6         | 28            | VTPTOG3_2[5:0]  | Sequence #2: Toggle Position 3 |
| 110     | [5:0]   | 6         | 05            | VTPTOG3_2[11:6] |                                |
| 111     | [5:0]   | 6         | 28            | VTPLEN2[5:0]    | Sequence #2: Total Length      |
| 112     | [3:0]   | 4         | 05            | VTPLEN2[9:6]    |                                |
| 113     | [5:0]   | 6         | 01            | VTPREP2[5:0]    | Sequence #2: Repetitions       |
| 114     | [11:6]  | 6         | 00            | VTPREP2[11:6]   |                                |
| 115     | [0]     | 1         | 01            | VTTPOL3         | Sequence #3: Start Polarity    |
| 116     | [5:0]   | 6         | 1A            | VTPTOG1_3[5:0]  | Sequence #3: Toggle Position 1 |
| 117     | [5:0]   | 6         | 01            | VTPTOG1_3[11:6] |                                |
| 118     | [5:0]   | 6         | 30            | VTPTOG2_3[5:0]  | Sequence #3: Toggle Position 2 |
| 119     | [5:0]   | 6         | 03            | VTPTOG2_3[11:6] |                                |
| 11A     | [5:0]   | 6         | 2C            | VTPTOG3_3[5:0]  | Sequence #3: Toggle Position 3 |
| 11B     | [5:0]   | 6         | 04            | VTPTOG3_3[11:6] |                                |

Table XXVIII. V1-V8 Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name   | Register Description           |
|---------|---------|-----------|---------------|-----------------|--------------------------------|
| 11C     | [5:0]   | 6         | 2C            | VTPLN3[5:0]     | Sequence #3: Total Length      |
| 11D     | [3:0]   | 4         | 04            | VTPLN3[9:6]     | Sequence #3: Repetitions       |
| 11E     | [5:0]   | 6         | 01            | VTPREP3[5:0]    |                                |
| 11F     | [11:6]  | 6         | 00            | VTPREP3[11:6]   |                                |
| 120     | [0]     | 1         | 00            | VTPPOL4         | Sequence #4: Start Polarity    |
| 121     | [5:0]   | 6         | 34            | VTPTOG1_4[5:0]  | Sequence #4: Toggle Position 1 |
| 122     | [5:0]   | 6         | 02            | VTPTOG1_4[11:6] | Sequence #4: Toggle Position 2 |
| 123     | [5:0]   | 6         | 0A            | VTPTOG2_4[5:0]  |                                |
| 124     | [5:0]   | 6         | 05            | VTPTOG2_4[11:6] |                                |
| 125     | [5:0]   | 6         | 06            | VTPTOG3_4[5:0]  | Sequence #4: Toggle Position 3 |
| 126     | [5:0]   | 6         | 06            | VTPTOG3_4[11:6] | Sequence #4: Total Length      |
| 127     | [5:0]   | 6         | 06            | VTPLN4[5:0]     |                                |
| 128     | [3:0]   | 4         | 06            | VTPLN4[9:6]     |                                |
| 129     | [5:0]   | 6         | 01            | VTPREP4[5:0]    | Sequence #4: Repetitions       |
| 12A     | [11:6]  | 6         | 00            | VTPREP4[11:6]   | Sequence #5: Start Polarity    |
| 12B     | [0]     | 1         | 00            | VTPPOL5         |                                |
| 12C     | [5:0]   | 6         | 12            | VTPTOG1_5[5:0]  |                                |
| 12D     | [5:0]   | 6         | 03            | VTPTOG1_5[11:6] | Sequence #5: Toggle Position 1 |
| 12E     | [5:0]   | 6         | 2C            | VTPTOG2_5[5:0]  | Sequence #5: Toggle Position 2 |
| 12F     | [5:0]   | 6         | 04            | VTPTOG2_5[11:6] |                                |
| 130     | [5:0]   | 6         | 28            | VTPTOG3_5[5:0]  |                                |
| 131     | [5:0]   | 6         | 05            | VTPTOG3_5[11:6] | Sequence #5: Toggle Position 3 |
| 132     | [5:0]   | 6         | 28            | VTPLN5[5:0]     | Sequence #5: Total Length      |
| 133     | [3:0]   | 4         | 05            | VTPLN5[9:6]     |                                |
| 134     | [5:0]   | 6         | 01            | VTPREP5[5:0]    |                                |
| 135     | [11:6]  | 6         | 00            | VTPREP5[11:6]   | Sequence #5: Repetitions       |
| 136     | [0]     | 1         | 00            | VTPPOL6         | Sequence #6: Start Polarity    |
| 137     | [5:0]   | 6         | 3F            | VTPTOG1_6[5:0]  |                                |
| 138     | [5:0]   | 6         | 3F            | VTPTOG1_6[11:6] |                                |
| 139     | [5:0]   | 6         | 3F            | VTPTOG2_6[5:0]  | Sequence #6: Toggle Position 2 |
| 13A     | [5:0]   | 6         | 3F            | VTPTOG2_6[11:6] | Sequence #6: Toggle Position 3 |
| 13B     | [5:0]   | 6         | 3F            | VTPTOG3_6[5:0]  |                                |
| 13C     | [5:0]   | 6         | 3F            | VTPTOG3_6[11:6] |                                |
| 13D     | [5:0]   | 6         | 00            | VTPLN6[5:0]     | Sequence #6: Total Length      |
| 13E     | [3:0]   | 4         | 00            | VTPLN6[9:6]     | Sequence #6: Repetitions       |
| 13F     | [5:0]   | 6         | 00            | VTPREP6[5:0]    |                                |
| 140     | [11:6]  | 6         | 00            | VTPREP6[11:6]   |                                |
| 141     | [0]     | 1         | 00            | VTPPOL7         | Sequence #7: Start Polarity    |
| 142     | [5:0]   | 6         | 3F            | VTPTOG1_7[5:0]  | Sequence #7: Toggle Position 1 |
| 143     | [5:0]   | 6         | 3F            | VTPTOG1_7[11:6] |                                |
| 144     | [5:0]   | 6         | 3F            | VTPTOG2_7[5:0]  |                                |
| 145     | [5:0]   | 6         | 3F            | VTPTOG2_7[11:6] | Sequence #7: Toggle Position 2 |
| 146     | [5:0]   | 6         | 3F            | VTPTOG3_7[5:0]  | Sequence #7: Toggle Position 3 |
| 147     | [5:0]   | 6         | 3F            | VTPTOG3_7[11:6] |                                |
| 148     | [5:0]   | 6         | 00            | VTPLN7[5:0]     |                                |
| 149     | [3:0]   | 4         | 00            | VTPLN7[9:6]     | Sequence #7: Total Length      |
| 14A     | [5:0]   | 6         | 00            | VTPREP7[5:0]    | Sequence #7: Repetitions       |
| 14B     | [11:6]  | 6         | 00            | VTPREP7[11:6]   |                                |
| 14C     | [0]     | 1         | 00            | VTPPOL8         |                                |
| 14D     | [5:0]   | 6         | 3F            | VTPTOG1_8[5:0]  | Sequence #8: Start Polarity    |
| 14E     | [3:0]   | 4         | 3F            | VTPTOG1_8[9:6]  | Sequence #9: Toggle Position 1 |
| 14F     | [5:0]   | 6         | 3F            | VTPTOG2_8[5:0]  |                                |
| 150     | [3:0]   | 4         | 3F            | VTPTOG2_8[9:6]  |                                |
| 151     | [5:0]   | 6         | 00            | VTPLN8[5:0]     | Sequence #8: Toggle Position 2 |
| 152     | [3:0]   | 4         | 00            | VTPLN8[9:6]     | Sequence #8: Total Length      |
| 153     | [5:0]   | 6         | 00            | VTPREP8         |                                |



Table XXVIII. V1-V8 Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name   | Register Description                             |
|---------|---------|-----------|---------------|-----------------|--|
| 154     | [0]     | 1         | 00            | VTTPOL8         | Sequence #9: Start Polarity                      |
| 155     | [5:0]   | 6         | 3F            | VTPTOG1_9[5:0]  | Sequence #9: Toggle Position 1                   |
| 156     | [3:0]   | 4         | 3F            | VTPTOG1_9[9:6]  |  |
| 157     | [5:0]   | 6         | 3F            | VTPTOG2_9[5:0]  | Sequence #9: Toggle Position 2                   |
| 158     | [3:0]   | 4         | 3F            | VTPTOG2_9[9:6]  |  |
| 159     | [5:0]   | 6         | 00            | VTPLEN9[5:0]    | Sequence #9: Total Length                        |
| 15A     | [3:0]   | 4         | 00            | VTPLEN9[9:6]    |  |
| 15B     | [5:0]   | 6         | 00            | VTTPREP9        | Sequence #9: Repetitions                         |
| 15C     | [0]     | 1         | 00            | VTTPOL10        | Sequence #10: Start Polarity                     |
| 15D     | [5:0]   | 6         | 3F            | VTPTOG1_10[5:0] | Sequence #10: Toggle Position 1                  |
| 15E     | [3:0]   | 4         | 3F            | VTPTOG1_10[6:0] |  |
| 15F     | [5:0]   | 6         | 3F            | VTPTOG2_10[5:0] | Sequence #10: Toggle Position 2                  |
| 160     | [3:0]   | 4         | 3F            | VTPTOG2_10[9:6] |  |
| 161     | [5:0]   | 6         | 00            | VTPLEN10[5:0]   | Sequence #10: Total Length                       |
| 162     | [3:0]   | 4         | 00            | VTPLEN10[9:6]   |  |
| 163     | [5:0]   | 6         | 00            | VTTPREP10       | Sequence #10: Repetitions                        |
| 164     | [0]     | 1         | 00            | VTTPOL11        | Sequence #11: Start Polarity                     |
| 165     | [5:0]   | 6         | 3F            | VTPTOG1_11[5:0] | Sequence #11: Toggle Position 1                  |
| 166     | [3:0]   | 4         | 3F            | VTPTOG1_11[9:6] |  |
| 167     | [5:0]   | 6         | 3F            | VTPTOG2_11[5:0] | Sequence #11: Toggle Position 2                  |
| 168     | [3:0]   | 4         | 3F            | VTPTOG2_11[9:6] |  |
| 169     | [5:0]   | 6         | 00            | VTPLEN11[5:0]   | Sequence #11: Total Length                       |
| 16A     | [3:0]   | 4         | 00            | VTPLEN11[9:6]   |  |
| 16B     | [5:0]   | 6         | 00            | VTTPREP11       | Sequence #11: Repetitions                        |
|         |         | 0         | 00            | VTTPRCP0        | V Region-Change Position #0<br>(Hard-Coded to 0) |
| 16C     | [2:0]   | 3         | 00            | VTTPREGPTR0     | V Region Pointer for Sequence-Change Position #0 |
| 16D     | [5:0]   | 6         | 3F            | VTTPRCP1[5:0]   | V Region-Change Position #1                      |
| 16E     | [5:0]   | 6         | 3F            | VTTPRCP1[11:6]  |  |
| 16F     | [2:0]   | 3         | 00            | VTTPREGPTR1     | V Region Pointer for Sequence-Change Position #1 |
| 170     | [5:0]   | 6         | 3F            | VTTPRCP2[5:0]   | V Region-Change Position #2                      |
| 171     | [5:0]   | 6         | 3F            | VTTPRCP2[11:6]  |  |
| 172     | [2:0]   | 3         | 00            | VTTPREGPTR2     | V Region Pointer for Sequence-Change Position #2 |
| 173     | [5:0]   | 6         | 3F            | VTTPRCP3[5:0]   | V Region-Change Position #3                      |
| 174     | [5:0]   | 6         | 3F            | VTTPRCP3[11:6]  |  |
| 175     | [2:0]   | 3         | 00            | VTTPREGPTR3     | V Region Pointer for Sequence-Change Position #3 |
| 176     | [5:0]   | 6         | 3F            | VTTPRCP4[5:0]   | V Region-Change Position #4                      |
| 177     | [5:0]   | 6         | 3F            | VTTPRCP4[11:6]  |  |
| 178     | [2:0]   | 3         | 00            | VTTPREGPTR4     | V Region Pointer for Sequence-Change Position #4 |
| 179     | [5:0]   | 6         | 3F            | VTTPRCP5[5:0]   | V Region-Change Position #5                      |
| 17A     | [5:0]   | 6         | 3F            | VTTPRCP5[11:6]  |  |
| 17B     | [2:0]   | 3         | 00            | VTTPREGPTR5     | V Region Pointer for Sequence-Change Position #5 |
| 17C     | [5:0]   | 6         | 3F            | VTTPRCP6[5:0]   | V Region-Change Position #6                      |
| 17D     | [5:0]   | 6         | 3F            | VTTPRCP6[11:6]  |  |
| 17E     | [2:0]   | 3         | 00            | VTTPREGPTR6     | V Region Pointer for Sequence-Change Position #6 |
| 17F     | [5:0]   | 6         | 3F            | VTTPRCP7[5:0]   | V Region-Change Position #7                      |
| 180     | [5:0]   | 6         | 3F            | VTTPRCP7[11:6]  |  |
| 181     | [2:0]   | 3         | 00            | VTTPREGPTR7     | V Region Pointer for Sequence-Change Position #7 |
| 182     | [0]     | 1         | 00            | SWEEP0          | V Sweep for Region #0                            |
| 183     | [0]     | 1         | 00            | MULTI0          | V Multiplier for Region #0                       |
| 184     | [5:0]   | 6         | 30            | HDLEN0[5:0]     | Region #0 HD Line Length                         |
| 185     | [5:0]   | 6         | 23            | HDLEN0[11:6]    |  |
| 186     | [1:0]   | 2         | 00            | HBLKSPTR0       | HBLK Sequence for Region #0                      |
| 187     | [0]     | 1         | 00            | VTPALT0         | VTP Sequence Alternation for Region #0           |
| 188     | [3:0]   | 4         | 00            | V1SPTRFIRST0    | V1 Sequence for Region #0 (1st Lines)            |

Table XXVIII. V1-V8 Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name     | Register Description                               |
|---------|---------|-----------|---------------|-------------------|--|
| 189     | [0]     | 1         | 00            | V1INVFIRST0       | V1 Sequence Inversion for Region #0 (First Lines)  |
| 18A     | [3:0]   | 4         | 00            | V1SPTRSECOND0     | V1 Sequence for Region #0 (Second Lines)           |
| 18B     | [0]     | 1         | 00            | V1INVSECOND0      | V1 Sequence Inversion for Region #0 (Second Lines) |
| 18C     | [5:0]   | 6         | 34            | V4_7START4[5:0]   | V1 and V5 Sequence Start for Region #0             |
| 18D     | [5:0]   | 6         | 00            | V1_5START0[11:6]  |  |
| 18E     | [3:0]   | 4         | 00            | V2SPTRFIRST0      | V2 Sequence for Region #0 (First Lines)            |
| 18F     | [0]     | 1         | 00            | V2INVFIRST0       | V2 Sequence Inversion for Region #0 (First Lines)  |
| 190     | [3:0]   | 4         | 00            | V2SPTRSECOND0     | V2 Sequence for Region #0 (Second Lines)           |
| 191     | [0]     | 1         | 00            | V2INVSECOND0      | V2 Sequence Inversion for Region #0 (Second Lines) |
| 192     | [5:0]   | 6         | 3D            | V4_7START4[5:0]   | V2 and V6 Sequence Start for Region #0             |
| 193     | [5:0]   | 6         | 00            | V2_6START0[11:6]  |  |
| 194     | [3:0]   | 4         | 01            | V3SPTRFIRST0      | V3 Sequence for Region #0 (First Lines)            |
| 195     | [0]     | 1         | 00            | V3INVFIRST0       | V3 Sequence Inversion for Region #0 (First Lines)  |
| 196     | [3:0]   | 4         | 00            | V3SPTRSECOND0     | V3 Sequence for Region #0 (Second Lines)           |
| 197     | [0]     | 1         | 00            | V3INVSECOND0      | V3 Sequence Inversion for Region #0 (Second Lines) |
| 198     | [5:0]   | 6         | 34            | V4_7START4[5:0]   | V3 and V7 Sequence Start for Region #0             |
| 199     | [5:0]   | 6         | 00            | V3_7START0[11:6]  |  |
| 19A     | [3:0]   | 4         | 01            | V4SPTRFIRST0      | V4 Sequence for Region #0 (First Lines)            |
| 19B     | [0]     | 1         | 00            | V4INVFIRST0       | V4 Sequence Inversion for Region #0 (First Lines)  |
| 19C     | [3:0]   | 4         | 00            | V4SPTRSECOND0     | V4 Sequence for Region #0 (Second Lines)           |
| 19D     | [0]     | 1         | 00            | V4INVSECOND0      | V4 Sequence Inversion for Region #0 (Second Lines) |
| 19E     | [5:0]   | 6         | 3D            | V4_8START0[5:0]   | V4 and V8 Sequence Start for Region #0             |
| 19F     | [5:0]   | 6         | 00            | V4_8START0[11:6]  |  |
| 1A0     | [5:0]   | 6         | 00            | V1_4FREEZE0[5:0]  | V1-V4 Freeze Start Position for Region #0          |
| 1A1     | [5:0]   | 6         | 00            | V1_4FREEZE0[11:6] |  |
| 1A2     | [5:0]   | 6         | 00            | V1_4RESUME0[5:0]  | V1-V4 Resume Start Position for Region #0          |
| 1A3     | [5:0]   | 6         | 00            | V1_4RESUME0[11:6] |  |
| 1A4     | [5:0]   | 6         | 00            | V5_8FREEZE0[5:0]  | V5-V8 Freeze Start Position for Region #0          |
| 1A5     | [5:0]   | 6         | 00            | V5_8FREEZE0[11:6] |  |
| 1A6     | [5:0]   | 6         | 00            | V5_8RESUME0[5:0]  | V5-V8 Resume Start Position for Region #0          |
| 1A7     | [5:0]   | 6         | 00            | V5_8RESUME0[11:6] |  |
| 1A8     | [0]     | 1         | 00            | SWEEP1            | V Sweep for Region #1                              |
| 1A9     | [0]     | 1         | 00            | MULTI1            | V Multiplier for Region #1                         |
| 1AA     | [5:0]   | 6         | 3F            | HDLEN1[5:0]       | Region #1 HD Line Length                           |
| 1AB     | [5:0]   | 6         | 3F            | HDLEN1[11:6]      |  |
| 1AC     | [1:0]   | 2         | 00            | HBLKSPTR1         | HBLK Sequence for Region #1                        |
| 1AD     | [0]     | 1         | 00            | VTPALT1           | V Sequence Alternation for Region #1               |
| 1AE     | [3:0]   | 4         | 00            | V1SPTRFIRST1      | V1 Sequence for Region #1 (First Lines)            |
| 1AF     | [0]     | 1         | 00            | V1INVFIRST1       | V1 Sequence Inversion for Region #1 (First Lines)  |
| 1B0     | [3:0]   | 4         | 00            | V1SPTRSECOND1     | V1 Sequence for Region #1 (Second Lines)           |
| 1B1     | [0]     | 1         | 00            | V1INVSECOND1      | V1 Sequence Inversion for Region #1 (Second Lines) |
| 1B2     | [5:0]   | 6         | 00            | V1_5START1[5:0]   | V1 and V5 Sequence Start for Region #1             |
| 1B3     | [5:0]   | 6         | 00            | V1_5START1[11:6]  |  |
| 1B4     | [3:0]   | 4         | 00            | V2SPTRFIRST1      | V2 Sequence for Region #1 (First Lines)            |
| 1B5     | [0]     | 1         | 00            | V2INVFIRST1       | V2 Sequence Inversion for Region #1 (First Lines)  |
| 1B6     | [3:0]   | 4         | 00            | V2SPTRSECOND1     | V2 Sequence for Region #1 (Second Lines)           |
| 1B7     | [0]     | 1         | 00            | V2INVSECOND1      | V2 Sequence Inversion for Region #1 (Second Lines) |
| 1B8     | [5:0]   | 6         | 00            | V2_6START1[5:0]   | V2 and V6 Sequence Start for Region #1             |
| 1B9     | [5:0]   | 6         | 00            | V2_6START1[11:6]  |  |
| 1BA     | [3:0]   | 4         | 00            | V3SPTRFIRST1      | V3 Sequence for Region #1 (First Lines)            |
| 1BB     | [0]     | 1         | 00            | V3INVFIRST1       | V3 Sequence Inversion for Region #1 (First Lines)  |
| 1BC     | [3:0]   | 4         | 00            | V3SPTRSECOND1     | V3 Sequence for Region #1 (Second Lines)           |
| 1BD     | [0]     | 1         | 00            | V3INVSECOND1      | V3 Sequence Inversion for Region #1 (Second Lines) |
| 1BE     | [5:0]   | 6         | 00            | V3_7START1[5:0]   | V3 and V7 Sequence Start for Region #1             |

Table XXVIII. V1-V8 Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name     | Register Description                               |
|---------|---------|-----------|---------------|-------------------|--|
| 1BF     | [5:0]   | 6         | 00            | V3_7START1[11:6]  |  |
| 1C0     | [3:0]   | 4         | 00            | V4SPTRFIRST1      | V4 Sequence for Region #1 (First Lines)            |
| 1C1     | [0]     | 1         | 00            | V4INVFIRST1       | V4 Sequence Inversion for Region #1 (First Lines)  |
| 1C2     | [3:0]   | 4         | 00            | V4SPTRSECOND1     | V4 Sequence for Region #1 (Second Lines)           |
| 1C3     | [0]     | 1         | 00            | V4INVSECOND1      | V4 Sequence Inversion for Region #1 (Second Lines) |
| 1C4     | [5:0]   | 6         | 00            | V4_8START1[5:0]   | V4 and V8 Sequence Start for Region #1             |
| 1C5     | [5:0]   | 6         | 00            | V4_8START1[11:6]  |  |
| 1C6     | [5:0]   | 6         | 00            | V1_4FREEZE1[5:0]  | V1-V4 Freeze Start Position for Region #1          |
| 1C7     | [5:0]   | 6         | 00            | V1_4FREEZE1[11:6] |  |
| 1C8     | [5:0]   | 6         | 00            | V1_4RESUME1[5:0]  | V1-V4 Resume Start Position for Region #1          |
| 1C9     | [5:0]   | 6         | 00            | V1_4RESUME1[11:6] |  |
| 1CA     | [5:0]   | 6         | 00            | V5_8FREEZE1[5:0]  | V5-V8 Freeze Start Position for Region #1          |
| 1CB     | [5:0]   | 6         | 00            | V5_8FREEZE1[11:6] |  |
| 1CC     | [5:0]   | 6         | 00            | V5_8RESUME1[5:0]  | V5-V8 Resume Start Position for Region #1          |
| 1CD     | [5:0]   | 6         | 00            | V5_8RESUME1[11:6] |  |
| 1CE     | [0]     | 1         | 00            | SWEEP2            | V Sweep for Region #2                              |
| 1CF     | [0]     | 1         | 00            | MULTI2            | V Multiplier for Region #2                         |
| 1D0     | [5:0]   | 6         | 3F            | HDLEN2[5:0]       | Region #2 HD Line Length                           |
| 1D1     | [5:0]   | 6         | 3F            | HDLEN2[11:6]      |  |
| 1D2     | [1:0]   | 2         | 00            | HBLKSPTR2         | HBLK Sequence for Region #2                        |
| 1D3     | [0]     | 1         | 00            | VTPALT2           | V Sequence Alternation for Region #2               |
| 1D4     | [3:0]   | 4         | 00            | V1SPTRFIRST2      | V1 Sequence for Region #2 (First Lines)            |
| 1D5     | [0]     | 1         | 00            | V1INVFIRST2       | V1 Sequence Inversion for Region #2 (First Lines)  |
| 1D6     | [3:0]   | 4         | 00            | V1SPTRSECOND2     | V1 Sequence for Region #2 (Second Lines)           |
| 1D7     | [0]     | 1         | 00            | V1INVSECOND2      | V1 Sequence Inversion for Region #2 (Second Lines) |
| 1D8     | [5:0]   | 6         | 00            | V1_5START2[5:0]   | V1 and V5 Sequence Start for Region #2             |
| 1D9     | [5:0]   | 6         | 00            | V1_5START2[11:6]  |  |
| 1DA     | [3:0]   | 4         | 00            | V2SPTRFIRST2      | V2 Sequence for Region #2 (First Lines)            |
| 1DB     | [0]     | 1         | 00            | V2INVFIRST2       | V2 Sequence Inversion for Region #2 (First Lines)  |
| 1DC     | [3:0]   | 4         | 00            | V2SPTRSECOND2     | V2 Sequence for Region #2 (Second Lines)           |
| 1DD     | [0]     | 1         | 00            | V2INVSECOND2      | V2 Sequence Inversion for Region #2 (Second Lines) |
| 1DE     | [5:0]   | 6         | 00            | V2_6START2[5:0]   | V2 and V6 Sequence Start for Region #2             |
| 1DF     | [5:0]   | 6         | 00            | V2_6START2[11:6]  |  |
| 1E0     | [3:0]   | 4         | 00            | V3SPTRFIRST2      | V3 Sequence for Region #2 (First Lines)            |
| 1E1     | [0]     | 1         | 00            | V3INVFIRST2       | V3 Sequence Inversion for Region #2 (First Lines)  |
| 1E2     | [3:0]   | 4         | 00            | V3SPTRSECOND2     | V3 Sequence for Region #2 (Second Lines)           |
| 1E3     | [0]     | 1         | 00            | V3INVSECOND2      | V3 Sequence Inversion for Region #2 (Second Lines) |
| 1E4     | [5:0]   | 6         | 00            | V3_7START2[5:0]   | V3 and V7 Sequence Start for Region #2             |
| 1E5     | [5:0]   | 6         | 00            | V3_7START2[11:6]  |  |
| 1E6     | [3:0]   | 4         | 00            | V4SPTRFIRST2      | V4 Sequence for Region #2 (First Lines)            |
| 1E7     | [0]     | 1         | 00            | V4INVFIRST2       | V4 Sequence Inversion for Region #2 (First Lines)  |
| 1E8     | [3:0]   | 4         | 00            | V4SPTRSECOND2     | V4 Sequence for Region #2 (Second Lines)           |
| 1E9     | [0]     | 1         | 00            | V4INVSECOND2      | V4 Sequence Inversion for Region #2 (Second Lines) |
| 1EA     | [5:0]   | 6         | 00            | V4_8START2[5:0]   | V4 and V8 Sequence Start for Region #2             |
| 1EB     | [5:0]   | 6         | 00            | V4_8START2[11:6]  |  |
| 1EC     | [5:0]   | 6         | 00            | V1_4FREEZE2[5:0]  | V1-V4 Freeze Start Position for Region #2          |
| 1ED     | [5:0]   | 6         | 00            | V1_4FREEZE2[11:6] |  |
| 1EE     | [5:0]   | 6         | 00            | V1_4RESUME2[5:0]  | V1-V4 Resume Start Position for Region #2          |
| 1EF     | [5:0]   | 6         | 00            | V1_4RESUME2[11:6] |  |
| 1F0     | [5:0]   | 6         | 00            | V5_8FREEZE2[5:0]  | V5-V8 Freeze Start Position for Region #2          |
| 1F1     | [5:0]   | 6         | 00            | V5_8FREEZE2[11:6] |  |
| 1F2     | [5:0]   | 6         | 00            | V5_8RESUME2[5:0]  | V5-V8 Resume Start Position for Region #2          |
| 1F3     | [5:0]   | 6         | 00            | V5_8RESUME2[11:6] |  |
| 1F4     | [0]     | 1         | 00            | SWEEP3            | V Sweep for Region #3                              |
| 1F5     | [0]     | 1         | 00            | MULTI3            | V Multiplier for Region #3                         |

Table XXVIII. V1-V8 Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name     | Register Description                               |
|---------|---------|-----------|---------------|-------------------|--|
| 1F6     | [5:0]   | 6         | 3F            | HDLEN3[5:0]       | Region #3 HD Line Length                           |
| 1F7     | [5:0]   | 6         | 3F            | HDLEN3[11:6]      |  |
| 1F8     | [1:0]   | 2         | 00            | HBLKSPTR3         | HBLK Sequence for Region #3                        |
| 1F9     | [0]     | 1         | 00            | VTPALT3           | VTP Sequence Alternation for Region #3             |
| 1FA     | [3:0]   | 4         | 00            | V1SPTRFIRST3      | V1 Sequence for Region #3 (First Lines)            |
| 1FB     | [0]     | 1         | 00            | V1INVFIRST3       | V1 Sequence Inversion for Region #3 (First Lines)  |
| 1FC     | [3:0]   | 4         | 00            | V1SPTRSECOND3     | V1 Sequence for Region #3 (Second Lines)           |
| 1FD     | [0]     | 1         | 00            | V1INVSECOND3      | V1 Sequence Inversion for Region #3 (Second Lines) |
| 1FE     | [5:0]   | 6         | 00            | V1_5START3[5:0]   | V1 and V5 Sequence Start for Region #3             |
| 1FF     | [5:0]   | 6         | 00            | V1_5START3[11:6]  |  |
| 200     | [3:0]   | 4         | 00            | V2SPTRFIRST3      | V2 Sequence for Region #3 (First Lines)            |
| 201     | [0]     | 1         | 00            | V2INVFIRST3       | V2 Sequence Inversion for Region #3 (First Lines)  |
| 202     | [3:0]   | 4         | 00            | V2SPTRSECOND3     | V2 Sequence for Region #3 (Second Lines)           |
| 203     | [0]     | 1         | 00            | V2INVSECOND3      | V2 Sequence Inversion for Region #3 (Second Lines) |
| 204     | [5:0]   | 6         | 00            | V2_6START3[5:0]   | V2 and V6 Sequence Start for Region #3             |
| 205     | [5:0]   | 6         | 00            | V2_6START3[11:6]  |  |
| 206     | [3:0]   | 4         | 00            | V3SPTRFIRST3      | V3 Sequence for Region #3 (First Lines)            |
| 207     | [0]     | 1         | 00            | V3INVFIRST3       | V3 Sequence Inversion for Region #3 (First Lines)  |
| 208     | [3:0]   | 4         | 00            | V3SPTRSECOND3     | V3 Sequence for Region #3 (Second Lines)           |
| 209     | [0]     | 1         | 00            | V3INVSECOND3      | V3 Sequence Inversion for Region #3 (Second Lines) |
| 20A     | [5:0]   | 6         | 00            | V3_7START3[5:0]   | V3 and V7 Sequence Start for Region #3             |
| 20B     | [5:0]   | 6         | 00            | V3_7START3[11:6]  |  |
| 20C     | [3:0]   | 4         | 00            | V4SPTRFIRST3      | V4 Sequence for Region #3 (First Lines)            |
| 20D     | [0]     | 1         | 00            | V4INVFIRST3       | V4 Sequence Inversion for Region #3 (First Lines)  |
| 20E     | [3:0]   | 4         | 00            | V4SPTRSECOND3     | V4 Sequence for Region #3 (Second Lines)           |
| 20F     | [0]     | 1         | 00            | V4INVSECOND3      | V4 Sequence Inversion for Region #3 (Second Lines) |
| 210     | [5:0]   | 6         | 00            | V4_8START3[5:0]   | V4 and V8 Sequence Start for Region #3             |
| 211     | [5:0]   | 6         | 00            | V4_8START3[11:6]  |  |
| 212     | [5:0]   | 6         | 00            | V1_4FREEZE3[5:0]  | V1-V4 Freeze Start Position for Region #3          |
| 213     | [5:0]   | 6         | 00            | V1_4FREEZE3[11:6] |  |
| 214     | [5:0]   | 6         | 00            | V1_4RESUME3[5:0]  | V1-V4 Resume Start Position for Region #3          |
| 215     | [5:0]   | 6         | 00            | V1_4RESUME3[11:6] |  |
| 216     | [5:0]   | 6         | 00            | V5_8FREEZE3[5:0]  | V5-V8 Freeze Start Position for Region #3          |
| 217     | [5:0]   | 6         | 00            | V5_8FREEZE3[11:6] |  |
| 218     | [5:0]   | 6         | 00            | V5_8RESUME3[5:0]  | V5-V8 Resume Start Position for Region #3          |
| 219     | [5:0]   | 6         | 00            | V5_8RESUME3[11:6] |  |
| 21A     | [0]     | 1         | 00            | SWEEP4            | V Sweep for Region #4                              |
| 21B     | [0]     | 1         | 00            | MULTI4            | V Multiplier for Region #4                         |
| 21C     | [5:0]   | 6         | 3F            | HDLEN4[5:0]       | Region #4 HD Line Length                           |
| 21D     | [5:0]   | 6         | 3F            | HDLEN4[11:6]      |  |
| 21E     | [1:0]   | 2         | 00            | HBLKSPTR4         | HBLK Sequence for Region #4                        |
| 21F     | [0]     | 1         | 00            | VTPALT4           | VTP Sequence Alternation for Region #4             |
| 220     | [3:0]   | 4         | 00            | V1SPTRFIRST4      | V1 Sequence for Region #4 (First Lines)            |
| 221     | [0]     | 1         | 00            | V1INVFIRST4       | V1 Sequence Inversion for Region #4 (First Lines)  |
| 222     | [3:0]   | 4         | 00            | V1SPTRSECOND4     | V1 Sequence for Region #4 (Second Lines)           |
| 223     | [0]     | 1         | 00            | V1INVSECOND4      | V1 Sequence Inversion for Region #4 (Second Lines) |
| 224     | [5:0]   | 6         | 00            | V1_5START4[5:0]   | V1 and V5 Sequence Start for Region #4             |
| 225     | [5:0]   | 6         | 00            | V1_5START4[11:6]  |  |
| 226     | [3:0]   | 4         | 00            | V2SPTRFIRST4      | V2 Sequence for Region #4 (First Lines)            |
| 227     | [0]     | 1         | 00            | V2INVFIRST4       | V2 Sequence Inversion for Region #4 (First Lines)  |
| 228     | [3:0]   | 4         | 00            | V2SPTRSECOND4     | V2 Sequence for Region #4 (Second Lines)           |
| 229     | [0]     | 1         | 00            | V2INVSECOND4      | V2 Sequence Inversion for Region #4 (Second Lines) |
| 22A     | [5:0]   | 6         | 00            | V2_6START4[5:0]   | V2 and V6 Sequence Start for Region #4             |
| 22B     | [5:0]   | 6         | 00            | V2_6START4[11:6]  |  |
| 22C     | [3:0]   | 4         | 00            | V4SPTRFIRST4      | V4 Sequence for Region #4 (First Lines)            |

Table XXVIII. V1-V8 Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name        | Register Description                               |
|---------|---------|-----------|---------------|----------------------|--|
| 22D     | [0]     | 1         | 00            | V4INVFIRST4          | V4 Sequence Inversion for Region #4 (First Lines)  |
| 22E     | [3:0]   | 4         | 00            | V4SPTRSECOND4        | V4 Sequence for Region #4 (Second Lines)           |
| 22F     | [0]     | 1         | 00            | V4INVSECOND4         | V4 Sequence Inversion for Region #4 (Second Lines) |
| 230     | [5:0]   | 6         | 00            | V4_7START4[5:0]      | V4 and V7 Sequence Start for Region #4             |
| 231     | [5:0]   | 6         | 00            | V4_7START4[11:6]     |  |
| 232     | [3:0]   | 4         | 00            | V4SPTRFIRST4         | V4 Sequence for Region #4 (First Lines)            |
| 233     | [0]     | 1         | 00            | V4INVFIRST4          | V4 Sequence Inversion for Region #4 (First Lines)  |
| 234     | [3:0]   | 4         | 00            | V4SPTRSECOND4        | V4 Sequence for Region #4 (Second Lines)           |
| 235     | [0]     | 1         | 00            | V4INVSECOND4         | V4 Sequence Inversion for Region #4 (Second Lines) |
| 236     | [5:0]   | 6         | 00            | V4_8START4[5:0]      | V4 and V8 Sequence Start for Region #4             |
| 237     | [5:0]   | 6         | 00            | V4_8START4[11:6]     |  |
| 238     | [5:0]   | 6         | 00            | V1_4FREEZE4[5:0]     | V1-V4 Freeze Start Position for Region #4          |
| 239     | [5:0]   | 6         | 00            | V1_4FREEZE4[11:6]    |  |
| 23A     | [5:0]   | 6         | 00            | V1_4RESUME4[5:0]     | V1-V4 Resume Start Position for Region #4          |
| 23B     | [5:0]   | 6         | 00            | V1_4RESUME4[11:6]    |  |
| 23C     | [5:0]   | 6         | 00            | V5_8FREEZE4[5:0]     | V5-V8 Freeze Start Position for Region #4          |
| 23D     | [5:0]   | 6         | 00            | V5_8FREEZE4[11:6]    |  |
| 23E     | [5:0]   | 6         | 00            | V5_8RESUME4[5:0]     | V5-V8 Resume Start Position for Region #4          |
| 23F     | [5:0]   | 6         | 00            | VTP5_8RESUME4[11:6]  |  |
| 240     | [0]     | 1         | 01            | VTP_SGLINEMODE       | VTP Second Sequence Output Enable during SGLINE    |
| 241     | [3:0]   | 4         | 02            | V1SPTR_SGLINE        | V1 Second Sequence                                 |
| 242     | [0]     | 1         | 00            | V1INV_SGLINE         | V1 Second Sequence Inversion                       |
| 243     | [5:0]   | 6         | 10            | V1START_SGLINE[5:0]  | V1 Start Position of Second V Pulse                |
| 244     | [5:0]   | 6         | 10            | V1START_SGLINE[11:6] |  |
| 245     | [3:0]   | 4         | 03            | V2SPTR_SGLINE        | V2 Second Sequence                                 |
| 246     | [0]     | 1         | 00            | V2INV_SGLINE         | V2 Second Sequence Inversion                       |
| 247     | [5:0]   | 6         | 2A            | V2START_SGLINE[5:0]  | V2 Start Position of Second V Pulse                |
| 248     | [5:0]   | 6         | 11            | V2START_SGLINE[11:6] |  |
| 249     | [3:0]   | 4         | 04            | V3SPTR_SGLINE        | V3 Second Sequence                                 |
| 24A     | [0]     | 1         | 00            | V3INV_SGLINE         | V3 Second Sequence Inversion                       |
| 24B     | [5:0]   | 6         | 32            | V3START_SGLINE[5:0]  | V3 Start Position of Second VTP Pulse              |
| 24C     | [5:0]   | 6         | 0F            | V3START_SGLINE[11:6] |  |
| 24D     | [3:0]   | 4         | 05            | V4SPTR_SGLINE        | V4 Second Sequence                                 |
| 24E     | [0]     | 1         | 00            | V4INV_SGLINE         | V4 Second Sequence Inversion                       |
| 24F     | [5:0]   | 6         | 2E            | V4START_SGLINE[5:0]  | V4 Start Position of Second VTP Pulse              |
| 250     | [5:0]   | 6         | 10            | V4START_SGLINE[11:6] |  |

Table XXIX. VSG1-VSG8 Register Map

| Address | Content | Bit Width | Default Value | Register Name  | Register Description               |
|---------|---------|-----------|---------------|----------------|------------------------------------|
| 251     | [0]     | 1         | 01            | SGPOL0         | Sequence #0: Start Polarity        |
| 252     | [5:0]   | 6         | 22            | SGTOG1_0[5:0]  | Sequence #0: Toggle Position 1     |
| 253     | [5:0]   | 6         | 13            | SGTOG1_0[11:6] |                                    |
| 254     | [5:0]   | 6         | 1E            | SGTOG2_0[5:0]  | Sequence #0: Toggle Position 2     |
| 255     | [5:0]   | 6         | 14            | SGTOG2_0[11:6] |                                    |
| 256     | [0]     | 1         | 01            | SGPOL1         | Sequence #1: Start Polarity        |
| 257     | [5:0]   | 6         | 0C            | SGTOG1_1[5:0]  | Sequence #1: Toggle Position 1     |
| 258     | [5:0]   | 6         | 11            | SGTOG1_1[11:6] |                                    |
| 259     | [5:0]   | 6         | 08            | SGTOG2_1[5:0]  | Sequence #1: Toggle Position 2     |
| 25A     | [5:0]   | 6         | 12            | SGTOG2_1[11:6] |                                    |
| 25B     | [0]     | 1         | 01            | SGPOL2         | Sequence #2: Start Polarity        |
| 25C     | [5:0]   | 6         | 3F            | SGTOG1_2[5:0]  | Sequence #2: Toggle Position 1     |
| 25D     | [5:0]   | 6         | 3F            | SGTOG1_2[11:6] |                                    |
| 25E     | [5:0]   | 6         | 3F            | SGTOG2_2[5:0]  | Sequence #2: Toggle Position 2     |
| 25F     | [5:0]   | 6         | 3F            | SGTOG2_2[11:6] |                                    |
| 260     | [0]     | 1         | 01            | SGPOL3         | Sequence #3: Start Polarity        |
| 261     | [5:0]   | 6         | 3F            | SGTOG1_3[5:0]  | Sequence #3: Toggle Position 1     |
| 262     | [5:0]   | 6         | 3F            | SGTOG1_3[11:6] |                                    |
| 263     | [5:0]   | 6         | 3F            | SGTOG2_3[5:0]  | Sequence #3: Toggle Position 2     |
| 264     | [5:0]   | 6         | 3F            | SGTOG2_3[11:6] |                                    |
| 265     | [5:0]   | 6         | 00            | SGACTLINE[5:0] | VSG Active Line                    |
| 266     | [4:0]   | 6         | 00            | SGACTLINE11:6] |                                    |
| 267     | [1:0]   | 2         | 00            | SGSEL1         | VSG1 Sequence Selector             |
| 268     | [1:0]   | 2         | 00            | SGSEL2         | VSG2 Sequence Selector             |
| 269     | [1:0]   | 2         | 00            | SGSEL3         | VSG3 Sequence Selector             |
| 26A     | [1:0]   | 2         | 00            | SGSEL4         | VSG4 Sequence Selector             |
| 26B     | [1:0]   | 2         | 01            | SGSEL5         | VSG5 Sequence Selector             |
| 26C     | [1:0]   | 2         | 01            | SGSEL6         | VSG6 Sequence Selector             |
| 26D     | [1:0]   | 2         | 01            | SGSEL7         | VSG7 Sequence Selector             |
| 26E     | [1:0]   | 2         | 01            | SGSEL8         | VSG8 Sequence Selector             |
| 26F     | [5:0]   | 6         | 00            | SGMASK[5:0]    | VSG Masking (0 = Output, 1 = Mask) |
| 270     | [1:0]   | 2         | 00            | SGMASK[7:6]    |                                    |

Table XXX. SUBCK, VSUB, MSHUT Register Map

| Address | Content | Bit Width | Default Value | Register Name    | Register Description   |
|---------|---------|-----------|---------------|------------------|--|
| 271     | [0]     | 1         | 01            | SUBCKPOL         | SUBCK Start Polarity   |
| 272     | [5:0]   | 6         | 0B            | SUBCK1TOG1[5:0]  | First SUBCK Toggle Position 1                                      |
| 273     | [5:0]   | 6         | 01            | SUBCK1TOG1[11:6] |  |
| 274     | [5:0]   | 6         | 05            | SUBCK1TOG2[5:0]  | First SUBCK Toggle Position 2                                      |
| 275     | [5:0]   | 6         | 02            | SUBCK1TOG2[11:6] |  |
| 276     | [5:0]   | 6         | 3F            | SUBCK2TOG1[5:0]  | Second SUBCK Toggle Position 1                                     |
| 277     | [5:0]   | 6         | 3F            | SUBCK2TOG1[11:6] |  |
| 278     | [5:0]   | 6         | 3F            | SUBCK2TOG2[5:0]  | Second SUBCK Toggle Position 2                                     |
| 279     | [5:0]   | 6         | 3F            | SUBCK2TOG2[11:6] |  |
| 27A     | [5:0]   | 6         | 3F            | SUBCKNUM[5:0]    | Number of SUBCKs per Field   |
| 27B     | [5:0]   | 6         | 00            | SUBCKNUM[11:6]   |  |
| 27C     | [5:0]   | 6         | 00            | SUBCKSUPPRESS    | Number of SUCKs to Suppress after VSG Line                         |
| 27D     | [5:0]   | 6         | 00            | EXPOSURE[5:0]    | Number of Fields to Suppress SUBCK/VSG (Exposure Time)             |
| 27E     | [5:0]   | 6         | 00            | EXPOSURE[11:6]   |  |
| 27F     | [0]     | 1         | 00            | VDHDOFF          | Disable VD and HD during Exposure                                  |
| 280     | [2:0]   | 3         | 00            | TRIGGER          | VSUB (TRIGGER[0]), MSHUT (TRIGGER[1]), STROBE (TRIGGER[2]) Trigger |
| 281     | [2:0]   | 3         | 02            | READOUT          | SUBCK Suppression after Exposure during Readout                    |
| 282     | [0]     | 1         | 00            | VSUBMODE         | VSUB Readout Mode  |

Table XXX. SUBCK, VSUB, MSHUT Register Map (continued)

| Address | Content | Bit Width | Default Value | Register Name        | Register Description  |
|---------|---------|-----------|---------------|----------------------|---|
| 283     | [0]     | 1         | 00            | VSUBKEEPON           | VSUB Off Mode (0 = Turn Off after Readout or Next VD, 1 = Keep Active beyond Readout) |
| 284     | [0]     | 1         | 01            | VSUBPOL              | VSUB Active Polarity  |
| 285     | [5:0]   | 6         | 00            | VSUBON[5:0]          | VSUB On Position  |
| 286     | [5:0]   | 6         | 00            | VSUBON[11:6]         |   |
| 287     | [0]     | 1         | 00            | MSHUTON              | MSHUT Enable (VD Aligned)   |
| 288     | [0]     | 1         | 01            | MSHUTPOL             | MSHUT Active Polarity   |
| 289     | [5:0]   | 6         | 00            | MSHUTONPOS_LN[5:0]   | MSHUT On Line Position (In Terms of HDs from VD Update)                               |
| 28A     | [5:0]   | 6         | 00            | MSHUTONPOS_LN[11:6]  |   |
| 28B     | [5:0]   | 6         | 00            | MSHUTONPOS_PIX[5:0]  | MSHUT On Pixel Position (In Terms of Pixels from HD On Position)                      |
| 28C     | [5:0]   | 6         | 00            | MSHUTONPOS_PIX[11:6] |   |
| 28D     | [5:0]   | 6         | 00            | MSHUTOFF_FD[5:0]     | MSHUT Field Off Position (In Terms of VDs from Field Containing Last SUBCK)           |
| 28E     | [5:0]   | 6         | 00            | MSHUTOFF_FD[11:6]    |   |
| 28F     | [5:0]   | 6         | 00            | MSHUTOFF_LN[5:0]     | MSHUT Line Off Position (In Terms of HDs from VD Aligned Off Position)                |
| 290     | [5:0]   | 6         | 00            | MSHUTOFF_LN[11:6]    |   |
| 291     | [5:0]   | 6         | 00            | MSHUTOFF_PX[5:0]     | MSHUT Pixel Off Position (In Terms of Pixels from HD Aligned Off Position)            |
| 292     | [5:0]   | 6         | 00            | MSHUTOFF_PX[11:6]    |   |
| 293     | [0]     | 1         | 01            | STROBPOL             | STROBE Active Polarity  |
| 294     | [5:0]   | 6         | 00            | STROBON_FD[5:0]      | STROBE Field On Position (In Terms of VDs from Field Containing Last SUBCK)           |
| 295     | [5:0]   | 6         | 00            | STROBON_FD[11:6]     |   |
| 296     | [5:0]   | 6         | 00            | STROBON_LN[5:0]      | STROBE Line On Position (In Terms of HDs from VD Aligned On Position)                 |
| 297     | [5:0]   | 6         | 00            | STROBON_LN[11:6]     |   |
| 298     | [5:0]   | 6         | 00            | STROBON_PX[5:0]      | STROBE Pixel On Position (In Terms of Pixels from HD Aligned On Position)             |
| 299     | [5:0]   | 6         | 00            | STROBON_PX[11:6]     |   |
| 29A     | [5:0]   | 6         | 00            | STROBOFF_FD[5:0]     | STROBE Field Off Position (In Terms of VDs from Field Containing Last SUBCK)          |
| 29B     | [5:0]   | 6         | 00            | STROBOFF_FD[11:6]    |   |
| 29C     | [5:0]   | 6         | 00            | STROBOFF_LN[5:0]     | STROBE Line Off Position (In Terms of HDs from VD Aligned Off Position)               |
| 29D     | [5:0]   | 6         | 00            | STROBOFF_LN[11:6]    |   |
| 29E     | [5:0]   | 6         | 00            | STROBOFF_PX[5:0]     | STROBE Pixel Off Position (In Terms of Pixels from HD Aligned Off Position)           |
| 29F     | [5:0]   | 6         | 00            | STROBOFF_PX[11:6]    |   |

# AD9891/AD9895

**Table XXXI. AFE Register Breakdown**


| Content | Bit Width | Default Value | Register Name  | Register Description                                     |
|---------|-----------|---------------|----------------|--|
| OPRMODE |           | 8'h0          |                | Serial Address: 10'h0{OPRMODE[5:0]}, 10'h1{OPRMODE[7:6]} |
| [7:0]   |           |               |                | Normal Operation   |
| [1:0]   | 2'h0      |               | POWERDOWN[1:0] | Standby1 (See Standby Modes Table)                       |
|         | 2'h1      |               |                | Standby2 (See Standby Modes Table)                       |
|         | 2'h2      |               |                | Standby3 (See Standby Modes Table)                       |
|         | 2'h3      |               |                | Disable Black Loop Clamping (HIGH Active)                |
| [2]     |           |               | DISBLACK       | Test Mode—Should Be Set LOW                              |
| [3]     |           |               | Test Mode      | Test Mode—Should Be Set HIGH                             |
| [4]     |           |               | Test Mode      | Test Mode—Should Be Set LOW                              |
| [5]     |           |               | Test Mode      | Test Mode—Should Be Set LOW                              |
| [6]     |           |               | Test Mode      | Test Mode—Should Be Set LOW                              |
| [7]     |           |               | Test Mode      | Test Mode—Should Be Set LOW                              |
| CTLMODE |           | 6'h0          |                | Serial Address: 10'h6{CLTMODE[5:0]}                      |
| [5:0]   |           |               |                | OFF  |
| [2:0]   | 3'h0      |               | CTLMODE[2:0]   | Mosaic Separate  |
|         | 3'h1      |               |                | VD Selected/Mosaic Interlaced                            |
|         | 3'h2      |               |                | Mosaic Repeat  |
|         | 3'h3      |               |                | 3-Color  |
|         | 3'h4      |               |                | 3-Color II   |
|         | 3'h5      |               |                | 4-Color  |
|         | 3'h6      |               |                | 4-Color II   |
|         | 3'h7      |               |                | Enable PxGA (HIGH Active)                                |
| [3]     |           |               | ENABLEPXGA     | Latch Output Data on Selected DOUT Edge                  |
| [4]     | 1'h0      |               | OUTPUTLAT      | Leave Output Latch Transparent                           |
|         | 1'h1      |               |                | ADC Outputs Are Driven                                   |
| [5]     | 1'h0      |               | TRISTATEOUT    | ADC Outputs Are Three-States                             |
|         | 1'h1      |               |                |  |



OUTLINE DIMENSIONS

64-Lead Plastic Ball Grid Array [CSPBGA]  
(BC-64)

Dimensions shown in millimeters

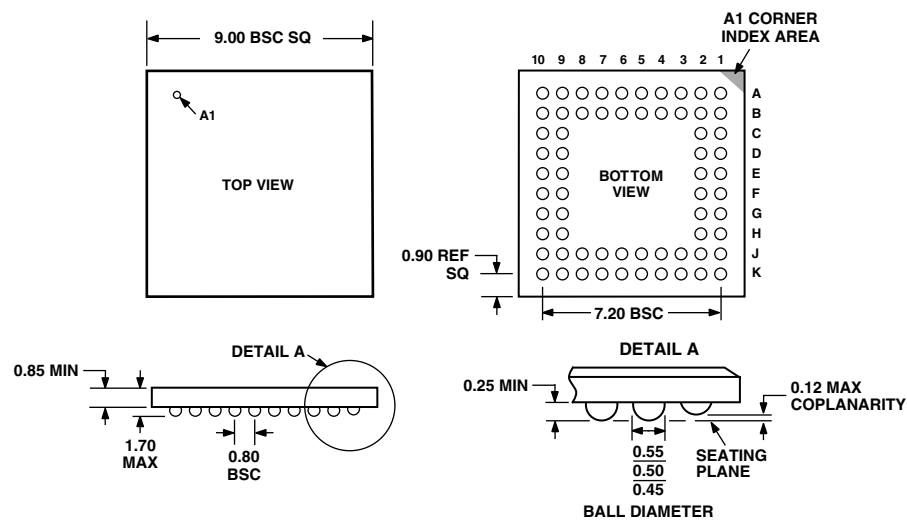

Revision History

| Location                                       | Page      |
|--|-----------|
| 8/02—Data Sheet changed from REV. 0 to REV. A. |           |
| Added AD9895 part                              | Universal |





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.