


Features

- ◆ Highest power density in SIP package
- ◆ Ultra wide 4:1 input range
- ◆ Small footprint: 21.8 x 9.2 mm
- ◆ Temperature range -40° to +85°C
- ◆ High efficiency up to 82%
- ◆ Excellent load and line regulation
- ◆ Short-circuit protection
- ◆ I/O isolation 1500 VDC
- ◆ Remote On/Off control
- ◆ 3-year product warranty

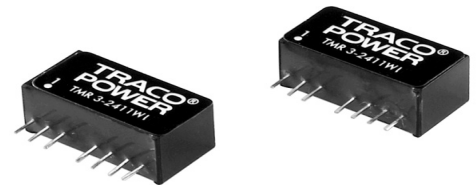

The TMR-3WI series is a new family of isolated 3W DC/DC converters with regulated output, featuring ultra-wide 4:1 input voltage range. The product comes in an ultra-compact SIP plastic package with a small footprint occupying only 2.0 cm² (0.3 square in.) of board space. An excellent efficiency allows -40° to +85°C operation temperatures.

Further features include remote On/Off control and continuous short circuit protection. The very compact dimensions of these converters make them an ideal solution for many space critical applications in battery-powered equipment and instrumentation.

| Models | | | | |
|--------------|----------------------------------|--------------------------------|---------------------|-----------------|
| Order code | Input voltage | Output voltage | Output current max. | Efficiency typ. |
| TMR 3-1210WI | 4.5 – 18 VDC (12 VDC nominal) | 3.3 VDC | 700 mA | 74 % |
| TMR 3-1211WI | | 5 VDC | 600 mA | 78 % |
| TMR 3-1212WI | | 12 VDC | 250 mA | 80 % |
| TMR 3-1213WI | | 15 VDC | 200 mA | 80 % |
| TMR 3-1221WI | | ±5 VDC | ±300 mA | 80 % |
| TMR 3-1222WI | | ±12 VDC | ±125 mA | 80 % |
| TMR 3-1223WI | | ±15 VDC | ±100 mA | 80 % |
| TMR 3-2410WI | | 9 – 36 VDC (24 VDC nominal) | 3.3 VDC | 700 mA |
| TMR 3-2411WI | 5 VDC | | 600 mA | 80 % |
| TMR 3-2412WI | 12 VDC | | 250 mA | 82 % |
| TMR 3-2413WI | 15 VDC | | 200 mA | 82 % |
| TMR 3-2421WI | ±5 VDC | | ±300 mA | 79 % |
| TMR 3-2422WI | ±12 VDC | | ±125 mA | 81 % |
| TMR 3-2423WI | ±15 VDC | | ±100 mA | 81 % |
| TMR 3-4810WI | 18 – 75 VDC (48 VDC nominal) | 3.3 VDC | 700 mA | 74 % |
| TMR 3-4811WI | | 5 VDC | 600 mA | 80 % |
| TMR 3-4812WI | | 12 VDC | 250 mA | 81 % |
| TMR 3-4813WI | | 15 VDC | 200 mA | 81 % |
| TMR 3-4821WI | | ±5 VDC | ±300 mA | 79 % |
| TMR 3-4822WI | | ±12 VDC | ±125 mA | 81 % |
| TMR 3-4823WI | | ±15 VDC | ±100 mA | 81 % |

Input Specifications

| | |
|--------------------------------|--|
| Input current at full load | 12 Vin models: 340 mA max. 24 Vin models: 170 mA max. 48 Vin models: 85 mA max. |
| Input current at no load | 12 Vin models: 40 mA max. 24 Vin models: 25 mA typ. 48 Vin models: 15 mA typ. |
| Surge voltage (100 msec. max.) | 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max. |
| Input filter | internal capacitor |
| ESD (electrostatic discharge) | EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A |
| Radiated immunity | EN 61000-4-3, 10 V/m, perf. criteria A |
| Fast transient / Surge | EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV perf. criteria A With external input capacitor e.g. Nippon chemi-con KY 100 μ F, 100 V, ESR 110 mOhm |
| Conducted immunity | EN 61000-4-6, 10 Vrms, perf. criteria A |

Output Specifications

| | |
|--|---|
| Voltage set accuracy | ± 1 % max |
| Regulation | – Input variation Vin min. to Vin max. 0.2 % max. – Load variation 0 – 100% single output models: 1.0 % max. dual output models: 1.0 % max. balanced load – Load cross regulation 25/100% 5.0 % max. (dual output models) |
| Minimum load | not required |
| Temperature coefficient | 0.02 %/K |
| Ripple and noise (20 MHz Bandwidth) | 30 mVpk-pk max. |
| Start up time (constant resistive load) | – Power On 30 ms typ. – Remote On 30 ms typ. |
| Transient response setting time (25% load step change) | 250 μ s typ. |
| Short circuit protection | continuous, automatic recovery |
| Capacitive load | 3.3 VDC models: 1'760 μ F max. 5 VDC models: 1'000 μ F max. 12 VDC models: 170 μ F max. 15 VDC models: 110 μ F max. ± 5 VDC models: ± 470 μ F max. ± 12 VDC models: ± 100 μ F max. ± 15 VDC models: ± 47 μ F max. |

General Specifications

| | |
|--|---|
| Temperature ranges | – Operating -40°C to $+85^{\circ}\text{C}$ – Case temperature $+100^{\circ}\text{C}$ max. – Storage -55°C to $+125^{\circ}\text{C}$ |
| Load derating | 3.3 %/K above 70°C |
| Humidity (non condensing) | 95 % rel. H max. |
| Reliability, calculated MTBF (MIL-HDBK-217F, at $+25^{\circ}\text{C}$, ground benign) | >1.7 Mio h |

All specifications valid at nominal input voltage, full load and $+25^{\circ}\text{C}$ after warm-up time unless otherwise stated.

General Specifications


| | | |
|-----------------------------|---|--|
| Isolation voltage (60 sec) | - Input/Output | 1'500 VDC |
| Isolation capacity | - Input/Output | 200 pF max. |
| Isolation resistance | - Input/Output (500 VDC) | >1 GOhm |
| Switching frequency | | 100 kHz min. (PFM) |
| Remote On/Off | - On: - Off: - Off stand by input current | open or high impedance 2...4 mA to applied via 1 kOhm resistor 2.5 mA max. |
| Vibration and thermal shock | | MIL-STD-810E |
| Safety standards | | UL /cUL 60950-1, IEC 60950-1:2005 (2nd Edition); +A1:2009 |
| Safety approvals | - CB test certificate (IEC 60950-1 2nd edition) - UL/cUL | www.tracopower.com/products/tmr3wi-cb.pdf pending |
| Environmental compliance | - Reach - RoHS | www.tracopower.com/products/tmr3wi-reach.pdf RoHS Directive 2011/65/EU |
| Altitude | - operation - non operation - test report | < 40'000ft (12'000m) < 50'000ft (15'000m) www.tracopower.com/products/tmr3wi-altitude.pdf |

Physical Specifications

| | |
|------------------|-------------------------|
| Casing material | non-conductive plastic |
| Potting material | silicon, UL 94V-0 rated |
| Weight | 4.8 g (0.17oz) |

Application note: www.tracopower.com/products/tmr3wi-application.pdf

Outline Dimensions

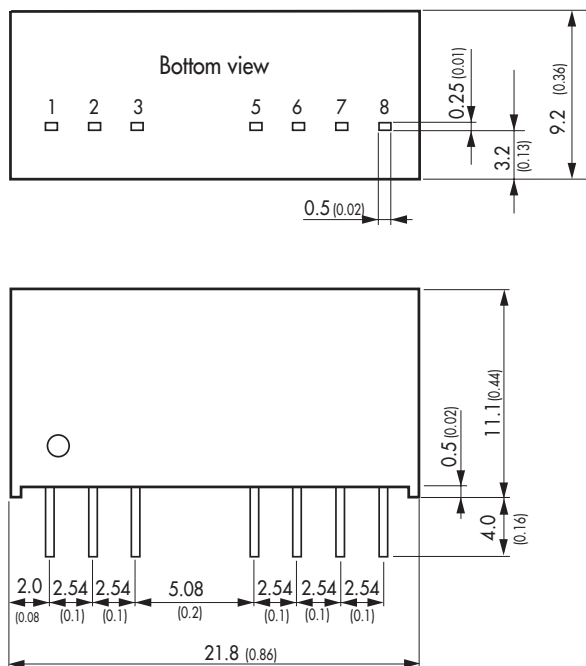

Pin-Out

| Pin | Single | Dual |
|-----|---------------|---------------|
| 1 | -Vin (GND) | -Vin (GND) |
| 2 | +Vin (Vcc) | +Vin (Vcc) |
| 3 | Remote On/Off | Remote On/Off |
| 5 | No con. | No con. |
| 6 | +Vout | +Vout |
| 7 | -Vout | Common |
| 8 | No con. | -Vout |

Dimensions in [mm], () = Inch
Pin dimension tolerances 0.1 (0.004)
Pin pitch tolerances: ±0.25 (±0.01)
Tolerances: ±0.5 (±0.02)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.