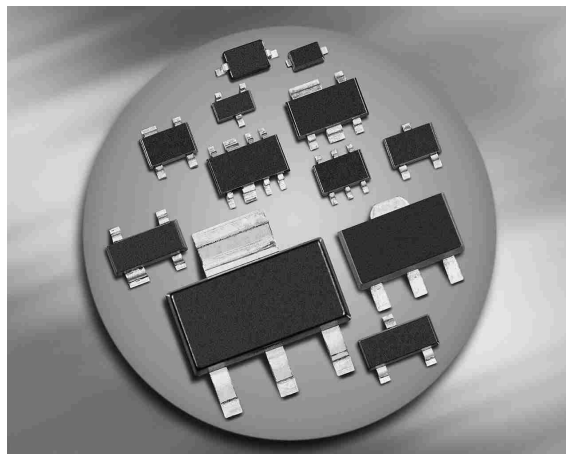







## Silicon Schottky Diode

- For mixer applications in VHF/UHF range
- For high-speed switching application
- Pb-free (RoHS compliant) package


**BAT17**

**BAT17-04  
BAT17-04W**

**BAT17-05  
BAT17-05W**

**BAT17-06W**

**BAT17-07**


**ESD (Electrostatic discharge)** sensitive device, observe handling precaution!

| Type      | Package | Configuration  | $L_S$ (nH) | Marking |
|-----------|---------|----------------|------------|---------|
| BAT17     | SOT23   | single         | 1.8        | 53s     |
| BAT17-04  | SOT23   | series         | 1.8        | 54s     |
| BAT17-04W | SOT323  | series         | 1.4        | 54s     |
| BAT17-05  | SOT23   | common cathode | 1.8        | 55s     |
| BAT17-05W | SOT323  | common cathode | 1.4        | 55s     |
| BAT17-06W | SOT323  | common anode   | 1.4        | 56s     |
| BAT17-07  | SOT143  | parallel pair  | 2          | 57s     |

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                         | Symbol           | Value       | Unit             |
|---------------------------------------------------|------------------|-------------|------------------|
| Diode reverse voltage                             | $V_R$            | 4           | V                |
| Forward current                                   | $I_F$            | 130         | mA               |
| Total power dissipation                           | $P_{\text{tot}}$ |             | mW               |
| BAT17, $T_S \leq 77^\circ\text{C}$                |                  | 150         |                  |
| BAT17-04, $T_S \leq 61^\circ\text{C}$             |                  | 150         |                  |
| BAT17-05, $T_S \leq 46^\circ\text{C}$             |                  | 150         |                  |
| BAT17-04W, -05W, -6W, $T_S \leq 92^\circ\text{C}$ |                  | 150         |                  |
| BAT17-07, $T_S \leq 60^\circ\text{C}$             |                  | 150         |                  |
| Junction temperature                              | $T_j$            | 150         | $^\circ\text{C}$ |
| Operating temperature range                       | $T_{\text{op}}$  | -55 ... 125 |                  |
| Storage temperature                               | $T_{\text{stg}}$ | -55 ... 150 |                  |

#### Thermal Resistance

| Parameter                                | Symbol            | Value      | Unit |
|------------------------------------------|-------------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{\text{thJS}}$ |            | K/W  |
| BAT17                                    |                   | $\leq 490$ |      |
| BAT17-04, BAT17-07                       |                   | $\leq 590$ |      |
| BAT17-05                                 |                   | $\leq 690$ |      |
| BAT17-04W, BAT17-05W, BAT17-06W          |                   | $\leq 390$ |      |

<sup>1)</sup>For calculation of  $R_{\text{thJA}}$  please refer to Application Note Thermal Resistance


Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                       | Symbol       | Values            |                   |                    | Unit     |
|---------------------------------------------------------------------------------|--------------|-------------------|-------------------|--------------------|----------|
|                                                                                 |              | min.              | typ.              | max.               |          |
| DC Characteristics                                                              |              |                   |                   |                    |          |
| Breakdown voltage<br>$I_{(BR)} = 10 \mu A$                                      | $V_{(BR)}$   | 4                 | -                 | -                  | V        |
| Reverse current<br>$V_R = 3 V$<br>$V_R = 4 V$<br>$V_R = 3 V, T_A = 60 ^\circ C$ | $I_R$        | -<br>-<br>-       | -<br>-<br>-       | 0.25<br>10<br>1.25 | $\mu A$  |
| Forward voltage<br>$I_F = 0.1 mA$<br>$I_F = 1 mA$<br>$I_F = 10 mA$              | $V_F$        | 200<br>250<br>350 | 275<br>340<br>425 | 350<br>450<br>600  | mV       |
| Forward voltage matching <sup>1)</sup><br>$I_F = 1 mA$                          | $\Delta V_F$ | -                 | -                 | 20                 |          |
| AC Characteristics                                                              |              |                   |                   |                    |          |
| Diode capacitance<br>$V_R = 0, f = 1 MHz$                                       | $C_T$        | 0.4               | 0.55              | 0.75               | pF       |
| Differential forward resistance<br>$I_F = 5 mA, f = 10 kHz$                     | $R_F$        | -                 | 8                 | 15                 | $\Omega$ |

<sup>1)</sup> $\Delta V_F$  is the difference between lowest and highest  $V_F$  in multiple diode component.


### Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

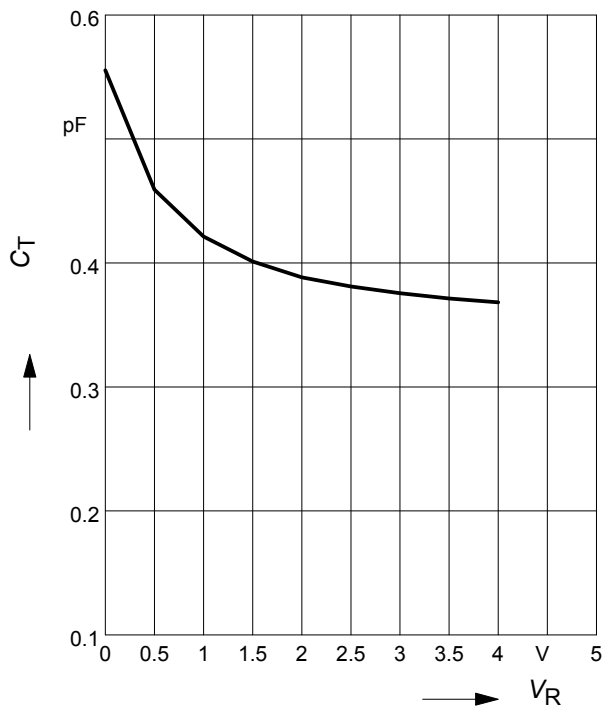


### Forward resistance $r_f = f(I_F)$

$f = 10\text{kHz}$

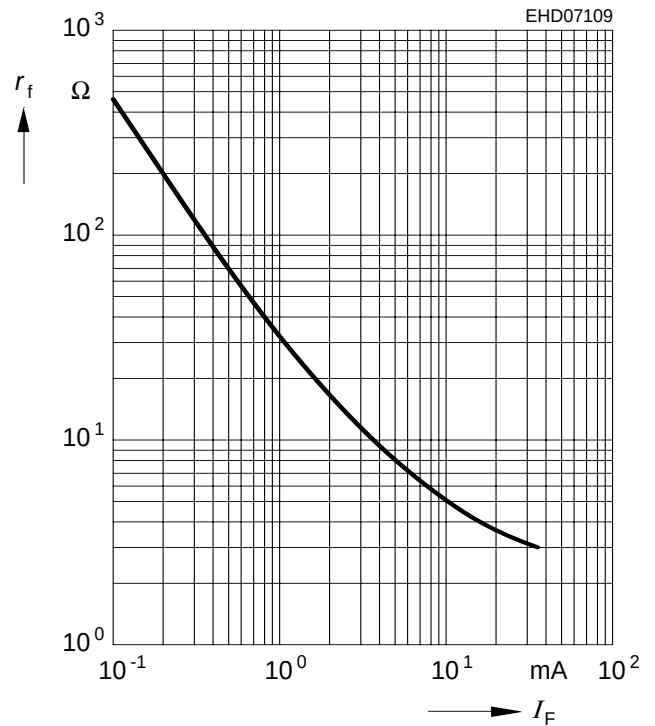


### Reverse current $I_R = f(V_R)$

$T_A = \text{Parameter}$

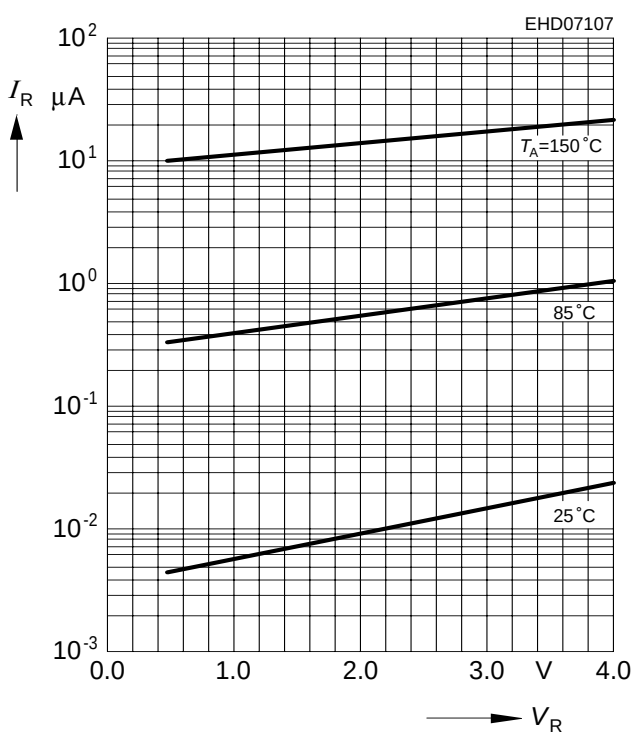


### Forward current $I_F = f(V_F)$

$T_A = \text{Parameter}$

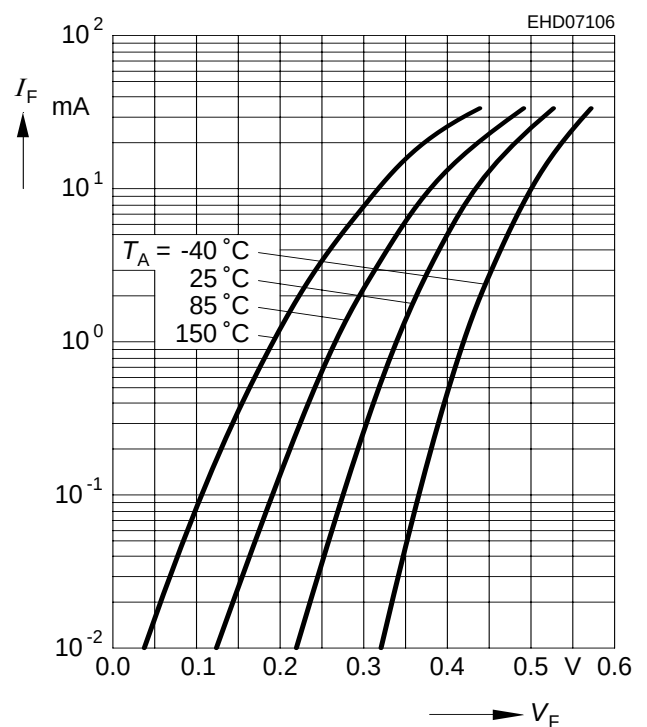


**Forward current  $I_F = f(T_S)$**

BAT17

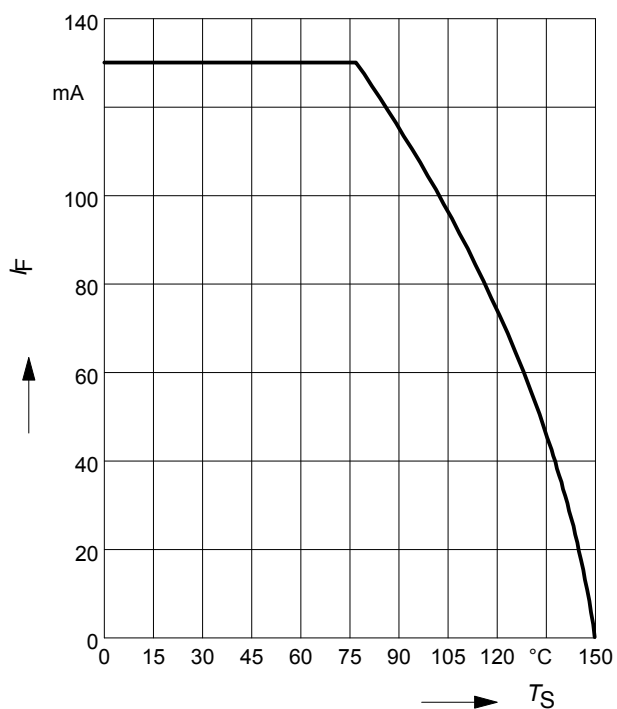

**Forward current  $I_F = f(T_S)$**

BAT17-04, BAT17-07

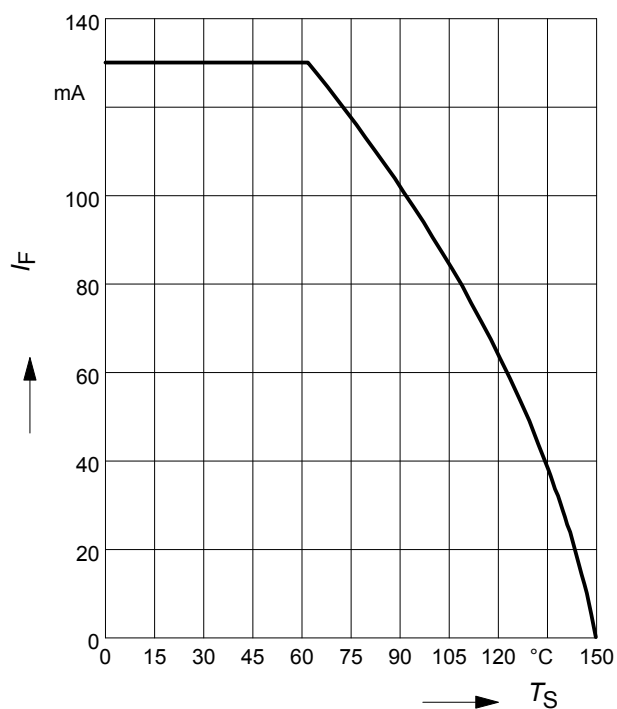

**Forward current  $I_F = f(T_S)$**

BAT17-05


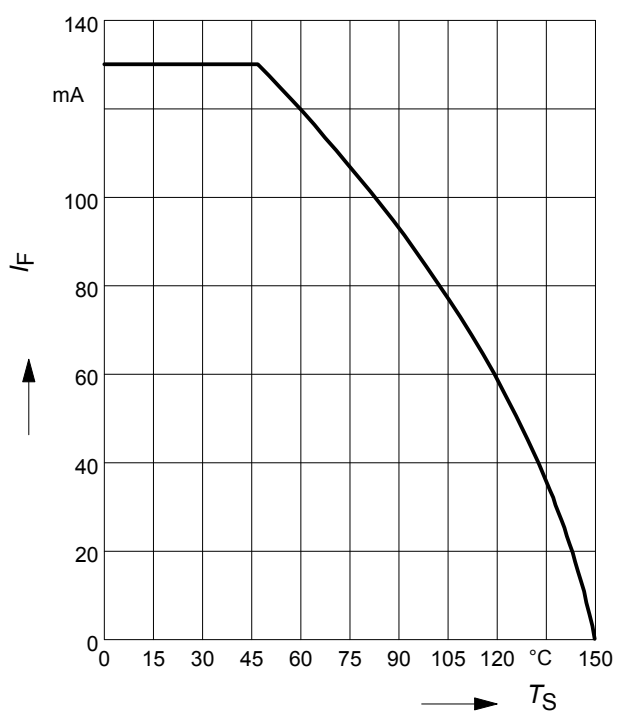


Diagram illustrating the marking on the BFP181 package:

- Manufacturer:** infineon
- Date code (YM):** 2005, June
- Pin 1:** Indicated by a line pointing to the first pin.
- Type code:** BFP181


Technical drawing of a mechanical part. The main view shows a rectangular component with a width of 4 and a height of 8. There are three rectangular features along the bottom edge, each with a width of 3.15 and a height of 2.6. A dimension of 2.6 is also shown for the distance between the first and second features. A cross-section view on the right shows a thickness of 0.2 and a width of 1.15. A label 'Pin 1' points to the first feature on the left.

## Package Outline

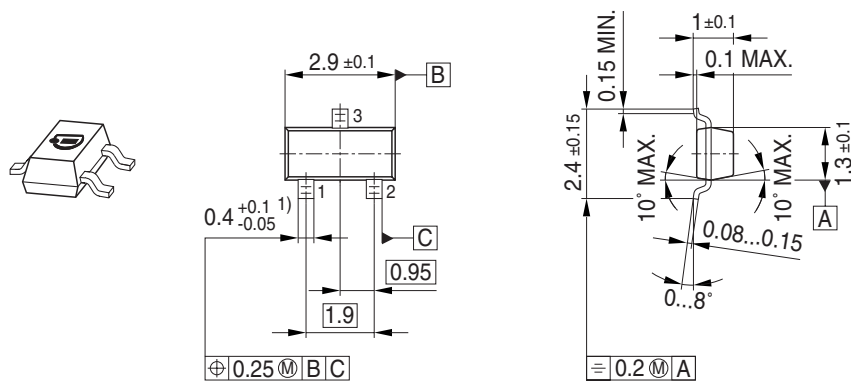


1) Lead width can be 0.6 max. in dambar area

## Foot Print




## Marking Layout (Example)

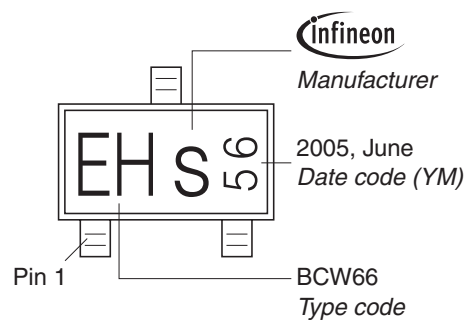


## Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

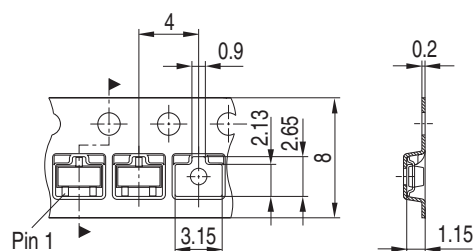


## Package Outline

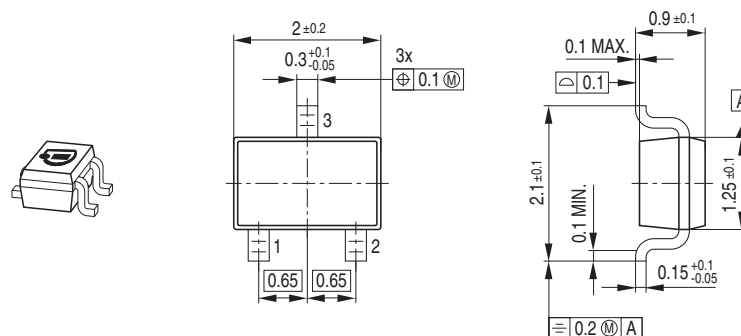

## Foot Print




## Marking Layout (Example)

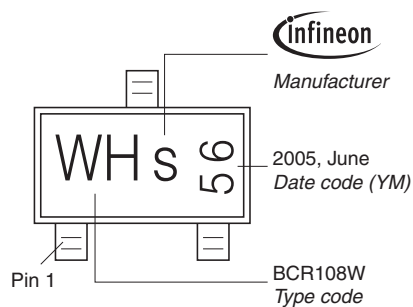

## Standard Packing

Reel  $\varnothing 180 \text{ mm}$  = 3.000 Pieces/Reel  
 Reel  $\varnothing 330 \text{ mm}$  = 10.000 Pieces/Reel

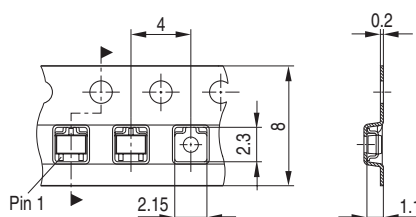



**Edition 2009-11-16**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

## **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

## **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

## **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.