

# MUN5211DW1T1G Series

Preferred Devices

## Dual Bias Resistor Transistors

### NPN Silicon Surface Mount Transistors with Monolithic Bias Resistor Network

The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. These digital transistors are designed to replace a single device and its external resistor bias network. The BRT eliminates these individual components by integrating them into a single device. In the MUN5211DW1T1G series, two BRT devices are housed in the SOT-363 package which is ideal for low power surface mount applications where board space is at a premium.

#### Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS

( $T_A = 25^\circ\text{C}$  unless otherwise noted, common for  $Q_1$  and  $Q_2$ )

Rating	Symbol	Value	Unit
Collector-Base Voltage	$V_{CBO}$	50	Vdc
Collector-Emitter Voltage	$V_{CEO}$	50	Vdc
Collector Current	$I_C$	100	mAdc

#### THERMAL CHARACTERISTICS

Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	187 (Note 1) 256 (Note 2) 1.5 (Note 1) 2.0 (Note 2)	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	670 (Note 1) 490 (Note 2)	$^\circ\text{C}/\text{W}$
Characteristic (Both Junctions Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	250 (Note 1) 385 (Note 2) 2.0 (Note 1) 3.0 (Note 2)	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	493 (Note 1) 325 (Note 2)	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Lead	$R_{\theta JL}$	188 (Note 1) 208 (Note 2)	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. FR-4 @ Minimum Pad
2. FR-4 @ 1.0 x 1.0 inch Pad




ON Semiconductor®

<http://onsemi.com>



SOT-363  
CASE 419B  
STYLE 1

#### MARKING DIAGRAM



xx = Device Code  
M = Date Code\*  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

#### DEVICE MARKING INFORMATION

See specific marking information in the device marking table on page 2 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

## MUN5211DW1T1G Series

### DEVICE MARKING AND RESISTOR VALUES

Device	Package	Marking	R1 (K)	R2 (K)	Shipping†
MUN5211DW1T1G	SOT-363 (Pb-Free)	7A	10	10	3000 / Tape & Reel
MUN5212DW1T1G	SOT-363 (Pb-Free)	7B	22	22	3000 / Tape & Reel
MUN5213DW1T1G	SOT-363 (Pb-Free)	7C	47	47	3000 / Tape & Reel
MUN5214DW1T1G	SOT-363 (Pb-Free)	7D	10	47	3000 / Tape & Reel
MUN5215DW1T1G	SOT-363 (Pb-Free)	7E	10	∞	3000 / Tape & Reel
MUN5216DW1T1G	SOT-363 (Pb-Free)	7F	4.7	∞	3000 / Tape & Reel
MUN5230DW1T1G	SOT-363 (Pb-Free)	7G	1.0	1.0	3000 / Tape & Reel
MUN5231DW1T1G	SOT-363 (Pb-Free)	7H	2.2	2.2	3000 / Tape & Reel
MUN5232DW1T1G	SOT-363 (Pb-Free)	7J	4.7	4.7	3000 / Tape & Reel
MUN5233DW1T1G	SOT-363 (Pb-Free)	7K	4.7	47	3000 / Tape & Reel
MUN5234DW1T1G	SOT-363 (Pb-Free)	7L	22	47	3000 / Tape & Reel
MUN5235DW1T1G	SOT-363 (Pb-Free)	7M	2.2	47	3000 / Tape & Reel
MUN5236DW1T1G	SOT-363 (Pb-Free)	7N	100	100	3000 / Tape & Reel
MUN5237DW1T1G	SOT-363 (Pb-Free)	7P	47	22	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## MUN5211DW1T1G Series

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted, common for Q<sub>1</sub> and Q<sub>2</sub>)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Collector-Base Cutoff Current ( $V_{CB} = 50\text{ V}$ , $I_E = 0$ )	$I_{CBO}$	-	-	100	nAdc
Collector-Emitter Cutoff Current ( $V_{CE} = 50\text{ V}$ , $I_B = 0$ )	$I_{CEO}$	-	-	500	nAdc
Emitter-Base Cutoff Current ( $V_{EB} = 6.0\text{ V}$ , $I_C = 0$ )	MUN5211DW1T1G	-	-	0.5	mAdc
	MUN5212DW1T1G	-	-	0.2	
	MUN5213DW1T1G	-	-	0.1	
	MUN5214DW1T1G	-	-	0.2	
	MUN5215DW1T1G	-	-	0.9	
	MUN5216DW1T1G	-	-	1.9	
	MUN5230DW1T1G	-	-	4.3	
	MUN5231DW1T1G	-	-	2.3	
	MUN5232DW1T1G	-	-	1.5	
	MUN5233DW1T1G	-	-	0.18	
	MUN5234DW1T1G	-	-	0.13	
	MUN5235DW1T1G	-	-	0.2	
	MUN5236DW1T1G	-	-	0.05	
MUN5237DW1T1G	-	-	0.13		
Collector-Base Breakdown Voltage ( $I_C = 10\ \mu\text{A}$ , $I_E = 0$ )	$V_{(BR)CBO}$	50	-	-	Vdc
Collector-Emitter Breakdown Voltage (Note 3) ( $I_C = 2.0\text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	50	-	-	Vdc

3. Pulse Test: Pulse Width < 300  $\mu\text{s}$ , Duty Cycle < 2.0%

## MUN5211DW1T1G Series

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted, common for Q<sub>1</sub> and Q<sub>2</sub>)

Characteristic		Symbol	Min	Typ	Max	Unit	
<b>ON CHARACTERISTICS</b> (Note 4)							
DC Current Gain ( $V_{CE} = 10\text{ V}$ , $I_C = 5.0\text{ mA}$ )	MUN5211DW1T1G	$h_{FE}$	35	60	-		
	MUN5212DW1T1G		60	100	-		
	MUN5213DW1T1G		80	140	-		
	MUN5214DW1T1G		80	140	-		
	MUN5215DW1T1G		160	350	-		
	MUN5216DW1T1G		160	350	-		
	MUN5230DW1T1G		3.0	5.0	-		
	MUN5231DW1T1G		8.0	15	-		
	MUN5232DW1T1G		15	30	-		
	MUN5233DW1T1G		80	200	-		
	MUN5234DW1T1G		80	150	-		
	MUN5235DW1T1G		80	140	-		
	MUN5236DW1T1G		80	150	-		
MUN5237DW1T1G	80	140	-				
Collector-Emitter Saturation Voltage ( $I_C = 10\text{ mA}$ , $I_B = 0.3\text{ mA}$ )	MUN5211DW1T1G	$V_{CE(sat)}$	-	-	0.25	Vdc	
	MUN5212DW1T1G		-	-	0.25		
	MUN5213DW1T1G		-	-	0.25		
	MUN5214DW1T1G		-	-	0.25		
	MUN5235DW1T1G		-	-	0.25		
	MUN5236DW1T1G		-	-	0.25		
	( $I_C = 10\text{ mA}$ , $I_B = 5\text{ mA}$ )		MUN5230DW1T1G	-	-		0.25
	MUN5231DW1T1G		-	-	0.25		
	MUN5237DW1T1G		-	-	0.25		
	( $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$ )		MUN5215DW1T1G	-	-		0.25
	MUN5216DW1T1G		-	-	0.25		
	MUN5232DW1T1G		-	-	0.25		
	MUN5233DW1T1G		-	-	0.25		
MUN5234DW1T1G	-	-	0.25				
Output Voltage (on) ( $V_{CC} = 5.0\text{ V}$ , $V_B = 2.5\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )	MUN5211DW1T1G	$V_{OL}$	-	-	0.2	Vdc	
	MUN5212DW1T1G		-	-	0.2		
	MUN5214DW1T1G		-	-	0.2		
	MUN5215DW1T1G		-	-	0.2		
	MUN5216DW1T1G		-	-	0.2		
	MUN5230DW1T1G		-	-	0.2		
	MUN5231DW1T1G		-	-	0.2		
	MUN5232DW1T1G		-	-	0.2		
	MUN5233DW1T1G		-	-	0.2		
	MUN5234DW1T1G		-	-	0.2		
	MUN5235DW1T1G		-	-	0.2		
	( $V_{CC} = 5.0\text{ V}$ , $V_B = 3.5\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )		MUN5213DW1T1G	-	-		0.2
	( $V_{CC} = 5.0\text{ V}$ , $V_B = 5.5\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )		MUN5236DW1T1G	-	-		0.2
( $V_{CC} = 5.0\text{ V}$ , $V_B = 4.0\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )	MUN5237DW1T1G	-	-	0.2			

4. Pulse Test: Pulse Width < 300  $\mu\text{s}$ , Duty Cycle < 2.0%

# MUN5211DW1T1G Series

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted, common for Q<sub>1</sub> and Q<sub>2</sub>) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>ON CHARACTERISTICS</b> (Note 5) (Continued)					
Output Voltage (off) ( $V_{CC} = 5.0\text{ V}$ , $V_B = 0.5\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )	$V_{OH}$	4.9	-	-	Vdc
MUN5211DW1T1G		4.9	-	-	
MUN5212DW1T1G		4.9	-	-	
MUN5213DW1T1G		4.9	-	-	
MUN5214DW1T1G		4.9	-	-	
MUN5233DW1T1G		4.9	-	-	
MUN5234DW1T1G		4.9	-	-	
MUN5235DW1T1G		4.9	-	-	
( $V_{CC} = 5.0\text{ V}$ , $V_B = 0.050\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )		4.9	-	-	
MUN5230DW1T1G		4.9	-	-	
( $V_{CC} = 5.0\text{ V}$ , $V_B = 0.25\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )		4.9	-	-	
MUN5215DW1T1G		4.9	-	-	
MUN5216DW1T1G		4.9	-	-	
MUN5231DW1T1G		4.9	-	-	
MUN5232DW1T1G		4.9	-	-	
MUN5236DW1T1G		4.9	-	-	
MUN5237DW1T1G		4.9	-	-	
Input Resistor	R1	7.0	10	13	k $\Omega$
MUN5211DW1T1G		15.4	22	28.6	
MUN5212DW1T1G		32.9	47	61.1	
MUN5213DW1T1G		7.0	10	13	
MUN5214DW1T1G		7.0	10	13	
MUN5215DW1T1G		3.3	4.7	6.1	
MUN5216DW1T1G		0.7	1.0	1.3	
MUN5230DW1T1G		1.5	2.2	2.9	
MUN5231DW1T1G		3.3	4.7	6.1	
MUN5232DW1T1G		3.3	4.7	6.1	
MUN5233DW1T1G		15.4	22	28.6	
MUN5234DW1T1G		1.54	2.2	2.86	
MUN5235DW1T1G		70	100	130	
MUN5236DW1T1G		32.9	47	61.1	
MUN5237DW1T1G					
Resistor Ratio MUN5211DW1T1G/MUN5212DW1T1G/ MUN5213DW1T1G/MUN5236DW1T1G MUN5214DW1T1G MUN5215DW1T1G/MUN5216DW1T1G MUN5230DW1T1G/MUN5231DW1T1G/MUN5232DW1T1G MUN5233DW1T1G MUN5234DW1T1G MUN5235DW1T1G MUN5237DW1T1G	R1/R2	0.8	1.0	1.2	
		0.17	0.21	0.25	
		-	-	-	
		0.8	1.0	1.2	
		0.055	0.1	0.185	
		0.38	0.47	0.56	
		0.038	0.047	0.056	
		1.7	2.1	2.6	

5. Pulse Test: Pulse Width < 300  $\mu\text{s}$ , Duty Cycle < 2.0%

### ALL MUN5211DW1T1G SERIES DEVICES

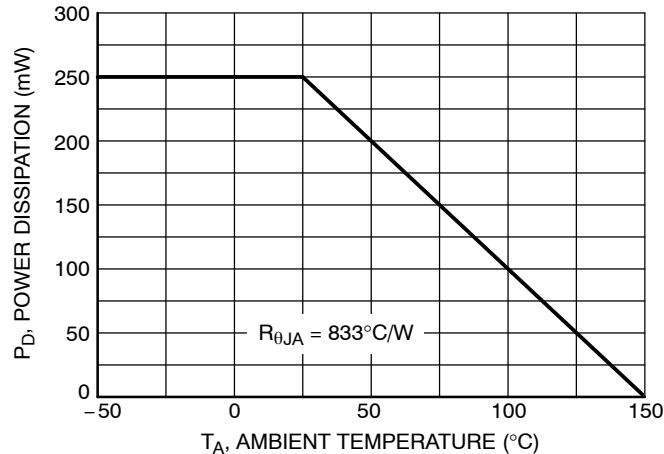


Figure 1. Derating Curve

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5211DW1T1G

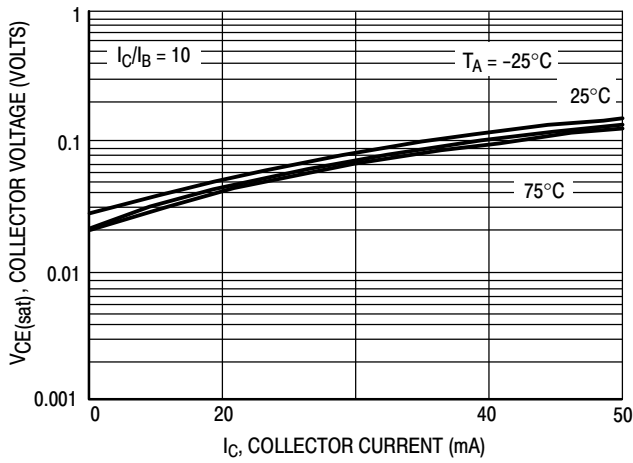


Figure 2.  $V_{CE(sat)}$  versus  $I_C$

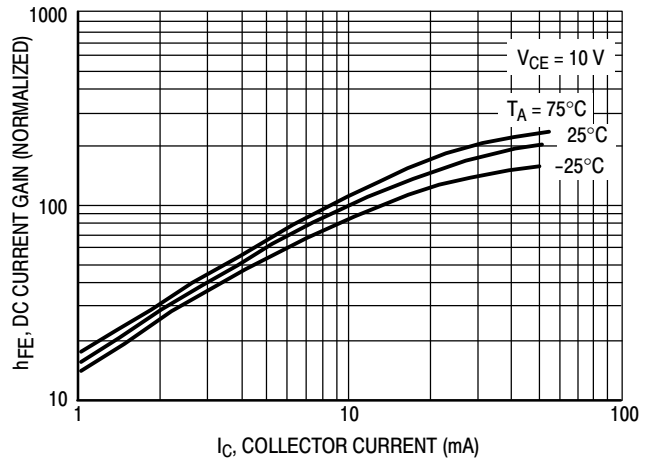


Figure 3. DC Current Gain

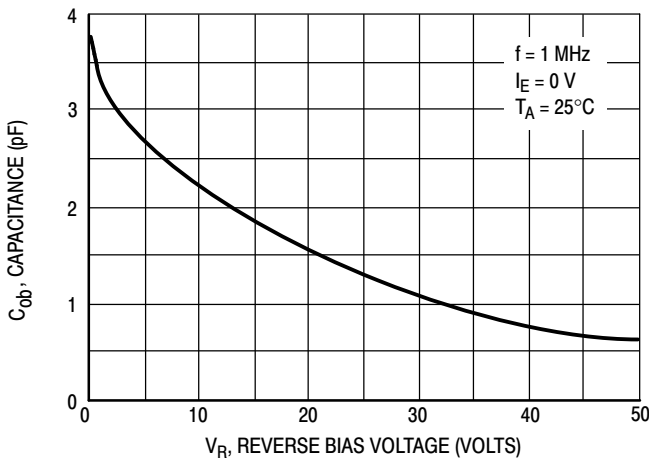


Figure 4. Output Capacitance

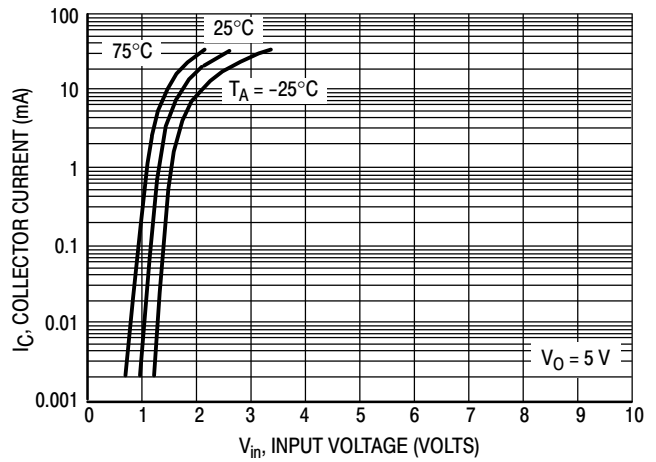


Figure 5. Output Current versus Input Voltage

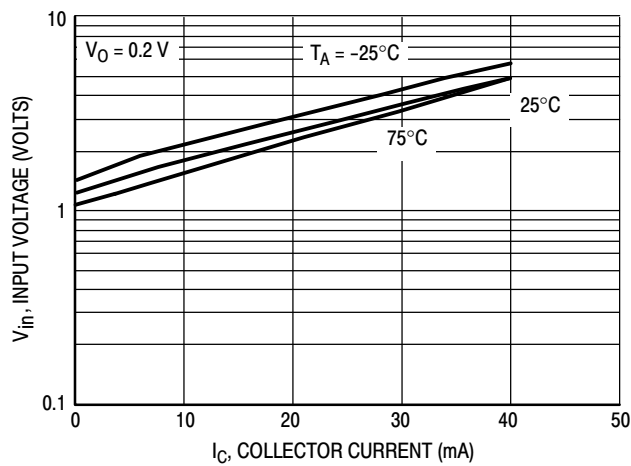


Figure 6. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5212DW1T1G

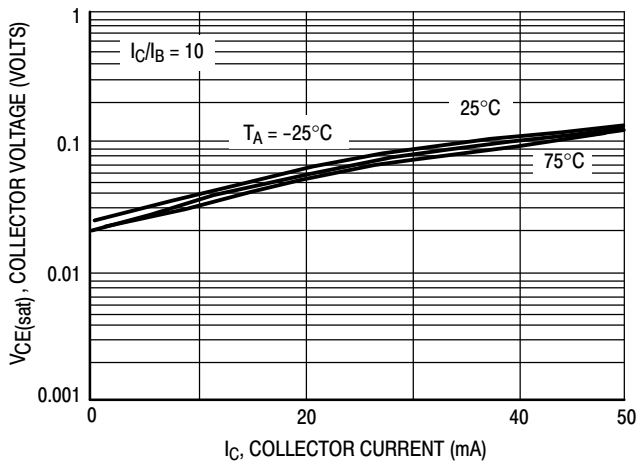


Figure 7.  $V_{CE(sat)}$  versus  $I_C$

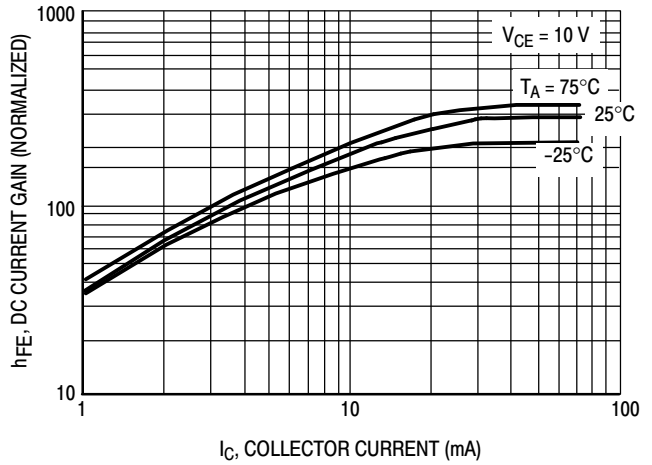


Figure 8. DC Current Gain

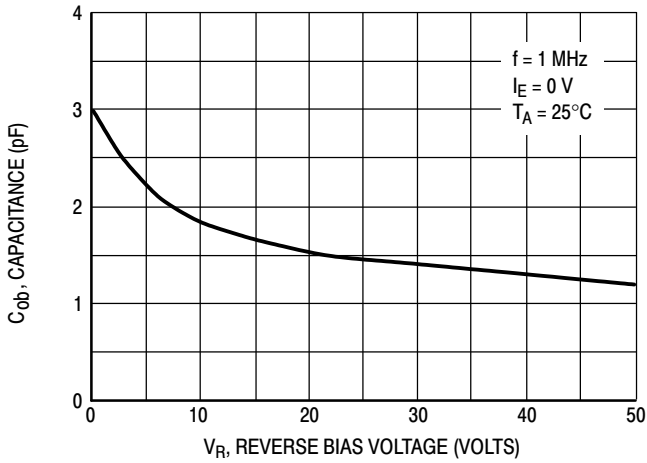


Figure 9. Output Capacitance

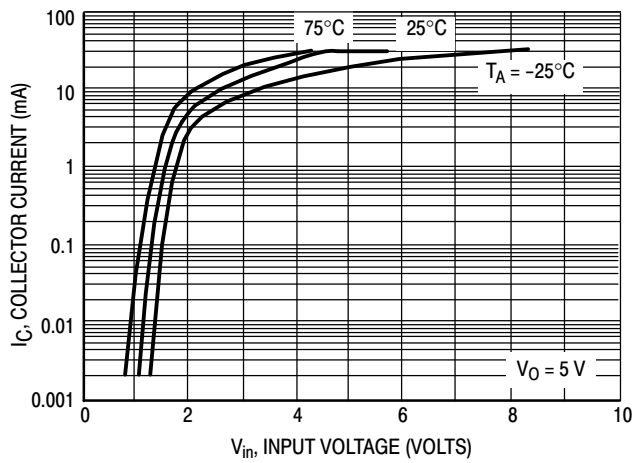


Figure 10. Output Current versus Input Voltage

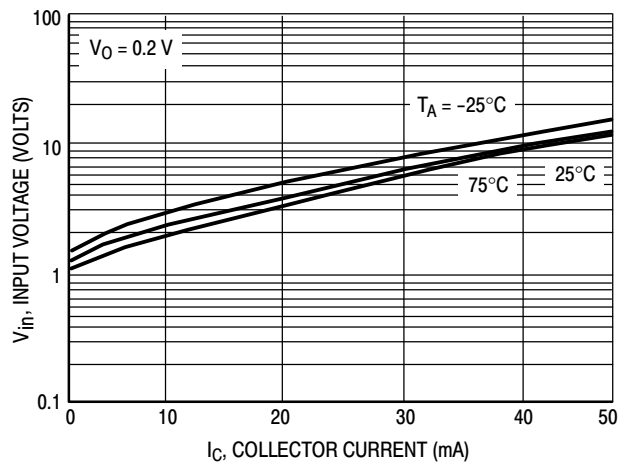


Figure 11. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5213DW1T1G

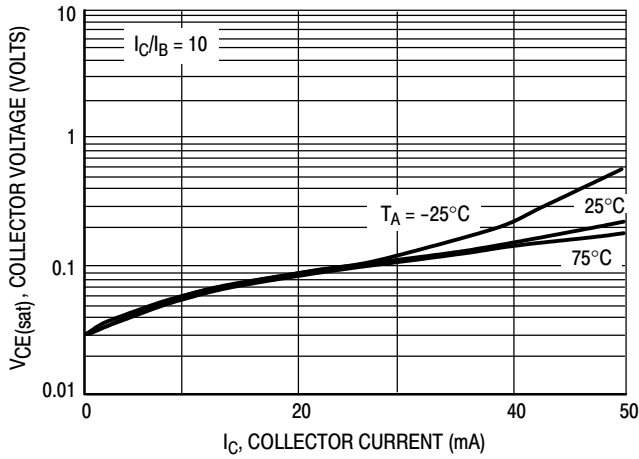


Figure 12.  $V_{CE(sat)}$  versus  $I_C$

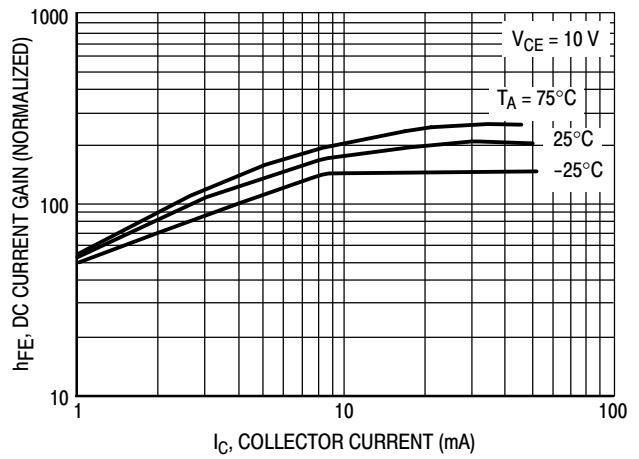


Figure 13. DC Current Gain

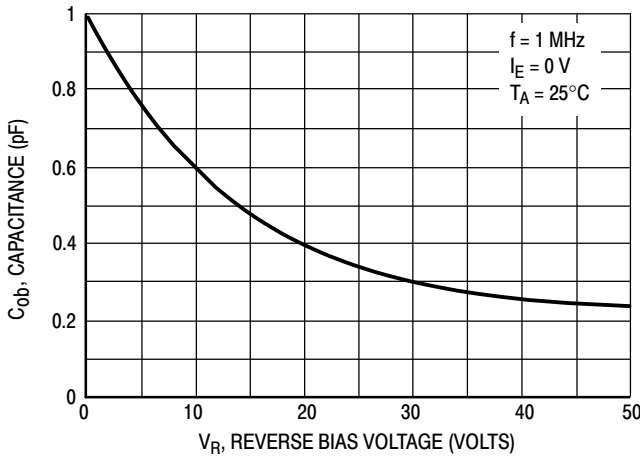


Figure 14. Output Capacitance

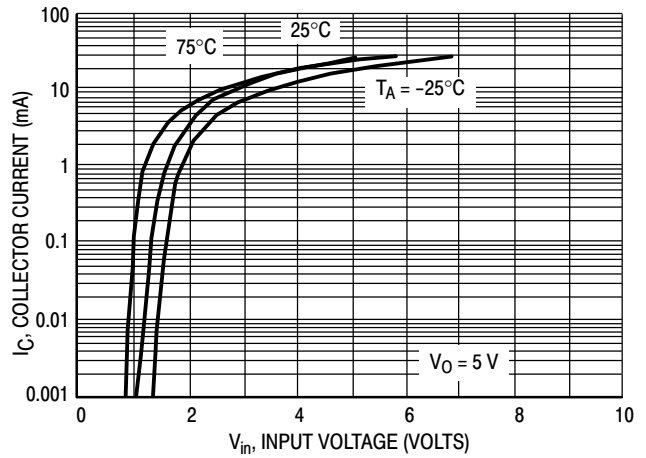


Figure 15. Output Current versus Input Voltage

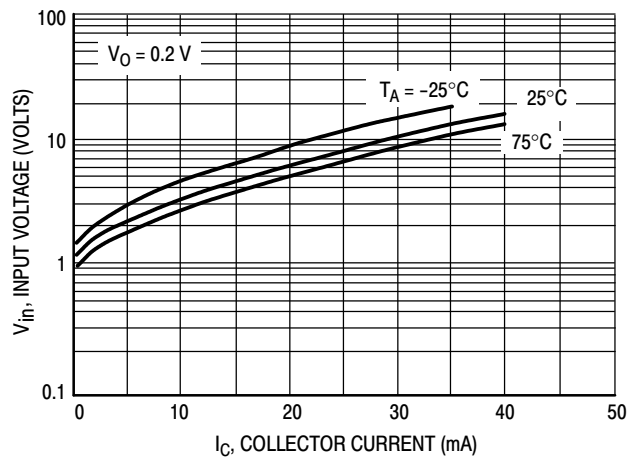


Figure 16. Input Voltage versus Output Current



# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5214DW1T1G

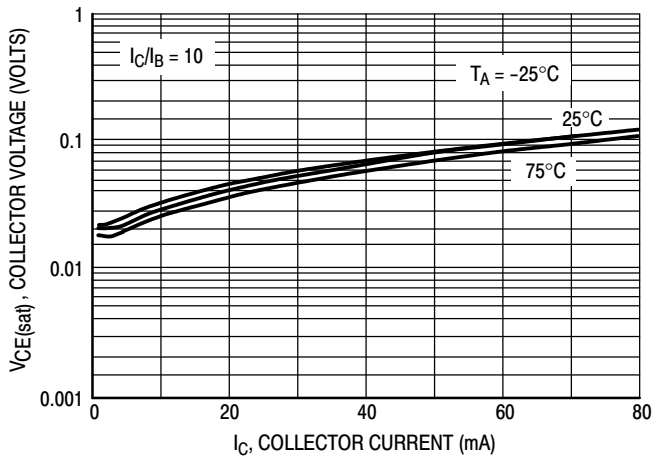


Figure 17.  $V_{CE(sat)}$  versus  $I_C$

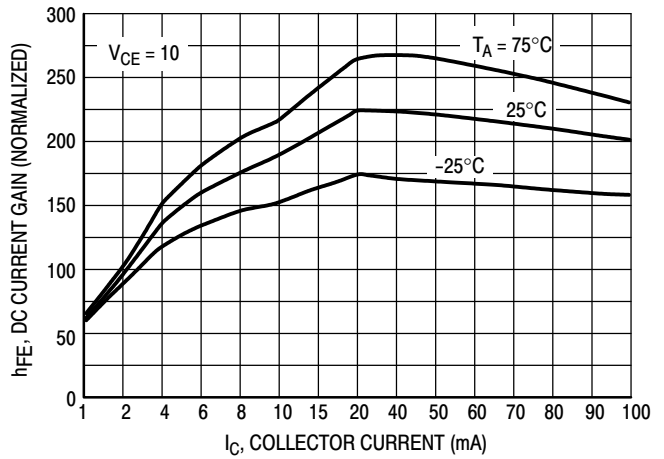


Figure 18. DC Current Gain

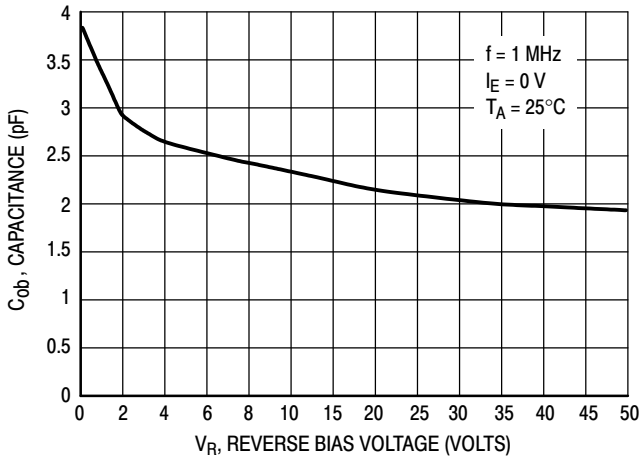


Figure 19. Output Capacitance

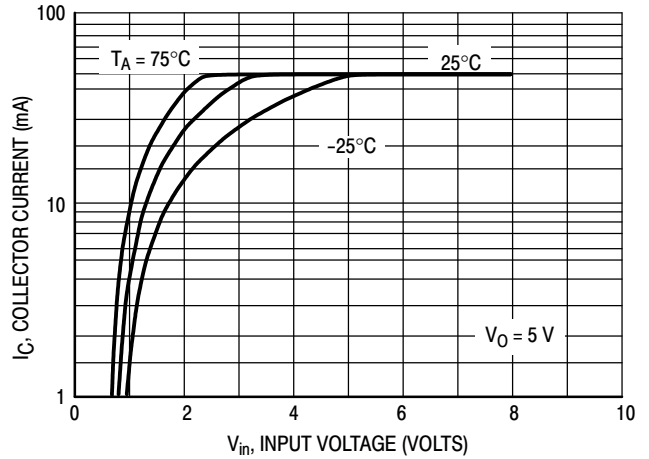


Figure 20. Output Current versus Input Voltage

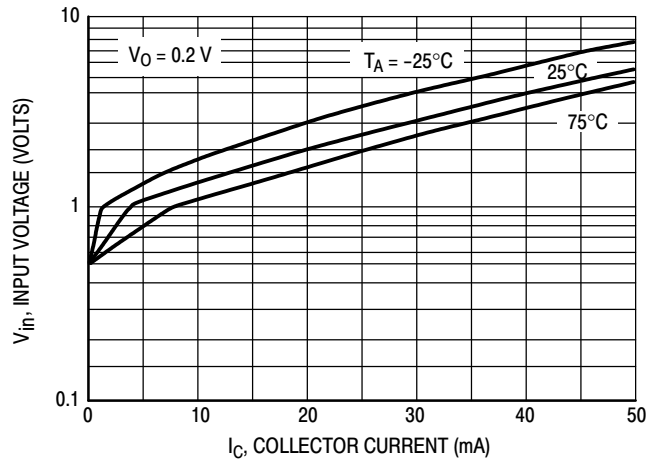


Figure 21. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5215DW1T1G

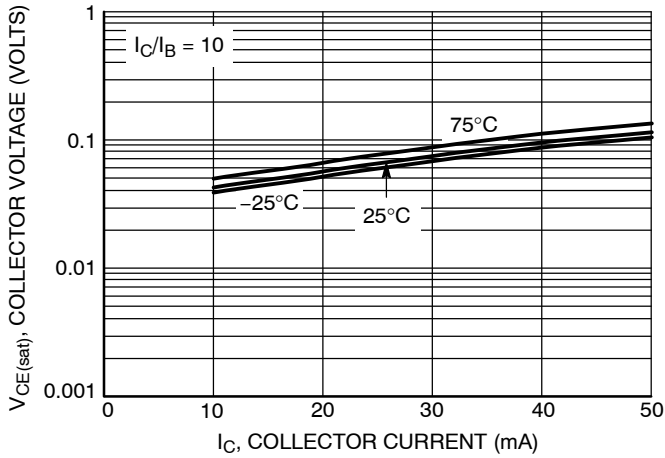


Figure 22.  $V_{CE(sat)}$  versus  $I_C$

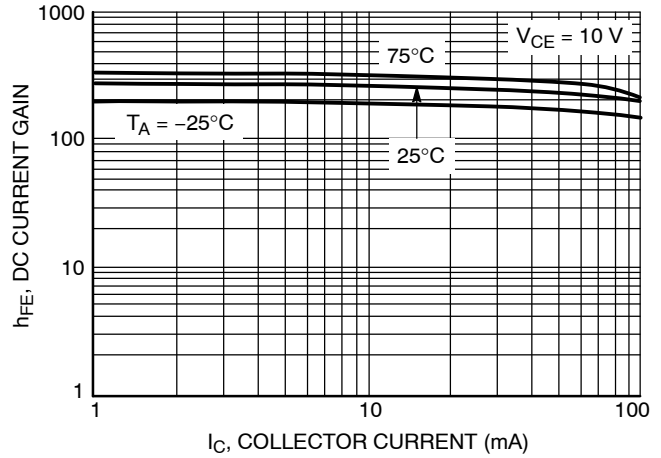


Figure 23. DC Current Gain

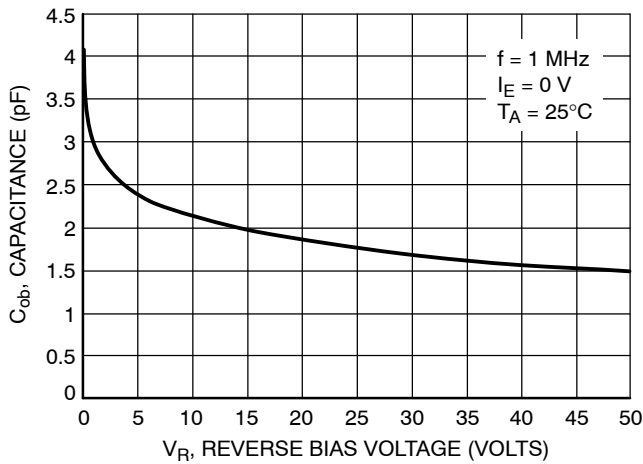


Figure 24. Output Capacitance

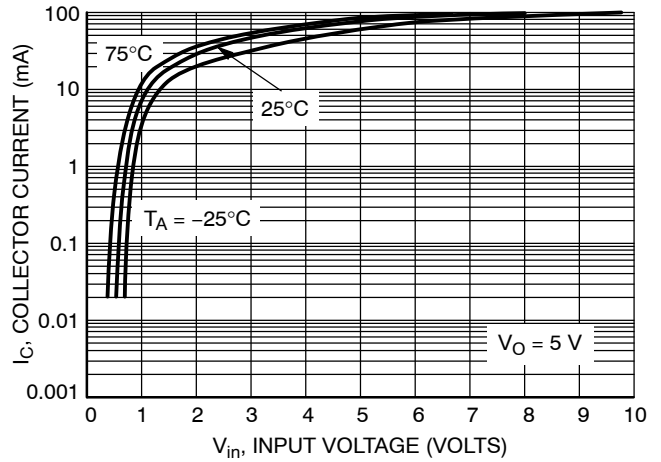


Figure 25. Output Current versus Input Voltage

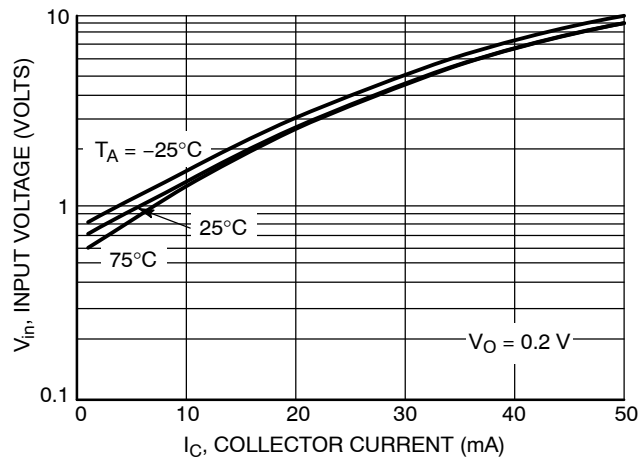


Figure 26. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5216DW1T1G

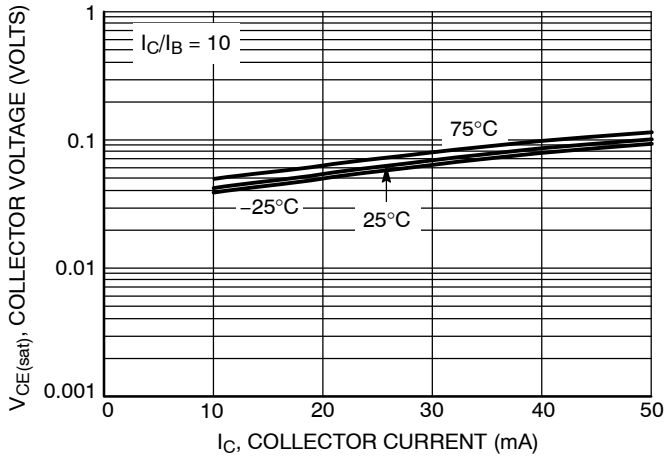


Figure 27.  $V_{CE(sat)}$  versus  $I_C$

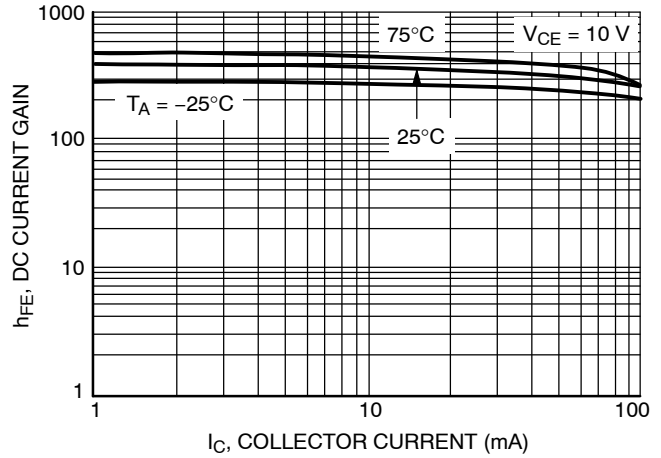


Figure 28. DC Current Gain

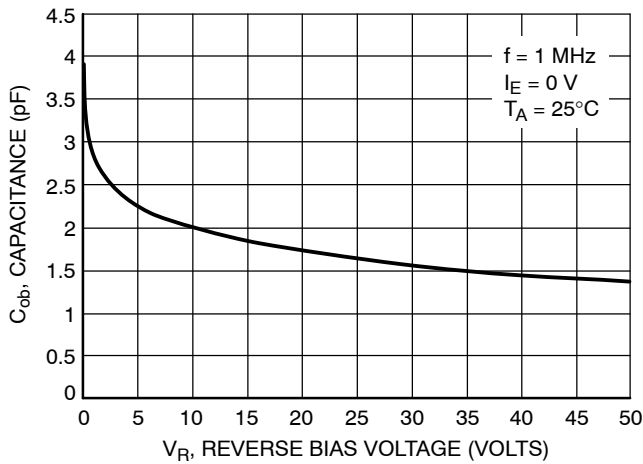


Figure 29. Output Capacitance

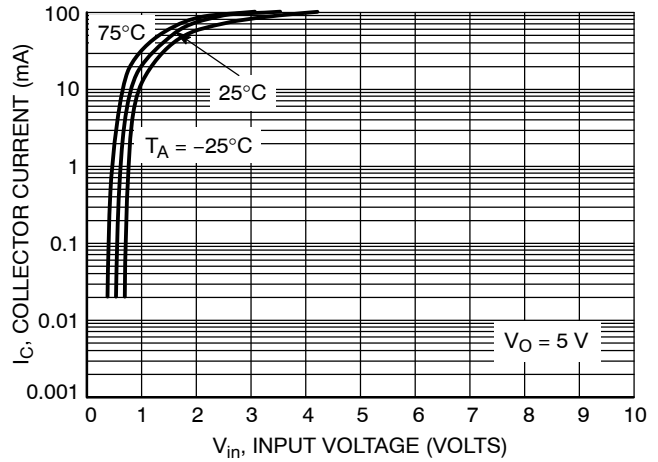


Figure 30. Output Current versus Input Voltage

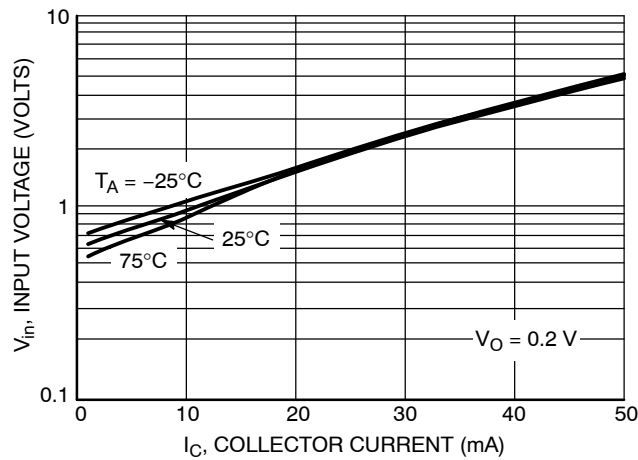


Figure 31. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5230DW1T1G

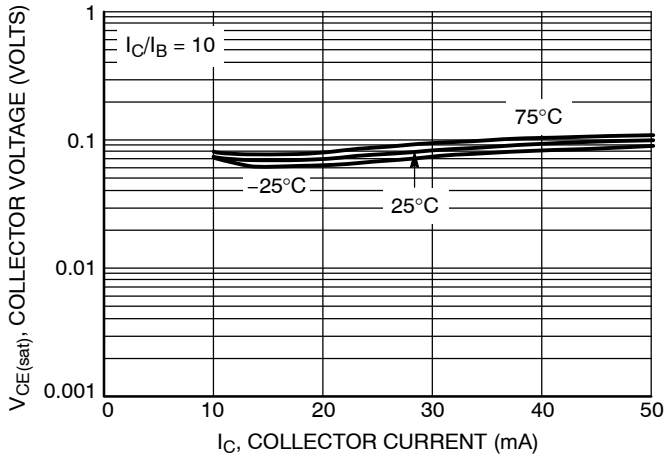


Figure 32.  $V_{CE(sat)}$  versus  $I_C$

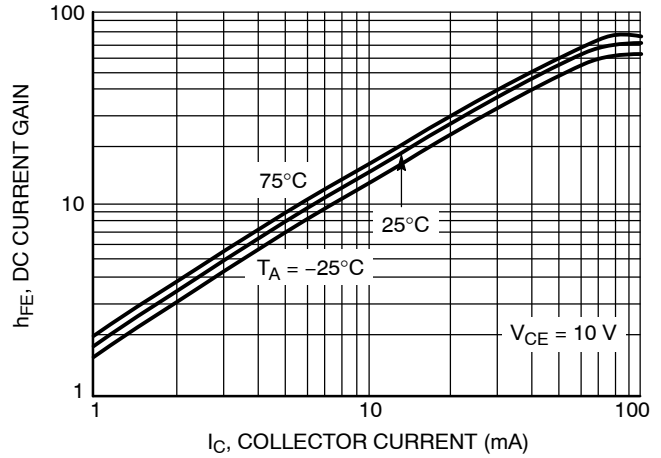


Figure 33. DC Current Gain

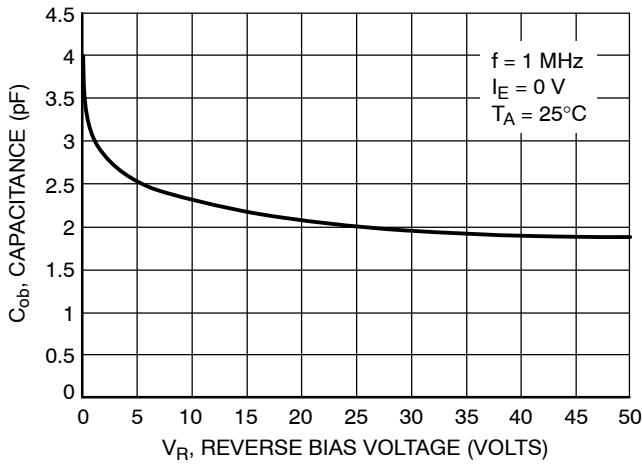


Figure 34. Output Capacitance

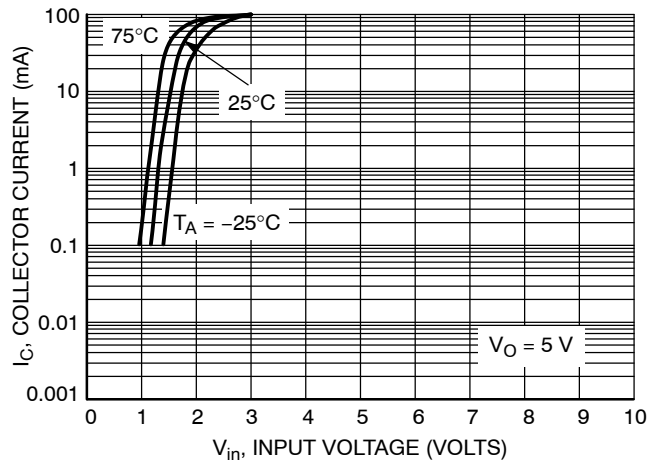


Figure 35. Output Current versus Input Voltage

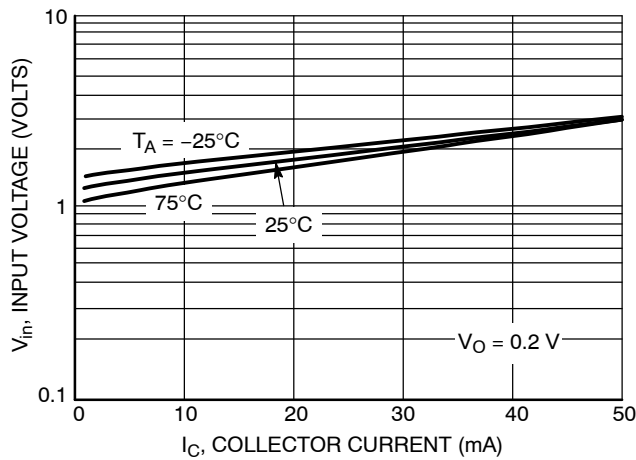


Figure 36. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5231DW1T1G

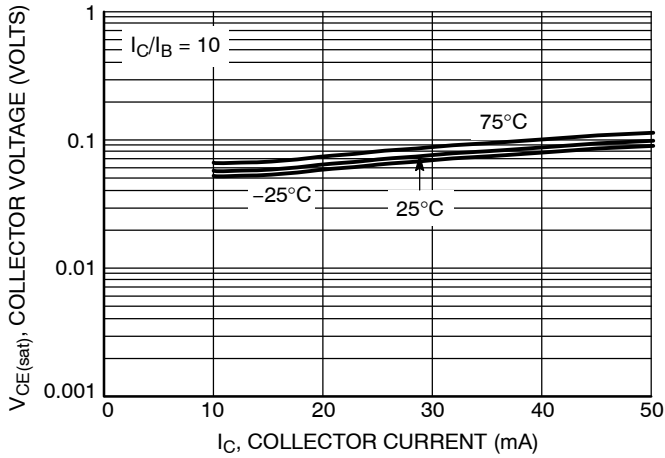


Figure 37.  $V_{CE(sat)}$  versus  $I_C$

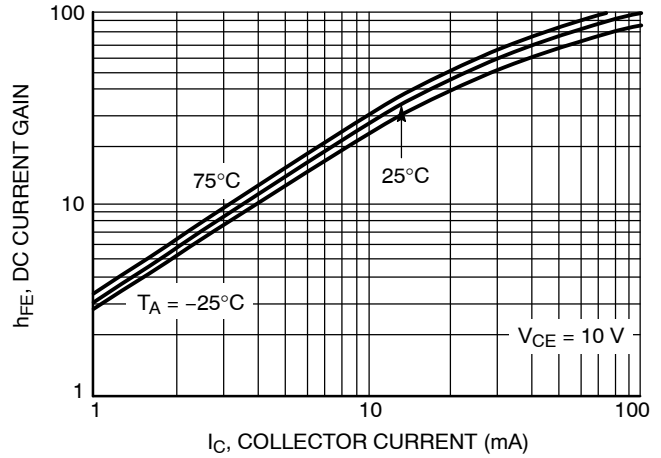


Figure 38. DC Current Gain

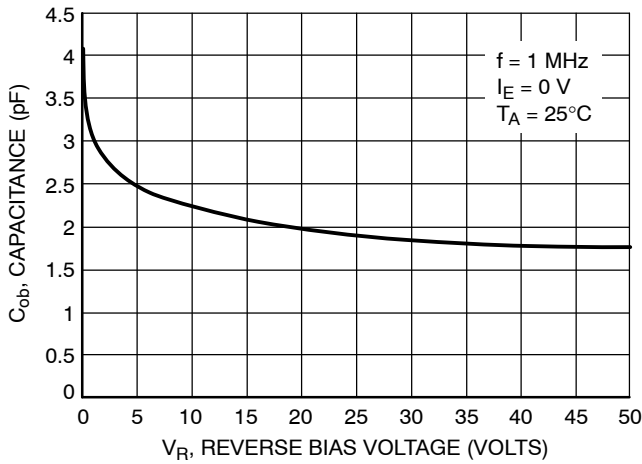


Figure 39. Output Capacitance

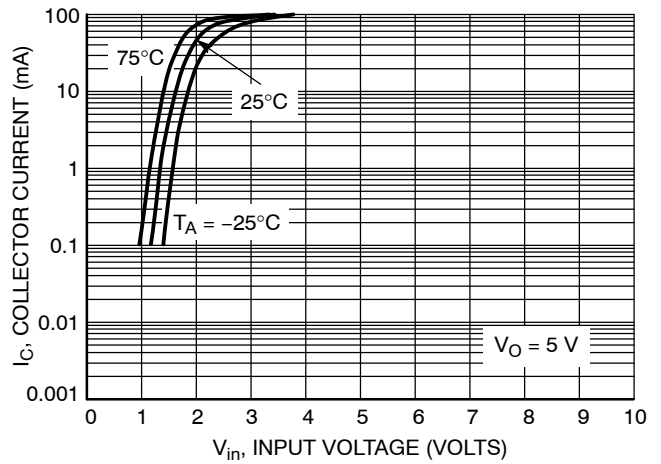


Figure 40. Output Current versus Input Voltage

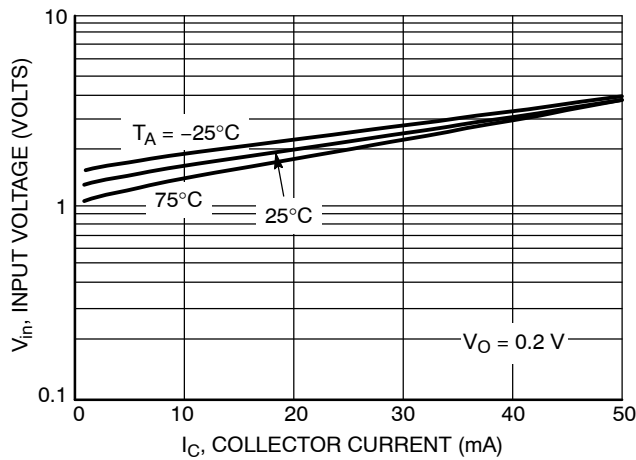


Figure 41. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5232DW1T1G

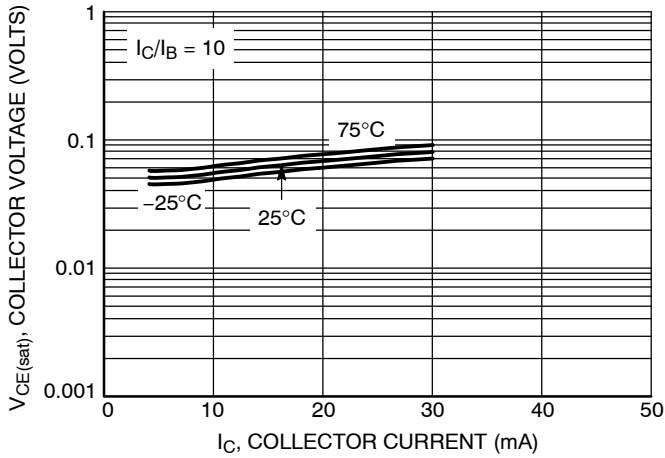


Figure 42.  $V_{CE(sat)}$  versus  $I_C$

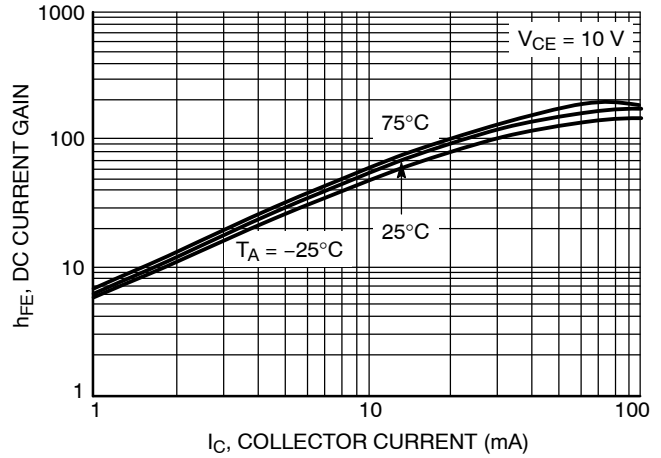


Figure 43. DC Current Gain

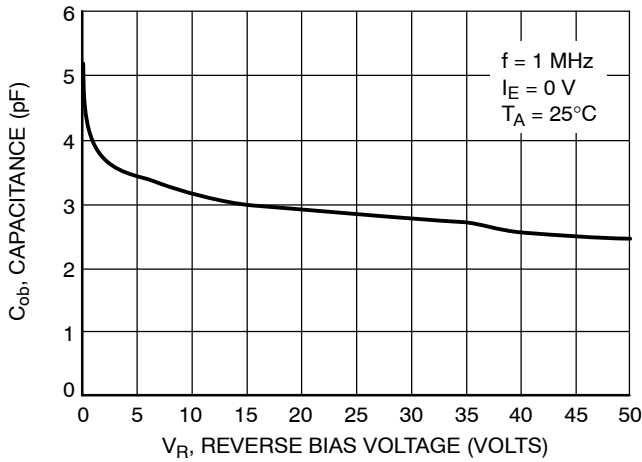


Figure 44. Output Capacitance

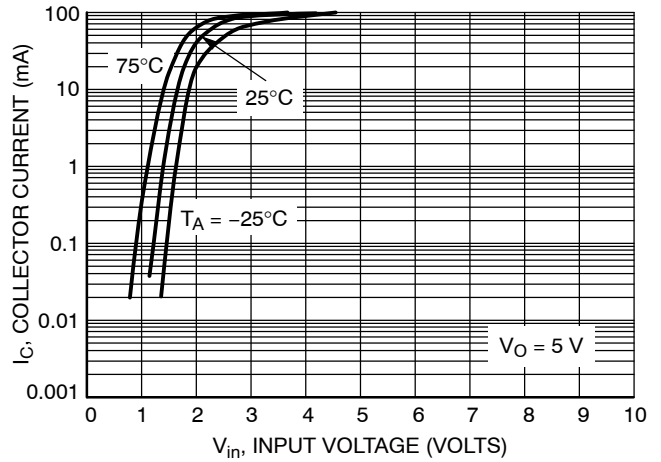


Figure 45. Output Current versus Input Voltage

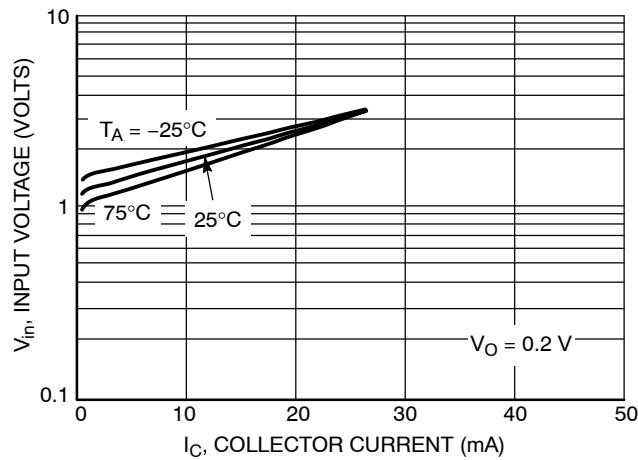


Figure 46. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5233DW1T1G

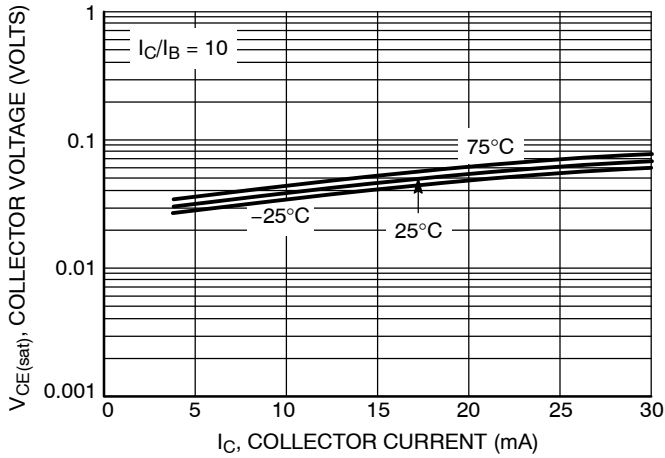


Figure 47.  $V_{CE(sat)}$  versus  $I_C$

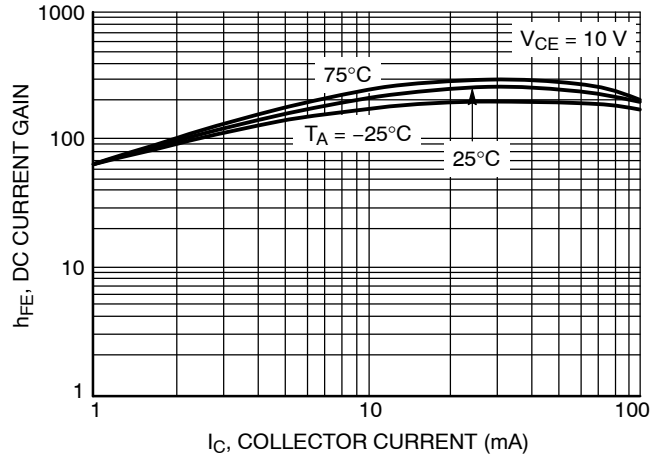


Figure 48. DC Current Gain

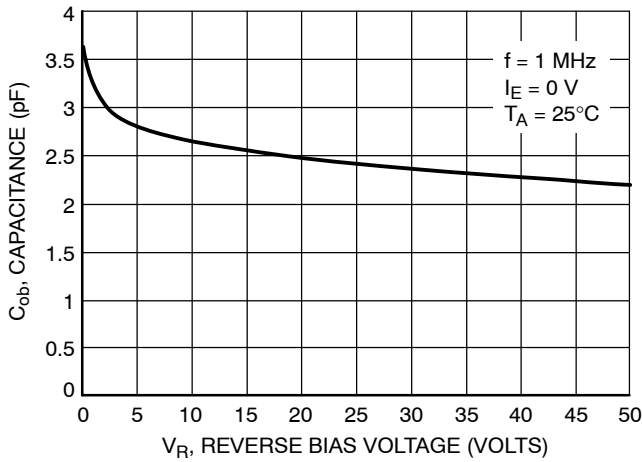


Figure 49. Output Capacitance

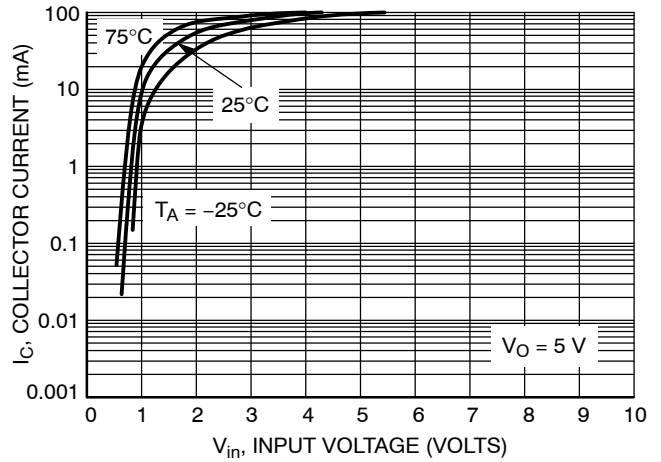


Figure 50. Output Current versus Input Voltage

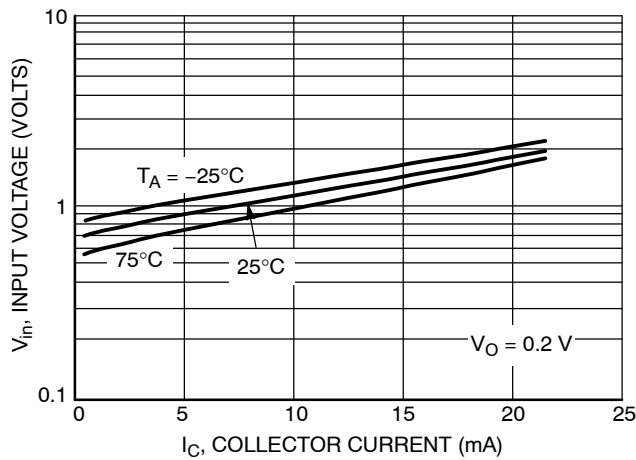


Figure 51. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5234DW1T1G

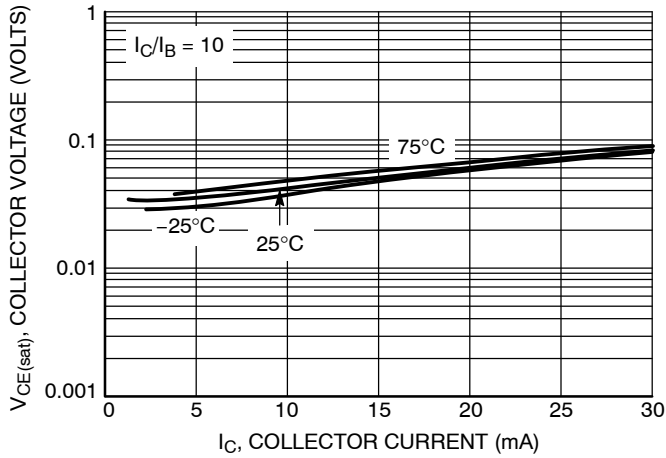


Figure 52.  $V_{CE(sat)}$  versus  $I_C$

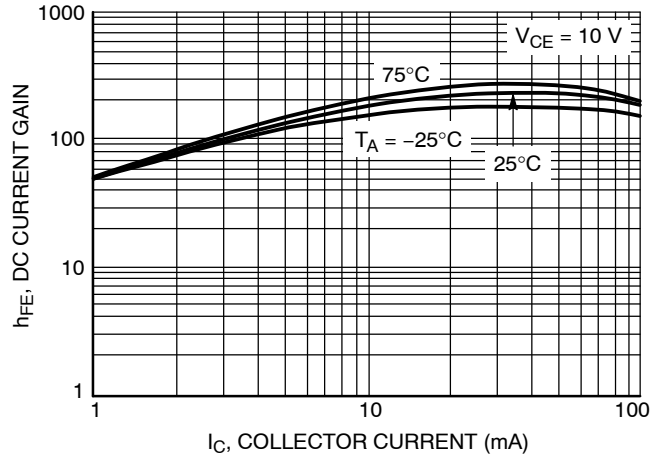


Figure 53. DC Current Gain



Figure 54. Output Capacitance

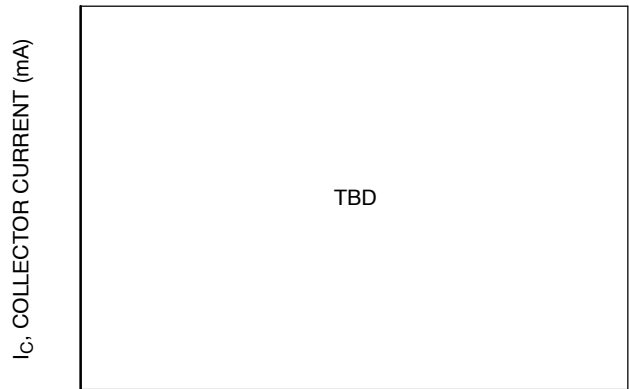


Figure 55. Output Current versus Input Voltage

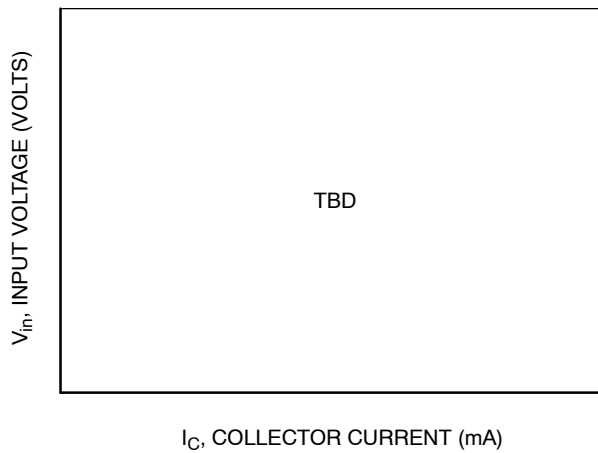


Figure 56. Input Voltage versus Output Current



# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5235DW1T1G

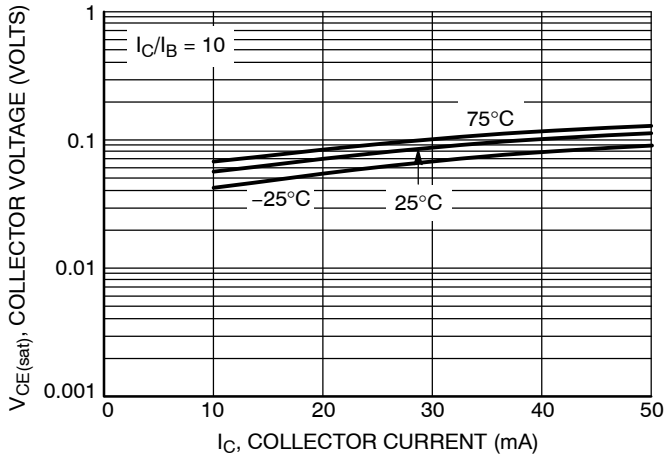


Figure 57.  $V_{CE(sat)}$  versus  $I_C$

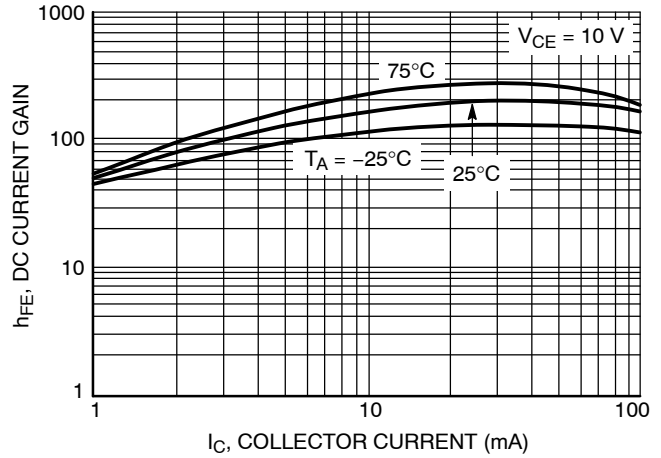


Figure 58. DC Current Gain

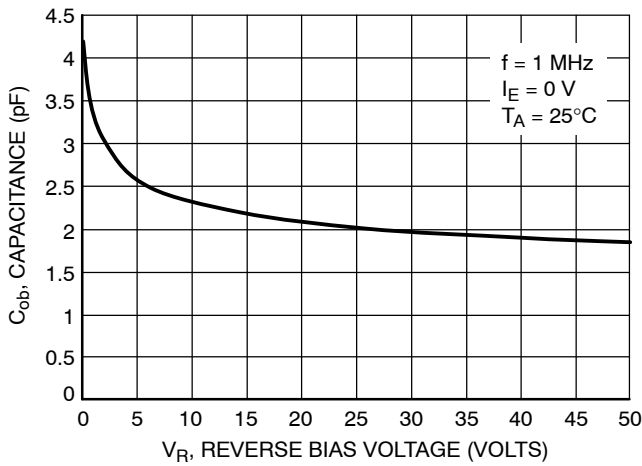


Figure 59. Output Capacitance

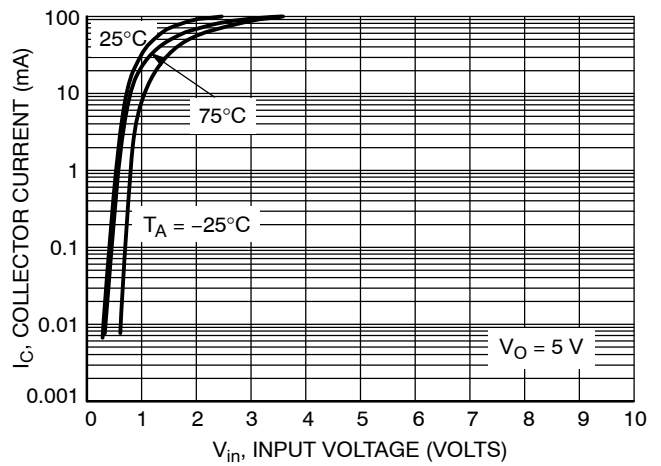


Figure 60. Output Current versus Input Voltage

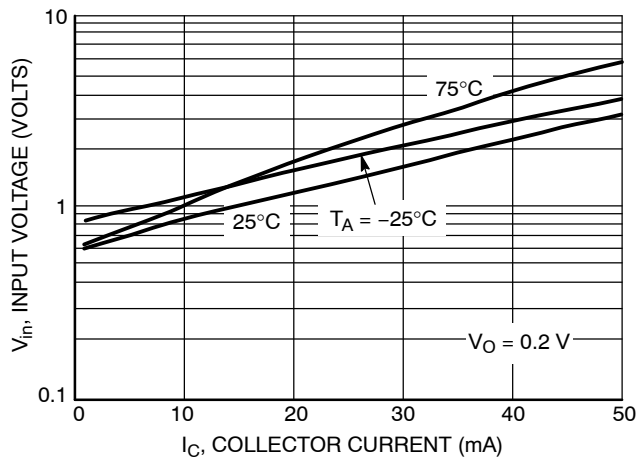


Figure 61. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5236DW1T1G

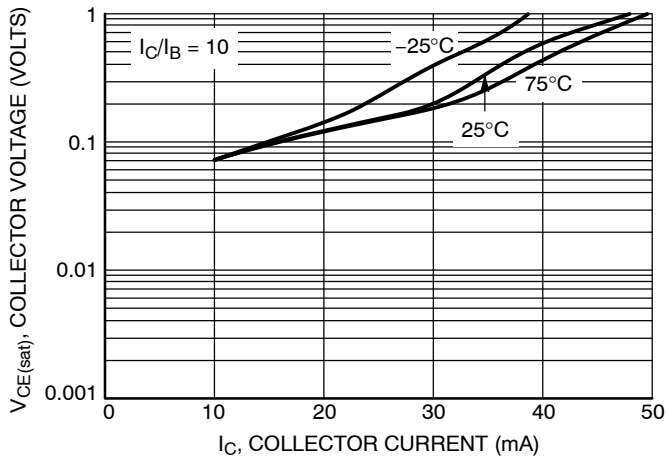


Figure 62.  $V_{CE(sat)}$  versus  $I_C$

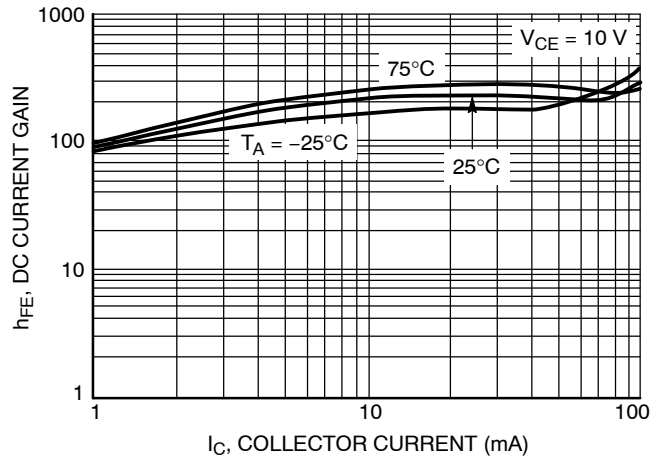


Figure 63. DC Current Gain

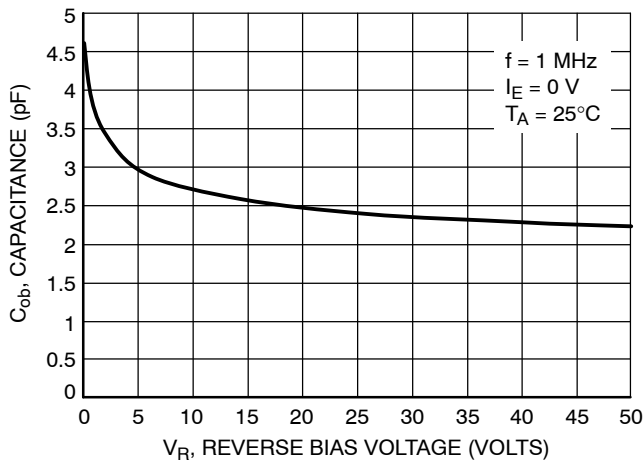


Figure 64. Output Capacitance

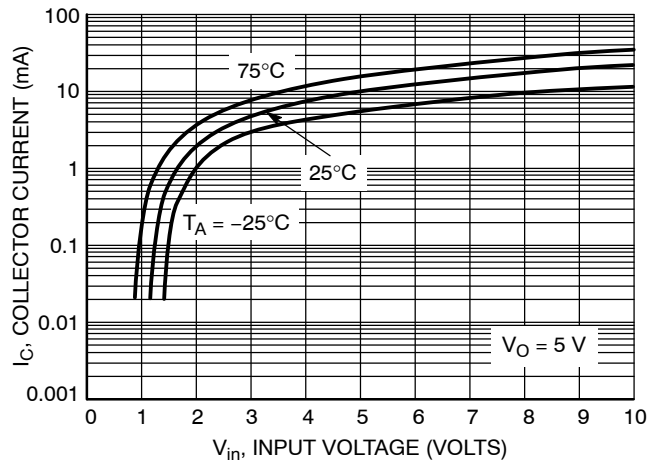


Figure 65. Output Current versus Input Voltage

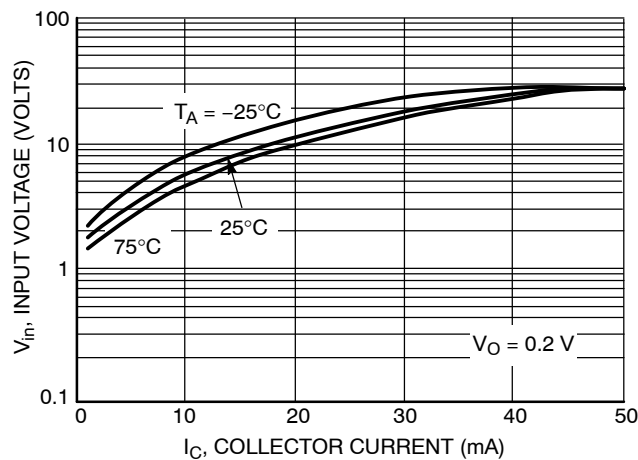


Figure 66. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## TYPICAL ELECTRICAL CHARACTERISTICS — MUN5237DW1T1G

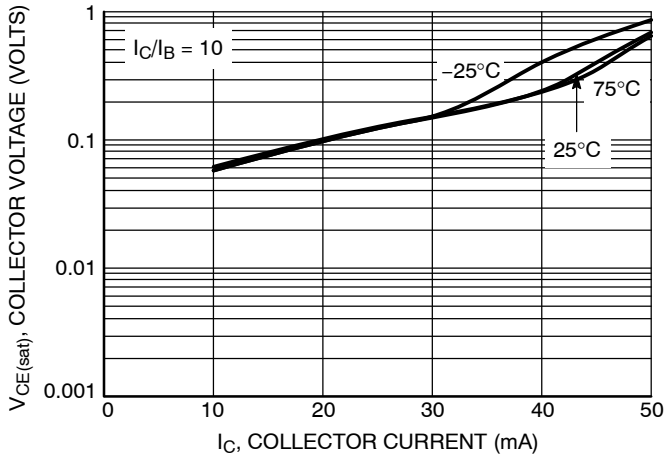


Figure 67.  $V_{CE(sat)}$  versus  $I_C$

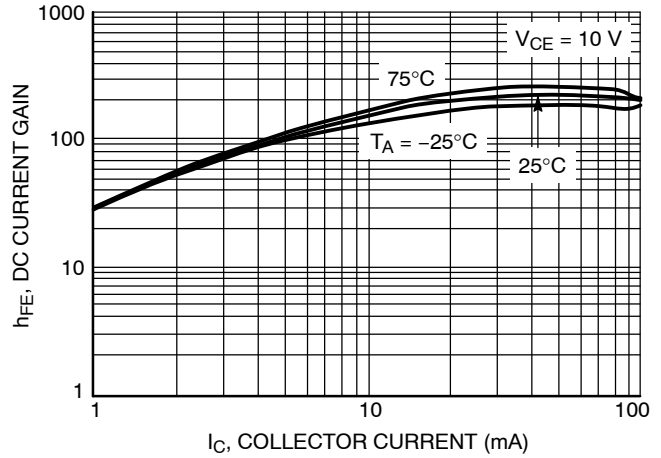


Figure 68. DC Current Gain

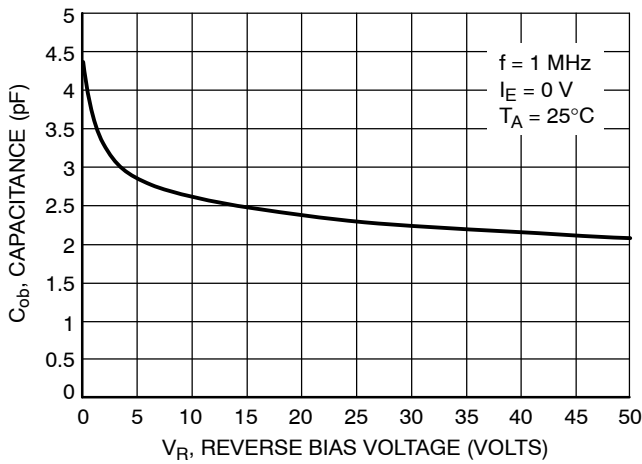


Figure 69. Output Capacitance

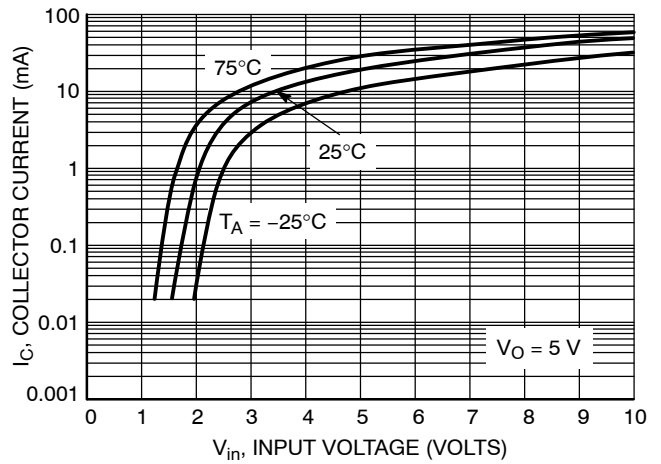


Figure 70. Output Current versus Input Voltage


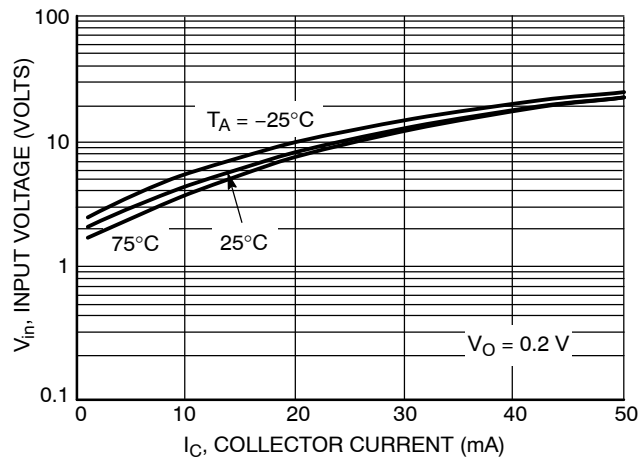


Figure 71. Input Voltage versus Output Current

# MUN5211DW1T1G Series

## PACKAGE DIMENSIONS

SC-88/SC70-6/SOT-363  
CASE 419B-02  
ISSUE W

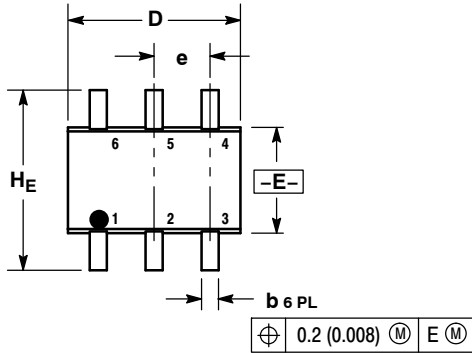

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 419B-01 OBSOLETE, NEW STANDARD 419B-02.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.95	1.10	0.031	0.037	0.043
A1	0.00	0.05	0.10	0.000	0.002	0.004
A3	0.20 REF			0.008 REF		
b	0.10	0.21	0.30	0.004	0.008	0.012
C	0.10	0.14	0.25	0.004	0.005	0.010
D	1.80	2.00	2.20	0.070	0.078	0.086
E	1.15	1.25	1.35	0.045	0.049	0.053
e	0.65 BSC			0.026 BSC		
L	0.10	0.20	0.30	0.004	0.008	0.012
HE	2.00	2.10	2.20	0.078	0.082	0.086

STYLE 1:

- PIN 1: EMITTER 2  
2: BASE 2  
3: COLLECTOR 1  
4: EMITTER 1  
5: BASE 1  
6: COLLECTOR 2

### SOLDERING FOOTPRINT\*

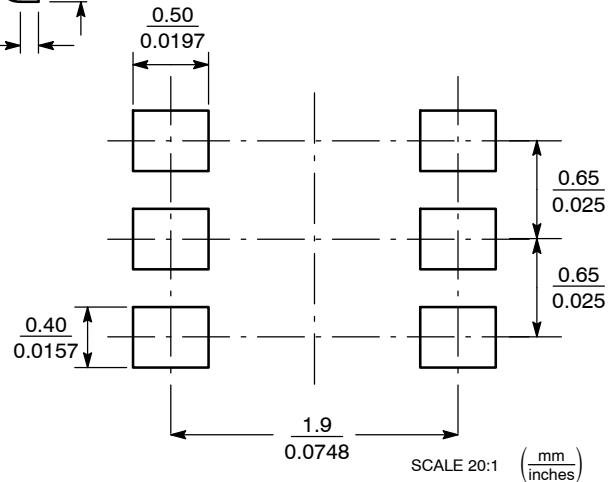

### SC-88/SC70-6/SOT-363

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.