

## 55110 Flange Mount Hall Effect Sensor with L.E.D.



### Features

- Magnetically operated position sensor
- Digital or Latching types available
- Integral LED
- Medium or high sensitivities
- 3 wire (voltage output)
- Reverse/Over voltage protection
- Built in temperature compensation


### Benefits

- High switching speed up to 10kHz
- Long life; up to 20 billion operations
- Visual indication of operation
- Unaffected by harsh environments
- Operates in static or dynamic magnetic field
- Customer selection of cable length and connector type

### Applications


- Position and limit sensing
- RPM measurement
- Flow metering
- Commutation of brushless dc motors
- Angle sensing
- Magnetic encoders

## DIMENSIONS (in) mm

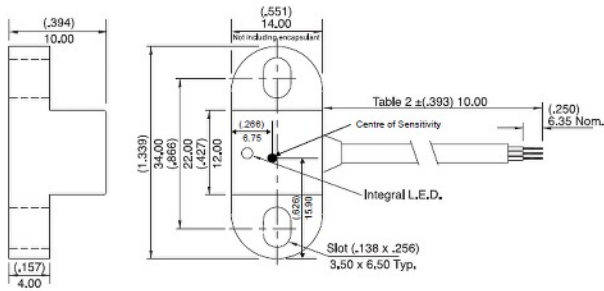

General Tol.: ± (.010) 0.25

## BLOCK DIAGRAMS

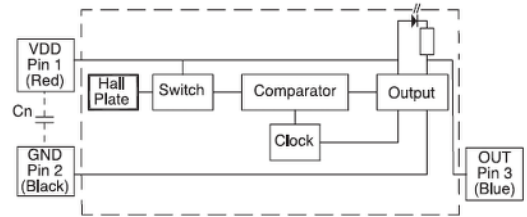

Note: Add capacitor Cn as shown, close for the sensors for transient suppression if required.

## CUSTOMER OPTIONS - Specifications

Hall Type			Digital Switch or Digital Latch
Hall Type			3 Wire (Voltage output)
Supply Voltage (Note 1)	Absolute Rating	Vdc	-15 to +28
	Operate	Vdc	+3.8 to +24
	Overvoltage Protection	Vdc - max.	32
Output High Voltage		Vdc - min.	Vdd-2 @ 0.1mA (sinking output with internal pull-up)
Output Low voltage		Vdc - max.	0.4 @ 20mA
Output Current (continuously on)		mA - max.	20
Switching Speed		Khz - max.	10
Temperature	Operating Storage	°C	-40 to +85
		°C	-65 to +85

Note 1: As long as Tj (Junction Temperature) max. Is not exceeded.

## CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

Select Hall Option	Hall Type	Sensitivity Gauss (typ.)	Activate - d (in) mm
3M	3 Wire Switch	130	(.492) 12.5
3H	3 Wire Switch	59	(.709) 18.0
3L	3 Wire Latch	86	(.394) 10.0

SELECT OPTION	CABLE LENGTH (in) mm
01	(3.94) 100
02	(11.81) 300
03	(19.69) 500
04	(29.53) 750
05	(39.37) 1000

SELECT OPTION	DESCRIPTION (2 WIRE VERSION ILLUSTRATED)
A	Tinned Leads
D	AMP MTE 2.54mm pitch
E	JST XHP 2.5mm pitch

## ORDERING INFORMATION



Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
 Hamlin Europe Tel: +44 (0)1603 257700 • Fax: +44 (0)1603 257702 • Email: sales.uk@hamlin.com  
 Hamlin China Tel: +86 (0) 512 69365 800 • Fax: +86 (0) 512 69365 811 • Email: sales.cn@hamlin.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.