

## UUX

Chip Type, Wide Temperature Range




For SMD



Anti-Solvent  
Feature  
(Through  
100V only)

- Chip type, operating over wide temperature range of to -55 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.




## Specifications

| Item                          | Performance Characteristics                                                                                                                                                                                                             |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|--------------------|---------------------------------------------------|----------------------------------------------|------|------|-----|
| Category Temperature Range    | -55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V)                                                                                                                                                                                |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
| Rated Voltage Range           | 6.3 to 400V                                                                                                                                                                                                                             |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
| Rated Capacitance Range       | 1 to 1000μF                                                                                                                                                                                                                             |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
| Leakage Current               | Rated voltage (V)                                                                                                                                                                                                                       | 6.3 to 100                                                                                           |      |      |      |      |      |      |                    | 160 to 400                                        |                                              |      |      |     |
|                               | Leakage Current                                                                                                                                                                                                                         | After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV (μA). |      |      |      |      |      |      |                    |                                                   | I = 0.04CV+100 (μA) max.(1 minute's at 20°C) |      |      |     |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                   |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
|                               | Rated voltage (V)                                                                                                                                                                                                                       | 6.3                                                                                                  | 10   | 16   | 25   | 35   | 50   | 63   | 100                | 160                                               | 200                                          | 250  | 400  |     |
|                               | tan δ (MAX.)                                                                                                                                                                                                                            | 0.22                                                                                                 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 | 0.10 | 0.08               | 0.20                                              | 0.20                                         | 0.20 | 0.25 |     |
| Stability at Low Temperature  | Measurement frequency: 120Hz                                                                                                                                                                                                            |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
|                               | Rated voltage (V)                                                                                                                                                                                                                       |                                                                                                      | 6.3  | 10   | 16   | 25   | 35   | 50   | 63                 | 100                                               | 160                                          | 200  | 250  | 400 |
|                               | Impedance ratio<br>ZT / Z20 (MAX.)                                                                                                                                                                                                      | Z-55°C / Z+20°C                                                                                      | 4    | 4    | 3    | 3    | 3    | 2    | 3                  | 4                                                 | —                                            | —    | —    | —   |
|                               |                                                                                                                                                                                                                                         | Z-40°C / Z+20°C                                                                                      | —    | —    | —    | —    | —    | —    | —                  | —                                                 | 6                                            | 6    | 6    | 10  |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (160 to 400V : 3000hours) at 105°C.                                                          |                                                                                                      |      |      |      |      |      |      | Capacitance change | Within ±20% of the initial capacitance value      |                                              |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | tan δ              | 200% or less than the initial specified value     |                                              |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | Leakage current    | Less than or equal to the initial specified value |                                              |      |      |     |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |
| Resistance to soldering heat  | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.               |                                                                                                      |      |      |      |      |      |      | Capacitance change | Within ±10% of the initial capacitance value      |                                              |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | tan δ              | Less than or equal to the initial specified value |                                              |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | Leakage current    | Less than or equal to the initial specified value |                                              |      |      |     |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |                                                                                                      |      |      |      |      |      |      |                    |                                                   |                                              |      |      |     |



## Chip Type

Type numbering system (Example : 10V 100μF)

(φ6.3, φ8 × 6.2)

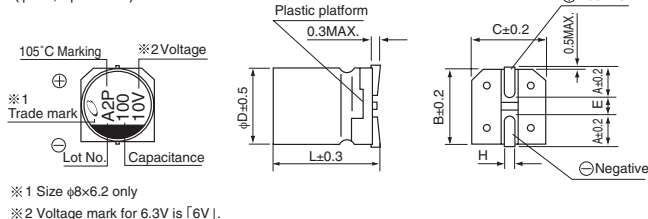

(φ8 × 10, φ10)

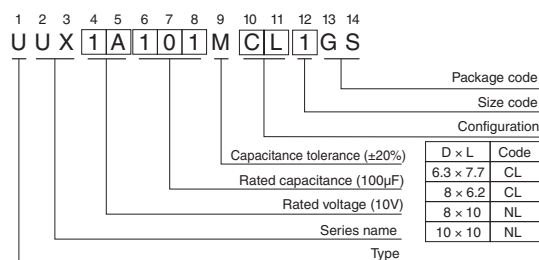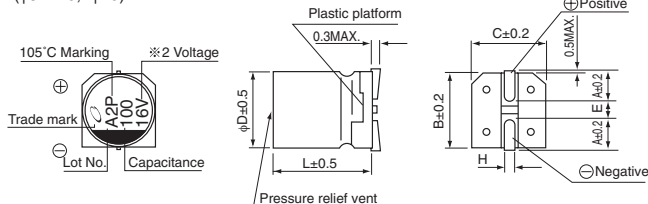

|        | (mm)       |            |            |            |
|--------|------------|------------|------------|------------|
| φD × L | 6.3 × 7.7  | 8 × 6.2    | 8 × 10     | 10 × 10    |
| A      | 2.4        | 3.3        | 2.9        | 3.2        |
| B      | 6.6        | 8.3        | 8.3        | 10.3       |
| C      | 6.6        | 8.3        | 8.3        | 10.3       |
| E      | 2.2        | 2.3        | 3.1        | 4.5        |
| L      | 7.7        | 6.2        | 10         | 10         |
| H      | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 |

● Dimension table in next page.

UUX

## ■ Dimensions

| Cap.<br>(μF) | V    | 6.3     |          | 10     |          | 16      |          | 25      |          | 35      |          | 50      |          | 63     |          | 100                      |                 |
|--------------|------|---------|----------|--------|----------|---------|----------|---------|----------|---------|----------|---------|----------|--------|----------|--------------------------|-----------------|
|              | Code | 0J      |          | 1A     |          | 1C      |          | 1E      |          | 1V      |          | 1H      |          | 1J     |          | 2A                       |                 |
| 4.7          | 4R7  |         |          |        |          |         |          |         |          |         |          |         |          |        |          | 8×6.2                    | 42              |
| 10           | 100  |         |          |        |          |         |          |         |          |         |          |         |          | 8×6.2  | 51       | 8×10                     | 75              |
| 22           | 220  |         |          |        |          |         |          |         |          |         |          | ○ 8×6.2 | 67(64)   | 8×10   | 108      | ■10×10                   | 150(121)        |
| 33           | 330  |         |          |        |          |         |          |         |          | ○ 8×6.2 | 76(75)   | 8×10    | 133      | ■10×10 | 185(179) | 10×10                    | 180             |
| 47           | 470  |         |          |        |          |         |          | ○ 8×6.2 | 79(78)   | 8×10    | 124      | ■10×10  | 180(167) | 10×10  | 220      | 10×10                    | 230             |
| 100          | 101  |         |          | 8×6.2  | 90       | ○ 8×10  | 148(111) | 8×10    | 181      | ■ 10×10 | 304(283) | 10×10   | 310      | 10×10  | 320      |                          |                 |
| 220          | 221  | ○ 8×10  | 161(121) | 8×10   | 173      | ■ 10×10 | 330(307) | ■10×10  | 351(283) | 10×10   | 450      |         |          |        |          |                          |                 |
| 330          | 331  | 8×10    | 288      | ■10×10 | 318(296) | ■ 10×10 | 441(410) | 10×10   | 372      |         |          |         |          |        |          |                          |                 |
| 470          | 471  | ■ 10×10 | 340(316) | ■10×10 | 351(326) | 10×10   | 489      |         |          |         |          |         |          |        |          |                          |                 |
| 680          | 681  | 10×10   | 408      | 10×10  | 392      |         |          |         |          |         |          |         |          |        |          |                          |                 |
| 1000         | 102  | 10×10   | 495      |        |          |         |          |         |          |         |          |         |          |        |          | Case size<br>φD × L (mm) | Rated<br>ripple |

| Cap.<br>(μF) | V    | 160   |    | 200   |    | 250   |    | 400   |    |
|--------------|------|-------|----|-------|----|-------|----|-------|----|
|              | Code | 2C    |    | 2D    |    | 2E    |    | 2G    |    |
| 1            | 010  |       |    |       |    |       |    | 8×10  | 25 |
| 1.8          | 1R8  |       |    |       |    |       |    | 8×10  | 26 |
| 2.2          | 2R2  |       |    |       |    |       |    | 8×10  | 27 |
| 3.3          | 3R3  |       |    | 8×10  | 31 | 8×10  | 31 | 10×10 | 38 |
| 3.9          | 3R9  |       |    | 8×10  | 34 | 8×10  | 34 | 10×10 | 39 |
| 4.7          | 4R7  |       |    | 8×10  | 37 | 8×10  | 37 | 10×10 | 40 |
| 6.8          | 6R8  |       |    | 8×10  | 44 | 8×10  | 44 |       |    |
| 10           | 100  | 8×10  | 57 | 10×10 | 64 | 10×10 | 64 |       |    |
| 18           | 180  | 10×10 | 64 |       |    |       |    |       |    |

Rated ripple current (mArms) at 105°C 120Hz

Size φ6.3 × 7.7 is available for capacitors marked. "○" / Size φ8 × 10 is available for capacitors marked. "■"

※ In this case, [6] will be put at 12th digit of type numbering system.

## ● Frequency coefficient of rated ripple current

| Cap.(μF)    | Frequency | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|-------------|-----------|-------|--------|--------|-------|----------------|
| 1 to 47     |           | 0.80  | 1.00   | 1.15   | 1.40  | 1.67           |
| 100 to 1000 |           | 0.85  | 1.00   | 1.08   | 1.20  | 1.30           |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.176) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.