SS Series

Features

- 85℃, 1,000 hours assured
- Standard micro miniature size with 5mm height
- RoHS Compliance

Sleeve & Marking Color: Black & White

Specifications

Items	Performance
Category Temperature Range	-40℃ ~ +85℃
Capacitance Tolerance	±20% (at 120Hz, 20℃)
Leakage Current (at 20℃)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V
Tanδ (at 120Hz, 20℃)	

Rated Voltage	4	6.3	10	16	25	35	50
Tanδ (max)	0.35	0.25	0.20	0.17	0.15	0.13	0.10

Low Temperature Characteristics (at 120Hz)

Impedance ratio shall not exceed the values given in the table below.

Rated Voltage		4	6.3	10	16	25	35	50
Impedance Ratio	Z(-25℃)/Z(+20℃)	7	6	4	3	2	2	2
	Z(-40℃)/Z(+20℃)	15	12	8	6	4	4	4

Endurance

Test Time	1,000 Hrs
Capacitance Change	Within ±30% of initial value 4 ~ 6.3V; Within ±25% of initial value 10 ~ 50V
Tanδ	Less than 200% of specified value
Leakage Current	Within specified value

* The above Specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied with rated ripple current for 1,000 hours at 85℃.

Shelf Life Test: Test time: 500 hours; other items are the same as those for the Endurance.

Ripple Current & Frequency Multipliers

Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k up
Under 47	0.75	1.00	1.15	1.34	1.50
100 to 330	0.80	1.00	1.08	1.20	1.30

Diagram of Dimensions

1. φD = 3mm

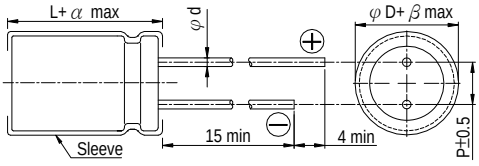

2. φD≧4mm

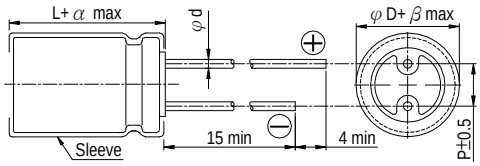

Unit: mm

Lead Spacing and Diameter

φD	3	4	5	6.3	8
P	1.0	1.5	2.0	2.5	2.5
φd	0.4	0.45			
α	1.0				
β	0.5				

Dimension & Permissible Ripple Current

Dimension: φD × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

V. DC / μF	Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA
0.1	0R1													3×5	1
0.22	R22													3×5	2
0.33	R33													3×5	2.8
0.47	R47													3×5	4
1	010													4×5(3×5)	8.7(7)
2.2	2R2											4×5(3×5)	8.7(7)	4×5(3×5)	10(9)
3.3	3R3									4×5(3×5)	11(10)	4×5	12	4×5	13
4.7	4R7							4×5(3×5)	14(11)	4×5	14	4×5	17	5×5	20
10	100					4×5(3×5)	17(13)	4×5	23	5×5	27	5×5	27	6.3×5	31
22	220			4×5(3×5)	22(18)	5×5	30	5×5	35	6.3×5	42	6.3×5	46	6.3×5	46
33	330	4×5	27	4×5	34	5×5	41	5×5	49	6.3×5	52	6.3×5	52	8×5	66
47	470	4×5	34	5×5	37	6.3×5	50	6.3×5	58	6.3×5	58	8×5	72	8×5	80
100	101	5×5	55	6.3×5	62	6.3×5	70	8×5	99	8×5	99				
220	221	6.3×5	74	8×5	104	8×5	120								
330	331	8×5	105	8×5	120										

Part Numbering System

SS series	330μF	±20%	6.3V	Bulk Package	Gas Type	8φ×5L	Pb-free and PET coating case
SS-	**331**	**M**	**0J**	**BK**	**-**	**0805**	
Series	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Coating Type

Note: For more details, please refer to “Part Numbering System (Radial Type)” on page 10.

All product specifications in the catalog are subject to change without notice. (CAT. 2013E1)

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.