

|     |         |              |     |                                                                                   |          |      |     |  |  |
|-----|---------|--------------|-----|-----------------------------------------------------------------------------------|----------|------|-----|--|--|
|     |         |              |     |                                                                                   |          |      |     |  |  |
|     |         |              |     |                                                                                   |          |      |     |  |  |
|     |         |              |     |                                                                                   |          |      |     |  |  |
|     |         |              |     |                                                                                   |          |      |     |  |  |
| --- | -----   | ---          | --- | F. CHANGED TOLERANCE<br>E. REMOVED THE ".5"                                       | -----    | ---  | --- |  |  |
| --- | -----   | ---          | --- | D. RE-ORDERED CHART (WAS SORTED BY "H")<br>C. CHANGED DIMENSION TO REF. DIMENSION | -----    | ---  | --- |  |  |
| I   | 9-18-06 | JCST         | JKG | B. CHANGED NOTES<br>A. ADDED NEW SIZES                                            | 38539-04 | JKG  | JKG |  |  |
| R   | 11-2-02 | JHNU<br>JCST | JKG | RELEASED TO PRODUCTION                                                            | 38539-04 | HIW  | HIW |  |  |
| REV | DATE    | BY           | CHK | DESCRIPTION                                                                       | ECN - R  | CUST | SUP |  |  |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



| PROFILE DIMENSION               |                |                |              |                |
|---------------------------------|----------------|----------------|--------------|----------------|
| NOMINAL<br>DUCT SIZE<br>(W X H) | B<br>REF       | H<br>REF       | T            | T<br>TOL.      |
| 25 X 25                         | 24.6<br>(.97)  | 20.5<br>(.81)  | 1.4<br>(.06) | ±.26<br>(.010) |
| 25 X 37                         | 24.6<br>(.97)  | 33.0<br>(1.30) | 1.4<br>(.06) | ±.26<br>(.010) |
| 25 X 50                         | 24.6<br>(.97)  | 45.5<br>(1.79) | 2.0<br>(.08) | ±.30<br>(.012) |
| 25 X 75                         | 24.6<br>(.97)  | 70.5<br>(2.78) | 1.7<br>(.07) | ±.30<br>(.012) |
|                                 |                |                |              |                |
| 37 X 37                         | 37.1<br>(1.46) | 33.0<br>(1.30) | 1.8<br>(.07) | ±.30<br>(.012) |
| 37 X 50                         | 37.1<br>(1.46) | 45.5<br>(1.79) | 2.0<br>(.08) | ±.30<br>(.012) |
| 37 X 75                         | 37.1<br>(1.46) | 70.5<br>(2.78) | 2.0<br>(.08) | ±.36<br>(.014) |
|                                 |                |                |              |                |
| 50 X 50                         | 49.6<br>(1.95) | 45.5<br>(1.79) | 2.0<br>(.08) | ±.30<br>(.012) |
| 50 X 75                         | 49.6<br>(1.95) | 70.5<br>(2.78) | 2.0<br>(.08) | ±.36<br>(.014) |
| 50 X 100                        | 49.6<br>(1.95) | 95.5<br>(3.76) | 2.2<br>(.09) | ±.40<br>(.016) |
|                                 |                |                |              |                |
| 75 X 75                         | 74.6<br>(2.94) | 70.5<br>(2.78) | 2.0<br>(.08) | ±.40<br>(.016) |
|                                 |                |                |              |                |
| 100 X 50                        | 99.6<br>(3.92) | 45.5<br>(1.79) | 2.0<br>(.08) | ±.40<br>(.016) |
| 100 X 75                        | 98.6<br>(3.92) | 70.5<br>(2.78) | 2.5<br>(.10) | ±.50<br>(.020) |
| 100 X 100                       | 99.6<br>(3.92) | 95.5<br>(3.76) | 2.5<br>(.10) | ±.50<br>(.020) |



| MOUNTING HOLE            |               |
|--------------------------|---------------|
| NOMINAL<br>DUCT<br>WIDTH | K             |
|                          | ±.5 (.02)     |
| 25                       | ----          |
| 37                       | ----          |
| 50                       | ----          |
| 75                       | 25.0<br>(.98) |
| 100                      | 25.0<br>(.98) |





| SLOT DIMENSION            |                |                 |
|---------------------------|----------------|-----------------|
| NOMINAL<br>DUCT<br>HEIGHT | D              | R               |
|                           | ±.8 (.03)      | ±.75 (.02)      |
| 25                        | 13.6<br>(.54)  | -----           |
| 37                        | 24.7<br>(.97)  | -----           |
| 50                        | 34.8<br>(1.37) | -----           |
| 75                        | 57.6<br>(2.27) | 26.26<br>(1.03) |
| 100                       | 81.0<br>(3.19) | 38.0<br>(1.50)  |

ALL DIMENSIONS ARE METRIC (INCHES)

|     |         |              |     |                                |          |     |      |     |  |                                                                                                              |                                                                    |  |
|-----|---------|--------------|-----|--------------------------------|----------|-----|------|-----|--|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--|
|     |         |              |     |                                |          |     |      |     |  | CAD FILENAME/LAYERS                                                                                          |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | D38539AA_DC_NNC_01B.PRT                                                                                      |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | PANDUIT<br>CORP. TINLEY PARK, ILLINOIS<br><br>WIRING DUCT AND COVER<br>TYPE "NNC" METRIC<br>CUSTOMER DRAWING |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  |                                                                                                              |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  |                                                                                                              |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  |                                                                                                              |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE:<br>(.X) ± (.XXX) ±<br>(.XX) ± 3.1 (.12) ANGLES ±  |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | UNLESS OTHERWISE SPECIFIED,<br>ALL DIMENSIONS ARE GIVEN<br>IN INCHES, THIRD ANGLE PROJECTION.                |                                                                    |  |
| I   | 9-18-06 | JCST         | JKG | SEE SHEET 1 OF 3 FOR REVISIONS | 38539-04 | JKG | JKG  |     |  | DRAWN BY<br>JHNU                                                                                             | MAT'L: HALOGEN FREE<br>MODIFIED<br>POLYPHENYLENE<br>OXIDE<br>(PPO) |  |
| R   | 11-2-02 | JHNU<br>JCST | JKG | SEE SHEET 1 OF 3 FOR REVISIONS | 38539-04 | HIW | HIW  |     |  | DATE<br>8-2-02                                                                                               |                                                                    |  |
| REV | DATE    | BY           | CHK | DESCRIPTION                    | ECN      | CHK | CUST | SUP |  | CHK'D<br>JKG                                                                                                 |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | SCALE<br>NONE                                                                                                |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | DRAWING NO.<br>38539-04<br>SHT 2 OF 3                                                                        |                                                                    |  |
|     |         |              |     |                                |          |     |      |     |  | DWG<br>A<br>SIZE                                                                                             |                                                                    |  |



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

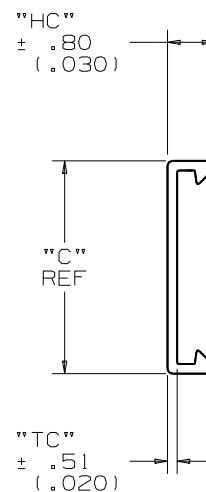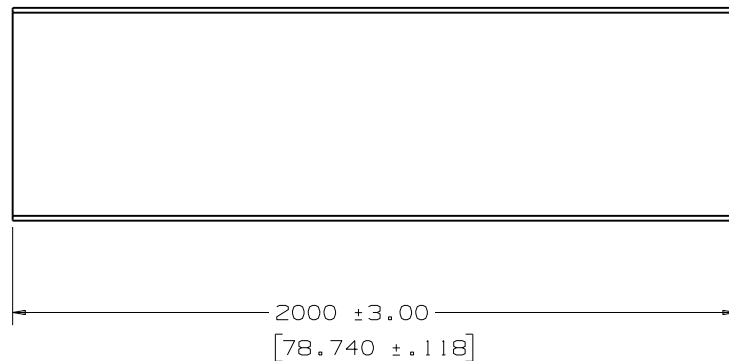

| NOMINAL<br>DUCT SIZE<br>(W) | C<br>REF       | HC           | TC            |
|-----------------------------|----------------|--------------|---------------|
| 25                          | 24.6<br>(.97)  | 8.9<br>(.35) | 1.30<br>(.05) |
| 37                          | 37.1<br>(1.46) | 8.9<br>(.35) | 1.30<br>(.05) |
| 50                          | 49.6<br>(1.95) | 8.9<br>(.35) | 1.40<br>(.06) |
| 75                          | 74.6<br>(2.94) | 9.4<br>(.37) | 1.40<br>(.06) |
| 100                         | 99.6<br>(3.92) | 9.4<br>(.37) | 1.40<br>(.06) |

ALL DIMENSIONS ARE METRIC (INCHES)

CAD FILENAME/LAYERS

D38539AA\_DC\_NNC\_01B

PANDUIT CORP TINLEY PARK, ILLINOIS

WIRING DUCT AND COVER  
TYPE "NNC" METRIC  
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± (.XXX) ± .005  
(.XX) ± .01 ANGLES ± 1°

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN IN  
INCHES, THIRD ANGLE PROJECTION.

|     |         |              |     |                                |          |     |      |     |  |
|-----|---------|--------------|-----|--------------------------------|----------|-----|------|-----|--|
|     |         |              |     |                                |          |     |      |     |  |
|     |         |              |     |                                |          |     |      |     |  |
|     |         |              |     |                                |          |     |      |     |  |
|     |         |              |     |                                |          |     |      |     |  |
|     |         |              |     |                                |          |     |      |     |  |
|     |         |              |     |                                |          |     |      |     |  |
| 1   | 9-18-06 | JCST         | JKG | SEE SHEET 1 OF 3 FOR REVISIONS | 38539-04 | JKG | JKG  |     |  |
| R   | 11-2-02 | JHNU<br>JCST | JKG | SEE SHEET 1 OF 3 FOR REVISIONS | 38539-04 | HIW | HIW  |     |  |
| REV | DATE    | BY           | CHK | DESCRIPTION                    | ECN      | - R | CUST | SUP |  |

DRAWN BY  
JHNU

DATE  
8-2-02

CHK'D  
JKG

MAT'L: HALOGEN FREE  
MODIFIED  
POLYPHENYLENE  
OXIDE  
(PPO)

SCALE  
NONE

DRAWING NO.  
38539-04  
SHT 3 OF 3

DWG  
A  
SIZE





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.